



A MITEL  
PRODUCT  
GUIDE

# NuPoint

## Unified Messaging Web Console

Release 9.5

May 2022

## Notices

The information contained in this document is believed to be accurate in all respects but is not warranted by **Mitel Networks™ Corporation (MITEL®)**. The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes. No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

## Trademarks

The trademarks, service marks, logos and graphics (collectively "Trademarks") appearing on Mitel's Internet sites or in its publications are registered and unregistered trademarks of Mitel Networks Corporation (MNC) or its subsidiaries (collectively "Mitel") or others. Use of the Trademarks is prohibited without the express consent from Mitel. Please contact our legal department at [legal@mitel.com](mailto:legal@mitel.com) for additional information. For a list of the worldwide Mitel Networks Corporation registered trademarks, please refer to the website: <http://www.mitel.com/trademarks>.

®,™ Trademark of Mitel Networks Corporation

© Copyright 2022, Mitel Networks Corporation

All rights reserved

# Contents

|                                                                              |          |
|------------------------------------------------------------------------------|----------|
| <b>1 NuPoint UM Web Console (On-Premise Only).....</b>                       | <b>1</b> |
| 1.1 Getting Started.....                                                     | 1        |
| 1.1.1 About NuPoint Unified Messaging (For on-premise deployments only)..... | 1        |
| 1.1.2 About the NuPoint UM Documentation Suite.....                          | 2        |
| 1.1.3 About this Help System.....                                            | 4        |
| 1.1.4 Searching the Online Help.....                                         | 4        |
| 1.1.5 What's New in This Release.....                                        | 6        |
| 1.1.6 Getting Help.....                                                      | 7        |
| 1.1.7 Using the Interfaces.....                                              | 11       |
| 1.1.8 Frequently Used Procedures Index.....                                  | 21       |
| 1.2 Basic Configuration.....                                                 | 21       |
| 1.2.1 Configuration Overview.....                                            | 21       |
| 1.2.2 Network Elements.....                                                  | 35       |
| 1.2.3 Mailboxes and Greetings.....                                           | 41       |
| 1.2.4 Class of Service.....                                                  | 191      |
| 1.2.5 NuPoint Voice Application.....                                         | 376      |
| 1.2.6 Pager (Outdial) Application.....                                       | 426      |
| 1.2.7 External Applications (including RS-232).....                          | 483      |
| 1.2.8 Message Waiting Application.....                                       | 487      |
| 1.2.9 Worksheets.....                                                        | 523      |
| 1.3 System Administration.....                                               | 541      |
| 1.3.1 Overview.....                                                          | 542      |
| 1.3.2 Maintenance.....                                                       | 542      |
| 1.3.3 Security.....                                                          | 582      |
| 1.3.4 Billing.....                                                           | 618      |
| 1.3.5 Reports.....                                                           | 651      |
| 1.3.6 Administration by Phone.....                                           | 721      |
| 1.3.7 Telephone Answering Service.....                                       | 728      |
| 1.4 Optional Features.....                                                   | 732      |
| 1.4.1 Installing an Optional Feature.....                                    | 732      |
| 1.4.2 Direct Drop Overview.....                                              | 734      |
| 1.4.3 Call Detail Recorder.....                                              | 736      |
| 1.4.4 Call Director.....                                                     | 779      |
| 1.4.5 Competitive TUI Emulation.....                                         | 782      |
| 1.4.6 Cut-Through Paging.....                                                | 784      |
| 1.4.7 Language Prompts.....                                                  | 792      |
| 1.4.8 NP Fax.....                                                            | 800      |

|                                                           |      |
|-----------------------------------------------------------|------|
| 1.4.9 NP Forms.....                                       | 851  |
| 1.4.10 NP Net.....                                        | 859  |
| 1.4.11 NP OnDemand.....                                   | 915  |
| 1.4.12 NP RapidDial.....                                  | 922  |
| 1.4.13 NP Receptionist.....                               | 930  |
| 1.4.14 NP WakeUps.....                                    | 970  |
| 1.4.15 PMS Integration.....                               | 974  |
| 1.4.16 Record A Call.....                                 | 1017 |
| 1.4.17 Recorded Announcement Device (RAD).....            | 1021 |
| 1.4.18 Softkeys.....                                      | 1022 |
| 1.4.19 SMS Notification (UK Only).....                    | 1024 |
| 1.4.20 Speech Auto Attendant.....                         | 1028 |
| 1.4.21 Speech to Text.....                                | 1095 |
| 1.4.22 Speech Navigation.....                             | 1105 |
| 1.4.23 Unified Messaging.....                             | 1110 |
| 1.4.24 Visual Voice Mail Support.....                     | 1187 |
| 1.4.25 VPIM.....                                          | 1187 |
| 1.4.26 Web View.....                                      | 1198 |
| 1.5 MiVoice Office 250 Integration.....                   | 1199 |
| 1.5.1 Overview.....                                       | 1199 |
| 1.5.2 Configuration.....                                  | 1202 |
| 1.5.3 MiVoice Office 250 Integration Troubleshooting..... | 1209 |
| 1.6 Call Director.....                                    | 1210 |
| 1.6.1 Getting Started.....                                | 1210 |
| 1.6.2 Getting Help.....                                   | 1225 |
| 1.6.3 Call Flow Examples and Tutorials.....               | 1228 |
| 1.6.4 Call Flow Actions Explained.....                    | 1243 |
| 1.6.5 Call Flow Authoring Procedures.....                 | 1269 |
| 1.6.6 Templates.....                                      | 1282 |
| 1.6.7 Admin Reports.....                                  | 1291 |
| 1.6.8 Call Flow Reports.....                              | 1294 |
| 1.6.9 Call Director Glossary.....                         | 1296 |



# NuPoint UM Web Console (On-Premise Only)

1

This chapter contains the following sections:

- [Getting Started](#)
- [Basic Configuration](#)
- [System Administration](#)
- [Optional Features](#)
- [MiVoice Office 250 Integration](#)
- [Call Director](#)

## 1.1 Getting Started

### 1.1.1 About NuPoint Unified Messaging (For on-premise deployments only)

**Note:**

NuPoint Unified Messaging service is not supported for MiCollab on MiCloud Flex deployments.

Mitel® NuPoint Unified Messaging is a message processing system that provides voice and fax messaging capabilities and personal mailboxes. System administrators create and maintain software files for all mailboxes on the system (the server).

You perform the following functions:

- Create and modify mailboxes
- Delete and reassign mailboxes
- Perform routine maintenance of software files
- Change the system time and date
- Establish system security

Additional administrative responsibilities may include the following activities:

- Bill clients

- Run reports
- Build classes of service
- Establish programming for pagers
- Set up system-wide distribution lists
- Create messages, greetings, and tutorials

This Online Help system contains instructions for performing these functions. Although you can perform many procedures using the telephone, most administration is performed using a system maintenance console (either the Web Console or the Text console).

**Note:**

NuPoint UM is offered as a standalone product and as an application within MiCollab. For information concerning **NuPoint UM Standalone**, refer to this help system. For information concerning **MiCollab NuPoint UM** (including details concerning the unique features and functions supported in MiCollab), refer to the MiCollab documentation.

## 1.1.2 About the NuPoint UM Documentation Suite

To access the NuPoint Unified Messaging guides (in .PDF format) and the System Administration Help file, go to Mitel Document Center and log in. You must be a registered user to access Mitel Online.

The NuPoint UM documentation set includes the following components:

**General Audience**

- General Information Guide:

This guide includes general information on systems architecture, resiliency, feature descriptions, licensing, and geographic availability and provides an overview of administration and maintenance.

**Installers**

- Technician's Handbook:

This guide includes information on hardware and software requirements, platforms and configurations, installations, basic maintenance, upgrades, data migration, configuring MSL, and trouble shooting systems and features.

- Engineering Guidelines

This guide includes information on system capacities, system requirements, and network engineering.

## Administrators

- **System Administration Help** (includes Call Director for the Administrator):

The help file includes information on post-installation instructions, system administration and maintenance, configuring and managing NuPoint UM and optional features, and troubleshooting Advanced UM.

## End Users

- Web View Help

This Help file includes information on the features that are available to users through the web client interface. It includes configuration information for end user settings and describes unified messaging features.

- Messaging User Guide

This guide includes information on setting up and using voice mailboxes, managing voice and email messages, using PCs to receive and manage messages, and the record-a-call, fax, and speech auto attendant features.

- Call Director Web Help

This help file includes information on configuring automated attendant call flows to handle your calls when you can't answer them personally.

- Mitel TUI Quick Reference Guide

This one-page document explains how to access voice mailboxes and identifies telephone user interface (TUI) main menu options.

## Mitel Online

All Mitel product documentation is available at [Mitel Document Center](#).

## Accessing Documents and Help Files

1.
  - a. Log in to Mitel OnLine.
  - b. Point to **Support** and then click **Product Documentation**.
  - c. In the right pane, select **Product Documentation**.
  - d. Point to **Messaging** and click **NuPoint Unified Messaging**.
  - e. A list of documents intended for System Administrators is displayed. Select a document from the list or select **Show End User Documents** or **Show Archived Documents** to access end user or archived documents.

### 1.1.3 About this Help System

This NuPoint Unified Messaging System Administration online help system is intended to help system administrators configure and maintain the NuPoint UM system and features.

#### Intended Audience

This guide is for system administrators who have completed the NuPoint UM System Administrator course. The Mitel OnLine version provides configuration procedures for both the Web Console and the Text console. The software version provides configuration procedures for the Web Console only.

#### Note:

In some cases, a procedure may be available only in Text console.

#### Finding Information

Each application or feature of NuPoint UM has its own section, arranged as follows:

- an **overview** or description of the application/feature and its components
- the **procedures** required to configure the application/feature using the Web console.
- the **procedures** required to configure the application/feature using the Text console

### 1.1.4 Searching the Online Help

The purpose of this topic is to help you understand how to optimize your searches so that you can find the information that you are looking for.

#### Finding Information

The Help system provides you with tabs to find information:

| <b>Contents tab</b> | <b>Groups the main topics of the Help system in to books. To open a book, click the book. To view a topic, click the topic name.</b>                                                                                                                                                    |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Index tab           | Lists index entries alphabetically. To see more index entries, type a keyword in the box. Clicking a keyword in the list displays the related topic.                                                                                                                                    |
| Search tab          | Allows you to search the online Help using a particular word or phrase. The online Help system lists all topics that contain your word or phrase. Type the word or phrase in the box and then press Enter. To view a topic, click the topic name. See Using Advanced Search Techniques. |
| Glossary tab        | Provides a definition for the terms used in this online Help.                                                                                                                                                                                                                           |

**Note:**

The Search will not find the phrase "Do Not Disturb". "Not" is a Boolean operator that will initiate a search for the word "do" but not the word "disturb". Use "do disturb" or "DND" to find this term.

## Using Advanced Search Techniques

When using the search feature in the online Help, the following techniques can help you narrow your searches for more precise results.

| <b>Search for</b> | <b>Example</b> | <b>Results</b>                                                                                                              |
|-------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------|
| a single word     | page           | Topics that contain the word "page" and its grammatical variations, such as pager and paging.                               |
| a phrase          | auto attendant | The query is equivalent to specifying "auto AND attendant," which will find topics containing both of the individual words. |

## Boolean operators

The AND, OR, NOT, and NEAR operators enable you to precisely define your search by creating a relationship between search terms. The following table shows how you can use each of these operators. If no operator is specified, AND is used. For example, the query "attendant console programming" (entered without the quotation marks) is equivalent to "attendant AND console AND programming."

| <b>Search for</b>             | <b>Example</b>        | <b>Results</b>                                              |
|-------------------------------|-----------------------|-------------------------------------------------------------|
| Both terms in the same topic. | attendant AND console | Topics containing both the words "attendant" and "console". |

| Search for                              | Example               | Results                                                                      |
|-----------------------------------------|-----------------------|------------------------------------------------------------------------------|
| Either term in a topic                  | attendant OR console  | Topics containing either the word "attendant" or the word "console" or both. |
| The first term without the second term. | attendant NOT console | Topics containing the word "attendant" but not the word "console".           |

**Note:**

The |, &, and ! characters don't work as Boolean operators (you must use OR, AND, and NOT).

**Finding words in a topic**

After you have narrowed your word search to a list of topics, click a topic from the list. Each occurrence of the word will be highlighted in yellow in the topic text. Note that only exact matches are highlighted.

**Note:**

If a Help link is highlighted in yellow as a result of a search, the link may not function until you remove the highlighting by clearing the search results. To clear the search results, search on another word, or by exit the Help.

For large topics, you may find it easier to search for the word in the topic text. To search for a word in a topic:

1. Put your cursor at the top of the topic frame.
2. Type **Ctrl-f**.
3. Enter the word and click **Find Next**.

**Linking back to the previously viewed topic**

You can go back to the previously viewed topic by clicking the **Back** button in the menu bar or by pressing the **Alt** and **<**- keyboard keys at the same time.

## 1.1.5 What's New in This Release

For a list of new functionality, see the [MiCollab What's New Guide](#) on the Mitel Customer Documentation site.

## 1.1.6 Getting Help

### 1.1.6.1 Accessing Documentation, Release Notes, Articles, and Downloads

The following sections detail how to access specific NuPoint UM documents from Mitel Document Center.

#### Documents and Help Files

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Product Documentation**.
3. Click the **Product Documentation** link.
4. Point to **Messaging** and click **NuPoint Unified Messaging**.
5. A list of documents intended for System Administrators is displayed. Select a document from the list or select **Show End User Documents** or **Show Archived Documents** to access end user or archived documents.

#### The Qualified Hardware List

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Product Documentation**.
3. Click the **Product Documentation** link.
4. To search for a document, press **CTL + F**.
5. To access the Mitel Standard Linux Qualified Hardware list, type **MSL** in the **CTL + F** search box.

#### Product Release Notes

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Mitel Knowledge Base**.
3. Click **Mitel Knowledge Base**.
4. In the **Product** list, select **Mitel NuPoint UM IP** (Standard Edition).
5. Under **Article Type**, select **Release Notes** and click **Search**.

#### Knowledge Base Articles

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Mitel Knowledge Base**.

3. Click **Mitel Knowledge Base**.
4. In the **Product** list, select **Mitel NuPoint UM IP** (Standard Edition).
5. Under **Article Type**, select the type of article to be viewed.
6. Specify other search parameters to narrow your search and click **Search**.

## Software Downloads

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Software Downloads**.
3. Select the appropriate Mitel NuPoint UM link.
4. Click the download link for your selected release and follow the instructions on the software download page.

### 1.1.6.2 Searching the Online Help

The purpose of this topic is to help you understand how to optimize your searches so that you can find the information that you are looking for.

#### Finding Information

The Help system provides you with tabs to find information:

| Contents tab | Groups the main topics of the Help system in to books. To open a book, click the book. To view a topic, click the topic name.                                                                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Index tab    | Lists index entries alphabetically. To see more index entries, type a keyword in the box. Clicking a keyword in the list displays the related topic.                                                                                                                                    |
| Search tab   | Allows you to search the online Help using a particular word or phrase. The online Help system lists all topics that contain your word or phrase. Type the word or phrase in the box and then press Enter. To view a topic, click the topic name. See Using Advanced Search Techniques. |
| Glossary tab | Provides a definition for the terms used in this online Help.                                                                                                                                                                                                                           |

#### Note:

The Search will not find the phrase "Do Not Disturb". "Not" is a Boolean operator that will initiate a search for the word "do" but not the word "disturb". Use "do disturb" or "DND" to find this term.



## Using Advanced Search Techniques

When using the search feature in the online Help, the following techniques can help you narrow your searches for more precise results.

| Search for    | Example        | Results                                                                                                                     |
|---------------|----------------|-----------------------------------------------------------------------------------------------------------------------------|
| a single word | page           | Topics that contain the word "page" and its grammatical variations, such as pager and paging.                               |
| a phrase      | auto attendant | The query is equivalent to specifying "auto AND attendant," which will find topics containing both of the individual words. |

## Boolean operators

The AND, OR, NOT, and NEAR operators enable you to precisely define your search by creating a relationship between search terms. The following table shows how you can use each of these operators. If no operator is specified, AND is used. For example, the query "attendant console programming" (entered without the quotation marks) is equivalent to "attendant AND console AND programming."

| Search for                              | Example               | Results                                                                      |
|-----------------------------------------|-----------------------|------------------------------------------------------------------------------|
| Both terms in the same topic.           | attendant AND console | Topics containing both the words "attendant" and "console".                  |
| Either term in a topic                  | attendant OR console  | Topics containing either the word "attendant" or the word "console" or both. |
| The first term without the second term. | attendant NOT console | Topics containing the word "attendant" but not the word "console".           |

### Note:

The |, &, and ! characters don't work as Boolean operators (you must use OR, AND, and NOT).

## Finding words in a topic

After you have narrowed your word search to a list of topics, click a topic from the list. Each occurrence of the word will be highlighted in yellow in the topic text. Note that only exact matches are highlighted.

**Note:**

If a Help link is highlighted in yellow as a result of a search, the link may not function until you remove the highlighting by clearing the search results. To clear the search results, search on another word, or by exit the Help.

For large topics, you may find it easier to search for the word in the topic text. To search for a word in a topic:

1. Put your cursor at the top of the topic frame.
2. Type **Ctrl-f**.
3. Enter the word and click **Find Next**.

**Linking back to the previously viewed topic**

You can go back to the previously viewed topic by clicking the **Back** button in the menu bar or by pressing the **Alt** and **<-** keyboard keys at the same time.

## 1.1.6.3 Documentation Conventions

**Reader Advisories**

The following reader advisories are used in this help system:

**Note:**

These symbols indicate text that contains additional information, especially useful in relation to a procedure.

**CAUTION:**

Information that helps you prevent equipment or software damage.

**Warning:**

Information that helps you prevent an interruption to telecommunications traffic.

## 1.1.6.4 Contacting Technical Support

### Order Desk

To contact the Order Desk, call

- Mitel NA Order Desk 1-800-796-4835.
- Mitel UK Order Desk: +44 870 160 0471.
- Mitel EMEA Order Desk: +44 1291 426071.

### Repair Department

You must obtain a Return of Merchandise Authorization (RMA) form from the Repairs Department before sending equipment back to Mitel.

- Mitel NA Repairs Department: 1-888-222-6483.
- Mitel EMEA Repairs Department: +44 1291 437666.

### Technical Support

Please contact Mitel Technical Support if you require technical assistance. If you cannot resolve the problem with the Troubleshooting sections in the *NuPoint Unified Messaging Technician's Handbook*, please collect the required information listed in the Troubleshooting chapter before calling Mitel Technical Support.

- Mitel NA Technical Support: 1-800-561-0860 or 1-613-592-2122. (Please have your technical support ID ready.)
- Mitel EMEA Technical Support: +44 1291 436888. (Please have your dealer ID and password ready.)

## 1.1.7 Using the Interfaces

### 1.1.7.1 Overview


There are two administration consoles for NuPoint Unified Messaging: the Text Console and the Web console. You can use the Web console for most configuration and programming, however, there are some instances when you must use the Text Console. Where applicable, instructions are supplied for both.

### The Web Console

The Web Console provides a user-friendly graphical user interface (GUI) that enables you to perform most administration functions. It is strongly recommended that you begin using the Web Console instead of the Text Console when working with these features, so as to familiarize yourself with the Web interface as its capabilities become increasingly


comprehensive. You must still use the Text Console for those configuration capabilities that are not supported on the Web Console.

Each Web Console window connects to one NuPoint Unified Messaging system. To administer a second NuPoint UM system, you can either open a Web Console session in another browser window or use the pass-through login capability in the Web Console to access other systems.

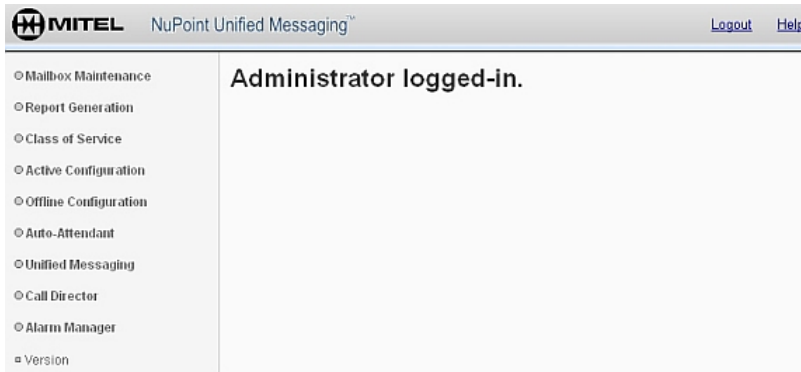

## The Text Console

The Text Console is a menu-driven administration console that you can use for all software configuration, feature programming, and system administration on the NuPoint Unified Messaging server (except the Speech Auto Attendant feature). As shown below, you make menu selections to navigate through the console and to perform maintenance and administration tasks.

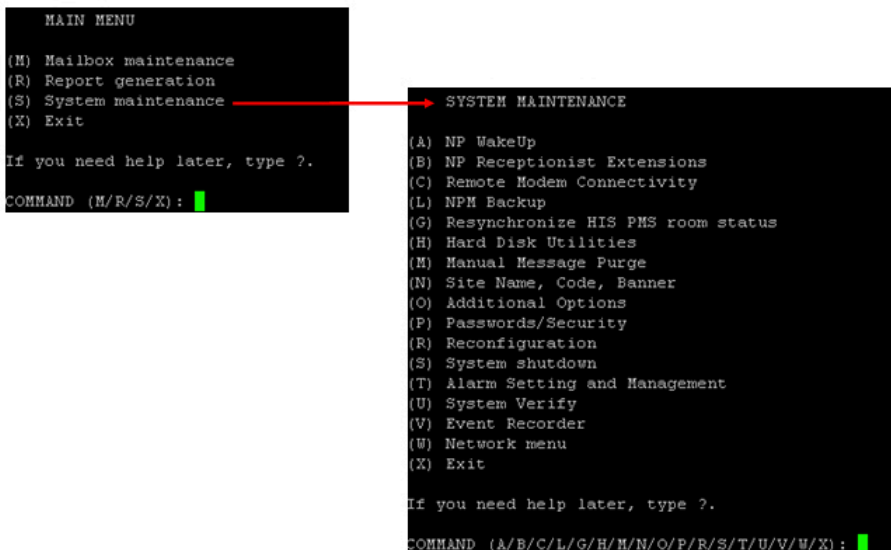

### 1.1.7.2 The Web Console

The Web Console provides a user-friendly graphical user interface (GUI) that enables you to perform most administration functions.

The Web Console supports two user types:

- **System superuser:** Two superusers ("admin" and "root") are created when the system is originally installed. They have access to all features and server resources.
- **FP SA user: Funtionally Partitioned System Administration (FP SA) users can access features and server resources based on which "permission categories" they have been assigned by the system superuser. For example, an FP SA user with permission category six is limited to accessing network and network-related features in the console.**

To log in to the NuPoint Unified Messaging Web Console:

1. Open a web browser and navigate to **http://< IP address or Fully Qualified Domain Name >/npm-admin**
2. Enter your user name and password, select the Server from the drop-down list, and then click Login.

## Conditions

- Conditions for FP SA Users:
  - Up to five different FP SA users can be logged in to Web Console simultaneously. If a sixth FP SA user attempts to log in, access will be denied.
  - An FP SA user can only have one login session. If a user opens a second session on the same or another client PC, the first session will be terminated.
  - A client PC can support only one login session. If a user opens a second session on the same client PC, the first session will be terminated.
  - After five minutes of inactivity, an FP SA login session will expire automatically.
  - After three unsuccessful login attempts, an FP SA user will be locked out and must contact the system superuser to have his or her [password reset](#).
- Conditions for System Superusers:
  - After 30 minutes of inactivity, a system superuser login session will expire automatically.
  - After three unsuccessful login attempts, a system superuser will be locked out for 20 minutes. If more unsuccessful logins are attempted, the console will locks itself indefinitely and the administrator must use the UNIX shell to unlock it via SSH/PuTTY. See [Unlocking the System Superuser Account](#), below, for details.
- The Web Console is supported on the following web browsers:
  - Microsoft Edge
  - Internet Explorer
  - Google Chrome
  - Mozilla Firefox

## Unlocking the System Superuser Account

Once the Web Console is locked (temporarily or permanently), you can log in using SSH/PuTTY and invoke the following command:

```
%  
/usr/vm/bin/unlocksona
```

The system prompts you for the password. After it is entered, the web console and SOAP interface are unlocked. The administrator can refresh (F5) the login page in the web browser and log in with the correct password.

**Note:** For more information about SSH/PuTTY access, see the *NuPoint Unified Messaging Technician's Handbook*.

## Menus

Use the menu on the left-hand panel to navigate the Web Console. The menus are divided into the following main categories:

- Mailbox Maintenance
- Report Generation
- Audit Trail
- Class of Service
- Active Configuration
- Offline Configuration
- Auto Attendant
- Unified Messaging
- Call Director
- Alarm Manager
- FPSA Manager
- Utilities
- Activate Configuration
- Version

Click each top-level menu to expand the menus for that category. Click an expanded menu item to display the corresponding feature in the right-hand panel. High-level menu items have a circle next to them. With the exception of the Edit Offline Configuration menu, clicking the circle expands and contracts its submenus. Submenu items with a square beside them provide access to the features.

Users can reach console menus only if they have the proper FPSA permission category (or categories).

### 1.1.7.3 The Text Console

The NuPoint UM Text Console is a menu-driven configuration tool you can use to customize and administer NuPoint UM software. Console administration is a menu-driven procedure; the starting point is the console Main Menu. From this menu, you can choose one of three sub-menus that allow you to change mailbox data files, perform system maintenance, or run reports. Once you begin one of these tasks, the system prompts you for specific information. You may type a question mark (?) in response to prompts to receive embedded online help.

The Text Console supports two user types:

- **System superuser:** Two superusers ("admin" and "root") are created when the system is originally installed. They have access to all features and server resources.
- **FPESA user: Functionally Partitioned System Administration (FPESA) users can access features and server resources based on which "permission categories" they have been assigned by the system superuser. For example, an FPESA user with permission category six is limited to accessing network and network-related features in the console .**

Multiple users can access Text Console simultaneously using any of the following methods:

- Onsite, by attaching a monitor and keyboard directly to the NuPoint UM server
- From a PC on the same network using an Ethernet connection
- From a remote PC using an SSH client like PuTTY

Text Console is supported through the main Linux interface (sign in as "root" to access the NuPoint UM Text Console, or as "admin" to access the MSL server console) and also through PuTTY.

**Note:**

For detailed Text Console instructions, refer to the NuPoint UM System Administration help file posted at [Mitel OnLine](#).

To activate Text Console:

1. Enable the appropriate SSH settings in MSL.
2. Launch an SSH client such as PuTTY.
3. Enter the **Host Name (or IP Address)** of the NuPoint UM server.
4. Click **Open**. A command prompt displays.

5. Log in as "root" and enter the root password. (The root password may be the same as the administrator password.)
6. Type **console** and press **Enter**. The Text Console displays.

Each time you log in, the system displays the console Main Menu, previous login information, and the system status. The following output displays this information. (Your system may have additional options depending on its configuration.)

```

root@10.39.17.222's password:
Last login: Wed Jul  9 14:37:18 2014 from 10.35.19.89
[root@sanity2 ~]# console
-----
Copyright (c) 1983-2009, Mitel Networks Corporation, All Rights Reserved.
-----
<System Status>
HOST      :      1
STATUS    :      ENA
OS VSN    :      2.6.32-431.5.1.el6.i686
MEMORY    :      188820/1938872
LOG DATA :      Y

MAIN MENU

(M) Mailbox maintenance
(R) Report generation
(S) System maintenance
(X) Exit

If you need help later, type ?.

COMMAND (M/R/S/X): █

```

Configuration is performed by entering the letter that corresponds to the menu item to be accessed. For example, to see the System Maintenance menu, you type **s** (or **S**) at the prompt. The System Maintenance menu opens many more menu choices. Instructions in this guide include all menu entries required to access the options to be configured.

```

SYSTEM MAINTENANCE
NP0174
(A) NP WakeUp
(B) NP Receptionist Extensions
(C) Remote Modem Connectivity
(L) NPM Backup
(G) Resynchronize HIS PMS room status
(H) Hard Disk Utilities
(M) Manual Message Purge
(N) Site Name, Code, Banner
(O) Additional Options
(P) Passwords/Security
(R) Reconfiguration
(S) System shutdown
(T) Alarm Setting and Management
(U) System Verify
(V) Event Recorder
(W) Network menu
(X) Exit

If you need help later, type ?.

COMMAND (A/B/C/L/G/H/M/N/O/P/R/S/T/U/V/W/X): █

```



## Viewing Menus

- When you finish entering a value for a parameter, the server displays an abbreviated form of the current menu, called the "short menu" (for example: COMMAND (A/E/F/G/H/X):). To view the complete current menu when a short menu is displayed, just press **Enter**.
- To return to the Main Menu from any NuPoint Voice configuration menu, press **X** (Exit), until the Main Menu appears.

## Accepting Defaults

- To accept a default displayed in a *prompt*, just press **Enter**.
- To accept a default displayed in a *menu*, no action is necessary.

## Avoiding Automatic Exit

### CAUTION:

The NuPoint Unified Messaging server "times out" after 15 minutes. This means that if you do not enter anything at the console for 15 minutes, the server automatically exits from the current program. When this happens, all work that has not been saved on the disk is lost.

To avoid being timed out and losing your work, follow these steps:

1. When you need time to think, note the name of the current menu.
2. Exit to the (server) Main Menu.
3. When you want to continue your work, enter the appropriate menu options to regain your place.

If you find that the NuPoint Unified Messaging server has timed out, follow the steps below. If your screen is blank, press any key to reactivate the screen and then continue with these steps.

1. Press any key to start the login sequence.
2. Enter your user ID and password (if requested).
3. Starting from the Main Menu, enter menu options to proceed to the menu from which the server timed out.
4. Re-enter data as needed to regain lost work.

## Quitting an Entry Session

At any point during entry of offline or online parameters, you can quit. Quitting discards all entries you have made and leaves the NuPoint Voice configuration the way it was before you started entering parameters.

To quit from the NuPoint Voice Configuration Offline or Online Menu:

|           |                                                           |
|-----------|-----------------------------------------------------------|
| Select:   | (Q) Quit -- Forget Changes                                |
| Prompt:   | Quit and forget changes? (y/n) =                          |
| Response: | Y to return to the NuPoint Voice Configuration Main Menu. |

## Shortcut Commands

You can use the CTRL (Control) key or the / (slash) key while simultaneously pressing another key to execute shortcut commands at a server console.

| To do this...                                                                                 | Type...                              |
|-----------------------------------------------------------------------------------------------|--------------------------------------|
| Activate a timed-out console                                                                  | any key                              |
| Exit from the offline or online menus, or FCOS, LCOS, GCOS menus, and save any entries.       | X                                    |
| Exit from the offline or online menus, or FCOS, LCOS, GCOS menus, without saving any entries. | Q + Y                                |
| Stop scrolling a displayed report.                                                            | CTRL-S                               |
| Resume scrolling a displayed report.                                                          | CTRL-Q                               |
| Return to the NuPoint Unified Messaging application when a # prompt is displayed.             | <b>CTRL-D</b> or<br>type <b>exit</b> |
| Return to the Reports Menu if you paused the display                                          | Q + return or Esc, Esc + return      |

### Note:

If you see a display of nonsense characters when you activate the console, **press the space bar to reset.**

## My System is Locked; How Do I Continue?

Occasionally, the system may appear to be "locked". When this happens, press **CTRL + Q** to continue console maintenance functions.

## 1.1.7.4 Console Capabilities

NuPoint UM configuration is in the process of being transferred to the Web Console. During this process, some items are only configurable using the Text Console. The following list details configuration capabilities:

| Feature/Item                                                                                                                                                                | Text Console                                                   | Web Console                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic Configuration:<br>Line Groups<br>Dial Plans<br>Mailboxes<br>Class of Service<br>NuPoint Voice Application<br>Pager/Outdial Application<br>Message Waiting Application | YES<br><br>with the <b>exception</b> of:<br>- Network Elements | YES<br><br>with the following <b>exceptions</b> :<br>- scheduling of greetings<br>- alternate greetings<br>- copying greetings<br>- enable cascade paging |
| System Administration                                                                                                                                                       |                                                                |                                                                                                                                                           |
| Maintenance<br>- purge, backup,<br>alarm management                                                                                                                         | YES                                                            | YES<br><br>with the following <b>exceptions</b> :<br>- manual purge<br>- system shutdown<br>- data restore                                                |
| Security<br>-audit trails, Functionally<br>Partitioned System<br>Administration (FPSA)                                                                                      | YES                                                            | NO                                                                                                                                                        |

| Feature/Item                          | Text Console                                       | Web Console                                                                                               |
|---------------------------------------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Billing<br>-Gather, set billing rates | YES                                                | YES                                                                                                       |
| Reports                               | YES                                                | YES<br><br>(subset of Text Console reports)                                                               |
| Optional Features                     |                                                    |                                                                                                           |
| Call Detail Recorder                  | YES                                                | NO (reporting only)                                                                                       |
| Call Director                         | NO<br><br>(Configuration only)                     | YES<br><br>(Configuration and interaction)                                                                |
| Competitive TUI Emulation             | YES                                                | YES                                                                                                       |
| Cut-Through Paging                    | YES                                                | YES                                                                                                       |
| Language Prompts                      | YES                                                | YES                                                                                                       |
| NP Fax                                | YES                                                | YES                                                                                                       |
| NP Forms                              | YES                                                | YES                                                                                                       |
| NP Net                                | YES                                                | NO<br><br>(TCP/IP and NCOS configuration only)                                                            |
| NP OnDemand                           | YES                                                | YES                                                                                                       |
| NP RapidDial                          | YES                                                | NO                                                                                                        |
| NP Receptionist                       | YES                                                | NO                                                                                                        |
| NP WakeUp                             | YES                                                | NO                                                                                                        |
| PMS Integration                       | NO<br><br>(Serial and Serial-to-IP converter only) | YES<br><br>(Rel 4.1 and later: Serial, Serial-to-IP, and IP.)<br><br>(Except check-in/check-out behavior) |
| Record-A-Call                         | YES                                                | YES                                                                                                       |

| Feature/Item          | Text Console | Web Console                    |
|-----------------------|--------------|--------------------------------|
| Softkeys              | YES          | NO<br>(Extension mapping only) |
| SMS Notification      | YES          | YES                            |
| Speech Auto Attendant | NO           | YES                            |
| Speech to Text        | NO           | YES                            |
| Unified Messaging     | YES          | YES                            |
| VPIM                  | YES          | NO                             |

## 1.1.8 Frequently Used Procedures Index

### 1.1.8.1 Frequently Used Procedures

The following frequently-used procedures may be required when configuring many of the applications used with NuPoint Unified Messaging:

#### In the Web Console:

- [Create a Line Group](#)
- [Customize an FCOS](#)
- [Assign an FCOS to a Mailbox](#)
- [Duplicate the Active Configuration](#)
- [Activate the Inactive Configuration](#)
- [View the Active Configuration](#)

#### In the Text Console:

- [Define a Line Group](#)
- [Customize an FCOS](#)
- [Assign an FCOS to a Mailbox](#)
- [Duplicate the Active Configuration](#)
- [Activate the Inactive Configuration](#)
- [Run a System Configuration Report](#)

## 1.2 Basic Configuration

### 1.2.1 Configuration Overview

## 1.2.1.1 Introduction

The chapters in this section describe how to configure the base NuPoint Unified Messaging software after it has been installed on a server. The definitions on this page describe terms and concepts that are used in this guide:

### Applications:

The following applications are provided with your basic NuPoint UM server. You can configure these applications to provide custom message-taking, outdialing, and Message Waiting Indication. Each application requires its own line group. (Note: NP Call Director and NP Receptionist are the exception - these two applications can share a line group with the NuPoint Voice application.)

- **NuPoint UM Voice Application** : the basic business application, used for message-taking and retrieval.
- **Pager Application** : used for paging, but also for a number of other functions that require outdialing.
- **Message Waiting Application** : used when an integration does not handle message waiting indicators itself.

### Modifiers:

Modifiers are characteristics that are common to all applications. You control the behavior of the application by configuring its modifiers. The most common modifiers are listed here:

- **Line Groups**: A line group is a set of one or more incoming telephone lines, which come into line ports on the server hardware. Each application you use must be assigned its own line group (except for NuPoint Receptionist and Call Director, which can both work in the same line group as the NuPoint Voice application. Also, any operations involving outdialing can use the same line group assigned to the Pager application.) Most of the modifications you make to an application are made to its line group. See [About Line Groups](#) for more information.
- **Dialing Plan**: To configure each application, you must define its dialing plan, which is the structure of how the mailboxes are numbered. Related features include which key a user presses to speak to a system attendant, or to use call placement. See [About Dialing Plans](#) for more information.
- **Day/Night Hours**: This feature of the NuPoint Voice application lets you set the work schedule: both office hours and which days are handled as weekends. This also handles certain situations such as a user wishing to speak to a system attendant.
- **Mailboxes**: Every user of the server needs a mailbox, and all applications require mailboxes. The administrator's mailbox and attendant's mailbox are special mailboxes that interact with applications; along with other special mailboxes like tree, rotational, and broadcast, they are discussed in the [Mailboxes](#) section. Mailbox features, such as Distribution Lists, receipts, and greetings are also discussed in that section.

- **Class of Service:**

- **Features Class of Service (FCOS):** a group of features applied to each mailbox that allow users to perform functions or control how the server can be used. See [Features Class of Service](#).
- **Limits Class of Service (LCOS):** a group of limitations on each user, such as length and number of messages. LCOSs also affect how some optional features work. One LCOS is assigned to each mailbox. These are explained in [Other Classes of Service](#).
- **Group Class of Service (GCOS):** determines which users can send messages or respond to messages from other users. There are two kinds of GCOSs, affinity and bit-mapped. One GCOS is assigned to each mailbox. These are explained in the [Other Classes of Service](#).
- **Network Class of Service (NCOS):** controls users' network access and is a part of the NP Net Digital Network optional feature. More NCOS information is contained in the [NP Net chapter of the Optional Features](#) section.
- **Restriction Class of Service (RCOS):** is an element of NPA/NXX call screening that restricts mailbox outdials to certain area codes or to certain prefixes within an area code. One RCOS is assigned to each mailbox. These are explained in the [Other Classes of Service](#).
- **Tenant Class of Service (TCOS):** used with the ESMDI "Multi-Tenant" application, to govern mailbox interaction between user communities. For more information about ESMDI integrations, see the *Optional Integrations Guide* available at Mitel OnLine.


## 1.2.1.2 About Configuration

### 1.2.1.2.1 About Configuration

Configuration is the process of entering application and modifier data in the administrator Text console or the Web console. This data is stored in a configuration file on the hard disk, and controls call processing.

#### Online Configuration

Some configuration settings can be changed "on the fly", that is, without the need for activation. These changes are made directly to the active configuration and take effect immediately upon exiting the menu. These changes are referred to as **Online Configuration**.

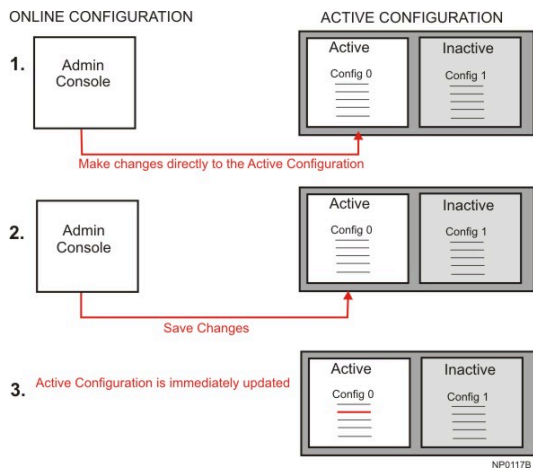


## Offline Configuration

Other configuration settings **cannot** be changed "on the fly". The NuPoint UM service must be stopped while the configuration settings are updated. For these cases, (see diagram) you must:

**Step 1: Duplicate the Active Configuration:** copies the active configuration data (Config 0) to the Offline Configuration to provide a base for your changes.

**Step 2: Make your changes** to the Offline Configuration and save (commit) them. The Inactive Configuration is updated with your new configuration information.

**Step 3: Activate the Inactive Configuration.** Config 1 becomes the active configuration.

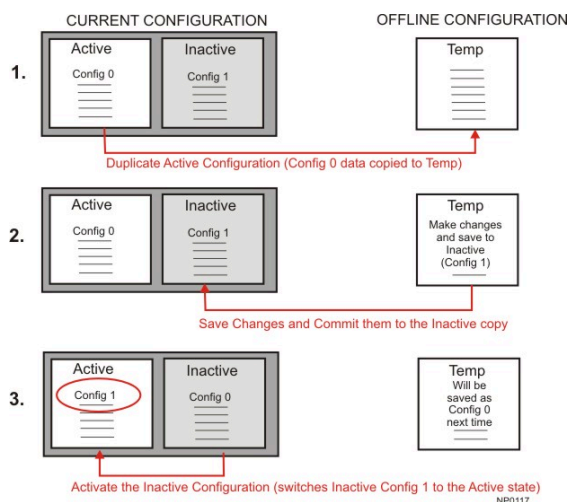

### Note:

The **Offline** menu is used exclusively to make changes to the **Inactive** configuration.



Some applications and features require you to make changes to both Online and Offline configuration items. You can make these changes separately (make the online changes to the Active configuration before you duplicate it) OR after Step 2, you can make the necessary Online configuration changes to the INACTIVE version and then, when you activate, all changes will be included.

## 1.2.1.2.2 Procedures (Web Console)

### 1.2.1.2.2.1 View Active Configuration

1. In the navigation tree, select **Active Configuration > View Active Configuration**.
2. To view the configuration of a particular line group, select the **number** from the list, or select **all** to view all groups.
3. Click **View** to see the report on screen, or click **Download** to save the report as a text file.

### 1.2.1.2.2.2 Duplicate the Active Configuration

For configuration parameters that must be modified offline, the Web Console prompts you to duplicate the active configuration.

1. In the navigation tree, click **Offline Configuration** and then **Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**. A confirmation message appears.
3. Make the required changes to the duplicate (offline) configuration.
4. When you are finished, click **Commit Changes and Exit** to commit the changes to the duplicate (offline) configuration.
5. When you are finished modifying the duplicate, and you are ready to implement the new configuration, you must [Activate the Inactive Configuration](#).

### 1.2.1.2.2.3 Activate the Inactive Configuration

To activate the inactive configuration:

1. In the navigation tree, select **Offline Configuration > Activate Offline Configuration**. An onscreen message indicates if the Offline Configuration has changed since the last activation.
2. You can delay the activation until **MWI queue** and **Pager queue** are empty by selecting the appropriate check boxes.

3. Click **Activate**. The currently active configuration is replaced with your edited offline version.

**Note:**

- NuPoint services are temporarily unavailable while the configuration is activated.
- When you activate the new configuration, the old configuration is stored offline as the "inactive" configuration. If you experience problems with the new configuration, you can restore the old configuration by repeating the preceding steps, provided no changes have been made to the configuration in the interim.

## 1.2.1.2.3 Procedures (Text Console)

### 1.2.1.2.3.1 *Duplicate the Active Configuration*

For configuration parameters that must be modified offline, the Web Console prompts you to duplicate the active configuration.

1. In the navigation tree, click **Offline Configuration** and then **Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**. A confirmation message appears.
3. Make the required changes to the duplicate (offline) configuration.
4. When you are finished, click **Commit Changes and Exit** to commit the changes to the duplicate (offline) configuration.
5. When you are finished modifying the duplicate, and you are ready to implement the new configuration, you must [Activate the Inactive Configuration](#).

### 1.2.1.2.3.2 *Activate the Inactive Configuration*

To activate the inactive configuration:

1. In the navigation tree, select **Offline Configuration > Activate Offline Configuration**. An onscreen message indicates if the Offline Configuration has changed since the last activation.
2. You can delay the activation until **MWI queue** and **Pager queue** are empty by selecting the appropriate check boxes.
3. Click **Activate**. The currently active configuration is replaced with your edited offline version.

**Note:**

- NuPoint services are temporarily unavailable while the configuration is activated.
- When you activate the new configuration, the old configuration is stored offline as the "inactive" configuration. If you experience problems with the new configuration, you can restore the old configuration by repeating the preceding steps, provided no changes have been made to the configuration in the interim.

### 1.2.1.3 About Line Groups

A line group is a quantity of telephone lines (server ports) that are grouped together and assigned to a single application. Any programming that is done for the application applies to every port in the line group. For example, you may have a NuPoint Voice line group, and/or a Paging line group. The number of ports assigned to each line group is dependent upon the traffic that you expect to experience for that particular application.

At the PBX or CO level, all telephone lines connected to the ports of an individual line group are typically assigned to a hunt group, ACD group, UCD group, etc. to ensure that incoming calls are answered by the first port that is available for the particular application.

**Note:**

oFor MiCollab deployments of NuPoint UM, you must use the MiCollab Users and Services Provisioning application to set up one or more Network Elements before configuring Line Groups.

#### Line Group Number

Each line group is represented by a discrete number. Valid line group numbers are 1 through 24. The preset default for the NuPoint Voice application is 1.

#### Group Name

The group name identifies the line group's purpose. For example, a line group could be called "Message Center." There is no default group name.

#### Line(s) in Group

You identify each line (or port) in a group with three identifiers that indicate a module, a slot, and a port. This set of three identifiers is called a *triplet*.

- **Module** refers to a CPU, the server's main processor. Since all NuPoint UM implementations have a single-module server, you can omit the module identifier and simply refer to the slot and port numbers.

**Note:** Support for multiple-module servers (e.g. NuPoint UM 640) was discontinued with NuPoint Release 6.0. As a result, you do not need to specify a module number for Release 6.0 and later.

- Slot is a reference to line card technology that doesn't apply to current model servers. For this reason, slot is always 0 for mail ports or 5 for fax ports.
- Port refers to the actual port number, starting at 0 and ending at the upper limit of your port licensing.

For each module, slot, and port, there are valid values. The following table describes them:

| Module/Host                            | Slot                     | Port (virtual)           |
|----------------------------------------|--------------------------|--------------------------|
| NuPoint UM 60 ports = 1<br>(or blank)  | Always 0 for mail ports. | 0 - licensed port limit, |
|                                        | Always 5 for fax ports.  | no duplicates allowed    |
| NuPoint UM 120 ports = 1<br>(or blank) |                          | OR                       |
|                                        |                          | * for all ports          |

All of these formats are valid:

| Example      | Specifies                                                       |
|--------------|-----------------------------------------------------------------|
| 1:*          | All lines on module 1                                           |
| 1:0:0-1:0:59 | All lines from 0 to 59 on module 1                              |
| 1:0:*        | All lines on module 1                                           |
| 1:0:0-2:0:4  | All lines on module 1, slot 0, through module 2, slot 0, port 4 |
| 1:*,2:*      | All lines on modules 1 and 2                                    |

If you are adding multiple lines to a group, you can separate the line numbers by commas as you enter them. For example, to add lines 0,1 and 5, enter 1:0:0,1:0:1,1:0:5.

If you are entering a range of lines, you must use the full triplet on both sides of the range. For example, to add 60 lines on module 1 to a line group, enter 1:0:0-1:0:59 (for single-module systems, you can omit the module number; for example, 0:0-0:59.)

**Note:**

For more information about adding line groups for specific applications, see the help topic for that application.

## 1.2.1.4 About Dialing Plans

### Dialing Plans for Mailboxes

The dialing plan is a string of nine elements. The elements in the string define, by position, the number of digits in valid mailbox numbers. The first element shows the number of digits allowed for mailboxes that begin with 1. The next element shows the number of digits allowed for mailboxes that begin with 2, and so on up to mailboxes that begin with 9. Each element is separated by commas.

If you change any element, you must re-enter the entire mailbox dialing plan.

Valid mailbox numbers can be up to 11 digits long, so valid numeric elements can be 0 (zero) through 11. When an element is zero, no mailboxes beginning with that digit are allowed.

**Example 1:** if your dialing plan is 0, 3, 3, 7, 3, 3, 3, 3, 10, the NuPoint Voice application interprets the string as follows:

| Digit   | Element | Interpretation                                                                                        |
|---------|---------|-------------------------------------------------------------------------------------------------------|
| 1       | 0       | No mailboxes start with 1. Mailbox numbers 1, 11, 111, etc. are all invalid.                          |
| 2       | 3       | Mailboxes starting with 2 are three digits long. Valid mailbox example: 211                           |
| 3       | 3       | Mailboxes starting with 3 are three digits long. Valid mailbox example: 347                           |
| 4       | 7       | Mailboxes starting with 4 are seven digits long. Valid mailbox example: 434-1234.                     |
| 5 6 7 8 | 3 3 3 3 | Mailboxes starting with 5, 6, 7, and 8 are three digits long. Valid examples are: 523, 617, 727, 855. |
| 9       | 10      | Mailbox numbers starting with 9 are ten digits long. Valid mailbox example: 912-456-7778.             |

The default dialing plan is 3,3,3,3,3,3,3,3,3 meaning all mailboxes have 3 digits that may start with any digit from 1-9.

You can also substitute a dial plan **type** for length of extension as follows:

## Dialing Plans for Server Features

Other entries allowed in the dialing plan allow other NuPoint Unified Messaging server features. The following table lists these entries for your reference.

| Element | Explanation                                                                                      |
|---------|--------------------------------------------------------------------------------------------------|
| 0-11    | Length of the mailbox. Zero means none may start with this number.                               |
| V       | Variable number (1 through 11) of digits; server uses timeout to determine end of mailbox number |
| M       | Analog networking (AMIS) mailboxes leading digit                                                 |
| A       | Dial-by-Name (ASCII) leading digit                                                               |
| T       | Call placement leading digit                                                                     |
| N(n)    | Networked mailboxes, (n) = mailbox number length. NV (variable number length) is also acceptable |
| P(n)    | Network mailbox with prefix used, (n) = mailbox length including prefix digit                    |

If the extension numbers at your site use too many starting digits to implement all these capabilities in your dialing plan, you can use the optional star prefix dialing plan, described below.

### Optional Star Prefix Dialing Plan

The standard dialing plan tells the NuPoint application how to handle DTMF digits 1 through 9. If you have a conflict (for example, if you have extensions starting with digit 3 and you have also assigned Dial by Name to digit 3), you can implement the optional Star Prefix dialing plan. This allows multiple features using the same digit entry with the star (\*) key.

You can implement several features with the optional dialing plan, as shown in the table below.

| Optional Dialing Plan Choices | Counterpart in Regular Dialing Plan |
|-------------------------------|-------------------------------------|
| Dial-by-Name                  | A                                   |
| Analog Networking             | M                                   |
| Networking without prefix     | N                                   |
| Networking with prefix        | P                                   |
| Call Placement                | T                                   |

For example, your regular Dial-by-Name dialing plan might look like this:

0,0,3,3,3,3,A,3,3 which would trigger the prompt, "Please enter a mailbox number or press 7 to dial by name." If you also have extension numbers that start with 7, they can never be directly reached. To avoid this conflict, use the Text Console to program a star prefix digit into the dialing plan. When properly configured, the star prefix dialing plan for

this example triggers the prompt, " Please enter a mailbox number or press \*7 to dial by name."

## PBX Dialing Plans

A PBX only allows a certain range of extension numbers. Ideally, employees' mailbox numbers should match their extension numbers. This makes it easier for callers to remember the proper mailbox number. If the numbers do not match, and the optional NP Receptionist program is installed, you can program certain conversion factors to allow the NuPoint Voice application to match the extension with the correct mailbox number.

If the company has employees in the field who do not have regular PBX extension numbers, you can give them mailbox numbers that do not fall in the range of allowable PBX extensions, even if there are enough mailbox numbers in this range. You can reserve these extra mailboxes for future expansion of in-house staff. For example, if the PBX allows extensions 200 to 399, you can keep the dialing plan at the default setting of 3,3,3,3,3,3,3,3, and assign all field personnel mailboxes 600 through 799.

Example 2: if your dial string is 0,4,3,3,3,3,A,V,10, it is interpreted as follows:

| Digit    | Element  | Interpretation                                                                             |
|----------|----------|--------------------------------------------------------------------------------------------|
| 1        | 0        | No Directory Numbers (DNs) start with 1.                                                   |
| 2        | 4        | DNs starting with 2 are four digits long. For example, 2123 is valid. 212 is not.          |
| <b>3</b> | <b>3</b> | DNs starting with 3, 4, 5 and 6 are three digits long.                                     |
| <b>4</b> | <b>3</b> |                                                                                            |
| <b>5</b> | <b>3</b> |                                                                                            |
| <b>6</b> | <b>3</b> |                                                                                            |
| 7        | A        | DNs starting with 7 are Dial-by-Name.                                                      |
| 8        | V        | DNs starting with 8 can be any length (variable).                                          |
| 9        | 10       | Mailbox numbers starting with 9 are ten digits long. Valid mailbox example: 1-916-456-7777 |

### 1.2.1.5 About Mailboxes

Think of a system mailbox as a post office box where voice messages, instead of written memos, are collected. Company employees become "system users" when they are assigned personal mailboxes.

To "open" their mailboxes, users call the system number, log in (press the star (\*) key plus the mailbox number on the telephone keypad), and enter personal passcodes. From NuPoint Receptionist, users press the star key (\*) plus the mailbox number, again press the star key (\*), and enter their passcodes. In an integrated system, users are taken directly to the passcode prompt.

A range of software tools are available to customize your system.

- After login, the functions that users can choose depend on the classes of service assigned to the mailbox when it was created:
  - Feature bits, grouped into a [Feature Class of Service](#) (FCOS), allow users to perform functions or control how the server can be used. One FCOS is assigned to each mailbox.
  - [Limits Class of Service](#) (LCOS) control features such as the number and length of messages stored in a mailbox. One LCOS is assigned to each mailbox.
  - [Group Class of Service](#) (GCOS) is the group management resource that keeps track of large systems with many groups. GCOS determines which users can send messages or respond to messages from other users. One GCOS is assigned to each mailbox.
  - [Network Class of Service](#) (NCOS) controls users' network access; it is part of the NuPoint Net Digital Network optional feature.
  - [Restriction Class of Service](#) (RCOS) is an element of NPA/NXX call screening that restricts mailbox outdials to certain area codes or prefixes within an area code. One RCOS is assigned to each mailbox.
  - Tenant Class of Service (TCOS) is used with the ESMDI "Multi-Tenant" application to govern mailbox interaction between user communities. (See "Creating or Modifying a Tenant COS" in the *NuPoint Unified Optional Integrations Guide*.)
- [Message Waiting Types](#) specify how users are notified of unplayed messages in mailboxes.
- Attendant Extension Numbers are called when assistance is requested by a caller leaving a message in a mailbox or when outside callers request assistance through NuPoint Receptionist. (See [Required](#) and Optional Mailbox Information.)
- NuPoint Receptionist processes calls according to individual users' requests.
  - Treatment Types assigned to mailboxes contain most instructions. (See [Treatment Types](#).)
  - Mailbox Extension Numbers are checked when callers input an extension number; this is the actual number that the system dials; it can be programmed when the "extension" is outside the PBX network (see [Programming NuPoint Receptionist to Dial an Outside "Mailbox's Extension"](#).)



**Note:**

You can configure and manage mailboxes, using either the Text Console or the Web Console.

**Outside Callers versus System Users**

- An "outside caller" dials the system number, enters a mailbox number, listens to the mailbox greeting (or to the prompt, "Please leave a message for <name>"), and then leaves a message.
- A "system user" logs in to his or her own mailbox and uses the make, give, or answer command to leave a message.

**Variable Length Mailbox Numbers**

The variable length mailbox number capability allows the server administrator greater flexibility when assigning mailbox numbers. You can configure a dialing plan to allow variable length mailbox numbers. Code a V in the desired digit position in the dialing plan, as described in the NuPoint Voice Application section under "Mailbox Dialing Plan."

Without this capability, all mailboxes in the same line group that begin with the same digit must be the same length. If, for example, you specify "3" as the mailbox number length for mailboxes beginning with 1, then all 1-series mailboxes must be three digits long: 100, 101, 102-199, etc. This means you have only 100 mailboxes available beginning with 1.

When you specify that mailboxes beginning with a certain digit can be variable length, those mailboxes can be as short as one digit (9), or as long as 11 (99999999999). This allows you over 11 billion different mailboxes beginning with 9! (You cannot, of course, configure 11 billion mailboxes, since that would exceed the storage capacity of the disk.)

Hotel installations can make good use of variable length mailboxes. It is convenient for a guest's mailbox number, telephone number, and room number to be the same, but this is impossible to achieve with fixed length mailbox numbers and a single line group. To understand why, realize that most hotel dialing plans assign three-digit numbers to rooms on floors one through nine, and four-digit numbers to rooms on floor 10 and above. If the mailbox for room 111 matched the phone number, the mailbox for room 1111 could not.

Variable length mailboxes allow you to keep all mailboxes in a single line group and still assign mailboxes that match room and telephone numbers.

**Configuration Considerations**

If you configure variable length mailboxes, mailbox owners must modify their interactions in these ways:

- When addressing a message to multiple recipients, they must enter a pound sign (#) after each mailbox number that is variable length, or wait for the server to prompt for the next recipient's mailbox number.

**Note:**

If mailbox owners enter a pound sign after a mailbox number that is not variable length, the server interprets it to mean that message addressing is complete. This can be confusing to mailbox owners, who find that pressing a pound sign at “the same time” elicits differing prompts. To avoid this confusion, it is recommended that you make either all mailboxes variable length, or none.

After entering the final mailbox number and pound sign, they must do one of the following:

- Enter an additional pound sign to get the “Begin recording . . .” prompt.
- Wait for the “Begin recording . . .” prompt.

### The System Time/Date Stamp for Messages

The system adds the time/date stamp to every message to tell the recipient when the message was recorded.

- If the user plays the message on the same day that it arrives, only the time is given (for example: 2:00 p.m.).
- If the user plays the message on a later day within the same week, the day of the week and the time are given (for example: Monday, 2:00 p.m.).
- If the user plays a message more than a week after it was received, the day of the week, the date, and the time are given (for example: Monday, May 22, 2:00 p.m.).

## 1.2.1.6 About Class of Service (COS)

Class of Service (COS) determines the characteristics that a mailbox will have. Some COS values determine what features will apply (such as x, or x). Other COS values determine what limits will apply (such as x and x). The NuPoint UM system is equipped with a set of [default COS values](#) which you can apply to the mailboxes you create. You can also copy and modify the default values to create your own custom COS values.

### Types of COS

- A **Feature Class of Service** (FCOS) is a collection of mailbox features, options, and abilities, identified by feature bits. For example, a mailbox that has a COS containing feature bit 043 allows that mailbox to receive the message of the day (an

announcement from the attendant's mailbox). each mailbox must be assigned an FCOS. If one is not specifically assigned, then the default FCOS 1 is applied.

- A **Limits Class of Service** (LCOS) is a group of mailbox limits used to control time and storage parameters within mailboxes, such as the number of messages the mailbox can store. The LCOS also determines the mailbox prompts language.
- A **Group Class of Service** (GCOS) manages communication between mailboxes for a particular set of users (for example, when some users need to exchange messages with each other but not with the majority of other mailbox owners).
- A **Restriction Class of Service** (RCOS) controls outdial applications, such as Call Placement, message delivery, and pages, and limits these telephone calls by either area code or prefix.

Two remaining classes of service are described in detail in other guides:

- A **Network Class of Service** (NCOS) controls network access for users; see the [NuPoint Net application section](#).
- A **Tenant Class of Service** (TCOS) manages mailbox interaction between user communities; see "ESMDI Integration" in the *NuPoint Unified Messaging Optional Integrations Guide* for more information.

## 1.2.1.7 Media Service

### Overview

By default, Mitel devices compress 20 milliseconds of sampled speech input into output frames, that is, a default "packet rate" of 20 ms. Different endpoints (for example, SIP devices) may require different packet rates for successful audio streaming. NuPoint UM interworking with MiVoice Business Release 4.0 (3300 ICP Release 10.0) or later, allows you to configure a variable packet rate for these devices.

### Limitations

- Variable packet rate is not supported for SIP connectivity with the MiVoice Office 250 or DMG (formerly PIMG/TIMG) deployments. These deployment options will maintain the fixed rate of 20 ms. even when the Variable Packet rate option is selected.
- Variable packet rate is not supported on MiVoice Business software prior to Release 4.0 (3300 ICP Release 10)

## 1.2.2 Network Elements

### 1.2.2.1 About Network Elements

**IMPORTANT:** Do not use this screen for MiCollab deployments using the Mitel MiVoice Business ICP. You must configure Network Elements in the MiCollab

**Users and Services application. You must also configure Network Elements before you configure line groups.**

Network Elements configuration must be done using the **Web Console**.

For standalone NuPoint UM, and for MiCollab deployments of NuPoint UM with the MiVoice Office 250 , you can use the Network Elements page of the NuPoint UM Web Console (only) to configure and manage various elements including multiple NuPoint servers, ICPs, and Digital Media Gateways (formerly PIMG/TIMG).

The local NuPoint UM server is automatically added to the Network Elements table and is identified by a padlock icon. The properties of the local server are configured at installation in the MSL server console so they are not configurable from the Network Elements page.

## 1.2.2.2 Procedures (Web Console)

### 1.2.2.2.1 Add a Network Element

To add a network element:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click Network Elements. The Network Elements table is displayed.
4. Click Add. The Add Network Elements form is displayed.
5. Configure the fields on the Network Elements form as described below.
6. Click Save.
7. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## Network Elements Fields Description

| Fields | Description/Values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type   | <p>*Required field.</p> <p>Select one of the following types: NPM, MN3300, PIMG, TIMG, HD PIMG, SIP GATEWAY, Other</p> <div style="background-color: #e6f2ff; padding: 10px; margin: 10px 0;"> <p><b>Note:</b></p> <p>The <b>SIP GATEWAY</b> option will appear only if the NuPoint Unified Messaging software is installed with a MiCollab license. If this is the case, then the MN3300 option will not appear in the list. The SIP GATEWAY option is used to integrate NuPoint Unified Messaging with the MiVoice Office 250 , MiVoice 5000 , or MiVoice MX-ONE . For more information about product integration, consult the following resources:</p> </div> <ul style="list-style-type: none"> <li>• MiVoice Office 250 with NuPoint UM standalone— <a href="#">MiVoice Office 250 Integration</a> and <i>Mitel MiVoice Office 250 and NuPoint UM Integration Guide</i></li> <li>• MiVoice 5000 with MiCollab NuPoint UM —<i>MiCollab Platform Integration Guide</i></li> <li>• MiVoice MX-ONE with NuPoint UM standalone— <i>NuPoint UM Technician's Handbook</i></li> </ul> |
| Name   | <p>(Optional Field.) Enter a name for the new element.</p> <p>This is the display name of the element.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Fields          | Description/Values                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Domain Name     | <p>*Required field.</p> <p>This is the display name of the element, unless a name has been entered in the Name field. If the element type is "NPM", you must enter in this field the fully qualified domain name of the server. For example: www.mitel.com. If the element type is anything other than "NPM", you can enter any name here, but it is strongly recommended that you enter the fully qualified domain name.</p> |
| IP Address      | <p>* Required field.</p> <p>The IP address of the system. For example: 127.0.0.1</p>                                                                                                                                                                                                                                                                                                                                          |
| Number of Ports | <p>Specifies the number of ports available. The maximum number of ports varies based on the configuration.</p> <div> <p><b>Note:</b></p> <p>This field will not be visible when the element is configured as NPM or MN3300.</p> </div>                                                                                                                                                                                        |
| Username        | <p>The user ID of the administrator account that is used to access the system. Maximum length is 20 alphanumeric characters.</p> <div> <p><b>Note:</b></p> <p>This field is only visible when the element is configured as NPM or MN3300.</p> </div>                                                                                                                                                                          |

| Fields   | Description/Values                                                                                                                                                                                                                                                                                                                                                     |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Password | <p>The password of the administrator account that used to access the system. Maximum length is 20 alphanumeric characters.</p> <p><b>Note:</b><br/>This field is only visible when the element is configured as NPM or MN3300.</p>                                                                                                                                     |
| URL      | <p>Specifies the path to launch the admin Console of the remote machine. Some characters such as "space" must be encoded as per the W3C specification (<a href="http://www.w3.org/Addressing/URL/url-spec.dita">http://www.w3.org/Addressing/URL/url-spec.dita</a>).</p> <p><b>Note:</b><br/>This field is only visible when the element is configured as "Other".</p> |

### 1.2.2.2.2 Modify a Network Element

You can modify the properties of any element except for the local element. To modify local element properties, you must use the Mitel Standard Linux (MSL) server manager console. For more information, see the *NuPoint UM Technician's Handbook*. You can modify the properties of one element at a time.

To modify an element:

1. In the navigation tree, click Offline Configuration > **Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click Network Elements. The Network Elements table is displayed.
4. Select an element in the table, and then click Edit.

5. Edit the required [network element fields](#).
6. Click Save.
7. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

### 1.2.2.2.3 Delete a Network Element

You can delete an element or multiple elements. You cannot delete the local element.

**Note:**

If lines have been mapped to an element, you must remove them before the element can be deleted.

To delete an element:

1. In the navigation tree, click Offline Configuration > **Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **Network Elements**. The Network Element table is displayed.
4. Select an element (or multiple elements) in the table, and then click Delete. Confirm the deletion.
5. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

### 1.2.2.2.4 Log In to a Remote Network Element

You can log in to a remote network element (that is, an element that is not the local element), through the Network Element table OR through the Web Console login page.

#### Log in from the Network Elements Table

1. In the navigation tree, click Offline Configuration > **Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **No**.
3. Click **Network Elements**. The Network Elements table is displayed.
4. Click the Login button beside the element to which you want to log in. If a userID and password have been supplied for the element when it was added to the Network



Elements table, then you will be automatically logged in. If not, then the link redirects you to the login page for that node.

### Log in from the Web Console Login Page

1. Open a Web browser and navigate to **http:// <IP Address or FQDN of the NuPoint UM server> /npm-admin**.
2. Enter the User Name and Password for the remote server, then select the server from the **Server** list.
3. Click Login.

## 1.2.3 Mailboxes and Greetings

### 1.2.3.1 Description

#### 1.2.3.1.1 What is a Mailbox?

Think of a system mailbox as a post office box where voice messages, instead of written memos, are collected. Company employees become "system users" when they are assigned personal mailboxes.

To "open" mailboxes, users call the system number, log in (press the star (\*) key plus the mailbox number on the telephone keypad, and enter personal passcodes. From NuPoint Receptionist, users press the star (\*) key plus the mailbox number, again press the star (\*) key, and enter their passcodes. In an integrated system, users are taken directly to the passcode prompt.

A range of software tools are available to customize your system. Once logged in, the functions users can choose depend on the class of service assigned to the mailbox when you create it:

- **Class of Service**
  - Feature bits, grouped into **Feature Class of Service** (FCOS), allow users to perform functions or control how the server can be used. One FCOS is assigned to each mailbox. ([See FCOS.](#))
  - **Limits Class of Service** (LCOS) controls features such as the number and length of messages stored in a mailbox. One LCOS is assigned to each mailbox. ([See LCOS.](#))
  - **Group Class of Service** (GCOS) is the group management resource that determines which users can send messages or respond to messages from other users. One GCOS is assigned to each mailbox. ([See GCOS.](#))
  - **Restriction Class of Service** (RCOS) is an element of NPA/NXX call screening that restricts mailbox outdials to certain area codes or prefixes within an area code. One RCOS is assigned to each mailbox. ([See Restriction Class of Service.](#))
  - **Network Class of Service** (NCOS) controls users' network access; it is part of the NuPoint Net Digital Network optional feature. ([See Network Class of Service.](#))
  - **Tenant Class of Service** (TCOS) is used with the ESMDI "Multi-Tenant" application to govern mailbox interaction between user communities. ([See "ESMDI Integration" in the NuPoint Unified Messaging Optional Integrations Guide](#) for more information.)
- **Message Waiting Types** specify how users are notified of unplayed messages in mailboxes. ([See Message Waiting Types.](#))
- **Attendant Extension Numbers** are called when assistance is requested by a caller leaving a message in a mailbox or when outside callers request assistance through NuPoint Receptionist. ([See Required Mailbox Information](#))
- NuPoint Receptionist processes calls according to individual users' requests.
  - **Treatment Types** assigned to mailboxes contain most instructions. ([See NuPoint Receptionist Treatment Types.](#))
  - **Mailbox Extension Numbers** are checked when callers input an extension number; this is the actual number that the system dials; it can be programmed when the "extension" is outside the PBX network (see [Programming NuPoint Receptionist to Dial an Outside Mailbox's Extension.](#))

## Outside Callers versus System Users

- An "outside caller" dials the system number, enters a mailbox number, listens to the mailbox greeting (or to the prompt, "Please leave a message for <name>"), and then leaves a message.
- A "system user" logs in to his or her own mailbox and uses the make, give, or answer command to leave a message.

## The System Time/Date Stamp for Messages

The system adds the time/date stamp to every message to tell the recipient when the message was recorded.

- If the user plays the message on the same day that it arrives, only the time is given (for example: 2:00 p.m.).
- If the user plays the message on a later day within the same week, the day of the week and the time are given (for example: Monday, 2:00 p.m.).
- If the user plays a message more than a week after it was received, the day of the week, the date, and the time are given (for example: Monday, May 22, 2:00 p.m.).

### 1.2.3.1.2 Types of Mailboxes in a Typical Installation

Besides standard mailboxes, a server typically has an administrator's mailbox, up to five attendant's mailboxes, and other special mailboxes. Special mailboxes have all the characteristics of standard mailboxes, plus special privileges and capabilities.

#### Standard Mailboxes

A standard mailbox is a collection point for voice messages. It also has greetings and prompts associated with it and can be configured to provide an array of capabilities related to voice messaging. You use different classes of service to configure mailboxes to provide the required capabilities.

#### Special Mailboxes

The following special mailboxes are described in detail below:

- [Administrator's mailbox](#)
- [Attendant's mailbox](#)
- [Broadcast](#)
- [Chain](#)
- [Check-In and check-out mailboxes](#)
- [Greeting-Only mailboxes](#)
- [Guest mailboxes](#)
- [NP OnDemand templates](#)
- [Rotational mailboxes](#)
- [Template mailboxes](#) (NP Forms)
- [Tree](#) (bulletin board) mailboxes (including [Shared Extension](#) mailboxes)

#### Administrator's Mailbox

The initial software installation contains an administrator's mailbox that has these special privileges:

- Contains the company greetings

- Can create or edit master distribution lists that can be used by any mailbox owner in the server (with an appropriate FCOS)
- Can add mailboxes, delete mailboxes, and change mailbox configuration, by phone

For more information about the administrator's mailbox, see [NuPoint Voice Application - Customize Administrator Mailbox](#).

## Attendant's Mailbox

The initial software installation also contains an attendant's mailbox. This mailbox supplies these functions:

- Its greeting is the message of the day, which is stored only in the attendant's mailbox.
- A customized site tutorial (a form of greeting) can be recorded from the attendant's mailbox.
- When outside callers access the message center, they are prompted to enter a mailbox number or wait. Callers who wait are then prompted to leave a name and a message. These unaddressed messages are stored in the attendant's mailbox.

For more information about the attendant's mailbox, see [NuPoint Voice Application - Customize Attendant Mailbox](#).

## Broadcast Mailboxes

With a broadcast mailbox, any caller can send a single message to multiple mailboxes. In addition, mailbox owners can send names and greetings to other mailbox owners. This capability is particularly useful for disaster recovery or overflow mailboxes. Broadcast mailboxes other than broadcast message mailboxes can also send a message waiting status to multiple mailboxes.

To illustrate use of a broadcast message mailbox, suppose the manager of a company health club wants club members to know about an upcoming tournament. The manager logs in to his or her mailbox and makes a message for the broadcast message mailbox. The broadcast message mailbox, in turn, sends the message to all members' mailboxes (this is sometimes called the "bulletin board feature").

In this example, the server administrator assigns a Broadcast FCOS to one mailbox. The server administrator then creates distribution list 01 for that mailbox, including the mailbox numbers of all the club members, to a maximum of 65,535.

This is a useful feature if you have mailboxes accessed in different calling areas. You can update the greeting for all the mailboxes, and then callers can reach the local mailbox to get the information they need. Or, you could use it to broadcast to remote mailboxes through NP Net (an optional feature).

### Broadcast Message Mailbox

A broadcast message mailbox must contain a distribution list 01. If you want the broadcast message mailbox to be able to keep messages that have been broadcast, it must first be able to receive messages. Add any of the “receive” feature bits to the broadcast message mailbox. Feature bit 043 (Receive message of the day) is needed only if the broadcast message mailbox is also the user’s *only* mailbox. In the LCOS assigned to this mailbox, you should set a shorter message length so the mailbox will not fill up too quickly.

### Broadcast Greeting, Name, or Passcode Mailbox

Broadcast greeting is a method of propagating a newly recorded or modified greeting to a list of mailboxes, similar to the method used for propagating messages with broadcast messages mailboxes. Broadcast name is identical in concept to broadcast greeting, except that newly recorded and modified names will be propagated to the broadcast list. Broadcast passcode is similar, except that it propagates a new mailbox passcode to the list.

You can create the broadcast list for a broadcast greeting, name or passcode mailbox like any distribution list, either from the User Options menu or from the List Maintenance Menu at the server maintenance console. All three of these mailbox types use distribution list 09. By assigning the appropriate feature bits to a mailbox, one, two, or all three of these capabilities can be performed by one mailbox.

### Greeting

A broadcast greeting mailbox requires feature bit 174 (Define broadcast greeting) in its FCOS. All types of greetings and all names created or modified on these broadcast mailboxes will be broadcast, including:

- Day/night company greetings for the administrator’s mailbox
- Message of the day
- Site tutorial for attendant mailboxes
- Multiple mailbox greetings

### Name

You can record a name in the broadcast name mailbox and have it announced. The mailbox is defined by the presence of feature bit 178 (Define broadcast name mailbox) in the FCOS. Since the name in the mailbox should be the name of the recipient group, such as “Sales Bulletin Board,” users must remember to state their names at the beginning of their messages. This name override capability is enabled through feature bit 123 (Announce broadcast mailbox name) in the mailbox FCOS. With this feature, if you do not record a name in the broadcast mailbox, the mailbox number is announced. In addition, answers to the messages are also broadcast. Without this feature, the server announces the name of the broadcast message originator, if that person is a server user. In this case, answers to a message go to the sender only. Outside callers

must remember to announce their names if they want recipients to know who sent the message.

## **Passcode**

You can change the passcode in the broadcast passcode mailbox and have it transmitted to all mailboxes in the distribution. This feature is enabled through feature bit 231 (Passcode Broadcast Mailbox) in the mailbox FCOS.

## **Multiple Mailbox Greetings**

Mailboxes with multiple mailbox greetings defined broadcast each individual greeting as it is created or modified, and a recipient mailbox is checked to see if its FCOS has feature bit 175 (Receive broadcast greeting) or feature bit 179 (Receive broadcast name), or feature bit 232 (Allow receipt of passcode broadcasts). Mailboxes generating broadcast greetings that also have multiple mailbox greetings enabled can only send messages to recipient mailboxes that also have multiple mailbox greetings enabled.

## **Broadcast Message Waiting Status**

The server also has the ability to automatically send the message waiting status of a mailbox to a distribution list of mailboxes without sending the actual message. This is useful in a business where any one of a number of people can respond to a message, but only one person needs to. A single response eliminates redundant answers to a message, thereby raising staff productivity and satisfying the sender of the message.

## **Example of Use**

In a brokerage firm, any of six account executives can respond to potential clients' requests for information. If the request results in a sale, the account executive who answered the request receives credit for that sale.

Broadcasting the message waiting status of a mailbox gives this firm an easy and efficient way to pass these potential sales on to its brokers. The brokerage first routes all prospects to a main mailbox in which they can leave requests. When callers leave requests, the server automatically turns on the message waiting lights on brokers' phones. The first available broker then logs into the main mailbox and responds to the request.

## **Configuration Requirements**

The broadcast message waiting status capability uses a server feature plus distribution list 01 of a mailbox:

- You must include feature bit 134 (Broadcast message waiting only) in the FCOS assigned to a mailbox before it can send its message waiting status to a distribution list.

- You must also set up distribution list 01 of a mailbox to include all the destination mailboxes to which to send the message waiting status of the main mailbox.

## Multiple Mailboxes per User

Each mailbox in distribution list 01 always reflects the message waiting status of the main mailbox, regardless of how many messages are in that destination mailbox. Therefore, you may want to assign a separate mailbox to users for their messages and reserve the destination mailbox simply to notify them a message is in the main mailbox.

## Incompatibility With Broadcast Message Feature

A mailbox can either send its messages or its message waiting status to the mailbox in its distribution list 01, but not both. This means the FCOS assigned to a mailbox cannot have both of these feature bits:

- 122 (Define broadcast mailbox)
- 134 (Broadcast message waiting only)

## Combining Broadcast Mailbox Types

In addition to being a standard mailbox, a broadcast greeting, name, or passcode mailbox can also be a tree mailbox. A broadcast greeting, name or passcode mailbox can itself be a broadcast message mailbox that contains different broadcast lists for messages and greetings. To have both messages and greetings broadcast to the same list of recipients, it is necessary to make distribution lists 01 and 09 identical. List 01 controls the messages broadcast to recipients, and list 09 controls the greeting, name, or passcode broadcast to recipients.

## Limits

Standard server limits on greeting and name length also restrict the broadcast greeting or name lengths for the sending mailbox; limits for recipient mailboxes are ignored.

Greetings will not be broadcast when modified through the console Greeting Copy/Delete Menu at the server maintenance console.

Statistical or billing information is not available for broadcast greeting activity.

## Non-Delivery Receipts

Non-delivery receipts are deposited in the broadcast mailbox under any of the following conditions:

- The recipient mailbox does not have the appropriate bit in its FCOS to receive a broadcast greeting or name.
- A remote recipient mailbox could not be reached because of network blockage.

- A greeting could not be copied or recorded for a mailbox (local or remote) for miscellaneous reasons.

## Chain Mailbox

Chain mailboxes play a greeting, then route calls to the mailbox selected by the caller. The chain mailbox itself cannot accept messages from users or callers. Chain mailboxes are useful for routing incoming callers. For example, a chain mailbox greeting could say, "Welcome to the Acme Company Credit Department. If you are calling about new home mortgages, enter 100 on your pushbutton phone. If you want to refinance your existing mortgage, enter 110. For car and truck loans, enter 120. If there is a problem with your credit report, enter 130. If you wish to speak to an operator, or have a rotary phone, please wait." The caller can then dial the appropriate mailbox number and be transferred to it.

A mailbox owner can log into a chain mailbox and change the mailbox name, greeting, and passcode, but cannot make messages, or create or use distribution lists.

## Check-In/Check-Out Mailboxes

These mailboxes are used by hotels.

A check-in mailbox is a special mailbox that manipulates other mailboxes. When a check-in mailbox is accessed, the server prompts for the mailbox number to be checked in, then prompts the caller (usually a hotel or motel attendant) to record a name and enter a passcode for the mailbox. More than one desk clerk can call into a single check-in mailbox at one time, so it is unnecessary to create more than one check-in mailbox for your server.

A check-out mailbox is the counterpart of the check-in mailbox. When the attendant calls a check-out mailbox, the server prompts for the mailbox number to be checked out. It then gives the attendant the choice of either keeping or discarding any messages left in the mailbox. Finally, the server purges the guest's name, greeting and passcode, and follows the attendant's command about messages. The mailbox is then ready to be checked in for the next guest.

A check-out mailbox must also be created to use the hotel check-in/check-out feature of the server.

## Greeting-Only Mailboxes

When a caller reaches a Greeting-Only mailbox, the server plays the greeting and then hangs up. Greeting-Only mailboxes are established by assigning FCOS 6 (Greeting Only) or a similar FCOS to them.

To illustrate a use of a Greeting-Only mailbox, imagine that a theater manager wants callers to hear an announcement of show times. The manager would create a mailbox with this FCOS, call the mailbox, log in, then record a greeting.



The mailbox user can change the mailbox name, greeting, and passcode but cannot create or use distribution lists. No one can make messages for or give messages to a Greeting-Only mailbox.

A Greeting-Only mailbox must have a greeting; otherwise the server considers the mailbox invalid. To log in to a Greeting-Only mailbox that does not have a greeting, press the star (\*) key on the phone key pad; then enter the mailbox number. You may choose to remove feature bit **066** (Login during greeting in Greeting-Only mailbox) after you record a greeting for the mailbox.

## Guest Mailboxes

A guest mailbox is one that is assigned to each guest, typically in a hotel or motel. You establish a guest mailbox by assigning an FCOS, such as the Lodging FCOS described in the [Feature Classes of Service](#) section, to it. These mailboxes are particularly appreciated by users who might be unfamiliar with voice messaging systems, and their uninitiated callers.

The guest does not need to do any kind of mailbox set-up, such as recording a name and passcode, before using the mailbox.

The server can usually be integrated with the hotel/motel telephone system to allow the user to log in simply by pressing a button on the telephone and entering a passcode, when prompted by the server. Immediately after the guest logs in, the server will play the first message automatically. The guest is given the options of keeping or discarding the message; when the choice is made, the next message, if any, is played without any input from the guest.

Prompts for a guest mailbox are in the form, “Press P, the 7 key, to play your message....” in order to be most helpful to the uninitiated user.

Callers also hear these expanded prompts, “Press R, the 7 key, to review your message...”

As a variation, a hotel or motel may wish to assign the full-feature guest mailbox. This is a mailbox with FCOS 2 (Full Guest) or its equivalent in the mailbox configuration. The desk clerk would still check in this mailbox; however, the guest would be able to change the name and passcode, and would also be able to record a personal greeting, make messages for other guest’s mailboxes, and so on.

## NP OnDemand Template Mailboxes

[NP OnDemand](#) is an optional feature where the NuPoint Unified Messaging system creates mailboxes only when they are needed. A NP OnDemand template mailbox is used as a model for the temporary mailboxes that this application creates. Typically, temporary mailboxes have their LCOS limits set to very small numbers (such as a day or two).

## Rotational Mailbox

A rotational mailbox allows callers to hear greetings that change. Greetings change either by time and date (in a “period” rotational mailbox) or with every call (in an index type rotational mailbox).

A rotational mailbox of either the period type or the index type plays its greeting, then plays the greeting of a child mailbox. Distribution list 01 in the rotational mailbox controls the rotating (or cycling) of callers through the child mailboxes. Rotational mailboxes do not require greetings, which can be useful in some applications.

You make a standard mailbox rotational by assigning FCOS 17 (Rotational) to it. You make a standard mailbox a child mailbox by including it in the distribution list of the rotational mailbox.

Callers cannot leave messages in the rotational mailbox itself, but they can leave messages in one of the child mailboxes, if the child mailbox is assigned an FCOS that allows callers to leave messages. You may have up to 190 child mailboxes in the rotational mailbox’s distribution list 01.

Note: You must use the **Text Console** to configure period- or index-type rotational mailboxes.

### Period-Type Rotational Mailboxes

To illustrate a use of a period-type rotational mailbox, suppose that a restaurant owner wants all callers to hear the special of the day. Tuesday callers, for example, would hear the restaurant greeting and the special for Tuesday; Wednesday callers would hear the restaurant greeting and the special for Wednesday, and so on. Figure 5-7 illustrates this example.

In this example, the restaurant owner would assign FCOS 17 (Rotational Mailboxes) to one mailbox (mailbox 100) and record a restaurant greeting for this mailbox. For this mailbox, the owner would also create distribution list 01 containing seven child mailboxes (mailboxes 101-107). To each of the seven child mailboxes the owner would assign FCOS 6 (Greeting Only); for each the owner would also record the daily special. The owner would then set the start date and start time for the rotation and the length of time before the server rotates to the next mailbox (24 hours in this example).

### Index-Type Rotational Mailboxes

The server assigns a sequential index to each member of the rotational mailbox’s distribution list. If a sorted list is created, mailboxes are indexed starting with the lowest-numbered mailbox. If an unsorted list is created, mailboxes are indexed starting with the first mailbox entered in the list. The first caller reaches the first indexed mailbox; the second caller reaches the second indexed mailbox, and so on. When the last-indexed mailbox is reached, the cycle starts over at the first indexed mailbox.

As an example of an index-type rotational mailbox, imagine that a veterinarian wants pet owners to hear three pet-care messages over an unspecified period of time. Each time pet owners call the veterinarian's number, they (are likely to) hear a different one of the three messages.

In this example (Figure 5-8) the veterinarian assigns FCOS 17 (Rotational Mailboxes) to one mailbox (mailbox 781) and records a standard veterinary-practice greeting for this mailbox. For this mailbox the veterinarian also creates distribution list 01 containing three mailboxes (mailboxes 711-713). To each of the three mailboxes, the veterinarian assigns FCOS 6 (Greeting Only); for each, the veterinarian also records a different pet-care message.

## Messages

Callers cannot leave messages in the rotational mailbox itself, but they can leave messages in one of the child mailboxes, if the child mailbox is assigned an FCOS that allows callers to leave messages. You may have up to 190 child mailboxes in the rotational mailbox's distribution list 01.

## Greetings

If you want the server to hang up after it plays the child mailbox greeting, assign a Greeting-Only FCOS to these child mailboxes, including feature bit 062 (Hang up immediately after greeting).


If you want each mailbox to provide an introductory announcement before connecting the caller with an employee, give the child mailboxes an FCOS that includes feature bit 063 (Call mailbox attendant after greeting) or feature bit 064 (Call mailbox's extension number after greeting). Do *not* include feature bit 062 (Hang up after greeting). Be sure to include the attendant's or extension number in the appropriate field when creating the mailbox.

Rotational mailboxes can also be used with NP Forms applications (see [FCOS 16](#)).


## Mailbox Status

You can obtain information on existing rotational mailbox parameters, such as whether the mailbox is the period or index type, by using the Mailbox Dump option in the Mailbox Maintenance menu.

Sample Period-Type Rotational Mailbox

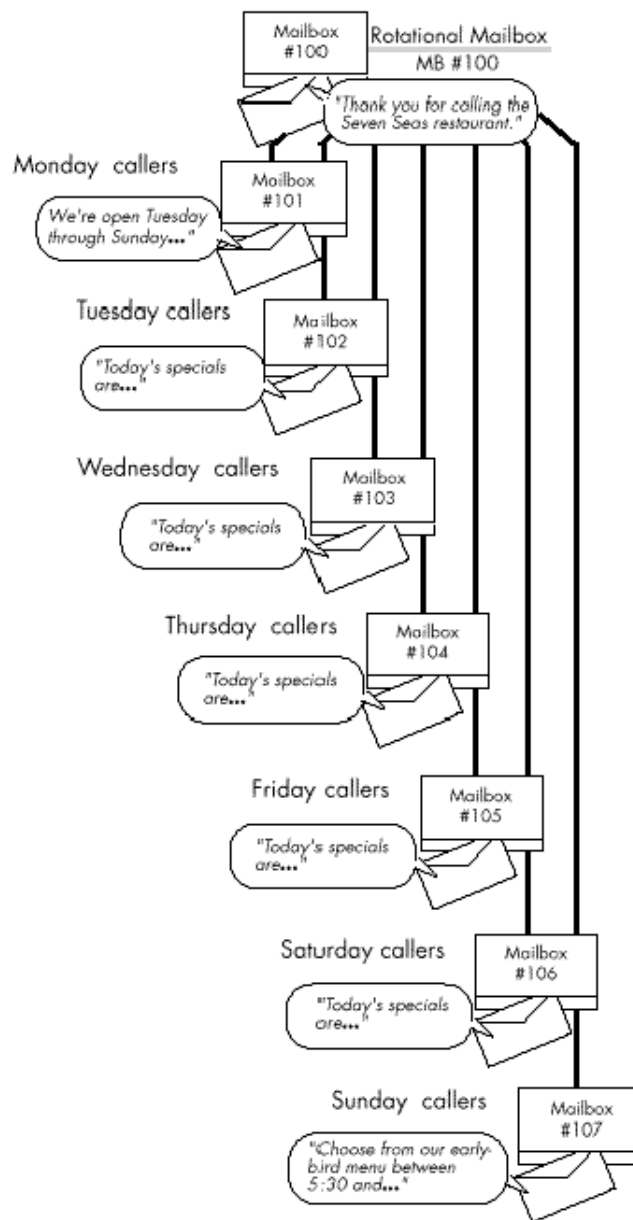


Sample Index-Type Rotational Mailbox

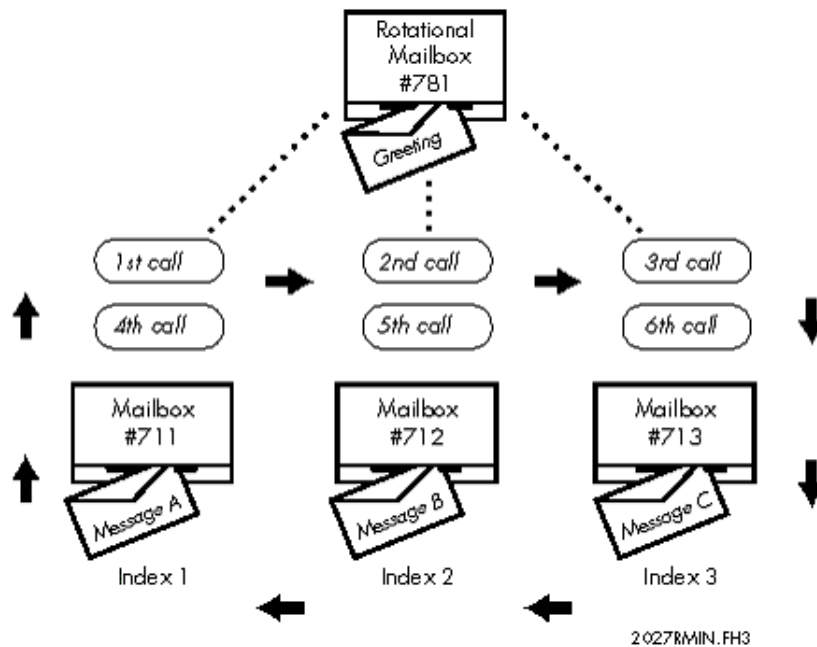

### Nested Rotational Mailboxes

You can build nested rotational mailbox arrangements by making a child mailbox itself a rotational mailbox. The figure below shows an arrangement in which the rotational mailbox has three child mailboxes. One of the child mailboxes (mailbox 426) is itself a rotational mailbox, with three other child mailboxes (mailboxes 432, 433, and 444).

### Sample Nested Rotational Mailboxes

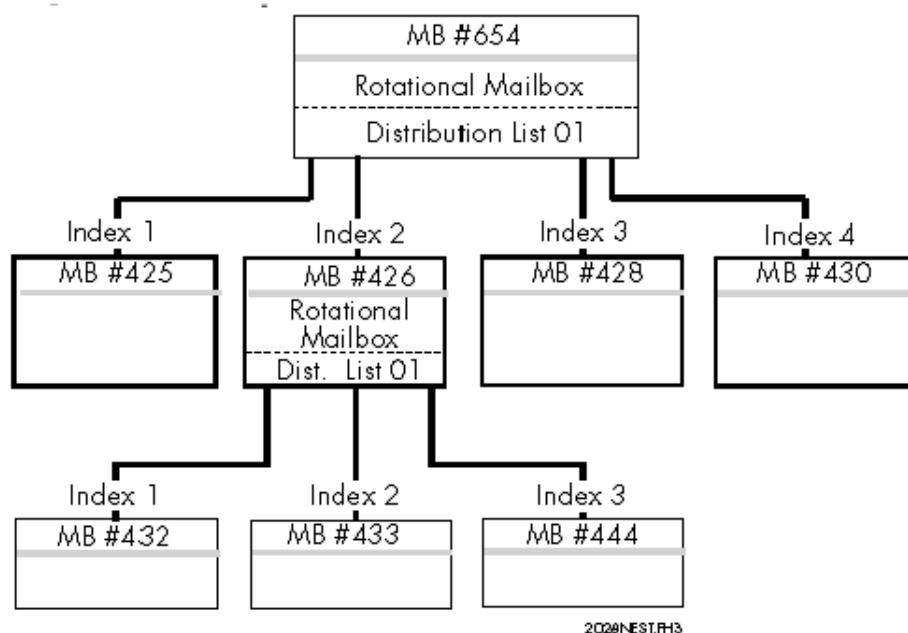

## Rotational Mailbox Diagram

Before configuring a rotational mailbox, complete a Mailbox Worksheet and a Rotational Mailbox Diagram. Each diagram entry is explained in the following paragraphs. Pre-programmed (default) values for entries are given, where applicable. If you want to use a default value, indicate that fact on the diagram. Then you will not need to select or enter any information for that parameter during re-configuration. The diagram below shows a sample Rotational Mailbox diagram. Blank worksheets and diagrams are [here](#).

### Mailbox No.

Enter the number of the rotational mailbox in the topmost box on the worksheet. Enter the numbers of all mailboxes that are members of the rotational mailbox's distribution list 01 (child mailboxes) in the remaining boxes. For every mailbox number you identify in the Rotational Mailbox Diagram, you should complete a corresponding Mailbox Worksheet. Blank worksheets are located in this manual.

### FCOS

The FCOS assigned to a child mailbox determines its relationship to the rotational mailbox and also determines how it is used. For example, FCOS 17 or a customized equivalent enables a rotational mailbox; FCOS 6 or a customized equivalent enables the mailbox to give the caller information then hang up. Use either one of the defaults described in the [Feature Class of Service](#) section or [customize an FCOS](#) that includes all the applicable feature bits.

### Index

If you want rotation to start at the first child mailbox in the rotational mailbox's distribution list 01, just enter a check mark; otherwise, enter the index number of the mailbox you want the rotation to start at. Rotation starts with the lowest-numbered index.

### Period

If you want the rotation to cycle on a time-and-date basis, enter the number of hours in the period. This is the length of time before the server rotates to the next child mailbox. All callers reach the same mailbox in the distribution list during the stated period. (No index is necessary.)

### Start date

For the period type of rotation, enter the date on which the rotation cycle is to start.

### Start time

For the period type of rotation, enter the time at which the rotation cycle is to start.

## Sample Rotational Mailbox Diagram

## Rotational Mailbox Worksheet

|                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                            |                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| System Mailbox number <u>100</u><br>FCOS <u>17</u><br>Index <u>    </u> Period <u>    </u><br>Start date <u>    </u><br>Start time <u>    </u><br>List <u>1</u><br>Members <u>101, 102, 103, 104,</u><br><u>105, 106, 107</u><br><input checked="" type="checkbox"/> Greeting/msg recorded |                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                            |                                                                              |
| System Mailbox number <u>101</u><br>FCOS <u>6</u><br>Index <u>    </u> Period <u>    </u><br>Start date <u>    </u><br>Start time <u>    </u><br>List <u>    </u><br>Members <u>    </u><br><input checked="" type="checkbox"/> Greeting/msg recorded                                      | System Mailbox number <u>102</u><br>FCOS <u>6</u><br>Index <u>    </u> Period <u>    </u><br>Start date <u>    </u><br>Start time <u>    </u><br>List <u>    </u><br>Members <u>    </u><br><input checked="" type="checkbox"/> Greeting/msg recorded | System Mailbox number <u>103</u><br>FCOS <u>6</u><br>Index <u>    </u> Period <u>    </u><br>Start date <u>    </u><br>Start time <u>    </u><br>List <u>    </u><br>Members <u>    </u><br><input type="checkbox"/> Greeting/msg recorded |                                                                              |
| Mailbox #104<br>Thursday Msg.<br>FCOS 6<br><input checked="" type="checkbox"/>                                                                                                                                                                                                             | Mailbox #105<br>Friday Msg.<br>FCOS 6<br><input checked="" type="checkbox"/>                                                                                                                                                                          | Mailbox #104<br>Saturday Msg.<br>FCOS 6<br><input checked="" type="checkbox"/>                                                                                                                                                             | Mailbox #104<br>Sunday Msg.<br>FCOS 6<br><input checked="" type="checkbox"/> |

### List

A rotational mailbox must have distribution list 01, whose members are the mailboxes that are rotated to. If the list is sorted when it is created, the rotation cycle begins with the lowest-numbered mailbox. If the list is unsorted when it is created, the rotation cycle begins with the first mailbox entered in the list. Distribution lists are allowed in child mailboxes (for example, to create a nested arrangement) but they are not needed for the rotational arrangement to work.

### Members

Identify all child mailboxes as members of distribution list 01 in the rotational mailbox.

## Template (NP Forms) Mailboxes

**NP Forms** is an optional feature, and provides an information template function (voice forms) for a server.

An NP Forms mailbox plays the greetings stored in its child mailboxes, sequentially, and records a message after each greeting. A typical application must have a rotational mailbox, with several child NP Forms mailboxes, all pointing to the same list of Greeting-Only mailboxes.

## Tree Mailboxes

A tree mailbox provides a call routing capability. It plays a greeting then prompts the caller to enter a single digit to obtain more information. After entering the desired digit, the caller is routed to a child mailbox. A tree mailbox is sometimes called a “bulletin board” mailbox.

A mailbox owner can set up a tree mailbox by creating distribution list 01, then adding the numbers of the child mailboxes into this list. The lowest-numbered mailbox number can be reached by pressing 1 after the greeting, the next lowest-numbered mailbox number can be reached by pressing 2, etc. Up to 190 child mailboxes can be added. A greeting that directs a caller to enter an appropriate number must be recorded.

As an example of a tree mailbox, suppose that a major hotel chain wants to route callers to a particular reservations desk. The tree mailbox greeting could be: “Welcome to Globe Hotels’ world-wide reservation service. Press 1 for hotels in Canada and the US; press 2 for hotels in Mexico and South America; press 3 for hotels in Europe.” Figure 5-11 illustrates this arrangement.

To implement this arrangement, you would first plan for two series of numbers to be processed in the same order:

- The mailbox numbers for the three reservations desks
- The single-digit numbers callers press on the key pad to reach these mailboxes

The chart below gives an example.

| Department        | Mailbox # | Digit callers press to reach mailbox |
|-------------------|-----------|--------------------------------------|
| Canada/US.        | 104       | 1                                    |
| Mexico/S. America | 106       | 2                                    |
| Europe            | 107       | 3                                    |


Second, you would assign the Tree FCOS to a standard mailbox that acts as the tree mailbox. You would then create standard mailboxes for each reservation desk to act as child mailboxes. Next, you would add the child mailbox numbers to distribution list 01 of the tree mailbox. Finally, you would record a greeting, similar to the one mentioned earlier, for the tree mailbox.



## Types of Child Mailboxes

Child mailboxes in the distribution list of a tree mailbox can themselves be trees or any other types of mailboxes. For example, by assigning an FCOS such as Unlimited or Restricted to a child mailbox, callers can leave messages.

## Sample Tree Mailbox Arrangement

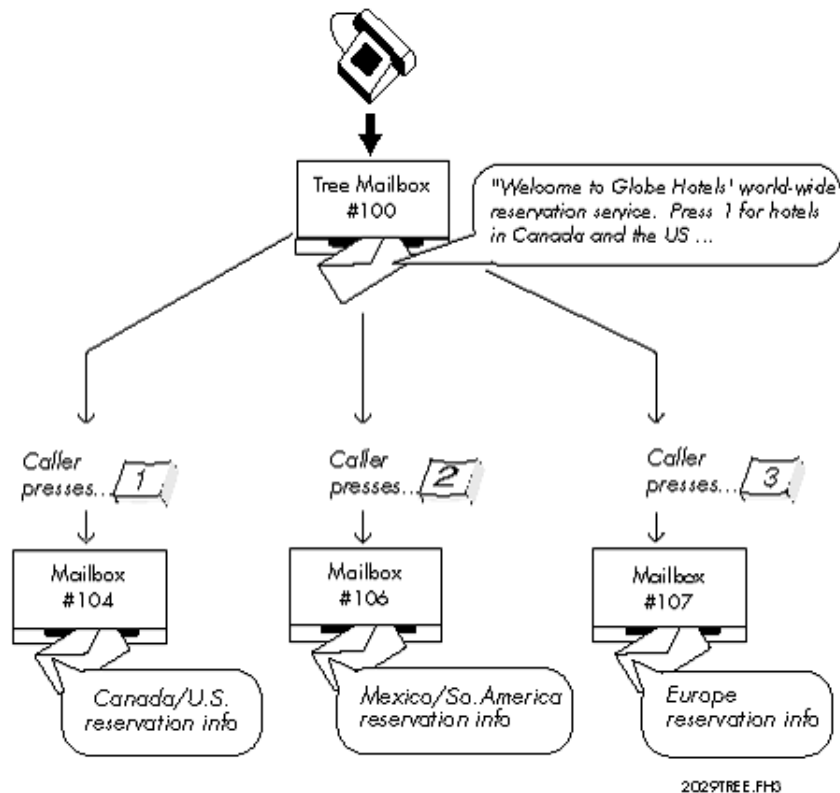

## Server Assigns Caller Input Digits

The server assigns the digits 1, 2, and 3 to the mailboxes in distribution list 01: digit 1 to the first mailbox in the list, digit 2 to the second mailbox in the list, and so on. If the list is sorted, digit 1 is assigned to the lowest numbered mailbox, digit 2 to the next lowest numbered mailbox, and so on. If you assign additional mailboxes to the list, then you should change the tree mailbox's greeting to reflect the new choices available. For sorted distribution lists, if you delete a mailbox from the list, or if new numbers are assigned to mailboxes, you must change the greeting to reflect the new order. These changes would not affect unsorted distribution lists.

## More Than Nine Child Mailboxes

If you have more than nine child mailboxes, the server pauses briefly after single-digit entries to allow for more digits. To speed up processing, the greeting should tell users they can enter 2# instead of 2 for the second branch.

## Routing of Calls

If callers do not enter a digit after listening to the greeting in a tree mailbox, they are routed to the attendant's mailbox.

- If feature bit 120 (Default to first child mailbox of tree mailbox) is included in the FCOS, callers are routed to the first mailbox in the list. The server then processes the call according to the FCOS assigned to the first child mailbox.
- Feature bit 186 (Default to last child mailbox of tree mailbox) works similarly, defaulting to the last mailbox in the list. The server then processes the call according to the FCOS assigned to the last child mailbox.

## Shared Extension Mailbox

To configure a tree mailbox where several people share one telephone extension, you can use the suggested additional FCOS for Shared Extension Mailbox (see [Features Class of Service](#)).

Assign the following feature bits to the Tree mailbox:

- 229 Play names of list 1 children
- 234 Check message wait status of children

You will also need to consider the routing of calls. If callers do not enter a digit after listening to the greeting in a tree mailbox, they are routed to the attendant's mailbox. For this type of mailbox, you do not want this to happen. To avoid this situation, you can assign either of the following feature bits:

- 120 Default to first child mailbox of tree mailbox
- 186 Default to last child mailbox of tree mailbox

You could have a last mailbox that has a greeting only and then hangs up ("Nothing recorded, Good Bye."). In this case, distribution list 01 would contain the shared users and the last "good bye" mailbox, which can be shared throughout your extension mailbox applications.

The shared extension mailbox must contain distribution list 01 with all child mailboxes as members. You can record a greeting for the mailbox; the server automatically prompts the user with the child mailboxes' names.

Each child mailbox must have an FCOS that contains feature bit 134 (Broadcast message waiting only), and distribution list 01 with the parent mailbox as the only member. Each child mailbox can have a name recorded so the shared extension mailbox plays its greeting with user names. If you don't record a name, the mailbox number is played instead.

Here is an example of what a caller would hear: "You have reached Ivy Dormitory, room 18" (a custom greeting). Then follows a standard greeting: "To leave a message for Cindy

Jones, press 1. To leave a message for Laura Smith, press 2.” If a user does not record a name, the prompt would be: “To leave a message for mailbox 203, press 3.”

A user of a shared extension mailbox would be prompted to enter the same digits when logging in, for example, “Hello Ivy Dormitory, room 18. To retrieve messages for Cindy Jones press 1, to retrieve messages for Laura Smith, press 2.” Then the user would be prompted with a name confirmation, and asked for the child mailbox’s passcode.

If a user moves to another room or telephone station, you can transfer the child mailbox to another shared mailbox extension without losing any messages.

Check both the current room mailbox and the moving to room mailbox distribution lists 01 for the following items:

- Are the members in the lists sorted or unsorted?
- When you make the change, which option will the move to room mailbox provide to the callers?

**Note:** When you are moving from one room to another, it is strongly recommended that the new member be at the end of the current members (just before the Good Bye mailbox number). You might have to write down the members sequence, and then delete all and re-input them in the needed sequence.

To do this, you would remove the child mailbox from distribution list 01, and add it to another shared mailbox extension’s distribution list. Then you would change the child mailbox’s distribution list to point to the new parent mailbox. All settings for the child mailbox, such as messages, greetings, name, etc. will remain intact.

## NP Receptionist Considerations

Feature bit 121 (Define tree mailbox) lets a child mailbox also be a tree mailbox. Feature bit 141 (Define chain mailbox in NP Receptionist) allows a child mailbox to act as a chain mailbox. In addition, with these feature bits included in the mailbox’s FCOS, NP Receptionist can route a call from a chain mailbox to a tree mailbox and vice-versa.

Callers can bypass the single-digit tree options if they want to enter an extension number instead. In the greeting of the tree mailbox, tell callers they can press # to bypass the single-digit tree options. Be sure to tell callers that they can press # only while the greeting is playing; at any other time during the call, if callers press #, they will be disconnected. The greeting should also state that callers can reach an attendant by pressing 0.

## Tree Mailbox Diagram

Before configuring a tree mailbox, complete a Mailbox Worksheet and a Tree Mailbox Diagram. Each diagram entry is explained in the following paragraphs. Pre-programmed (default) values for entries are given, where applicable. If you want to use a default value, indicate that fact on the diagram. Then you will not need to select or enter any

information for that parameter during re-configuration. The diagram below shows a sample Tree Mailbox diagram. Blank Mailbox Group Worksheets are [here](#).

### Mailbox No.

Enter the number of the tree mailbox in the topmost box on the worksheet. Enter the number of all mailboxes that are members of the tree mailbox's distribution list 01 (child mailboxes) in the remaining boxes. For every mailbox number identified in the Tree Mailbox Diagram, there should be a corresponding Mailbox Worksheet completed (see "Mailbox Worksheets" later in this section).

### Sample Tree Mailbox

#### FCOS

A The FCOS assigned to a child mailbox determines its relationship to the tree mailbox and also determines how it is used. For example, FCOS 15 (Tree) or a customized equivalent enables a tree mailbox; FCOS 17 (Rotational Mailboxes) or a customized equivalent enables branching to another mailbox; FCOS 6 (Greeting Only) or a customized equivalent enables the mailbox to give the caller information then hang up; FCOS 1 (Unlimited) allows the mailbox to play a greeting then allows a caller to leave a message. Use either one of the defaults described in the [Feature Class of Service](#) section or [customize an FCOS](#) to include all the applicable feature bits.

#### List

A tree mailbox must have distribution list 01, whose members are the mailboxes that are branched to when a caller presses the associated digit.

#### Members

Identify all child mailboxes as members of distribution list 01 in the tree mailbox.

#### Greeting recorded

You must record a greeting in the tree mailbox, to tell callers which digit to press for the desired mailbox. You should also record appropriate greetings or messages in the child mailboxes.

## 1.2.3.1.3 About Distribution Lists

This topic covers:

- How distribution lists are used in the server software
- Interactions between distribution lists and various class of service settings
- Distribution list administration

## Overview

A distribution list allows a mailbox owner to send the same message to a number of recipients by entering the distribution list number instead of entering each mailbox number. Mailbox owners can create distribution lists by phone, or a server administrator can create them at the server maintenance console.

There are two types of distribution lists: mailbox owner distribution lists (sometimes called “user distribution lists”), which are only accessible by the mailbox owner, and master distribution lists (sometimes called “system distribution lists”), which are accessible by all users of a line group.

In addition to addressing messages, distribution lists control the actions of several special mailbox features. The distribution lists in tree mailboxes and rotational mailboxes identify child mailboxes, and the distribution lists in broadcast mailboxes identify the recipients of broadcast messages, greetings, and so forth.

Distribution list administration involves many parts of server administration:

- FCOS settings allow mailbox owners to send to and receive from distribution lists.
- LCOS settings control the maximum number of list per mailbox, up to 99, and the maximum number of recipients per list, up to 65,535.
- GCOS settings identify which mailboxes can exchange messages.
- Mailbox settings control the ability of mailbox owners to review and/or modify distribution lists.

Once you have configured mailboxes appropriately, you can create distribution lists – including master distribution lists – and maintain them from a telephone. In addition, you can create distribution lists from the server console using the List Maintenance Menu.

## Mailbox Owner Distribution Lists

Mailbox owners can create up to 99 distribution lists for groups of people that they communicate with frequently. Mailbox owner distribution lists are only accessible by the mailbox owner. Although a server administrator can create distribution lists for any mailbox, it is usually easier to let the mailbox owners create and maintain their own lists.

When mailbox owners are given the capability to create and use their own distribution lists, the server plays the appropriate prompts and options in the User Options Menu. Besides adding and deleting members, mailbox owners can review the members of a list and record a spoken name for it to serve as a confirmation when addressing messages to the list.

A server administrator can control whether or not a mailbox owner can review or modify distribution lists. Turning off both capabilities can be useful for broadcast mailboxes, while turning off the modify capability can be useful in service bureau environments in which the service bureau maintains the lists for the customers.

Mailbox owners address messages to their distribution lists by pressing a 0 (zero) before the list number, for example “015” to address a message to distribution list 15. If feature bit 036 is enabled, the sender receives a receipt listing which recipients have and have not listened to the message.

## Master Lists

Master lists are useful when more than one person must send messages to the same group of people. A master list is a line group-specific distribution list that you can define in the administrator’s mailbox for that line group. There can be up to 99 master lists. All mailbox owners who call in on that particular line group can use a master list by pressing “00” before the list number; for example, “009” to address a message to master distribution list 9, or “0025” for master list 25.

A master list defined for one line group is not necessarily a distribution list for another line group. They can share master lists if they share the same administrator’s mailbox.

Although you can create master distribution lists over the phone, it is usually easier to use the server maintenance console due to the size of some lists. It is often necessary to add newly-created mailboxes to one or more master list. You must use the phone to log in to the administrator’s mailbox and record spoken names for master distribution lists. For more information see [Master Distribution Lists](#).

## Distribution Lists and Special Mailboxes

Several types of special-function mailboxes use distribution lists to accomplish their purposes. These include:

- Tree and rotational mailboxes
- Broadcast message mailboxes
- Broadcast password mailboxes
- Broadcast greeting mailboxes
- Broadcast name mailboxes

Tree, rotational, and broadcast message mailboxes all use distribution list 1 to define child or recipient mailboxes. For tree and rotational mailboxes, the order of child mailboxes in the distribution list can affect what callers hear.

Broadcast greeting, name and passcode mailboxes use distribution list 9 to identify the recipients of the broadcasts. Using list 9 for these features allows these mailboxes to also perform other special functions, such as broadcast messages, which use distribution list 1. The mailbox owner can define the remaining distribution lists.

## Nesting Distribution Lists

“Nesting” refers to the ability to make one distribution list a member of another list. This allows you to create a distribution list for each department, and then create a

company-wide distribution list that only contains the department lists. Any changes to the department lists are automatically picked up by the company-wide list.

The server allows unlimited distribution list nesting by default, except in a broadcast mailbox. Nesting operates as shown in the figure.

### Distribution List Nesting

Once the lists are set up, mailbox 301 can make a message to list 2, and the following mailboxes receive the message: 224 through 227, 101 through 104, and 401 through 403. Mailbox 104 only receives one copy of the message, even though it appears in both lists 3 and 4.

Feature bit 222 prevents mailbox owners from nesting distribution lists.

If you are creating the distribution list from the server console, identify a nested distribution list by including “D” before the list number (for example, D03). This is not needed when creating a list from the telephone; just enter the list number (for example, 03). For complete information refer to the Mailbox task list in this manual.

**Note:** If you send a message to a nested list that contains many mailboxes, a mailbox owner can receive a message twice. This can happen if a mailbox appears in two lists and the mailbox owner receives the message while the server is still processing the rest of the list. If the mailbox owner discards the message, the server can send another copy when it reaches to the second occurrence of the mailbox. This is only an issue with very large nested distribution lists.

For more information see [Nest a Distribution List](#).

### Distribution List Interaction With FCOS

You can use the mailbox FCOS to control the ability to send messages to distribution lists, receive messages sent to other lists, or create or modify distribution lists. As described above, a feature bit prevents distribution list nesting. Additional feature bits control whether mailbox owners can use master distribution lists.

The feature bits listed here affect distribution list use.

| Feature Bits that Control Distribution Lists |                                                  |
|----------------------------------------------|--------------------------------------------------|
| Feature Bit                                  | Description                                      |
| 032                                          | Make (messages) to user distribution list        |
| 033                                          | Give (messages) to user distribution list        |
| 034                                          | Make to master distribution list                 |
| 035                                          | Give to master distribution list                 |
| 036                                          | Auto-receipt for user distribution list messages |
| 044                                          | Receive user distribution list messages          |

| Feature Bits that Control Distribution Lists |                                           |
|----------------------------------------------|-------------------------------------------|
| Feature Bit                                  | Description                               |
| 045                                          | Receive master distribution list messages |
| 074                                          | Create or modify user distribution list   |
| 134                                          | Broadcast message waiting status          |
| 222                                          | Deny nesting of distribution lists        |

In addition, these limits affect distribution lists:

- Maximum number of distribution lists (maximum 99)
- Maximum recipients count (maximum 65,535)

For more information about Class of Service, see [Features Class of Service](#).

### Distribution List Interaction With LCOS

You can use LCOS settings to control the number of distribution lists per mailbox, the number of members per list, and the maximum number of recipients for any message. The specific limits that apply to distribution lists are:

- Maximum members per distribution list (maximum 65,535)
- Maximum number of distribution lists (maximum 99)
- Maximum recipients count (maximum 65,535)

You can use the “Maximum recipients count” limit to control the impact of nested distribution lists. The server does not deliver the message to more recipients than this limit allows, even if the total recipients in the nested distribution lists is greater.

**Note:** The maximum for a distribution list in a tree or rotational mailbox is 190 members.

For more information about LCOS, see [Other Classes of Service](#).

### Distribution List Interaction With GCOS

Distribution lists are affected by the GCOS settings that control the ability of any mailbox owner to send messages to other mailbox owners. You must ensure that all members of a master distribution list have GCOS settings that allow them to exchange messages. Mailbox owners cannot add recipients who do not share GCOS settings to their distribution lists.

For more information about GCOS, see the [Other Classes of Service](#) section.

### Mailbox Settings for Distribution Lists

Each mailbox has two parameters that are specific to distribution lists:

- Lists with review rights



- Lists with change rights

These parameters control which lists a mailbox owner can review or change. Review rights allow the owner to play the names and numbers of all mailboxes in a list. Denying review rights can keep the contents of a list confidential. Change rights allow the owner to add or delete mailboxes in a list. Denying change rights prevents the user from altering a distribution list, which is helpful for certain applications, such as networking, that require distribution lists.

## List Maintenance

The List Maintenance Menu allows you to create, modify, delete and view distribution lists in any mailbox. You can also locate all lists that contain a specific mailbox, and delete that mailbox from all lists.

By using Administration by Phone you can create, modify, delete and review master distribution lists in an administrator's mailbox, and you can record names for those lists. From an administrator's mailbox you can create and modify master lists from 1 to 99, just like a mailbox owner's personal lists. Administrators' mailboxes do not have user (mailbox owner) distribution lists, only master lists.

### 1.2.3.1.4 About Names and Greetings

A mailbox owner can record a name for the mailbox. If the owner does not record a name, the server uses the mailbox number instead. For example, if you have mailbox 5731 and record "Kevin Lee" as your name, other users hear "Kevin Lee" when they make messages for your mailbox. If you do not record a name, users hear "Mailbox fifty-seven thirty-one." Users also hear mailbox names when they play messages from other users. If you get a message from an outside caller, no name is used.

Greetings are played when callers or users reach your mailbox, either by entering your mailbox number or by dialing your extension (if you have an integration that supports this feature). Mailbox owners can choose various types of greetings, depending on their FCOS. In many of the integrations that a server supports, owners can choose greetings that respond to the condition under which a call has been received by the server: Ring No Answer, Busy, or Forward. Personal greetings for these three possible conditions are called *conditional greetings*. To have the same greeting played under all conditions, a user would enable the *primary greetings*.

The general greeting option allows a user to select whether to use personal or server greetings. If conditional greetings are also enabled, the user can select conditional server greetings that play in response to line conditions as shown in the following table.

| Greetings Supplied by the Server |                                                                             |
|----------------------------------|-----------------------------------------------------------------------------|
| Condition                        | Greeting                                                                    |
| Ring No Answer                   | "I'm sorry, [name] does not answer. Please leave your message at the tone." |

| Greetings Supplied by the Server |                                                                                |
|----------------------------------|--------------------------------------------------------------------------------|
| Condition                        | Greeting                                                                       |
| Busy                             | "I'm sorry, [name] is on another call. Please leave your message at the tone." |
| Call Forward                     | "I'm sorry, [name] is not available. Please leave your message at the tone."   |

You can copy a mailbox greeting to a mailbox name and copy a mailbox name to a greeting.

### 1.2.3.1.5 Unplayed Messages and Message Receipts

NuPoint UM offers message processing flexibility in the related areas of:

- Defining what happens to unplayed messages
- Controlling when the server sends message receipts

#### Unplayed Messages

Feature bit **145** (Message stays in original queue) determines how the server classifies a message if a mailbox owner does not explicitly keep a message (by pressing K) or discard it (by pressing D).

#### Message Receipts

Feature bit **147** (Send receipt after full play) controls whether the server waits for a mailbox owner to explicitly keep a message (by pressing K) or discard it (by pressing D) before sending a receipt to the sender of that message. The server makes this decision only after a mailbox owner plays the entire message.

The presence of this feature bit works on a partially played message exactly as it does on a completely played message. Otherwise, it would be possible for the server to put a partially played message into a mailbox owner's saved queue but not send a receipt.

Feature bit 147 has an effect only when it is in the same FCOS as feature bit 145. Refer to [Feature Bit Descriptions](#) for more information about how these two feature bits interact.

### 1.2.3.2 Configuration

#### 1.2.3.2.1 Mailboxes

### 1.2.3.2.1.1 Mailbox Configuration Summary

When you create a mailbox, you are actually building a data file on the hard disk. As a minimum, the following five elements must be entered:

- Mailbox number (default is 1).
- FCOS (default is 1).
- LCOS (default is 1).
- GCOS (default is 1).
- Message waiting type #1.

This procedure summarizes the steps involved in configuring, maintaining, and searching for mailboxes.

#### Configure Mailboxes

1. Complete Mailbox Worksheets. An index of blank Mailbox Worksheets is located [here](#).
2. Configure each **standard mailbox** in accordance with completed Mailbox Worksheets.
3. Configure **administrator's mailboxes**. One administrator's mailbox can be configured for each line group.
4. *Configure **attendant's mailboxes**. Up to five attendant's mailboxes per line group can be configured.*
5. Configure tree mailboxes, if needed.
6. Configure rotational mailboxes, if needed.
7. Configure broadcast mailboxes, if needed.

### 1.2.3.2.1.2 Mailbox Names with Accented Characters

NuPoint UM Releases 4.0 and later support the entry of accented names. The Speech Auto Attendant feature requires that you enter the accented character for proper recognition of the spoken name.

**Note:** If you have upgraded from a pre-4.0 release, your database may contain names that should contain accents. Please use the Web Console to modify these mailboxes to include the accented characters.

In Windows, you can use a combination of the ALT key and the numeric key pad to insert these accented characters:

| Capital Letters |             | Lower Case Letters |             |
|-----------------|-------------|--------------------|-------------|
| To type:        | Press ALT + | To type:           | Press ALT + |
| À               | 0192        | à                  | 0224        |
| Â               | 0194        | â                  | 0226        |
| Ä               | 0196        | ä                  | 0228        |
| È               | 0200        | è                  | 0232        |
| É               | 0201        | é                  | 0233        |
| Ê               | 0202        | ê                  | 0234        |
| Ë               | 0203        | ë                  | 0235        |
| Î               | 0206        | î                  | 0238        |
| Ï               | 0207        | ï                  | 0239        |
| Ô               | 0212        | ô                  | 0244        |
| Œ               | 0140        | œ                  | 0156        |
| Ù               | 0217        | ù                  | 0249        |
| Û               | 0219        | û                  | 0251        |
| Ü               | 0220        | ü                  | 0252        |
| Ÿ               | 0159        | ÿ                  | 0255        |
| Ç               | 0199        | ç                  | 0231        |
| Ö               | 0214        | ö                  | 0246        |
| Æ               | 0198        | æ                  | 0230        |
| Ø               | 0216        | ø                  | 0248        |
| Å               | 0197        | å                  | 0229        |
| Š               | 0138        | š                  | 0154        |
| Ž               | 0142        | ž                  | 0158        |
| ß               | 0223        |                    |             |

### 1.2.3.2.1.3 Configure an Overflow Mailbox

You can use an overflow mailbox to accept messages when a primary mailbox is full.

To configure an overflow mailbox:

1. [Customize an FCOS](#) to include feature bit 189 (Rotate on Full Mailbox).
2. Create a standard mailbox that will be the overflow mailbox, or use an existing standard mailbox and assign the customized FCOS.
3. [Create Distribution List 1](#) for the primary mailbox, and add the overflow mailbox as the member. You can add more than one mailbox to the list and the server uses each one as an overflow mailbox when the previous overflow mailbox fills up.

When a new message is received by a full mailbox, it is routed to the first available mailbox in the full mailbox's Distribution List 1 (the overflow mailbox).

### 1.2.3.2.1.4 Configure a Broadcast Mailbox

This procedure describes how to configure these types of broadcast mailboxes:

- Broadcast **message** mailbox
- Broadcast **name** mailbox
- Broadcast **greeting** mailbox (including automatic transfer to an attendant or a mailbox extension)
- Broadcast **passcode** mailbox
- Broadcast **message waiting** mailbox

It also describes how to broadcast messages, names, and greetings to the same recipients.

To configure a broadcast mailbox:

1. Complete a Mailbox Worksheet. Blank Mailbox Worksheets are [here](#).
2. Enter the requested information, as described in the following sections, from your completed worksheet.

#### Broadcast Message Mailbox

1. [Customize an FCOS](#) to include the following feature bits:
  - **40** (receive messages from other users)
  - **44** (receive user distribution list messages)
  - **122** (define broadcast mailbox)
2. Configure a broadcast message mailbox (same as a standard mailbox) and assign the new FCOS.
3. [Create Distribution List 1](#) for the broadcast message mailbox just configured, adding as members all the mailboxes that are to receive messages made for the broadcast mailbox.

#### Broadcast Name Mailbox

1. [Customize an FCOS](#) to include feature bit **178** (define broadcast name mailbox).
2. Configure a broadcast message mailbox (same as a standard mailbox) and assign the new FCOS.
3. To every receiving mailbox, assign an FCOS that includes feature bit **179** (receive broadcast name).
4. [Create Distribution List 9](#) for the broadcast name mailbox, adding as members all the mailboxes that are to receive names sent on from the broadcast mailbox.

## Broadcast Greeting Mailbox

1. [Customize an FCOS](#) to include feature bit **174** (define broadcast greeting mailbox).
2. Configure a broadcast message mailbox (same as a standard mailbox) and assign the new FCOS.
3. To every receiving mailbox, assign an FCOS that includes feature bits:
  - **161** (enable mailbox's conditional greetings)
  - **162** (enable mailbox's general greetings)
  - **175** (receive broadcast greeting)
4. [Create Distribution List 9](#) for the broadcast greeting mailbox, adding as members all the mailboxes that are to receive greetings sent on from the broadcast mailbox.

## Broadcast Greeting Then Transfer to an Attendant

1. [Customize an FCOS](#) to include the following feature bits:
  - **63** (call mailbox attendant after greeting)
  - **174** (define broadcast greeting mailbox)
2. Configure a broadcast greeting mailbox as described above and assign the new FCOS.
3. For the **Attendant extension number** parameter, enter the number of the attendant's extension that the caller is to be automatically transferred to after playing the greeting.

## Broadcast Greeting Then Transfer to a Mailbox Extension

1. [Customize an FCOS](#) to include the following feature bits:
  - **64** (Call mailbox user extension after greeting)
  - **174** (define broadcast greeting mailbox)
2. Configure a broadcast greeting mailbox as described above and assign the new FCOS.
3. For the **Mailbox's extension number** parameter, enter the number of the mailbox's extension that the caller is to be automatically transferred to after playing the greeting.

## Broadcast Passcode Mailbox

1. [Customize an FCOS](#) to include feature bit **231** (Passcode broadcast mailbox).
2. Configure a broadcast greeting mailbox as described above and assign the new FCOS.

3. To every receiving mailbox, assign an FCOS that includes feature bits:
  - **125** (Clear user passcode)
  - **232** (Allow receipt of passcode broadcasts)
4. [Create Distribution List 9](#) for the broadcast passcode mailbox, adding as members all the mailboxes that are to receive the broadcast passcode.

### Broadcast Message Waiting Mailbox

1. [Customize an FCOS](#) to include feature bit **134** (Broadcast message waiting only).
2. Configure a broadcast greeting mailbox as described above and assign the new FCOS.
3. Create [Distribution List 1](#) for the broadcast message waiting mailbox, adding as members all the mailboxes that are to receive the message-waiting status.

### Same Recipients for Messages, Names, and Greetings

1. Create [Distribution Lists](#) 1 and 9 for the broadcast message mailbox. Make the two lists identical.
2. *Use Distribution List 1 for broadcasting messages.*
3. Use Distribution List 9 for broadcasting names and greetings from the broadcast message mailbox.

## 1.2.3.2.1.5 Configure a Shared Extension Mailbox

This capability allows multiple users who share a telephone extension to each have their own private mailbox.

To configure the shared-extension capability in a tree mailbox:

1. [Configure a tree mailbox](#) and assign a [customized FCOS](#) that includes the following feature bits:
  - All the feature bits typically required for a tree mailbox, as in FCOS 15 (Tree)
  - **229** (Play names of list 1 children)
  - **234** (Check message wait status of children)
2. Add the same GCOS to the tree mailbox that is assigned to its child mailboxes (the mailboxes that share the extension).

### 3. For each child mailbox:

- Assign an FCOS that includes feature bit **134** (Broadcast message waiting status).
- Assign the same GCOS that you assigned to the tree mailbox.

### 4. [Create Distribution List 1](#) for the tree mailbox just configured, adding all the child mailboxes.

### 5. Create Distribution List 1 for each child mailbox. Make the tree mailbox the only member.

### 6. Record a greeting for the tree mailbox. For example, "Thank you for calling Redwood Realty." The server automatically supplements this greeting with directions for the caller to press a different number for each person sharing the tree mailbox (extension). For example, "To leave a message for John McSales, press 1, for Jane VanBroker, press 2, for Lee Smith, press 3."

### 7. Direct mailbox owners of the child mailboxes to record their own names and greetings in their respective mailboxes, if wanted.

## 1.2.3.2.1.6 *Configure a Chain Mailbox*

To configure a chain mailbox:

1. Complete a Mailbox Worksheet. Blank worksheets are [here](#).
2. Create a new mailbox (or modify an existing mailbox) and assign **FCOS 8** (the default Chain FCOS) or another FCOS that contains all feature bits applicable for chain mailboxes.
3. Record a mailbox owner's greeting for the chain mailbox.

## 1.2.3.2.1.7 *Implement a Tree Mailbox*

A tree mailbox plays a greeting and ends with a prompt to enter a single digit to obtain more information. When the caller presses a digit, the call is transferred to another (child) mailbox or to the operator. A tree mailbox is sometimes called a "bulletin board" mailbox. [FCOS 15](#) is the default Tree FCOS.

### Tree Mailbox Worksheet/Diagram

Before configuring a tree mailbox, complete a Mailbox Individual Worksheet and a Tree Mailbox Worksheet. (Blank worksheets are available [here](#).) Include the following information:

- **Mailbox number:** Enter the number of all mailboxes that are members of the tree mailbox's distribution list 01 (child mailboxes) in the remaining boxes.



- **FCOS:** The FCOS assigned to a child mailbox determines its relationship to the tree mailbox and also determines how it is used.
- • Use one of the default FCOS or a customized FCOS that includes all applicable feature bits. (See Step 2. Create 'Root' Mailbox with FCOS 15, below.)
- **List:** A tree mailbox must have distribution list 01, whose members are the mailboxes branched to when a caller presses the associated digit.
- **Members:** Identify all child mailboxes as members of distribution list 01 in the tree mailbox.
- **Greeting recorded:** You must record a greeting in the tree mailbox to tell callers which digit to press for the desired mailbox.
- • Also record appropriate greetings or messages in the child mailboxes.

### To Configure a Simple Tree Mailbox

Use the following steps to configure a simple tree mailbox:

1. Complete a Mailbox Individual Worksheet and a Tree Mailbox Worksheet.
2. If required, [customize an FCOS](#) based on the default FCOS 15 to add the following optional feature bits:
  1. • To route callers who do not enter a digit promptly after the Tree mailbox greeting to the **first** child mailbox, add feature bit **120** (default to first child of mailbox).
  - To route these callers to the **last** child mailbox, include **feature bit 186** (default to last child of tree mailbox)
1. Create a "Root" mailbox and assign the default or customized Tree FCOS.
2. In the child mailboxes, disable the Tutorial.
3. [Create Distribution List](#) 01 for the Tree mailbox just configured.
4. Add the numbers of all child mailboxes to this list:
  1. • To reach the lowest mailbox number, press 1 after the greeting.
  - To reach the next mailbox number, press 2, and so on.
  - Up to 190 child mailboxes can be added.
1. Record an appropriate greeting in the tree mailbox and all child mailboxes to direct callers to enter the appropriate numbers.

1. • If you delete a mailbox from the list or if you assign new numbers to mailboxes, you must change the greeting to reflect the new order. In other words, you must re-assign list entries because the system assigns caller input digits.
  - If the appropriate FCOS bits are set (FCOS bits 120 or 186, see Step 2) and callers do not enter a digit after listening to the greeting in a tree mailbox, callers are routed to the attendant's mailbox or to the first or last child mailbox.

## To Configure a Nested Tree Mailbox

1. Select the child mailbox that you want to set up as a Tree mailbox.
2. Configure the mailbox as described under To Configure a Simple Tree Mailbox, above.
3. [Create Distribution List 1](#) for the newly-configured nested tree mailbox by adding all child mailboxes (related to the nested tree mailbox) as members.
4. Record a greeting in the nested tree mailbox.

## Notes on Tree Mailboxes

- Child mailboxes in the distribution list of a tree mailbox can be tree (or any other type of) mailboxes.
- • Using NP Receptionist, feature bit **121** (Define tree mailbox) allows a child mailbox to also be a tree mailbox.
- Feature bit **141** (Define chain in mailbox in NP Receptionist) allows a child mailbox to act as a chain mailbox.
- With these feature bits included in the mailbox's FCOS, NP Receptionist can route a call from a chain mailbox to a tree mailbox and vice-versa.
- Callers can bypass the single-digit tree options if they want to enter an extension number instead. *For example:* By assigning an FCOS such as Unlimited or Restricted to a child mailbox, callers can leave messages.
- The system processes the call according to the FCOS assigned to the selected child mailbox.
- • If feature bit **120** (Default to first child mailbox of tree mailbox) is included in the FCOS, callers are routed to the first mailbox in the list.
- Feature bit **186** (default to last child mailbox of tree mailbox) works similarly by defaulting to the last mailbox in the list.

When the tree mailbox is built in the administrator's mailbox, the tree mailbox greeting should:

1. • Instruct callers to press the # key (pound) to bypass the single-digit tree options.
  - State that callers can reach an attendant by pressing 0 (zero).

**Note:** Be sure to tell callers to press the # key (pound) only while the greeting is playing; at any other time during the call, if callers press #, they are disconnected.

### **EXAMPLE: SIMPLE TREE MAILBOX**

A major hotel chain wants to route callers to a particular reservations desk. The tree mailbox greeting says, "Welcome to Globe Hotels' world-wide reservation service. Press 1 for hotels in Canada and the US; press 2 for hotels in Mexico and South America; press 3 for hotels in Europe."

To Implement this Arrangement:

**1.** Plan for two series of numbers to be processed in the same order:

- Mailbox numbers for the three reservations desks.
- Single-digit numbers callers press on the telephone keypad to reach these mailboxes. The following table illustrates the example.

| Department           | Mailbox # | Digit callers press to reach mailbox |
|----------------------|-----------|--------------------------------------|
| Canada/US            | 104       | 1                                    |
| Mexico/South America | 106       | 2                                    |
| Europe               | 107       | 3                                    |

**2.** Assign the Tree FCOS to a standard mailbox that acts as the tree mailbox.

**3.** Create standard mailboxes for each reservation desk to act as child mailboxes.

**4.** Add the child mailbox number to distribution list 01 of the tree mailbox.

**5.** Record a greeting (similar to the one mentioned in this example) for the tree mailbox.

## **1.2.3.2.1.8 Implement a Rotational Mailbox System**

A rotational mailbox plays its greeting, and then plays the greeting of a child (distribution list) mailbox. The child mailbox greeting is selected by "rotating" through the mailboxes in distribution list 01 of the rotational mailbox. Mailbox rotation can be triggered by one of two methods: **index** or **period**.

**Note:**

Setting **index** and **period** can not be performed in the Web Console. Use the Text console to configure.

### **Index Method**

When you create distribution list 01 in the rotational mailbox:

- Index number 1 is automatically assigned to the lowest mailbox number in the list; index number 2 to the next highest number, and so on.
- Every time the rotational mailbox is called, the system plays the rotational mailbox greeting and plays the greeting of the mailbox that matches the current index.
  - After this greeting plays, the counter increments by one.
- The next time that the rotational mailbox is accessed, the system plays its greeting and the greeting of the mailbox that matches the new index.
- When the greeting of the last mailbox in distribution list 01 plays, the system rotates back to the first mailbox on the list, resets the index to 1, and begins the cycle again.
  - Default index is 1 (that is, the cycle begins with the lowest mailbox on the list). You may set the index to a higher number if you want the cycle to begin with a different mailbox.

## Period Method

The greeting of the first mailbox in distribution list 01 plays for the specified period, and then the second mailbox greeting plays for the specified period.

A start date and start time for the cycle must be set. After all mailboxes in the distribution list are accessed for the specified period, the system resets the start date and time to the date and time of the last call. Then the cycle begins again, with the greeting of the first mailbox in the list.

## Prepare the Mailboxes

In this application you are working with a rotational mailbox and a child (distribution list) mailbox. The following table summarizes the steps to prepare these mailboxes.

| Rotational Mailbox                                                                                       | Child Mailbox                                              |
|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 1. Customize a rotational mailbox FCOS.                                                                  | 1. Create the mailboxes                                    |
| 2. Create a mailbox with this FCOS.                                                                      | 2. Log in to the mailboxes, and record suitable greetings. |
| 3. Set the index or period.                                                                              |                                                            |
| 4. Set up the distribution list. (This step must be done after distribution list mailboxes are created). |                                                            |
| 5. Log in to the mailbox and record a greeting                                                           |                                                            |

### Note:

In practice, combine some of these steps for efficiency.

## To Configure a Rotational Mailbox System

Steps 1 through 4 outline a general plan for setting up a rotational mailbox and its child mailboxes.

### Step 1: Create Mailboxes

1. Create one mailbox with the rotational mailbox FCOS that you configured.
2. Create as many child mailboxes as you need. Choose an FCOS that suits the application.

#### EXAMPLES:

- If you want the system to hang up after it plays the child mailbox greeting, assign a Greeting-only FCOS to the mailboxes.
- If you want each mailbox to provide an introductory announcement before connecting the caller with an employee, give the child mailboxes an FCOS that includes feature bit **063** (Call mailbox attendant after greeting) or feature bit **064** (Call mailbox's extension number after greeting). Be sure to include the attendant's extension number in the appropriate field when creating the mailbox.

#### Note:

The rotational mailbox and all child mailboxes must be in the same GCOS.

### Step 2: Set the Index or Period for the Rotational Mailbox

The index tells the system which mailbox in the distribution list should begin the cycle. The system automatically rotates to the next mailbox in the list on each subsequent call.

The period defines how long to play the current child mailbox greeting before rotating to the next greeting. If you specify a period, it will override the index.

This procedure is only available in the **Text console**. See [Configure a Rotational Mailbox](#).

### Step 3: Prepare the Rotational Mailbox

1. Call the system and log in to the rotational mailbox.
2. Press **U** (the 8 key) for User Options.
3. Press **L** (the 5 key) to change a distribution list. You are prompted for a distribution list number.
4. Enter **01**.
5. Press **A** (the 2 key) then enter the number of a child mailbox.

6. Repeat Step 5 until all child mailboxes have been added to the list. Press **X** (the 9 key) to save the changes.
7. Press **U** (the 8 key) for User Options.
8. Press **G** (the 4 key), then record a Greeting.
9. Press **X** (the 9 key) to save the changes. Press **X** *twice in quick succession* to exit the mailbox and recycle to the system greeting.

#### Step 4: Prepare the Child Mailboxes

1. Log in to the **first** child mailbox.
2. Press **U** (the 8 key) for User Options.
3. Press **G** (the 4 key) and record a greeting.
4. Press **X** (the 9 key) to save the changes. Press **X** *twice in quick succession* to exit the mailbox and recycle to the system greeting.
5. Log in to the **next** child mailbox.
6. Repeat steps 2 through 5 until all mailboxes have suitable greetings.

### 1.2.3.2.1.9 Passcode Expiry

#### Overview

In the interest of increased security, you can configure an expiry period for mailbox passcodes from 1 to 365 days. To disable the passcode expiry feature, ensure that it is set to the default value of "0".

Enforcement of the passcode expiry is performed through the TUI interface. Users who log in to the TUI of an expired mailbox are prompted to enter a new passcode.

UM users who do not use the TUI are unaffected by passcode expiry behavior. UM email messages continue to be synchronized and delivered after passcode expiry. Web View users can continue to log in.

#### Conditions and Limitations

- This feature is not supported for MiCollab deployments of NuPoint Unified Messaging and must be left at the default setting of "0" expiry.
- By default, the TUI plays back the new passcode to the user. To change this operation to a prompt to "Re-enter new passcode", TUI users must have FCOS feature bit 300 - Enable Secure Tutorial assigned.

- New passcodes are valid only if:
  - they meet existing NP-UM passcode restrictions
  - they differ from the most recent passcode
  - they are successfully confirmed by the TUI (when feature bit 300 - Enable Secure Tutorial is assigned)

### 1.2.3.2.1.10 Assign Alternate Extensions to a Single Mailbox

The Alternate Extension feature is used to assign multiple extension numbers to a single mailbox. You can add four more extension fields to the mailbox record for a total of five phone numbers that can be associated with one mailbox. The first extension is the primary extension; the other four are alternate extensions.

#### Call Behavior

Call behavior depends on the call scenario. The Receptionist feature and FCOS bit 64 use the primary extension to transfer calls as before. All the extension fields are used by this new feature to match against incoming calling IDs.

The following describes a few call scenarios:

1. Calling from any of the mapped extensions to voice mail is greeted by the login prompt of the mailbox that has the mappings.
2. A call to a teleworker phone that then forwards to voice mail is greeted by the desk phone's mailbox's greeting.
3. A call to a cell phone that then forwards to a DID number on the switch that ends up at the desk phone will get ring back while the desk phone is ringing. If the call is not picked up, the desk phone forwards to voice mail and the caller hears the desk phone's mailbox's greeting.
4. When an MWI action is instigated, only the set on the switch whose extension matches the mailbox number is affected. This extension may or may not be one of the 5 mapped to the mailbox.

In general, alternative extensions are used for non-desktop telephone numbers (for example, cell phones or teleworker phones). However, the system does not prevent you from associating desktop telephone extensions with the primary mailbox.

#### Configuration

Depending on the integration and call scenarios, configuration for this feature can be quite different. However, there are always three common aspects:

- Set configuration

- Switch configuration
- NuPoint Unified Messaging configuration

### Example:

#### MiVoice Business ICP Integration – desk phone and teleworker phone

In this scenario, a MiVoice Business ICP user has a desk phone and a teleworker phone. This user would like these two phones to have the same mailbox and get the same voice mail integration with each of the two phones.

#### Set configuration:

- Configure the teleworker set to forward to the voice mail hunt group. This should be the same as forward configuration for the user's desk phone.

#### Switch configuration:

- Same as set configuration.

#### NuPoint configuration:

1. Create a mailbox matching the extension of the user's desk phone.
2. Set the primary extension to the extension of the user's desk phone (i.e. use the default value).
3. Set the alternate extension #2 to the extension of the user's teleworker phone.

Assuming that the extensions are of the same length, the extension dial plan of the line group for incoming calls does not have to change. (Otherwise, the flexible 'r;v' dial plan would have to be used.)

4. Configure the mailbox extensions.

### 1.2.3.2.1.11 Unplayed Messages and Message Receipts

NuPoint UM offers message processing flexibility in the related areas of:

- Defining what happens to unplayed messages
- Controlling when the server sends message receipts

#### Unplayed Messages

Feature bit **145** (Message stays in original queue) determines how the server classifies a message if a mailbox owner does not explicitly keep a message (by pressing K) or discard it (by pressing D).



## Message Receipts

Feature bit **147** (Send receipt after full play) controls whether the server waits for a mailbox owner to explicitly keep a message (by pressing K) or discard it (by pressing D) before sending a receipt to the sender of that message. The server makes this decision only after a mailbox owner plays the entire message.

The presence of this feature bit works on a partially played message exactly as it does on a completely played message. Otherwise, it would be possible for the server to put a partially played message into a mailbox owner's saved queue but not send a receipt.

Feature bit 147 has an effect only when it is in the same FCOS as feature bit 145. Refer to [Feature Bit Descriptions](#) for more information about how these two feature bits interact.

### 1.2.3.2.1.12 Message Waiting Types

The mailbox message waiting type tells the system what equipment, if any, is available to notify a mailbox owner of unplayed messages.

**Note:** The MITEL SX-200 DIGITAL PABX and SX-2000 PABX use message waiting types 0, 3, 5, and 7 only.

#### Default Message Waiting Types

| MWI Type         | Description                                                                                                                                                                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0: None          | No message notification is available.                                                                                                                                                                                                                                                                                                             |
| 1: Not available | The mailbox does not have any message notification capabilities.                                                                                                                                                                                                                                                                                  |
| 3: DTMF-to-PBX   | <p>The system sends DTMF signals over the telephone lines to control PBX message waiting indicators. This method is compatible only with certain PBXs.</p> <p>For this protocol to be used, the technician must program codes to control lights and to configure a line group with at least one port dedicated as a message lights outdialer.</p> |

| MWI Type                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5: Pager                 | <p>This message waiting type is used to activate a radio pager, or to provide message delivery, when a message is left in a mailbox. The Pager application must be configured for the system to support pagers and/or message delivery.</p> <p>Mailbox programming for this message waiting type is complex. Refer to Pagers and Message Delivery, for information on adding a pager or programming message delivery for a mailbox.</p> |
| 7: Program RS232         | Allows servers to turn PBX message waiting indicators on and off by sending signals to the PBX over RS-232 data links. The data links connect to modems that are connected to analog ports on the PBX.                                                                                                                                                                                                                                  |
| 11: Centrex              | Allows servers to turn PBX message waiting indicators on and off by sending signals to the PBX over RS-232 data links. The data link is a direct serial connection to the PBX.                                                                                                                                                                                                                                                          |
| 16: HIS PMS              | Optional RS-232 message waiting system for PMS                                                                                                                                                                                                                                                                                                                                                                                          |
| 17: Unified Integrations | Outgoing MWI programming for mailboxes with mappings from several extensions. See ESMDI in the NuPoint UM Optional Integrations Guide for more information.                                                                                                                                                                                                                                                                             |
| 28: MiTAI Messaging      | MiTAI MWI uses proprietary MiTAI messaging to communicate directly with the MiVoice Business ICP to activate message waiting indicators on designated phones.                                                                                                                                                                                                                                                                           |

## 1.2.3.2.2 Distribution Lists

### 1.2.3.2.2.1 Distribution List Configuration

This procedure summarizes the steps for allowing distribution lists as a user option, and for configuring the available types and functions of distribution lists in a server.

1. **Customize an FCOS** to include some or all of the following feature bits, as applicable:

- **20** (make messages)
- **24** (give messages)
- **32** (make to user distribution list)
- **33** (give to user distribution list)
- **34** (make to master distribution list)
- **35** (give to master distribution list)
- **36** (auto-receipt for user dist list msgs)
- **40** (receive messages from other users)
- **44** (receive user dist list messages)
- **45** (receive master dist list messages)
- **70** (User Options Menu)
- **74** (create or modify user distribution list)

**Note:**

Feature bit 74 alone does not allow all distribution lists to be modified; you must also allow change rights in the mailbox configuration.

2. **Customize an LCOS** to include the desired limits parameters from the table below:

- Max Number of Distribution Lists
- Max Members Per Distribution List
- Max Recipients Count
- Min Number of Recipients for Receipt Summary
- Other limits parameters as required

3. **Customize a GCOS** to include a group shared by all members of the same distribution list.

4. Configure the appropriate mailboxes, entering the correct FCOS, LCOS, GCOS and allowing review and change rights for distribution lists as required.

After mailboxes have been appropriately configured, distribution lists (including master distribution lists) can be created and maintained from the mailboxes. In addition, you can

create distribution lists for mailbox owners (and master distribution lists) from the List Maintenance Menu.

Web Console:

- [Configure a Mailbox for Distribution Lists](#)

Text Console:

- [Configure a Mailbox for Distribution Lists](#)

## 1.2.3.2.2.2 Configure for Name and Greeting Broadcast

The mailbox used for broadcasting greetings or names can be a standard mailbox, broadcast mailbox, or tree mailbox.

To use a distribution list for broadcasting greetings or names:

1. [Customize an FCOS](#) to include the following feature bits, as applicable:

- **174** (define broadcast greeting mailbox) in the FCOS assigned to the mailbox that will broadcast greetings.
- **175** (receive broadcast greeting) in the FCOS assigned to the mailbox that will receive broadcast greetings.
- **178** (define broadcast name mailbox) in the FCOS assigned to the mailbox that will broadcast names.
- **179** (receive broadcast name) in the FCOS assigned to the mailbox that will receive broadcast names.

2. [Create DistributionLists](#) 1 and 9 to contain the greeting or name broadcast list.

To broadcast messages and greetings to the same list of recipients, make Distribution List 1 for broadcasting messages and keep Distribution List 9 for broadcasting greetings and names. Make Distribution Lists 1 and 9 identical in content.

## 1.2.3.2.2.3 Allow Broadcasting to a Broadcast Mailbox

Use this procedure to allow a broadcast mailbox to send a message to another broadcast mailbox, which can rebroadcast the message.

1. [Customize an FCOS](#) to include some or all of the following feature bits, as applicable:
  - **174** (define broadcast greeting mailbox)
  - **175** (receive broadcast greeting)
  - **178** (define broadcast name mailbox)
  - **179** (receive broadcast name)
2. Assign the number **1** to the distribution list in the receiving broadcast mailbox.
3. Include the receiving broadcast mailbox in Distribution List 1 of the sending broadcast mailbox.
4. Configure the receiving broadcast mailbox with the applicable FCOS, LCOS, and GCOS the same as for any [distribution list](#) message receiving.

### 1.2.3.2.2.4 Nest a Distribution List or Prevent Nesting

This procedure describes the nesting of a distribution list within a distribution list. It also describes how to prevent mailbox owners from nesting distribution lists.

#### Nesting a Distribution List

To nest a list:

1. Specify the list as a member of the list being created or modified.
2. • Make sure the number of a nested list is different from the number of the distribution list that contains it.

#### Preventing a Nested Distribution List

- To prevent nesting, customize an FCOS to include feature bit 222 (deny nesting of distribution lists) and assign it to the required mailboxes.

### 1.2.3.2.2.5 Overview

System-wide distribution lists are created in the administrator's mailbox. These are called **master lists**, and can be accessed by any mailbox on the system. Master lists eliminate the need to store the same large distribution list in more than one mailbox.

For example, one list may contain the mailboxes of everyone in the company; a second list may exist for the Personnel Department; a third may list mailboxes in the Finance Department.

Like ordinary distribution lists, master lists are created from the User Options Menu. They are numbered from 01 to 09, like users' personal distribution lists. When users want to

send messages to a master list, they must add an extra zero to the beginning of the list number to tell the system to access a master list and not a personal distribution list. (For example, users enter **001** to access Master List 01.)

### Using a Master Distribution List

- To **make** a message for a Master List the mailbox must have feature bit **020** (Make) and feature bit **034** (Make to master distribution list) in its FCOS.
- To **give** messages to a master list, the mailbox must have the feature bit **035** (Give to master distribution list) in its FCOS.
- To **receive** a Master Distribution List message:
  - The mailbox can receive a master list message either through the Make or Give command.
  - The mailbox must have feature bit **045** (Receive master distribution list message) in its FCOS.

To distinguish a master list from an ordinary distribution list, users must add an extra zero (0) to the beginning of the master list number.

To send a message to the members of Master List 01:

1. Log in to your mailbox.
2. Press **M** to Make a message. The system prompts: "Enter mailbox number to make message for."
3. Enter **001**.
4. The system prompts: "Record a message for Master List <name>."

### 1.2.3.2.2.6 Create a Master Distribution List by Phone

To create a Master (System) Distribution list:

1. Ensure the administrator's mailbox has an FCOS that supports distribution lists.
2. Enter the server's extension number.
3. Log into the administrator's mailbox (the following steps are typical. Logging into the administrator's mailbox could differ at your installation, depending on integrations and other optional features that are installed):

**4.** Press the \* button and enter the administrator's mailbox number.

- Enter the administrator's passcode.
- Press **8** for **User Options**.
- Press **5** to create or modify a list.
- Enter the list number preceded by a 0 (zero); valid list numbers are 1 to 99, entered as "01" through "099."
- Press **6** to name the list.
  - Record a list name.
  - Press **9** to save the name.
- Press **2** to add a member name to the list. Enter the number of the mailbox that you wish to add.
  - The server confirms the entry: "<user's name> added." Repeat this step for each mailbox to be added.
- Press **9** to save your entries and exit to the Main Menu.

### Modify a Master Distribution List

- 1.** Enter the server's extension number.
- 2.** Log into the administrator's mailbox (the following steps are typical. Logging into the administrator's mailbox could differ at your installation, depending on integrations and other optional features that are installed):
  - Press the \* button and enter the administrator's mailbox number.
  - Enter the administrator's passcode.
  - Press **8** for User Options.
  - Press **5** to create or modify a list.
  - Enter the number of the list to be changed. The system indicates: "You are modifying <list name>."
- 3.** Press **P** (the **7** key) to Play all the members of the list. This step is not essential, but it may prevent you from modifying the wrong list.
- 4.** Press **A** (the **2** key) to Add a name to the list, *or Press D (the 3 key) to Delete a name and then enter the number of the mailbox to add/delete.* The system confirms the entry: "<User Name> added (/deleted)."
- 5.** Repeat Step 4 for each mailbox to be modified.
- 6.** Press **X** (the **9** key) to save the modified list and exit to the Main Menu.

### 1.2.3.2.3 Mailboxes for Hotel-Motel

### 1.2.3.2.3.1 Record Company Greetings

#### Overview

The Company Greeting is the message that outside callers hear when they access the system. You can record two greetings: one to play during regular working hours, and one to play during evening or weekend hours. Company greetings are made by recording a greeting in the administrator's mailbox for each line group.

The system ports are divided into line groups. Each line group can have a different administrator's mailbox and, therefore, a different company greeting. More than one administrator's mailbox may be configured. (To view system line groups in the Web Console, click **Active Configuration > View System Configuration**. In the Text Console, see [Statistics Reports](#) . )

For example, with NP Receptionist, you can record appropriate greetings for the automated receptionist number and the message center number. Separate day and night greetings can be recorded for both administrator's mailboxes. (If only one greeting is recorded, it is played during both time periods.)

The software contains a pre-recorded **Wait Prompt**, which issues the message: "Please enter an extension number or wait for assistance." Check your system Configuration Report to see whether this prompt is disabled. Disabling this prompt allows you to record the text of this message in the same voice as the rest of the company greeting.

If you do not record a personalized company greeting, NP Receptionist issues the default greeting: "Welcome to the Automated Attendant."

You can also configure a schedule for playing company greetings using the Text Console (only).

#### Programming

This procedure describes how to record a company day greeting and night greeting. This procedure assumes that you have defined an administrator mailbox for the line group.

##### 1. Log into the administrator's mailbox.

- Enter the server extension number.
- Press the **star (\*)** then enter the administrator's mailbox number.
- Enter the administrator's passcode.



## 2. Record the company greeting.

- Press the **8 button** for User Options.
- Press the **4 button** for Greetings. The server prompts, "Press D to record the day greeting; N to record the night greeting."
- Press D or N, then record the appropriate greeting.
- After you have recorded the greeting, press the **7 button** to review it.
  - To add information to it, press the **2 button**.
  - To discard it and record a new one, press the **3 button**.
  - To abandon the task, press the **3 button** then press the **9 button** before the recording prompt plays.
- When you are satisfied with the greeting that you have recorded, press the **9 button** to save the recording and return to the Main Menu.

## 3. To record a company greeting for the other period, repeat the process described in step 2. If either a day greeting (only) or a night greeting (only) is recorded, the following prompt plays during the period for which no greeting was recorded:

"Welcome to the message center. Please enter a mailbox number or wait."

4. If you have administrator's mailboxes defined for other line groups and you want a company greeting to play in those line groups:
5. Log into the administrator's mailbox for the appropriate line group.
6. Record the company greeting.

### 1.2.3.2.3.2 Record an Alternate Company Greeting

This procedure describes how to record an alternate greeting that, when enabled, plays instead of the company greeting. This procedure assumes that you have defined an administrator's mailbox for the line group.

To record an alternate greeting:

#### 1. Log into the administrator's mailbox.

- Dial the server extension number.
- Press the **star (\*)** button then enter the administrator's mailbox number.
- Enter the administrator's passcode.

## 2. Record the alternate greeting.

- Press the **8 button** for User Options.
- Press the **4 button** for Greetings.
  - For an alternate day greeting, press the **3 button** followed by the **7 button**.
  - For an alternate night greeting, press the **6 button** followed by the **7 button**.
  - For an alternate to both day and night greetings, press the **2 button** followed by the **7 button**.

## 3. After you have recorded the greeting, press the **7 button** to review it.

- To add information to it, press the **3 button**.
- To discard it and record a new one, press the **3 button**.
- To abandon the task, press the **3 button** then press the **9 button** before the recording prompt plays.

## 4. When you are satisfied with the greeting that you have recorded, press the **9 button** to save the recording and return to the Main Menu.

## 5. If you have administrator's mailboxes defined for other line groups and you want an alternate greeting to play in those line groups:

- Log into the administrator's mailbox for the next desired line group.
- Record the alternate greeting for that administrator's mailbox.

## 1.2.3.2.3.3 *Allow a Transfer Automatically After a Greeting*

To allow a caller to be transferred automatically to an attendant or a mailbox extension after playing a greeting:

### Transfer to an Attendant

1. Ensure that the mailbox from which a caller is transferred contains the desired greeting.
2. Specify an attendant extension in the mailbox. For the **Attendant extension** number: field or prompt, enter the **number** of the attendant's extension that the caller is automatically transferred to after playing the greeting.
3. [Customize an FCOS](#) to include feature bit **063** (Call mailbox attendant after greeting). Ensure that this FCOS does not include bit 062 (Hang up immediately after greeting).
4. Assign the FCOS to the mailbox that transfers a caller to an attendant after the greeting plays.

## Transfer to a Mailbox Extension

1. Ensure that the mailbox from which a caller is transferred contains the desired greeting.
2. Specify an extension for the mailbox. For the mailbox **Extension number:** field or prompt, enter the **number** of the mailbox's extension that the caller is automatically transferred to after playing the greeting.
3. [Customize an FCOS](#) to include feature **064** (Call mailbox user extension after greeting). Ensure that this FCOS does not include bit 062 (Hang up immediately after greeting).
4. Assign this FCOS to the mailbox that transfers a caller to the mailbox's extension after the greeting plays.

### 1.2.3.2.3.4 Configure for Name and Greeting Broadcast

The mailbox used for broadcasting greetings or names can be a standard mailbox, broadcast mailbox, or tree mailbox.

To use a distribution list for broadcasting greetings or names:

1. [Customize an FCOS](#) to include the following feature bits, as applicable:
  - **174** (define broadcast greeting mailbox) in the FCOS assigned to the mailbox that will broadcast greetings.
  - **175** (receive broadcast greeting) in the FCOS assigned to the mailbox that will receive broadcast greetings.
  - **178** (define broadcast name mailbox) in the FCOS assigned to the mailbox that will broadcast names.
  - **179** (receive broadcast name) in the FCOS assigned to the mailbox that will receive broadcast names.
2. [Create DistributionLists](#) 1 and 9 to contain the greeting or name broadcast list.

To broadcast messages and greetings to the same list of recipients, make Distribution List 1 for broadcasting messages and keep Distribution List 9 for broadcasting greetings and names. Make Distribution Lists 1 and 9 identical in content.

### 1.2.3.2.3.5 Configure for a Receipt Notice or Summary

This procedure describes how to delay a requested receipt notice, configure the playing of a receipt summary, and allow a distribution list message to automatically generate a receipt notice.

## Delaying a Receipt Notice

Customize an FCOS to include feature bit 223 (delay requested receipt for 24 hours) and assign to the required mailbox. When this bit is in the FCOS, the mailbox owner will not hear any requested receipts until 24 hours later.

## Allowing an Automatically-Generated Receipt Notice

1. Customize an FCOS to include the following feature bits and assign to the **sending** mailboxes:
  - **36** (auto-receipt for user dist list msgs)
  - **20** (make messages)
  - Either **32** (make to user distribution list) OR **33** (give to user distribution list)
2. Customize an FCOS to include feature bit **44** (receive user dist list messages) and assign to the **receiving** mailboxes.

When bit 36 is in the FCOS, the server automatically generates a receipt notice for a message sent to a distribution list. When mailbox owners log into their mailboxes, the receipt announces:

"The following users have not played your message." (list of mailbox names)

"The following users have played your message." (list of mailbox names, each followed by the time the user played the message)

Each time mailbox owners log in, they hear the updated receipt notice. Receipts are updated until mailbox owners discard them.

## Configuring for a Receipt Summary

1. Set the **Min Number of Recipients for Receipt Summary** parameter in the **LCOS** to a number from 1 through 65,535. Specify 0 to disable the playing of a receipt summary.
2. Assign the LCOS to the mailbox that will receive receipts.
3. After a distribution list message is made to at least the number of recipients specified, the server plays the following receipt summary, in this order:

"n recipients could not receive your message."

"n recipients have not played your message."

"n recipients have played your message."

### 1.2.3.2.3.6 Record the Message of the Day

The Message of the Day is made by recording a greeting in the **attendant's mailbox**. This message is sent to every mailbox on the system. After the message is broadcast, it automatically plays the next two times a user logs in. (For example, in a hotel environment, each guest might hear "Thank you for staying with ABC Hotels. Don't forget our free breakfast buffet available at 8 AM every day." the first two times they log in to access their voice mail.)

**Note:**

Mailboxes must have FCOS feature bit 043 to receive the Message of the Day.

More than one attendant's mailbox may be configured on your system; the Message of the Day must be recorded from the primary attendant's mailbox. (The others are used only to store messages when the primary mailbox is full.) The primary attendant's mailbox is the first mailbox number listed in the Configuration Report.

To record the Message of the Day:

1. Enter the system's main extension number to reach the attendant/NP Receptionist.
2. Log in to the attendant's mailbox:
  - Press the \* key (star).
  - Enter the attendant's mailbox number.
  - Press the \* key (star) to indicate that you are the owner of this mailbox.
3. Enter the attendant's passcode.
4. Press **U** (the **8** key) for User Options.
5. Press **G** (the **4** key) to record a Greeting.
6. At the "Press M to change the Message of the Day..." prompt, press **M** (the **6** key) to Change the Message of the Day.
7. Press **R** (the **7** key) to Record the Message of the Day.
8. Record your message (speak the Message of the Day).
9. Press **R** (the **7** key) to Review your recording.
  - Press **A** (the **2** key) to Add information to the message.
  - Press **D** (the **3** key) to Discard the message and record a new one.
10. When you are satisfied with this message, press **X** (the **9** key) to save the recording and return to the Main Menu.
11. Press **L** (the **5** key) to Listen to the message.
12. Press **X** (the **9** key) to Exit.

## Delete or Change the Message of the Day

The Message of the Day can be deleted by recording a new Message of the Day. Every new mailbox receives the Message of the Day that is stored in the attendant's mailbox, regardless of when the message was recorded.

If you do not regularly record a Message of the Day, you must be sure to delete messages that are no longer up-to-date. Once deleted, users do not hear the old Message of the Day, even if they have not logged in since the new message was created.

### To Delete the Message of the Day

1. Follow Steps 1 through 6 in "To Record the Message of the Day", above.
2. Press **L** (the **5** key) to Listen to the message.
3. Quickly press **D** (the **3** key); **immediately** press **X** (the **9** key). The system responds: "Nothing recorded. Greeting changed."

### To Change the Message of the Day

1. Follow Steps 1 through 6 in "To Record the Message of the Day", above.
2. Press **L** (the **5** key) to Listen to the message.
3. Press **R** (the **7** key) to Record the Message of the Day.
4. Record over your previous message (say the new Message of the Day).

## 1.2.3.2.3.7 Enable or Disable a Message of the Day

This procedure describes how to record a message of the day, and how to prevent a message of the day from playing. This procedure assumes that you have defined an attendant's mailbox for the line group.

### Enabling a Message of the Day

1. [Customize an FCOS](#) to contain feature bit 43 (Receive Message of the Day) and assign to each mailbox you want to receive the message of the day.
2. Record the message of the day in the attendant's mailbox.
3. Dial the server extension number.

4. Log in to the primary attendant's mailbox (the first mailbox number listed in the configuration report).

- Press the \* button, and then enter the attendant's mailbox number.
- Enter the attendant's passcode.
- Press the **8** button for User Options.
- Press the **4** button. The server prompts, "Press M to record the message of the day ; T to record the site tutorial ."
- Press the **6** button to record the message of the day.
- Press the **7** button to start recording the message.
- After you have recorded the message of the day, press the **7** button to review it:
- To add information to the message, press the **2** button.
- To discard the message and record a new one, press the **3** button.
- To abandon the task, press the **3** button then press the **9** button before the recording prompt plays.
- When you are satisfied with the Message of the Day that you have recorded, press the **9** button to save the recording and return to the Main Menu.

### Disabling a Message of the Day

To disable a message of the day by phone, record a new message then discard it:

1. Dial the server extension number.
2. Log into the Attendant's Mailbox.
  - Press the \* button, and then enter the attendant's mailbox number.
  - Enter the attendant's passcode.
3. Press the **8** button for User Options.
4. Press the **4** button. The server prompts, "Press M to record the message of the day ; T to record the site tutorial ."
5. Press the **6** button to record the message of the day.
6. In quick succession, without recording any words, press the **3** button, and then press the **9** button. You will hear "Nothing recorded. Message changed." The original message and anything just recorded are deleted.

### 1.2.3.2.3.8 Extended Absence Greetings

An Extended Absence Greeting (EAG) tells callers that the person they are calling is away for an extended period of time. Callers do not have the option to skip the greeting. At the end of the greeting, callers can leave a message, transfer to the line-group attendant, or end the call.

You must assign FCOS 297 (Enable Extended Absence Greeting) to a mailbox to allow the user to record and enable an EAG. You can also assign 298 (Disable message delivery when Extended Absence Greeting is enabled). For information about how users can record and enable an EAG greeting for their mailbox, refer to the *NuPoint Unified Messaging User Guide*.

EAG is included in the base software and can be enabled for any NuPoint Unified Messaging user

**Note:**

When EAG is enabled, you cannot log in to the Message Center directly from a remote phone. You must press the star (\*) key before entering your mailbox number.

### 1.2.3.2.3.9 Record a Site Tutorial

The site tutorial, like the Message of the Day, is made by recording a greeting in the attendant's mailbox. It may consist of any instructions the administrator considers necessary. This tutorial plays after the standard tutorial when a mailbox is created or when the mailbox user enables the tutorial feature, from the User Options Menu.

More than one attendant's mailbox may be configured on your system. The site tutorial can be recorded only from the primary attendant's mailbox. (The others are used to store messages only when the primary mailbox is full.) The primary attendant's mailbox is the first mailbox number listed in the Configuration Report.

To record a site tutorial:

1. Enter the system's main extension number to reach the attendant/NP Receptionist.
2. Log in to the attendant's mailbox:
  - Press the \* key (star).
  - Enter the attendant's mailbox number.
  - Press the \* key (star) to indicate that you are the owner of this mailbox.
3. Enter the attendant's passcode.
4. Press **U** (the **8** key) for User Options.
5. Press **G** (the **4** key). The system prompts: "Press M to change the Message of the Day; T to change the Site Tutorial."
6. Press **T** (the **8** key) to record the site Tutorial.
7. Press **R** (the **7** key) to Record.
8. Record your message (say the site tutorial).



9. Press **R** (the **7** key) to Review it.

- Press **A** (the **2** key) to Add information to the message.
- Press **D** (the **3** key) to Discard the message and record a new one.

10. When you are satisfied with the site tutorial, press **X** (the **9** key) to save the recording and return to the Main Menu. The system indicates: "Greeting changed."

11. Press **L** (the **5** key) to Listen to your new message.

12. Press **X** (the **9** key) to Exit this menu.

## 1.2.3.3 Procedures (Web Console)

### 1.2.3.3.1 Managing Mailboxes

You manage mailboxes from the "Mailboxes" data view. You can add, edit, delete, search for, and show all mailboxes from this view.

The Mailbox data view is divided into 2 distinct areas: the search area and the list area. Because there may be thousands of mailboxes in a system, you can perform a search for a single mailbox, or a range of mailboxes, to display. The resulting list is sorted in ascending order by mailbox number. You can then select from the list a single mailbox, or a range of mailboxes, to add, edit, or delete.

#### The Mailbox Data View

To open the Mailbox data view

- In the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
- Use the **Search** or **Show All** button to display mailbox information.

A common view is displayed, from which you can add, edit, delete, search for and show all mailboxes.

Since a mailbox has a lot of programmable data, the data is categorized and presented under different tabs. Each mailbox has a Basic view, which provides the tabs required for basic mailbox configuration, and an Advanced view, which enables more tabs so you can configure additional features. Tabs are context specific so some tabs do not appear under some conditions.

The following list contains all of the available tabs:

- General
- Class of Service
- Message Waiting
- Outdial Applications
- Personal Distribution Lists

- System Distribution Lists
- UI Mapping
- Statistics
- Miscellaneous

For a complete listing of the parameters on these tabs, see [Mailbox Parameters](#).

To page through the Mailbox Data View

- You can navigate any multi-page display using the page number links or the Next/Previous/First/Last links on the right side of each page, at the top and bottom of the list.

To select a mailbox

- Select a check box beside the mailbox to modify OR you can click **Edit > Range** and then enter a range of mailboxes to modify.

To display mailbox data

- Each mailbox displays number, name, extension, and department data. Each mailbox in the list is also a link to the detailed configuration for that mailbox. To modify mailbox data, you can click the mailbox link OR you can select the mailbox check box and then click **Edit**.

**Note:**

Rotational mailboxes must be configured using the **Text Console**.

### 1.2.3.3.2 Mailbox Parameters - Web Console

This topic discusses the parameters used to configure a mailbox. The information is presented in the same layout you see when using the Web Console. For the Text console layout, see [Mailbox Parameters - Text Console](#).

The mailbox data view is the form where you enter data when you add or edit a mailbox or multiple mailboxes. You open this view from the Mailboxes window, when you add or edit/view mailbox data. The following tabs are available:

- **General Tab:** The General tab is where you enter the personal information for the mailbox user.
- **Class of Service Tab:** The Class of Service tab contains all of the possible class of service options that can be set for a mailbox. You can only edit named COS.
- **Message Waiting Tab:** The Message Waiting tab allows you to set parameters like message waiting types, frequencies, and intervals.

- **Outdial Applications Tab:** The Outdial Applications tab allows you to set parameters for Fax and NP-UM Wake Up.
- **Personal Distribution Lists Tab:** The Personal Distribution Lists tab allows you to set up personal distribution lists. As the administrator, you can create a personal distribution lists in your own mailbox and then assign that list to other mailbox users as a system distribution list.
- **System Distribution Lists Tab:** The System Distribution List Tab contains all of the system distribution lists that are programmed in the system and allows you to assign System Distribution Lists that to a mailbox. The system distribution lists are the personal distribution lists of the administrator mailbox. This tab is not available when you add mailboxes.
- **UI Mapping Tab:** The UI Mapping Tab allows you to assign more than one extension to a mailbox. The tab is available only if the ESMDI feature is configured for the system.
- **Stats Tab:** The Statistics Tab allows you to view basic statistics for a mailbox.
- **Miscellaneous Tab:** The Miscellaneous tab allows you to set other miscellaneous parameters.

## Basic and Advanced Views

The default view of mailbox data is the Basic View, which displays only the General, Class of Service and Message Waiting tabs. There is also an Advanced View, which displays the General, Class of Service, Message Waiting, Outdial Applications, Personal Distribution Lists, System Distribution Lists, Statistics, and Miscellaneous tabs. To display either the Basic or Advanced view, click Basic or Advanced.

## Mailbox Tabs Field Descriptions

| General Tab                   |                   |  |             |        |
|-------------------------------|-------------------|--|-------------|--------|
| <a href="#">(Back to Top)</a> |                   |  |             |        |
| Field                         | Displayed in View |  | Description | Values |
| Basic                         | Advanced          |  |             |        |

General Tab

(Back to Top)

|      |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                               |
|------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Name | ü | ü | <p>Name of the mailbox user.</p> <p>If you enter a name, it is assigned to ALL mailboxes being created. Enter the name in either of two formats: &lt;LN&gt;, &lt;FN&gt; or &lt;FN&gt; &lt;LN&gt; (for example "Smith, Harry" or "Harry Smith"). Make sure to include a comma if you use &lt;LN&gt;, &lt;FN&gt; format and a space if you use &lt;FN&gt; &lt;LN&gt; format. The mailbox name is displayed any time that mailbox information is requested.</p> <div><b>Note:</b><ul style="list-style-type: none"><li>If a user's name includes accented characters (example, "L'Abbé"), ensure that you enter</li></ul></div> | <p>Maximum 31 characters. Accented characters count for two characters. Default is blank.</p> |
|------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|

**General Tab**[\(Back to Top\)](#)

|                       |   |   |                                                                                                                                                                                                                                                                                                                                            |                                                        |
|-----------------------|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Passcode              | ü | ü | <p>Passcode of the mailbox user. Used to access the mailbox.</p> <p>If a passcode is specified, it is assigned to ALL mailboxes being created. If no passcode is specified, one is not assigned to the mailbox when it is created.</p> <p>For Administrator mailbox passcode requirements see <a href="#">Administrator Passcodes</a>.</p> | Minimum 4 digits, maximum 10 digits. Default is blank. |
| Force Passcode Change |   | ü | Select this check box to force users to change the default passcode at initial login. After successful change, this check box is cleared.                                                                                                                                                                                                  | Default is disabled (cleared).                         |

**General Tab**[\(Back to Top\)](#)

|            |   |   |                                                                                                                                                                                                                                                                                                                                                |                                                                    |
|------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Department |   | ü | <p>Contains a department number code to indicate the department of the mailbox user.</p> <p>If a department is specified, it is assigned to ALL mailboxes being created.</p>                                                                                                                                                                   | Maximum 10 alpha numeric and special characters. Default is blank. |
| Extension  | ü | ü | <p>Extension number of the mailbox user.</p> <p>If you enter an extension and it differs from the first mailbox number being created, then it is assigned to ALL mailboxes being created. If the field is left blank, then an extension number is assigned by default to be the same number as the mailbox for each mailbox being created.</p> | Maximum 11 digits. Default is blank.                               |

| <b>General Tab</b><br><b>(<a href="#">Back to Top</a>)</b> |   |   |                                                                                                                                                                                                                                                                                |                                      |
|------------------------------------------------------------|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Pre-dial string                                            |   | ü | This drop-down list contains the pre-dial indices that have been programmed by the technician. Select to specify a string that must be dialed prior to the extension in order to reach that extension. If a string is selected, it is assigned to ALL mailboxes being created. | Default is 0.                        |
| Alternate Extension (1-4)                                  |   | ü | You can add alternates for this extension so that up to 4 other phones (like a cell phone, for example) can share this mailbox.                                                                                                                                                | Default is blank.                    |
| Attendant Extension                                        | ü | ü | This is the number that is called if user dials 0 to return to the attendant. If an attendant extension is defined, it is assigned to ALL mailboxes being created.                                                                                                             | Maximum 15 digits. Default is blank. |
| Pre-dial string                                            |   | ü | This drop-down list contains the pre-dial indices that have been programmed by the technician. Select to specify a string that must be dialed prior to the extension in order to reach that extension. If a string is selected, it is assigned to ALL mailboxes being created. | Default is 0.                        |
| Enable Tutorial                                            |   | ü | Allows you to enable the introductory tutorial for a new mailbox. If this option is cleared, it is applied to ALL mailboxes being created.                                                                                                                                     | Default is enabled (selected).       |

**General Tab**[\(Back to Top\)](#)

|                   |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                   |
|-------------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| UM Audio Encoding | ü | ü | <p>Allows you to configure the audio encoding method to use for this mailbox.</p> <p><b>ADPCM:</b><br/>Microsoft audio encoding (default)</p> <p><b>GSM 6.10:</b><br/>Audio encoding with wider support for mobile devices</p> <p><b>MP3:</b> Use MP3 only if ADPCM and GSM 6.10 cannot be played on the user device, or if the user is employing a hosted/webmail web service such as Gmail or Yahoo Mail.</p> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>The three different audio encoding types are available to all user types (Standard, Advanced UM, and UM-SMTP).</li> <li>MP3 may</li> </ul> | Default is ADPCM. |
|-------------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|



| General Tab                   |  |  |                                                                                                                                                                                                                                                                                                                                                                 |                                                                          |
|-------------------------------|--|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <a href="#">(Back to Top)</a> |  |  |                                                                                                                                                                                                                                                                                                                                                                 |                                                                          |
| Email Address                 |  |  | <div>E-mail address for UM-SMTP user. This is the e-mail address where the user receives the e-mail copy of each message.</div> <div>From the drop-down box beside the message field (if displayed), select the delivery option for voice messages</div> <div><ul style="list-style-type: none"><li>• Audio Attachment</li><li>• Speech-to-Text</li></ul></div> | Maximum 64 characters. Must be a valid e-mail address. Default is blank. |

**General Tab**[\(Back to Top\)](#)

|                            |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                          |
|----------------------------|---|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Standard                   | ü | ü | <p>E-mail addresse(s) for Standard UM user (availability of multiple addresses depends on the class of service for the mailbox). This is the e-mail address where the user receives the e-mail copy of each message. If an e-mail address is entered, it is assigned to ALL mailboxes being created.</p> <p>From the drop-down box beside the message field (if displayed), select the delivery option for voice messages</p> <ul style="list-style-type: none"> <li>• Audio Attachment</li> <li>• Audio Link</li> <li>• Web View Link (except MiCollab )</li> <li>• Text Notification</li> <li>• Speech-to-Text</li> </ul> | Maximum 64 characters. Must be a valid e-mail address. Default is blank. |
| Email Address (1, 2 and 3) |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                          |

General Tab

(Back to Top)

|                           |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                          |
|---------------------------|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| UM-Web View Email Address | ü | ü | <p>E-mail address to which to save Web View messages (availability depends on the class of service for the mailbox). If the user selects a message in Web View and clicks the <b>Save</b> button, the message will be sent to this e-mail address. If an e-mail address is entered, it is assigned to ALL mailboxes being created.</p> <p>If the system is not licensed to use the Standard UM features, then this field will not be displayed. If the feature is licensed but the mailbox does not have the FCOS to use the feature, then the field will be displayed but will be disabled until the mailbox does have the correct FCOS</p> | Maximum 64 characters. Must be a valid e-mail address. Default is blank. |
|---------------------------|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|

General Tab

([Back to Top](#))

|                                               |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                   |
|-----------------------------------------------|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| Advanced UM Email Alias / Full Name / Address | ü | ü | <p>The field name is dependant upon the type of mail server that is in use:</p> <ul style="list-style-type: none"><li>• <b>Advanced UM Email Alias</b> displays for MS Exchange. Enter an alias for the username.</li><li>• <b>Advanced UM Email Full Name</b> displays for Lotus Domino. Enter the complete username in the following format: <code>FirstNameLastName/Region/Company</code>.</li><li>• <b>Advanced UM Email Address</b> displays for Google Apps. Enter an email address for the username.</li></ul> <p>If the field is left blank, or contains</p> | Maximum 64 characters. Must not contain spaces. Default is blank. |
|-----------------------------------------------|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|

General Tab

([Back to Top](#))

|                            |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                   |
|----------------------------|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| Advanced UM Email Password | ü | ü | <p>Password for Advanced UM users (availability depends on the class of service for the mailbox). If the field is left blank, or contains spaces, the Advanced UM feature will not function for this mailbox.</p> <p>If the system is not licensed to use the Advanced UM features, then this field will not be displayed. This field is not displayed if:</p> <ul style="list-style-type: none"><li>• FCOS bit 295 is not set for the user</li><li>• the mail server type is Google Apps</li><li>• the mail server type is MS Exchange, the adapter type is IMAP, and the</li></ul> | Maximum 64 characters. Must not contain spaces. Default is blank. |
|----------------------------|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|

**General Tab**[\(Back to Top\)](#)

| Advanced UM Speech-to-Text Transcription                     | ü                 | ü        | Select this check box if you need text transcription of voice messages for Advanced UM NuPoint users. (Users can also set this option on the Settings tab of the Web View.) | Default is blank. |
|--------------------------------------------------------------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Class of Service Tab</b><br><a href="#">(Back to Top)</a> |                   |          |                                                                                                                                                                             |                   |
| Field                                                        | Displayed in View |          | Description                                                                                                                                                                 | Values            |
|                                                              | Basic             | Advanced |                                                                                                                                                                             |                   |

| General Tab   |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |
|---------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| (Back to Top) |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |
| Feature       | ü | ü | <p>The Feature Class of Service (FCOS) controls mailbox user privileges and outside caller functions for the mailbox. Individual privileges and restrictions are designated by numbers, which are referred to as "feature bits". Each FCOS has its own unique combination of these feature bits. For example, a user's ability to make, give, or answer messages is controlled by the FCOS assigned.</p> <p>The FCOS that you specify is assigned to ALL mailboxes being created.</p> <ul style="list-style-type: none"><li>To view the FCOS available on your system, select an FCOS from the Feature</li></ul> | Default is 1. |

**General Tab**[\(Back to Top\)](#)

|                                       |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |
|---------------------------------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Limits                                | ü | ü | <p>The Limits Class of Service (LCOS) imposes limits on mailboxes. It can be a valuable tool for allocating disk storage space and port use.</p> <p>Each LCOS can set the maximum times allowed for recording mailbox greetings, user messages, caller messages, and mailbox names; it can limit the amount of time a user remains logged in during one session. The LCOS can specify the maximum time that a played or unplayed message can be stored in a mailbox before it is erased by the automatic purge. It can specify the maximum</p> | Default is 1. |
| NuPoint Unified Messaging Web Console |   |   | <p>number of messages that</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |



General Tab

([Back to Top](#))

|       |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |
|-------|--|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Group |  | ü | <p>The Group Class of Service (GCOS) is the group management resource that keeps track of large systems with many groups.</p> <p>Each GCOS consists of 128 possible groups. Any or all of the 128 groups can be assigned or deleted from the GCOS.</p> <p>The GCOS that you specify is assigned to ALL mailboxes being created.</p> <ul style="list-style-type: none"><li>• To view the GCOS that are configured on your system, select a GCOS from the Group drop-down list, and then click View.</li><li>• To list, create, edit, or delete a GCOS, see <a href="#">Group Class of Service</a>.</li></ul> | Default is 1. |
|-------|--|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

| General Tab   |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |               |
|---------------|--|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| (Back to Top) |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |               |
| Restriction   |  | ü | <p>The Restriction Class of Service (RCOS) is an element of NPA/NXX call screening that restricts mailbox outdials to certain area codes or prefixes within an area code. One RCOS is assigned to each mailbox.</p> <p>The RCOS that you specify is assigned to ALL mailboxes being created.</p> <ul style="list-style-type: none"><li>• To view the RCOS that are configured on your system, select an RCOS from the Restriction drop-down list, and then click View.</li><li>• To list, create, edit, or delete an RCOS, see <a href="#">Restriction Class of Service</a>.</li></ul> | Default is 1. |

General Tab

(Back to Top)

|         |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |               |
|---------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Network |  | ü | <p>The Network Class of Service (NCOS) controls users network access. NCOS settings control whether a mailbox owner can send, give, or answer messages over the network. You can configure up to 64 NCOS and combine features to create NCOS that provide network privileges for specific user groups. NCOS is part of the NP-UM Net Digital Network optional feature. Only available in Advanced view.</p> <p>The NCOS that you specify is assigned to ALL mailboxes being created.</p> <ul style="list-style-type: none"><li>To view the NCOS that are configured on your system, select an</li></ul> | Default is 1. |
|---------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

**General Tab**[\(Back to Top\)](#)

|        |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |               |
|--------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Tenant |  | ü | <p>The Tenant Class of Service (TCOS) is used with the ESMDI "Multi-Tenant" application to manage mailbox interaction between user communities.</p> <p>The TCOS that you specify is assigned to ALL mailboxes being created.</p> <ul style="list-style-type: none"> <li>• To view the TCOS that are configured on your system, select a TCOS from the Tenant drop-down list, and then click View.</li> <li>• To list, create, edit, or delete a TCOS, see <a href="#">Tenant Class of Service</a>.</li> </ul> | Default is 1. |
|--------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

**General Tab**[\(Back to Top\)](#)

Message Waiting Tab

[\(Back to Top\)](#)

| Field | Displayed in View |          | Description | Values |
|-------|-------------------|----------|-------------|--------|
|       | Basic             | Advanced |             |        |

**General Tab**[\(Back to Top\)](#)

|                                                               |   |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |
|---------------------------------------------------------------|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Message Waiting #1 Type                                       | ü | ü | <p>Select one of the three supported types of message waiting notification:</p> <ul style="list-style-type: none"> <li>• DTMF to PBX</li> <li>• HIS PMS</li> <li>• Pager</li> <li>• Unified Integration</li> <li>• Program RS232</li> <li>• Hitachi PMS</li> <li>• Centrex RS232</li> <li>• MiTAI Messaging</li> </ul> <p>The Details link is enabled if the type of notification that is selected requires you to define additional parameters. Click the Details link to display these parameters. If no additional parameters are required, then the Details link is disabled.</p> <p><b>Note:</b> If you select "Pager", you must specify at least</p> | Default is None. |
| <p>Message Waiting #2 Type</p> <p>Message Waiting #3 Type</p> | ü | ü |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |

**General Tab**[\(Back to Top\)](#)

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                           |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <p>Pager Details Form</p>                 | <p>When you select "Pager" as Message Waiting #1 Type or #2 Type, click the Details link to open the Pager Details form.</p> <p><b>Note:</b> For each Message Waiting Type (#1 and #2), the mailbox can have a Primary and an Alternate pager. The parameters you must set for both pagers are the same. The fields for the alternate pager are disabled by default, and you can enable them by selecting the "Enable Alternate Pager/ Telephone Number" check box.</p> |                                           |
| <p>Page/call on Urgent Messages only.</p> | <p>Select this check box for notification of urgent messages only.</p>                                                                                                                                                                                                                                                                                                                                                                                                  | <p>Default is cleared (not selected).</p> |

**General Tab**[\(Back to Top\)](#)

|                   |                                                                                                                                                           |                                                                                                                                                    |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Type              | Select "Paging" or "Message Delivery".                                                                                                                    | Default is "Paging".                                                                                                                               |
| Telephone Number  | <p><b>*Required field.</b></p> <p>Enter the paging or message delivery telephone number.</p>                                                              | The length of this number is determined by the LCOS for Paging-Phone Length or Message delivery-Phone Length. Maximum 16 digits. Default is blank. |
| Post Pager Number | <p>(Optional field.)</p> <p>Enter a number that will be displayed on the screen of a display pager.</p>                                                   | Maximum 24 digits. Default is blank.                                                                                                               |
| Access type       | <p>(Optional field.)</p> <p>Select a dial string to indicate how to place a call and where the call should be billed, unbilled, or if it is internal.</p> | Default is undefined.                                                                                                                              |



| General Tab                   |                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                         |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| <a href="#">(Back to Top)</a> |                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                         |
| Frequency                     | <p>*Required field.</p> <p>Defines the number of times that the system retries the delivery of a page or message waiting notification if there is not a busy signal. In the event of a page, this could occur if the pager was out of range or the paging system was down. In the event of message delivery this could mean that somebody is answering the message delivery number, but it is not the mailbox owner (no passcode).</p> | <p>Digits in the range of 0-255 only. Default is 3.</p> |

**General Tab**[\(Back to Top\)](#)

|               |                                                                                                                                                                               |                                                  |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Interval      | <p><b>*Required field.</b></p> <p>Defines the amount of time, in seconds, that the server will wait between Frequency retries.</p>                                            | Digits in the range of 0-255 only. Default is 2. |
| Busy Attempts | <p><b>*Required field.</b></p> <p>Defines the number of times that the system retries the delivery of a page or message delivery message, when the paging number is busy.</p> | Digits in the range of 0-255 only. Default is 3. |
| Interval      | <p><b>*Required field.</b></p> <p>Defines the amount of time, in seconds, that the server will wait between Busy Attempt retries.</p>                                         | Digits in the range of 0-255 only. Default is 2. |

| General Tab                                                              |                   |                                                                                                                                                                    |                                                                                                                                            |        |
|--------------------------------------------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------|
| (Back to Top)                                                            |                   |                                                                                                                                                                    |                                                                                                                                            |        |
| Start Time                                                               |                   | The time of day that the paging or message delivery is turned ON for a mailbox.                                                                                    | AM/PM format. Hour field allows digits in the range of 1-12, and the minute field allows digits in the range of 1-59. Default is 12:00 AM. |        |
| Stop Time                                                                |                   | <p>The time of day that the paging or message delivery is turned OFF for a mailbox.</p> <p><b>Note:</b>The Stop time must be equal to or after the Start time.</p> | AM/PM format. Hour field allows digits in the range of 1-12, and the minute field allows digits in the range of 1-59. Default is 12:00 AM. |        |
| Enable Alternate Pager/Telephone Number                                  |                   | Select to enable and define parameters for an alternate pager. The fields to program are the same as for the primary pager (see above).                            | Default is cleared (not selected).                                                                                                         |        |
| Outdial Applications Tab                                                 |                   |                                                                                                                                                                    |                                                                                                                                            |        |
| <p><b>Note:</b><br/>This tab is available in the Advanced view only.</p> |                   |                                                                                                                                                                    |                                                                                                                                            |        |
| (Back to Top)                                                            |                   |                                                                                                                                                                    |                                                                                                                                            |        |
| Field                                                                    | Displayed in View |                                                                                                                                                                    | Description                                                                                                                                | Values |
|                                                                          | Basic             | Advanced                                                                                                                                                           |                                                                                                                                            |        |

**General Tab**[\(Back to Top\)](#)

|                      |  |   |                                                                                                                                                                                                                                                                                   |                                                                                                                                  |
|----------------------|--|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Fax                  |  | ü | The Fax optional feature must be installed and configured on the NuPoint Unified Messaging system, and this mailbox must have the proper Fax COS assigned to it for you to define the parameters in this section. If the feature is not installed, this section is not displayed. | Default is cleared (not selected).                                                                                               |
| Fax call access type |  | ü | This field contains dial strings that indicate how to place a call and where the call should be billed, unbilled or internal.                                                                                                                                                     | Default is undefined.                                                                                                            |
| Default fax number   |  | ü | This is the number of the fax machine.                                                                                                                                                                                                                                            | Digits only. Maximum digits is determined by the LCOS Maximum Number of digits for Telephone Number for a Fax. Default is blank. |

| General Tab                    |  |   |                                                                                                                                                                                                                                                                                                               |                                                                          |
|--------------------------------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <a href="#">(Back to Top)</a>  |  |   |                                                                                                                                                                                                                                                                                                               |                                                                          |
| Send Email Fax Confirmation to |  | ü | E-mail address to which to fax transmission confirmation messages are sent. The subject line of the message includes the following information: success/failure status, number of pages, and date and time of transmission attempt.<br><br>Leave this field blank to receive confirmation by voice mail only. | Maximum 64 characters. Must be a valid e-mail address. Default is blank. |

**General Tab**[\(Back to Top\)](#)

|               |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                  |
|---------------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| NP-UM Wake Up |  | ü | <p>The NP-UM Wake Up optional feature must be installed on the NuPoint Unified Messaging system for you to define parameters in this section. If the feature is not installed, this section is not displayed. If you enable the NP-UM Wake Up outdial application, you must enter a <a href="#">Number</a>.</p> <p>To enable an NP-UM Wake UP application for this mailbox, select the NP-UM Wake Up check box.</p> | Default is cleared (not selected).               |
| Frequency     |  | ü | Defines the number of times NP-UM Wake Up will try to deliver the wakeup message.                                                                                                                                                                                                                                                                                                                                   | Digits in the range of 0-255 only. Default is 3. |
| Interval      |  | ü | Defines the amount of time in minutes that the system will wait between retries to deliver the message.                                                                                                                                                                                                                                                                                                             | Digits in the range of 0-255 only. Default is 2. |

**General Tab**[\(Back to Top\)](#)

|             |  |   |                                                                                                                                                                                                                                                       |                                                                                                                                    |
|-------------|--|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Number      |  | ü | <p>*Required field (if NP-UM Wake Up is selected).</p> <p>The telephone number that the NP-UM Wake Up software will call to deliver the wakeup message.</p>                                                                                           | The length of this number is determined by the LCOS NP-UM Wakeup Phone Number length. Maximum 11 digits allowed. Default is blank. |
| Access Type |  | ü | The drop-down list contains dial strings that indicate how to place a call and where the call should be billed, unbilled, or if it is internal. The access types displayed in this list must be set up through the Text Console by the administrator. | Default is Undefined.                                                                                                              |

**General Tab**[\(Back to Top\)](#)

|              |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |
|--------------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Access Types |  | ü | <p>This section of the page allows you to set up the preferences for each type of access. There are settings for Internal, Billed, and Unbilled types. The access types displayed in drop down lists must be set up through the Text Console by the administrator.</p> <p>The dial first option allows the user to specify whether the billing number or the telephone number should be dialed first. By default this field is set to Billing Number. These billing settings are not enabled unless the user specifies a Billed access type. By default all access types are undefined.</p> | N/A |
|--------------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|



**General Tab**[\(Back to Top\)](#)

|                            |  |   |                                                                                                                                 |                                                |
|----------------------------|--|---|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Internal access type       |  | ü | Defines the type of internal access.                                                                                            | Default is Undefined.                          |
| Billed access type         |  | ü | Defines the type of billed access. The Billed access type requires you to configure settings for Billing Number and Dial first. | Default is Undefined.                          |
| Billing Number             |  | ü | Defines the phone number for billed calls.                                                                                      | Maximum length is 25 digits. Default is blank. |
| Dial first                 |  | ü | Defines which access type to dial first.                                                                                        | Default is Billing Number.                     |
| Unbilled access type       |  | ü | Defines the type of unbilled access.                                                                                            | Default is Undefined.                          |
| Call placement access type |  | ü | Defines the type of call placement access.                                                                                      | Default is Undefined.                          |

**Personal Distribution Lists Tab****Note:**

This tab is available in the Advanced view only.

Tab Description: For each Personal Distribution List, you can specify a name, the list contents, and you can set preferences on whether the mailbox owner can edit or view the list.

[\(Back to Top\)](#)

| Field | Displayed in View |          | Description | Values |
|-------|-------------------|----------|-------------|--------|
|       | Basic             | Advanced |             |        |

General Tab

([Back to Top](#))

|        |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                 |
|--------|--|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Number |  | ü | <p>Each mailbox can have lists numbered 01 to 99. Lists 1 and 9 can be used by the system for system distribution lists.</p> <p>The actual number of lists depends on a LCOS. If the user can only have 2 lists, then this drop down list will only show entries for 01 and 02. If the user had more lists before the LCOS was changed to limit list access, then those lists are not deleted, but the user will not have access to them.</p> <p>When the tab is first opened, the data for list 01 is displayed. The list may be empty, or have already been programmed. The list drop down list</p> | 1-99. Default is 1. Number of allowed lists depends on an LCOS. |
|--------|--|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|

| <b>General Tab</b><br><b>(<a href="#">Back to Top</a>)</b> |  |   |                                                                                                                                                                                                                                                                                                                                                         |                                                                                         |
|------------------------------------------------------------|--|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Name                                                       |  | ü | (Optional field).<br><br>Defines the name of the distribution list.                                                                                                                                                                                                                                                                                     | Maximum 31 alpha numeric characters. Default is blank.                                  |
| Allow user to change                                       |  | ü | Defines whether the user has permissions to change the contents of the distribution list. You can clear this option to prevent the user from changing the list.                                                                                                                                                                                         | Default is selected (enabled).                                                          |
| Allow user to review                                       |  | ü | Defines whether the user has permissions to view the contents of the distribution list. You can clear this option to prevent the user from viewing the contents of the list.                                                                                                                                                                            | Default is selected (enabled).                                                          |
| Keep Sorted                                                |  | ü | Defines whether newly added list entries should be put at the end of the list or inserted in the list sorted. Existing list entries are not affected.                                                                                                                                                                                                   | Default is selected (enabled).                                                          |
| List Members                                               |  |   | This area shows the content of the distribution list. For each list member, the type of number, the number, and the name are displayed. The maximum number of members in a distribution list depends on the LCOS Maximum members per Distribution List. If the user has reached that limit, then the Add and the Address Book buttons will be disabled. | Maximum number of members is defined by the LCOS Maximum members per Distribution List. |

| <b>General Tab</b><br><b>(<a href="#">Back to Top</a>)</b> |  |   |                                                                                                                                                                                                                                                                                                                                        |                     |
|------------------------------------------------------------|--|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Add button                                                 |  | ü | <p>To add a member to a list, click Add, and then select the <a href="#">type of number to add</a> from the drop-down list, and enter the <a href="#">number</a>.</p> <p>To browse for a member to add, click <a href="#">Address Book</a>.</p>                                                                                        | N/A                 |
| Type to add (drop-down list)                               |  | ü | <p>Select one of the following types of numbers to add to the list:</p> <ul style="list-style-type: none"> <li>• Mailbox</li> <li>• Personal Distribution List</li> <li>• System Distribution List</li> <li>• Phone Number</li> <li>• Remote Mailbox</li> <li>• Remote Mailbox with network presence</li> <li>• AMIS Analog</li> </ul> | Default is Mailbox. |

|                                                     |  |   |                                        |                                 |
|-----------------------------------------------------|--|---|----------------------------------------|---------------------------------|
| <b>General Tab</b><br><a href="#">(Back to Top)</a> |  |   |                                        |                                 |
| Number to add                                       |  | ü | Enter the number of the member to add. | Maximum 30 digits (no hyphens). |

General Tab

([Back to Top](#))

|                     |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |     |
|---------------------|--|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Address Book button |  | ü | <p>To browse for a member to add, click Address Book.</p> <p>From the Address Book View, you can view the lists of mailboxes, personal, and system distribution lists. By picking a list type in the View List drop-down list, you can view the contents of the list in the list control. You can then scroll and select one or multiple items to add to the list. Click Add to move selected items to the Add to Distribution List, or click Remove to remove selected items from the distribution list.</p> <p>When you reach the limit of the number of members allowed in a distribution list (defined</p> | N/A |
|---------------------|--|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|

**General Tab**[\(Back to Top\)](#)

Delete button

ü

To Delete list members, select the items to be deleted and click Delete. The list is updated to remove the deleted items.

The button is disabled unless a member is selected for deletion.

**System Distribution List****Note:**

This tab is available in the Advanced view only. It is not displayed when you add a mailbox.

[\(Back to Top\)](#)

Tab Description

Values

The System Distribution lists are created by you, the administrator, through your own account. When you create personal distribution lists in the administrator mailbox, these lists become the system distribution lists that are displayed in this System Distribution list tab. When you view the list of System lists in the mailbox data view, you can select the System lists that the mailbox will be able to use. The tab displays 10 system lists per page.

Default is cleared.

**UI Mapping Tab****Note:**

This tab is available in the Advanced view only, and is not displayed when you are creating a mailbox.

[\(Back to Top\)](#)

UI Mapping Tab Description

## General Tab

([Back to Top](#))

There are many ways that UI mapping can be used. For example, you can map several different extensions to one mailbox, OR in the case of a multi-PBX environment you can map the same extension in several different ways (i.e. 520-12324 and 560-1234) to its mailbox. A maximum of 16 extensions can be mapped to a mailbox. In this tab, you can add new extensions to a mailbox or edit and delete existing extensions.

| Field              | Available in View |          | Description                                                                                                                                                    | Values                                   |
|--------------------|-------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
|                    | Basic             | Advanced |                                                                                                                                                                |                                          |
| Extension          |                   | ü        | <p>To add an extension, click Add.</p> <p>To edit an extension, select a row and click Edit.</p> <p>To delete an extension, select a row and click Delete.</p> | Maximum 11 digits.                       |
| Switchgroup        |                   | ü        | Allows you to select a switchgroup for the extension. Select from 1-32.                                                                                        | Default is 1.                            |
| Tenant             |                   | ü        | Allows you to define a Tenant number for the extension.                                                                                                        | Maximum 4 digits in the range of 1-1000. |
| In Permission      |                   | ü        | Allows you to enable In Permissions. Clear the check box to disable.                                                                                           | Default is selected.                     |
| Out Permission     |                   | ü        | Allows you to enable Out Permissions. Clear the check box to disable.                                                                                          | Default is selected.                     |
| No Answer Greeting |                   | ü        | Allows you to select the number of the greeting to be played when a call gets a No Answer Greeting.                                                            | 0-4. Default is 0.                       |



| General Tab                                                                                                                                                                                                              |                   |          |                                                                                                        |                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------|--------------------------------------------------------------------------------------------------------|--------------------|
| <a href="#">(Back to Top)</a>                                                                                                                                                                                            |                   |          |                                                                                                        |                    |
| Line Busy Greeting                                                                                                                                                                                                       |                   | ü        | Allows you to select the number of the greeting to be played when a call gets a Line Busy Greeting.    | 0-4. Default is 0. |
| Call Forward Greeting                                                                                                                                                                                                    |                   | ü        | Allows you to select the number of the greeting to be played when a call gets a Call Forward Greeting. | 0-4. Default is 0. |
| Stats Tab                                                                                                                                                                                                                |                   |          |                                                                                                        |                    |
| <b>Note:</b><br>This tab is available in the Advanced view only.                                                                                                                                                         |                   |          |                                                                                                        |                    |
| <a href="#">(Back to Top)</a>                                                                                                                                                                                            |                   |          |                                                                                                        |                    |
| Stats Tab Description                                                                                                                                                                                                    |                   |          |                                                                                                        |                    |
| This tab displays a summary of the number of unplayed messages and saved messages in the mailbox, the last time the mailbox was logged in to, and the number of unsuccessful login attempts. These fields are read-only. |                   |          |                                                                                                        |                    |
| Miscellaneous Tab                                                                                                                                                                                                        |                   |          |                                                                                                        |                    |
| <b>Note:</b><br>This tab is available in the Advanced view only.                                                                                                                                                         |                   |          |                                                                                                        |                    |
| <a href="#">(Back to Top)</a>                                                                                                                                                                                            |                   |          |                                                                                                        |                    |
| Field                                                                                                                                                                                                                    | Displayed in View |          | Description                                                                                            | Values             |
|                                                                                                                                                                                                                          | Basic             | Advanced |                                                                                                        |                    |

**General Tab****([Back to Top](#))**

|                       |  |   |                                                                                                                                                                                                                                          |                             |
|-----------------------|--|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Receptionist Settings |  | ü | The NP-UM Receptionist settings must be installed and configured on the NuPoint Unified Messaging system for them to be displayed here. The Receptionist settings are disabled unless you select the corresponding settings check boxes. | N/A                         |
| Day treatment         |  | ü | Select check box to enable this setting.                                                                                                                                                                                                 | Default is 1 - treatment 1. |
| Night treatment       |  | ü | Select check box to enable this setting.                                                                                                                                                                                                 | Default is 1 - treatment 1. |
| Miscellaneous         |  | ü | This section allows you to define miscellaneous mailbox settings.                                                                                                                                                                        |                             |
| Access Code           |  | ü | Defines an access code for the mailbox. It will be validated as the user exits the field and if there is invalid input, the error The access code must contain only digits. will be displayed.                                           | Maximum 11 digits allowed.  |

General Tab

([Back to Top](#))

|                  |  |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                        |
|------------------|--|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Time Zone Offset |  | ü | <p>The time zone setting for a mailbox is a number that the server adds to or subtracts from the hour portion of the time stamp on a message. This allows mailbox owners to convert the time stamp on a message to the time zone of their choice. This occurs in the mailbox, so only a mailbox owner hears the converted time stamp. Users sending messages to or receiving messages from the server hear the server's normal time stamp.</p> <p>The time zone offset also applies to personal Call Director call flows containing weekly and holiday schedules. These call flows automatically "inherit" the</p> | <p>The values range from -23 to +23. Default is 0.</p> |
|------------------|--|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|

### 1.2.3.3.3 Search for a Mailbox

You can perform a basic search or an advanced search for mailboxes you want to view. You can also specify how many results to view per page: 10, 15, 20, 30 or 50.

When the search results are displayed, you can select mailboxes from the list to edit.

#### Basic Mailbox Search

The basic search allows you to specify the mailbox number, or range of numbers, you want to see. You can also view all mailboxes by leaving the Number field empty and clicking **Show All**. When the search is complete, the results are displayed in the list area of the Mailboxes window.

To perform a basic search for one or multiple mailboxes

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. In the Mailboxes window, click the Search tab.
3. In the Search for Mailbox Number or Range field, enter a mailbox number and/or range of numbers (see Mailbox Search Fields table below).
4. From the View drop-down list, select the number of mailboxes to display per page.
5. Click Search.

To display a complete list of mailboxes

- Leave the Search for Mailbox Number or Range field blank, and click Search or Show All.

#### Advanced Mailbox Search

The advanced search allows you to perform a Boolean search (using the "and" operator only), by defining up to six different search criteria.

1. In the Mailboxes window, click the Advanced Search tab.
2. In the **Search for** list, select a field to search for (see "Values" column in the Mailbox Search Fields table, below).
3. In the **equals** field, enter a valid parameter for the selected field (see "Values" column in the Mailbox Search Fields table, below).
4. To add another search criterion (up to six in total), click the plus (+) button.
5. To remove a criterion, click the minus (-) button.
6. Click Search.

## Example of Advanced Search

To search for all mailboxes in the 1500-1599 range that have an FCOS of 1, define two search criteria:

- **Mailbox** equals **1500-1599 +**
- **FCOS** equals **1**

## Mailbox Search Fields

| Type of Search | Field                              | Description                                                                                                                                                                              | Values                                                               |
|----------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Basic          | Search for Mailbox Number or Range | Allows you to enter a mailbox number or range of numbers. Multiple mailbox numbers must be separated by a comma or a space, or be entered as a range (for example: 1001, 1003 1005-1009) | 1-999999999. Maximum 40 characters (digits, commas, and hyphens).    |
|                | View ... at a time                 | Allows you to define the number of mailboxes to display per page. Select from the drop-down list.                                                                                        | 10, 15, 20, 30 or 50 results per page.                               |
| Advanced       | Search for                         | Allows you to select a field type to search for.                                                                                                                                         | Mailbox, Extension, Name, FCOS, Department and Message Waiting type) |

| Type of Search | Field  | Description                                                     | Values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|--------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                | equals | The allowable values differ for each type of field. See Values. | <p>All criteria have a maximum of 40 characters.</p> <p>Mailbox values:</p> <ul style="list-style-type: none"> <li>• Single (i.e. 1500)</li> <li>• Multiple individual (i.e. 1500, 1502, 1505)</li> <li>• Range (i.e. 1500-1510)</li> <li>• The single, individual and range can be combined (i.e. 1500 1501 1600-1620)</li> <li>• Valid characters 0-9, space, comma</li> </ul> <p>Extension values:</p> <ul style="list-style-type: none"> <li>• Single (i.e. 1500)</li> <li>• Multiple individual (i.e. 1500, 1502, 1505)</li> <li>• Range (i.e. 1500-1510)</li> <li>• Valid characters 0-9, space, comma</li> </ul> <p>Name values:</p> <ul style="list-style-type: none"> <li>• Name is a fuzzy match. Searches for the specified substring. The search is case insensitive and there will be no wild cards.</li> </ul> |

| Type of Search | Field              | Description                                                                                       | Values                                 |
|----------------|--------------------|---------------------------------------------------------------------------------------------------|----------------------------------------|
|                | View ... at a time | Allows you to define the number of mailboxes to display per page. Select from the drop-down list. | 10, 15, 20, 30 or 50 results per page. |

### 1.2.3.3.4 Add Mailboxes

You can add one or many mailboxes at a time.

To add mailboxes:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Click Add. The Mailbox Data View is displayed.
3. Enter the required information as described here:

#### Create Mailboxes

This section of the view is always displayed if you are adding new mailboxes.

| Field                     | Displayed in View |          | Description                                                                                                                                                                                                                                                                                                     | Values                   |
|---------------------------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
|                           | Basic             | Advanced |                                                                                                                                                                                                                                                                                                                 |                          |
| Mailbox Number            | ü                 | ü        | Enter a single mailbox number to create a single mailbox, or enter multiple mailbox numbers separated by a comma or space. You can also enter a range. (For example, 1000, 1002 1004-1010).                                                                                                                     | 1-999999999              |
| Copy from another mailbox | ü                 | ü        | Allows you to copy data from an existing mailbox. Enter a mailbox number in this field to copy the data from that mailbox into the new mailboxes you are creating, and then click Copy. All the fields from that mailbox are displayed now for the new mailboxes, except for the Name and the Extension fields. | Existing mailbox number. |

1. To copy data from another mailbox, in the Add Mailboxes section enter the mailbox number in the Copy from another mailbox field, and then click Copy.

2. Define the required parameters in the [General Tab](#).
3. Define the required parameters in the [Class of Service Tab](#).
4. Define the required parameters in the [Message Waiting Tab](#). This tab allows you to set up message waiting notification for a mailbox.

The following tabs are available only in the [Advanced](#) view:

1. Define the required parameters in the [Outdial Applications Tab](#). This tab allows you to specify the Fax, NP-UM Wake Up, Call Placement, and Access Types parameters for the mailbox.
2. Define the required parameters in the [Personal Distribution Lists Tab](#). This tab allows you to set up the personal distribution lists for a mailbox.
3. Define the required parameters in the [Miscellaneous Tab](#). This tab allows you to set addition mailbox preferences.
4. When you have finished defining mailbox parameters, click Save.

**Note:**

If you experience an error when you attempt to save a new mailbox, simply re-enter the information and save it again.

### 1.2.3.3.5 Edit Mailboxes

You can edit a single mailbox or multiple mailboxes at the same time. When editing multiple mailboxes, changes are applied to all mailboxes being edited.

#### Edit a single mailbox

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Click a mailbox link OR select a mailbox in the list, and then click Edit > Selected. The Mailbox data view is displayed, populated with data for the selected mailbox. To view and edit advanced data, click the Advanced link in the Mailbox form.
4. Edit the [mailbox parameters](#) as required. At any time before you save your changes, you can click Cancel or the Back button on your Web browser to discard all changes without saving.
5. Click Save.

#### Edit multiple mailboxes

Changes are applied to all mailboxes being edited.



1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailboxes you want to edit and then do one of the following:
  - To edit the selected mailboxes:
    - Click Edit > Selected.
  - OR
  - To edit a range of mailboxes:
    - Click Edit > Range.
    - Enter mailbox numbers separated by a comma, a space or a range (for example: 1001,1003 1005-1007).
    - Click Load. A blank [Mailbox data view](#) is displayed unless all the selected mailboxes have the same settings.
4. To edit any field, select the corresponding check box, and then modify the value. Note the following form behavior for editing multiple mailboxes:
  - If you leave a check box cleared, then the field's previous value remains unchanged for each mailbox.
  - If you enable a check box and assign the field a new value, then that value is assigned to all mailboxes being edited.
  - If you enable a check box and then leave the field blank (as in the case of a text field), then that field is cleared for all the mailboxes. In the case of list boxes, these will revert to their default values (for example, the Access type and Pre-dial string lists will default to "undefined").
  - At any time before you save your changes, you can click Cancel or the Back button on your Web browser to discard all changes without saving them.
5. Click Save.

### 1.2.3.3.6 Delete Mailboxes

You can delete a single mailbox or multiple mailboxes. You can click Cancel at any time before you confirm the deletion to cancel the delete operation and retain the mailbox.

#### Delete a Single Mailbox:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select a mailbox in the list, and then click Delete. The system prompts you to confirm the deletion.

4. To confirm that you want to delete the mailbox, click Yes. (If you click No, the deletion is halted and the mailbox remains.)

The Mailboxes list is updated.

### Delete Multiple Mailboxes

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailboxes you want to edit from the list of mailboxes , and then click Delete > Selected.

OR

To delete a range of mailboxes

- Click Delete > Range.
  - Enter mailbox numbers separated by a comma, a space or a range (for example: 1001,1003 1005-1007).
  - Click Delete.
4. The system prompts you to confirm the deletion. To confirm that you want to delete the mailboxes, click Yesto delete the displayed mailbox or click Yes to Allto delete all mailboxes in the selected range. If you click No, the selected mailbox is not deleted. You can also click Cancelduring a range deletion to cancel the deletion.

The Mailboxes list is updated.

### 1.2.3.3.7 Unlock Mailboxes

Some mailboxes may be locked through the Web View interface. You can unlock these mailboxes by following the steps below. You can unlock a single mailbox or unlock multiple mailboxes at the same time.

#### Unlock a single mailbox:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailbox to unlock and then click **Unlock > Selected**.
4. A confirmation message appears when the mailboxes are unlocked.

#### Unlock multiple mailboxes:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.

2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Click **Unlock > Range** and enter the mailbox numbers to unlock, separated by a comma, a space, or as a range (for example: 1001,1003 1005-1007).
4. Click **Unlock**. A confirmation message appears when the mailboxes are unlocked.
5. Click **Done**.

### 1.2.3.3.8 Set or Clear Mailbox Passcode or Tutorial

To reset a mailbox passcode:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailbox you want to modify, and then click Edit.
4. On the **General** tab, highlight the existing **Passcode** and enter the new passcode.
5. Click Save.

To set or clear the mailbox tutorial:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailbox you want to modify, and then click Edit.
4. Click Advanced.
5. Do one of the following:
  - to enable the tutorial, select the **Tutorial** check box.
  - to disable the tutorial, clear the **Tutorial** check box.

### 1.2.3.3.9 Set Passcode Expiry

To set a passcode expiry for a mailbox:

1. [Customize an LCOS](#) to include a value (0-365 days) for the **Passcode Expiry Period** limit. (Default is 0 or disabled.)
2. Assign the new LCOS to the appropriate mailboxes.

### 1.2.3.3.10 Distribution Lists

### 1.2.3.3.10.1 Managing Distribution Lists

The Personal Distribution Lists tab allows users to set up personal group distribution lists. System Distribution lists are created by you, the administrator, through your own account. When you create personal distribution lists in the administrator mailbox, these lists become the system distribution lists that are displayed on the System Distribution list tab. When you view the list of System Distribution Lists in the mailbox data view, you can select those System lists to assign to other mailbox users as Master or System distribution lists.

This procedure assumes that [Distribution Lists Configuration](#) has been completed.

To create a Distribution list:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for the mailbox to which you want to add a distribution list.
3. Click the mailbox link OR select the mailbox in the list, and then click Edit. The Mailbox data view is displayed (Basic view), populated with data for the selected mailbox.
4. Click Advanced.
5. On the **Personal Distribution** tab, select a **Number** to apply to this distribution list.
6. Enter a **Name** for the list. (For example, "Sales Team".)
7. To have newly added list entries inserted in the list sorted, select **Keep Sorted**. To have new entries added at the end of the list, clear the Keep Sorted check box.
8. To allow users to change the contents of the distribution list, select **Allow user to change**. Clear this check box to prevent users from making changes.
9. To allow users to view the contents of the distribution list, select **Allow user to review**. Clear this check box to prevent users from viewing the list.

To add (or delete) members in a distribution list:

1. Access the **Personal Distribution** tab of the Edit Mailbox page (see steps 1-4 above), and under **List Members**, click **Add** (or Delete).
2. Do one of the following:
  - Use the Address Book button to add members from the system address book
  - OR
  - Enter member information manually :
    - In the **Type** list, select the **member** type to add (or delete).
    - In the **Number** field, enter the mailbox or distribution list **number**.
3. Click **Save**.

### 1.2.3.3.10.2 Import/Export a Distribution List

Distribution Lists can be imported or exported in CSV format.

This procedure assumes that [Distribution Lists Configuration](#) has been completed.

#### Importing Distribution Lists

To import a Distribution List:

1. From the navigation tree, click **Mailbox Maintenance**, and then click **Mailboxes**.
2. Search for the mailbox you wish to update.
3. Click the mailbox link OR select the mailbox in the list, and then click **Edit**. The Mailbox data view is displayed (Basic view).
4. Click Advanced.
5. On the Per Dist Lists tab, select the **Number** of the distribution list you wish to update.
6. Click **Import List**. The Import Distribution List window appears.
7. Click **Choose File** and browse to the location of the Distribution List.
8. Select the file, click **Open** and then click **OK**.
9. The Distribution List is now imported into the system.

#### File Import Error Report

If you attempt to import a Distribution List that contains an error such as a non-existent mailbox number, the invalid data will be excluded and a dialog will display alerting you to the fact that an error report was created. You can access the report immediately by clicking the **Download Error Report** button and following the prompts or you can view the report at a later time by logging in to the system using SSH/PuTTY and then downloading the Distribution\_list.txt file from the following location: **/usr/vm/log/**. The report lists the total number of "successful" and "unsuccessful" records that you have attempted to import and provides an explanation for each unsuccessful record (for example, "Does not exist", "Invalid type", etc.).

#### Exporting Distribution Lists

Distribution Lists can also be exported to a specified location. Exporting a Distribution List does not remove it from the system; it is still available on the system from where it was exported.

To export a Distribution List:

1. From the navigation tree, click **Mailbox Maintenance**, and then click **Mailboxes**.
2. Search for the mailbox you wish to update.

3. Click the mailbox link OR select the mailbox in the list, and then click **Edit**. The Mailbox data view is displayed (Basic view).
4. Click Advanced.
5. On the Per Dist Lists tab, select the **Number** of the distribution list you wish to update.
6. Select a Distribution List to export.
7. Click **Export**. The File Download window appears.
8. Click **Save** and then specify a location for the file.
9. Click **Save** again.
10. The Distribution List is now exported to the specified location.

You may now modify the list in a spreadsheet application such as OpenOffice Calc. You can add, delete and update data.

**Note:**

- The CSV file name has the following format:  
**DL\_<mailbox\_number>\_<DL\_number>.csv**
- The CSV file has two columns:
  - **Type:** The item type (Mailbox, Personal Distribution List, System Distribution List, AMIS Analog, Phone Number, Remote Mailbox on Network, Remote Mailbox). The records in this column do not need to be in any particular order. For example, Phone Number entries can be listed before Mailbox entries.
  - **Number:** The mailbox and distribution list number.
- As a minimum, the CSV file requires one entry (a single complete row in the file).
- When you import a CSV file, matching entries will be overridden to avoid duplicating data.
- The CSV file requires valid data. For example, you cannot import an entry for a mailbox that does not exist. Nor can you import an entry with non-numeric characters.
- The Distribution List export/import feature is supported only in the NuPoint Web Console. It is not available in the Text Console or Web View.

### 1.2.3.3.11 Mailboxes for Hotel-Motel

#### 1.2.3.3.11.1 *Set Languages for Prompts*

If an additional language (besides the default languages) is required, the appropriate additional language prompts must be licensed and installed before performing this procedure.

To set prompt language:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups**, select the line group you want to modify, and then click **Edit**.
4. On the **Voicemail** tab, in the **Default Prompt Language** section, select the additional language from the drop-down list. **Note:** If the required language does not appear in the list, ensure that it has been properly licensed and installed.
5. Click **Save**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.3.4 Procedures (Text Console)

### 1.2.3.4.1 Mailbox Parameters - Text Console

This topic discusses the parameters used to configure a mailbox.

#### Mailbox to Create (Mailbox Number)

All data in the mailbox file is referenced by the mailbox number. This number must conform to the mailbox dialing plan of your system; otherwise the user will not be able to access the mailbox. For an explanation, see "Dial Plan". The dialing plan for your system may be found in the Configuration Report.

#### Note:

When creating a range of mailboxes:

Enter the first and last numbers in the series, separated by a hyphen (for example: 222-314).

- Numbers must conform to your system's mailbox dialing plan.

#### Mailbox Name

The mailbox name may consist of up to 31 alphanumeric characters. Enter the name in either of two formats: <LN>, <FN> or <FN> <LN> (for example "Smith, Harry" or "Harry Smith"). Make sure to include a comma if you use <LN>, <FN> format and a space if you

use <FN> <LN> format. The mailbox name is displayed any time that mailbox information is requested. If you do not want to enter a mailbox name, press <Enter>.

**Note:**

If a user's name includes accented characters (example, "L'Abb  "), ensure that you enter the [accented characters](#) for proper SAA recognition.

Suggestions for this field are

- User's name, if mailboxes are held by individuals. **Note:** You should maintain a uniform format for Dial-by-Name; for example, all uppercase (capital) letters.
- Mailbox functions, if the mailbox is dedicated to a specific purpose.
- Useful criterion for a mailbox search.

**Note:**

When creating a range of mailboxes, Mailbox name is given to every mailbox in the range.

## Department Code

The department code can be up to 10 alphanumeric and special characters. This field is intended to hold a department name or similar designation.

- Use as a search criterion (for example, display all mailboxes that belong to Department 04A).
- Use for billing.
- Video Dispatch application can display department codes at the top of the screen.

**Note:**

When creating a range of mailboxes the department code is assigned to every mailbox in the range.

## Access Code

The access code is a specific code that the caller must enter in order to leave a message. To leave this entry blank (no access code), press <Enter>.



**Note:**

When creating a range of Mailboxes the Access code is assigned to every mailbox in the range.

**Receptionist Day Treatment/Receptionist Night Treatment**

Enter the number of the Receptionist treatment type that best matches the way that the mailbox owner wants calls processed during regular working hours. Treatment types are described in the [NP Receptionist Treatment Types section](#).

Select "Mailbox only" treatment if

- Mailbox owner does not have a PBX extension.
- Mailbox owner wants all calls received during regular working hours to be transferred directly to the mailbox.

**Note:**

When creating a range of mailboxes the Receptionist treatment is assigned to every mailbox in the range.

**Mailbox's Primary Extension Number**

The mailbox's extension number is the number that NP Receptionist calls during the day or night if the mailbox has a Day/Night Treatment Type other than "Mailbox only".

- If the user's extension number is the same as the mailbox number, press <Enter>.
- Enter the user's PBX extension number if it is different from the mailbox number.
- If you want NP Receptionist to call a number outside the PBX network, refer to [Programming NP Receptionist to Dial an Outside Mailbox Extension Number](#).

**Note:**

When creating a range of mailboxes:

- If you press <Enter>, NP Receptionist automatically assigns a matching mailbox extension number to every mailbox in the range.
- If you enter a mailbox's extension number that differs from the first mailbox number in the range, all mailboxes are given the same mailbox's extension number—the number that you just entered.

## Mailbox's Extension Pre-dial Index

The pre-dial index represents a dial string that is programmed by the system technician. This entry is required only if the mailbox's extension number is long (as is the case when the mailbox's extension number is actually an outside number).

- If the mailbox's extension number is a PBX extension and/or no pre-dial index is needed, press **Enter**.

### Note:

- When creating a range of mailboxes, if you enter a pre-dial index, it is assigned to all mailboxes in the range.
- When mailbox programming is complex enough to require a pre-dial index, it is better to create the mailboxes individually. See [Pre-extension Dial Strings Report](#) (available via Text console only.)

## Mailbox's Alternate Extension (1-4)

You can add alternates for this extension so that up to 4 other phones (like a cell phone, for example) can share this mailbox.

## Attendant Extension Number

The Attendant extension number is called if users—who are logged in to their mailboxes—press 0 (zero) in response to the prompt: "Press P to play the current message, X to exit the system, zero to return to the attendant."

- Mailbox FCOS must contain feature bit 002.
- If a personal attendant number is not defined, the PBX console attendant number is called (if defined by the technician).

With NP Receptionist, the attendant extension number is also the personal assistance number for callers to this mailbox. NP Receptionist calls this number

- Any time callers request (or wait for) assistance after they enter the user's extension number.
- If the user's (for example, Mary Smith) treatment type specifies call screening: NP Receptionist announces to the attendant, "Hello, <John Jones> calling for <Mary Smith>."
- If the attendant extension number is not defined in the mailbox: NP Receptionist transfers callers to the system attendant extension.

- If neither a **personal** attendant extension number nor a **system** attendant extension number is defined, callers are transferred to the attendant's mailbox and are prompted to leave their names, numbers, and messages.

**Note:**

When creating a range of mailboxes, the attendant's extension number (if any) that you assign to the first mailbox is given to all others in the range.

## Features Class of Service (FCOS)

The FCOS controls mailbox user privileges and outside caller functions for the mailbox. Individual privileges and restrictions are designated by numbers called feature bits. The FCOS is a combination of these feature bits. For example, a user's ability to make, give, or answer messages is controlled by the FCOS assigned.

To view the FCOS available on your system, you can run an [FCOS Report](#) (Text Console only). The [FCOS section](#) of this guide describes FCOS and feature bits in detail and gives instructions for building additional FCOS.

**Note:**

When creating a range of mailboxes, the same FCOS is given to all mailboxes in the range.

## Limits Class of Service (LCOS)

The LCOS imposes certain time limits on mailboxes. It can be a valuable tool for allocating disk storage space and port use.

Each LCOS can set the maximum times allowed for recording mailbox greetings, user messages, caller messages, and mailbox names; it can limit the amount of time a user remains logged in during one session. The LCOS can specify the maximum time a played or unplayed message can be stored in a mailbox before it is erased by the automatic purge. It can specify the maximum number of messages that a user can accumulate in a mailbox. You can also modify an LCOS to specify secondary language prompts.

To view the LCOS configured on your system, run an [LCOS Report](#) (text console only). The [Limits Class of Service section](#) describes the LCOS parameters in detail and gives instructions for building and modifying the LCOS.

**Note:**

When creating a range of mailboxes, the same LCOS is given to all mailboxes in the range.

**Group Class of Service (GCOS)**

The GCOS is the group management resource that keeps track of large systems with many groups.

Bitmapped GCOS, numbered 1 through 64, make up a collection of groups. Each GCOS consists of 128 possible groups. Any or all of the 128 groups can be assigned or deleted from the GCOS.

Affinity group GCOS, numbered 65 through 32,267, work well when mailboxes require communication within particular groups; they do not work across groups.

The [Group Class of Service](#) section discusses GCOS in detail and provides information about restrictions and interactions between mailboxes and FCOS.

**Note:**

When creating a range of mailboxes, the same GCOS is given to all mailboxes in the range.

**Network Class of Service (NCOS)**

The NCOS controls user's network access. NCOS settings control whether a mailbox owner can send, give, or answer messages over the network. You can configure up to 64 NCOS and combine features to create NCOS that provide network privileges for specific user groups. NCOS is part of the NP Net Digital Network optional feature.

The [Network Class of Service section](#) in the NP Net optional feature chapter discusses NCOS and provides configuration instructions.

**Note:**

When creating a range of mailboxes, the same NCOS is given to all mailboxes in the range.

## Tenant Class of Service (TCOS)

The TCOS is used with the ESMDI "Multi-Tenant" application to manage mailbox interaction between user communities.

See "ESMDI Integration" in the *NuPoint Unified Messaging Optional Integrations Guide* for more information and configuration instructions.

### Note:

When creating a range of mailboxes, the same TCOS is given to all mailboxes in the range.

## Restriction Class of Service (RCOS)

The RCOS is an element of NPA/NXX call screening that restricts mailbox outdials to certain area codes or prefixes within an area code. One RCOS is assigned to each mailbox.

The [Restriction Class of Service section](#) discusses RCOS and provides configuration instructions.

### Note:

When creating a range of mailboxes, the same RCOS is given to all mailboxes in the range.

## Enter a Temporary Passcode

A temporary passcode provides security until the new user logs in (that is, when a new user accesses the mailbox and enters a personal passcode).

- Default passcode length is 10 digits (this parameter may be changed by the technician who programs your system).
- Once logged in, a tutorial instructs a new user to enter a personal passcode and record greetings and names for mailboxes.

The [Configuration Report](#) (text console only) shows the default passcode length for your system.

**Note:**

If you enter a temporary passcode when creating a range of mailboxes, it is assigned to all mailboxes in the range.

**Force Passcode Change (Y/N)**

You can force users to change the default passcode at their initial login.

**Tutorial (Y/N)**

You can choose to activate tutorials to guide users to enter personal passcodes and record greetings and names for mailboxes. The standard tutorial, which gives basic instructions to a mailbox owner on how to set up a new mailbox, is automatically enabled when a mailbox is created. The standard tutorial is *not* available, however, if [NP TDD](#) is enabled. When the tutorial is accessed the first time on a new mailbox, it directs the new owner to record a name and greeting, and to set a passcode. There are times when mailbox owners do not want to hear the tutorial (for example, if they are setting up a series of tree mailboxes for directory assistance). The Set Passcode/Tutorial option from the Mailbox Maintenance menu is used to disable (or enable) a standard tutorial, when desired.

Instead of the standard tutorial, customized information tailored to an individual installation can be recorded in the attendant's mailbox and played for new mailbox owners. This is a site tutorial, a greeting typically recorded by a server administrator.

**Enter Internal Outcall Index**

The index number (0 to 15) that represents the access code for internal calls.

**Enter Billed Outcall Index**

The index number (0 to 15) that represents the access code for outdials to be charged to a billing account.

**Enter Unbilled Outcall Index**

The index number (0 to 15) that represents the access code for outdials not charged to a billing account.

**Enter Billing Number (appears only when Billed Outdial Index is configured)**

The number of the account (up to 24 digits) to which outdials are billed.

**Enter Billing Dialing Order (appears only when Billed Outdial Index is configured)**

The order in which the system processes the billing number and destination telephone number in the outdial dial string. You select **BN** to require the billing number to be processed before the destination telephone number, or **NB** to require the destination telephone number to be processed before the billing number.

**Configure NP Wake Up?**

See [NP Wakeup](#) for information about NP WakeUp feature parameters.

**Message Waiting Type #1**

The message waiting indicator type tells the system how to notify a user of unplayed messages in the mailbox. The type selected depends on what is available on the system. The system supports the following message waiting types:

- 0: None
- 1: Not available
- 3: DTMF to PBX
- 5: Pager (Outdial)
- 7: Program RS232
- 9: Centrex RS232
- 11: Centrex
- 16: HIS PMS
- 17: Unified Integrations (UI)
- 21: Hitachi PMS
- 28: MiTAI Messaging

See [Message Waiting Types](#) for more information.

**Note:**

- The MITEL SX-200 DIGITAL PABX and SX-2000 PABX use message waiting types 0, 3, 5, and 7.
- When creating a range of mailboxes, the same message waiting type is assigned to all mailboxes in the range, however,
- If you choose message waiting type #2 (AC message indicators), the system automatically assigns sequential message waiting light addresses to the mailboxes in the range.

*EXAMPLE:* If you assign address D2 to the first mailbox in the range, the second mailbox is addressed D3, the third D4, and so on.

- If you are assigning pagers and/or message delivery, create the mailboxes individually.

**Pager Parameters (appear only when MWI Type 5 Pager is configured)**

See [Mailboxes for Paging](#) for information about paging parameters. See [Pagers and Message Delivery](#) for more information about Paging.

**Message Waiting Type #2**

Message waiting type #2 allows the system to notify a user of unplayed messages in two different ways. For example, the system can activate a radio pager and update a video dispatch screen at the same time.

All message waiting indicator types can be used as message waiting #2 indicators. You can have up to four radio pagers per mailbox.

**When creating a range of mailboxes**

- The same message waiting type #2 (if any) is assigned to all mailboxes in the range.
- Message waiting type exceptions listed for message waiting type #1 apply to message waiting type #2.

**Message Waiting Type #3**

Type 3 is restricted to one of the following:

- 0 for None
- 9 for Centrex RS-232
- 17 for Unified Integrations



**Fax Retrieval Pager Access Type (Fax Call access type)**

This parameter contains dial strings that indicate how to place a Fax call. See [Configuring Fax Applications](#) for more information.

**Default Telephone Number for Fax Retrieval (Default Fax Number)**

This is the number of the fax machine and is a required entry for Fax.

**Call Placement Pager Access Type**

Defines the type of call placement access. Enter a pager system between 0 and 15, you may also choose to use the billed index:

**I** - Internal outdial index

**B** - Billed outdial index

**U** - non-billed outdial index

**N** or **.** - undefined index

**Time Zone Offset**

The offset (hours) between the time zone in which the mailbox owner is located and the time zone in which the server is located.

**Lists with Change Rights**

The number(s) of distribution lists in the mailbox that the owner is allowed to change; the default is ALL.

**Lists with Review Rights**

The number(s) of distribution lists in the mailbox that the owner is allowed to review; the default is ALL.

**Configure UI Mailbox Mappings?**

There are many ways that UI mapping can be used. For example, you can map several different extensions to one mailbox, OR in the case of a multi-PBX environment you can map the same extension in several different ways (for example, 520-1234 and 560-1234) to its mailbox. A maximum of 16 extensions can be mapped to a mailbox.

## 1.2.3.4.2 Create a Standard Mailbox

This procedure describes how to configure a standard mailbox on the server. It can be used either to create a new mailbox or to modify an existing mailbox. Before you begin, complete the [Mailbox Individual Worksheet](#).

To create a standard mailbox:

From the Main Menu, select **(M) Mailbox Maintenance**. Enter the requested information, as described in the following steps, from your completed Mailbox Worksheet.

1. Select **(C) Create New Mailboxes** and enter the *number* of the new mailbox you want to configure.

OR

Select **(M) Modify Mailboxes** to modify an existing mailbox.

2. Enter the *number* of the mailbox you want to create or modify. The number must conform to the Dial Plan. (Prompts are almost the same for creating a new mailbox and modifying an existing one, except that "New" precedes each prompt when you select Modify Mailboxes.)

**Note:**

Mailbox prompts depend on the optional features that are installed on your server. See the Optional Features section if you have questions about responding to prompts that are not explained here.

3. At the **Name** prompt, enter a name for the mailbox (or if modifying an existing mailbox, press **Enter** to go to the next prompt.) Use a name (up to 31 alphanumeric characters) that describes the purpose, membership, ownership, or function of the mailbox. Enter the name in either of two formats: <LN>, <FN> or <FN> <LN> (for example "Smith, Harry" or "Harry Smith"). Make sure to include a comma if you use <LN>, <FN> format and a space if you use <FN> <LN> format. If you plan to implement Dial-by-Name, use the [Last Name First Flag](#) to specify which name should be entered first, the user's first name or last name, when using this feature. By default, callers must enter the user's last name first when using Dial-by-Name.
4. At the **Department code** prompt, enter the department code or alternate code (a string (directory number) of up to 10 digits that is the alternate code the server transmits after the pre-DN ON string) if required for message waiting lights. For DTMF-to-PBX MWI, valid characters are: 0-9, \* and #.

5. At the **Access Code** prompt, specify the access code that must be dialed before an outside caller can access the mailbox, if required. The access code can be up to 10 characters that specify how callers can reach the mailbox:

|      |                                                                                                                                           |
|------|-------------------------------------------------------------------------------------------------------------------------------------------|
| M    | to require the caller to enter a mailbox number                                                                                           |
| P    | to require the caller to enter a mailbox number and a passcode                                                                            |
| code | to require the caller to enter a specific access code of up to 10 digits. Valid characters are 0-9, A-D, * (star key), and # (pound key). |

You can enter any combination of the above. Leave this field blank for no access code.

**Note:**

You must also [assign an FCOS](#) with feature bit 137 to enable the access code.

6. If **NP Receptionist** is installed in your server, refer to [NP Receptionist](#) for Receptionist parameters; otherwise, press **Enter** to skip the parameters.
7. If this mailbox uses DTMF-to-PBX message waiting lights or if NP Receptionist is installed in your server, specify the **Mailbox's primary extension number** if different than the mailbox number. Enter one of the following:
8. The PBX extension **number plus dial string codes**, from Table 1 at the end of this procedure.
  - A **string**, as explained in the NP Receptionist Manual, if NP Receptionist is installed in your server.
  - Leave blank if the extension number is the same as the mailbox number.
9. If NP Receptionist is installed in your server, refer to [NP Receptionist](#) for the **Mailbox's extension pre-dial index**; otherwise, press **Enter** to skip over the parameter.
10. At the **Mailbox's alternate extension** prompts, you can enter alternates for this extension so that other phones (like a cell phone, for example) can share this mailbox. Enter the phone number of another phone that will share this mailbox, or leave blank.
11. At the **Attendant's extension number** prompt, specify the attendant extension number if an attendant is available to this mailbox. Enter one of the following:
  - The extension number of the mailbox attendant that the mailbox owner or caller is transferred to after pressing 0.
  - Leave blank.
  - Refer to [NP Receptionist](#) for directions, if NP Receptionist is installed in your server.

12. If the attendant extension exceeds 15 digits, or if NP Receptionist is installed in your server, you must specify the **Attendant extension pre-dial index**. Do one of the following:
  - enter the dial string characters that point to the dial string the server must process before dialing the attendant extension number
  - leave blank
  - Refer to [NP Receptionist](#) for directions, if NP Receptionist is installed in your server.
13. At the **Features Class of Service** prompt, enter the number (1-640) of the FCOS that governs this mailbox. The default value is 1. Enter ? for a list of defined FCOSs. You are prompted for FCOS again.
14. At the **Limits Class of Service** prompt, enter the number (1-640) of the LCOS that governs this mailbox. The default value is 1. Enter ? for a list of defined LCOSs. You are prompted for LCOS again.
15. At the **Group Class of Service** prompt, enter the number (1-32,000) of the GCOS that governs this mailbox. The default value is 1. Enter ? for a list of defined bitmapped GCOSs. You are prompted for GCOS again.
16. If NP Net is installed in your server, refer to the NP Net chapter for the **Network Class of Service**.
17. If Enhanced SMDI is installed in your server, refer to the Enhanced SMDI Integration Installation section of the *Optional Integrations Guide* for the **Tenant Class of Service**.
18. At the **Restriction Class of Service** prompt, enter the number (1-64) of the RCOS that governs this mailbox. Enter ? for a list of defined RCOSs. You are prompted for RCOS again.
19. At the **UM audio encoding** prompt, select an encoding format (0-2) for audio files for this mailbox. Enter one of the following:
  - a. **0** - ADPCM Microsoft Audio encoding (default)
  - b. **1** - GSM 6.1 (Wider support for mobile devices)
  - c. **2** - MP3 (Use MP3 only if ADPCM and GSM 6.10 cannot be played on the user device, or if the user is employing a hosted/webmail web service such as Gmail or Yahoo Mail. MP3 may result in poorer sound quality than the other audio encoding methods.)
20. At the **Enter a Temporary Passcode** prompt, do one of the following:
  - a. enter 4-10 digits (0-9) to set a specific passcode
  - b. enter **S** to make the passcode the same as the mailbox number
  - c. enter **R** to have the server generate a passcode for you (and display it in the mailbox configuration report that automatically appears after you respond to the last mailbox parameter)
  - d. press **Enter** to leave the passcode unchanged

21. At the **Force passcode change (y/n)** prompt, select **Y** to enable or **N** to disable the option to force users to change their passcode at their next login. (A user's successful passcode change resets this option to 'n'.)
22. At the **Tutorial** prompt, select **Y** to enable or **N** to disable the standard tutorial (also called new user tutorial, user tutorial, and NuPoint Voice tutorial). The server default is generally for the standard tutorial to play when a new mailbox is created.
23. At the **Standard UM Email address** prompt, enter the email address (max 64 characters) where the user receives an email copy of each message, or leave blank. Availability of multiple addresses depends on the class of service for the mailbox.
24. At the **Standard UM Email Option** prompt, select the delivery option for each email address:
  - a. **0** for **Audio Attachment** (Wave, ADPCM Codec),
  - b. **3** for **Audio Link** (Wave, ADPCM Codec),
  - c. **6** for **Web View Link**,
  - d. **7** for **Text Notification**
  - e. **8** for **Speech to Text**
  - f. or leave blank
25. At the UM WebView Email address prompt, enter the email address to which to save Web View messages, or leave blank. When the user selects a message in Web View and clicks the **Save** button, the message will be sent to this e-mail address. (Availability depends on the class of service for the mailbox.)

**Note:**

If outdials from this mailbox are being billed to a long distance carrier or other account, continue with the next step, otherwise, press **Enter** to skip to the Message Waiting Type parameter configuration in step 31.

26. At the **Internal Outcall Index** prompt, *enter t* he index number (0-15) representing the access code for internal calls or enter **?** for a list of defined index numbers. You are prompted for the index again.
27. At the **Enter Billed Outcall Index** prompt, enter the index number (0-15) representing the access code for outdials to be charged to a billing account or enter **?** for a list of defined index numbers. You are prompted for the index again.

**Note:**

The Internal Outcall Index and the Billed Outcall Index must be different numbers.

- 28.** At the **Non-billed Outcall Index** prompt, enter the index number (0-15) representing the access code for outdials not charged to a billing account, or enter ? for a list of defined index numbers. You are prompted for the index again.
- 29.** At the **Enter Billing Number** prompt, enter the calling card number, up to 24 digits, to which outdials are billed.

**Note:**

If you use this field then you cannot use MWI2 with an alternate pager.

- 30.** At the **Enter billing dialing order** specify the order in which the server processes the billing number and destination telephone number in the outdial dial string. Enter one of the following:
- a. bn** to require the billing number to be processed before the destination telephone number
  - b. nb** to require the destination telephone number to be processed before the billing number
- 31.** At the **Message wating type #1** prompt, specify the type of MWI using a number from the following table:

| Number | Message Waiting Type          |
|--------|-------------------------------|
| 0      | None                          |
| 3      | DTMF to PBX                   |
| 5      | Pager (See Pager Application) |
| 7      | Program RS232                 |
| 9      | Centrex RS232                 |
| 11     | Centrex                       |
| 16     | HIS PMS                       |
| 17     | Unified Integration           |
| 21     | Hitachi PMS                   |
| 28     | MiTAI Messaging               |

If more than one type of message waiting indication is used, this is the primary type.

- 32.** At the **Message wating type #2** prompt, you can specify a secondary MWI type. If message waiting type 5 was specified at the first or second message waiting type parameter, [set the mailbox parameters for paging](#) or message delivery, or both.
- 33.** If you need a third type of message waiting indication, specify it.

**34.** At the **Fax retrieval pager access type**, enter one of the following access types: enter a pager system between 0 and 15, or select one of the following from the billed index:

- a.** I - Internal outdial index
- b.** B - Billed outdial index
- c.** U - non-billed outdial index
- d.** N or - undefined index

**35.** At the **Default telephone number for fax retrieval** prompt, enter up to 25 digits for the telephone number.

**36.** If call placement will be used, specify the **Call placement pager access type**; otherwise, press **Enter** to skip to the next parameter. Enter either a number from 0 to 15 representing the pager access index number, or a billed index:

|   |                              |
|---|------------------------------|
| B | for Billed Outdial Index     |
| I | for Internal Outdial Index   |
| N | for Undefined Index          |
| U | for Non-billed Outdial Index |

**37.** At the **Time zone offset** prompt, specify an offset if required. Enter the hours of difference, from -23 through 23, between the mailbox owner's time zone and the NuPoint Voice module time zone.

**38.** At the **Lists with change rights** and the **Lists with review rights** prompts, allow the mailbox owner to have review rights or change rights, or both, for the selected distribution lists by entering one of the following:

- A single list, for example **2**
- A series of lists, for example, **1,3,4,6**
- A range of lists, for example **1-6**
- A combination of any of the above entries; for example: **1-5,8,12,50-70,90**
- **A** for all distribution lists
- **N** for no distribution lists

**Note:**

This mailbox parameter alone does not allow change rights; you must also include feature bit 74 (create or modify user distribution list) in the FCOS.

**39.** After the last entry, the server displays the mailbox configuration and then prompts for the next mailbox number to create/modify.

**40.** If required, you are prompted to **Configure UI mailbox mappings?** Select **Y** if this mailbox should have a mapping configured for the UI application or **N** if no mapping is required.

At this point, the parameter settings are saved and you can continue with mailbox configuration or press **Enter** to exit.

### 1.2.3.4.3 Define an Administrator Mailbox

To define an administrator's mailbox:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
4. Otherwise, select **(E) Modify Active Configuration**.
5. Select **(G) Group Selected** and enter the number of the line group that this administrator's mailbox serves.
6. Check the dialing plan for the specified line group. Ensure the administrator's mailbox number that you want to designate is compatible with the number of digits allowed by the plan, does not start with a prohibited digit, and so on.
7. From the Voice Configuration Menu, select **(M) Modify Application**, and then **(Z) Dial String and Mailbox** menu.
8. Select **(C) Administrator's Mailbox #** and enter the number you want to designate as the administrator's mailbox. The administrator's mailbox can be the default (998), one of the numbers already reserved for it, or any other number in the server, as long as it matches the dialing plan. Numbers reserved for the administrator's mailbox are:

|        |             |
|--------|-------------|
| 98     | 9999998     |
| 998    | 99999998    |
| 9998   | 999999998   |
| 99998  | 9999999998  |
| 999998 | 99999999998 |

9. Exit to the Main Menu to save the mailbox designation you just entered.
  - If the administrator's mailbox number is not the default or is not one of the numbers reserved for it, create the mailbox through the Mailbox Maintenance Menu. Set the mailbox parameters the same as for a [standard mailbox](#), with this exception:
10. Assign an FCOS that contains all the features of a typical administrator's mailbox such as default FCOS **1 (Unlimited)** or default FCOS **10 (VIP)** to the mailbox.

**Note:**

For enhanced server security, we recommend that you select a number other than the default or one of the reserved numbers.



11. To define an administrator's mailbox for another line group, select the desired line group, and repeat the preceding steps. You can use a different number for each administrator's mailbox if you want each line group to have a different company greeting.

### Administrator Passcodes

When creating the administrator mailbox, you must ensure that the passcode you enter is not trivial. If you use the following types of passcodes, NuPoint UM will accept the entry but you will not be able to log in to the admin mailbox on subsequent attempts:

- do not use the mailbox number
- do not use consecutive digits (like 1234)
- do not use repeated digits (like 1111)

Examples of valid passcodes are: 1397 or 2684 (as long as the mailbox number is not the same).

### 1.2.3.4.4 Define an Attendant Mailbox

To define an attendant's mailbox:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
  2. Do one of the following:
  3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  4. Otherwise, select **(E) Modify Active Configuration**.
- 
1. Select **(G) Group Selected** and enter the number of the line group that this administrator's mailbox serves.
  2. Check the dialing plan for the specified line group. Ensure the attendant mailbox number that you want to designate is compatible with the number of digits allowed by the plan, does not start with a prohibited digit, and so on.
  3. From the Voice Configuration Menu, select **(M) Modify Application**, and then **(Z) Dial String and Mailbox** menu.
  4. Select **(D) Attendant's Mailbox #** and then enter the number or numbers you wish to designate as the attendant's mailbox (or mailboxes). Up to five attendant's mailboxes

can be defined per line group. Enter multiple attendant's mailbox numbers separated by commas; for example: 5999,6999,7999,8999,9999

The attendant's mailbox can be the default (999), one of the numbers already reserved for it, or any other number in the server, as long as it matches the dialing plan. Numbers reserved for the attendant's mailbox are:

|        |             |
|--------|-------------|
| 99     | 9999999     |
| 999    | 99999999    |
| 9999   | 999999999   |
| 99999  | 9999999999  |
| 999999 | 99999999999 |

5. Exit to the Main Menu to save the mailbox designation you just entered.
6. If the attendant's mailbox number is not the default or is not one of the numbers reserved for it, create the mailbox through the Mailbox Maintenance Menu. Set the applicable mailbox parameters the same as for a [standard mailbox](#).

**Note:**

For enhanced server security, we recommend that you select a number other than the default or one of the reserved numbers.

To define an attendant's mailbox for another line group, select the desired line group, then repeat the preceding steps. Use a different number for each attendant's mailbox.

## 1.2.3.4.5 Modify or Delete Mailboxes

The **Modify** option allows you to change any parameters of an existing mailbox.

1. From the Main Menu, select ( **M** ) **Mailbox Maintenance Menu**.
2. Select ( **M** ) **Modify**.
3. At the **Mailbox to Modify** prompt, enter the mailbox number you want to update. The system displays existing mailbox information and prompts you for changes.
4. Enter new values and press **Enter** for any value you do not want to modify.
5. When all mailbox information has been displayed/modified, the system displays the new information and prompts for the next mailbox number. Enter another mailbox number, or press <Enter> to return to the Mailbox Maintenance Menu.

The **Delete** option allows you delete a single mailbox or a range of mailboxes:

To Delete a Single Mailbox

1. From the Main Menu, select **(M) Mailbox Maintenance Menu**.
2. Select **(D) Delete**.
3. Enter the number of the mailbox to delete. The system displays the mailbox information and prompts you to confirm this delete.
4. Enter **Y** to delete the mailbox OR to leave the mailbox unchanged, enter **N** or press **Enter**. The system prompts for the next mailbox number to delete. Enter another mailbox number, or press **Enter** to return to the Mailbox Maintenance Menu.

#### To Delete a Range of Mailboxes

1. From the Main Menu, select **(M) Mailbox Maintenance Menu**.
2. Select **(D) Delete**.
3. Enter the first and last numbers of the mailboxes in the range to be deleted, separated by a hyphen (for example: 101-203). The system asks for confirmation.
4. Type **delete** (lower-case).
5. You are prompted to confirm. Ensure that the mailbox numbers in the range are correct and then enter **Y** to delete this range of mailboxes.
6. The system prompts for the next mailbox number to delete. Enter another mailbox number, OR press **Enter** to return to the Mailbox Maintenance Menu.

### 1.2.3.4.6 Find Mailbox Information

There are several options available for displaying and reporting mailbox information for a specified mailbox or group of mailboxes:

**Mailbox Search** : use this option to program the system to display information on all mailboxes that match the mailbox parameters or a group of parameters that you select.

**Inquire About Mailboxes** : use this option to display mailbox information for a specified mailbox number or for a range of mailbox numbers. This option produces the Mailbox Data Inquiry Report.

**Mailbox Block Inquiry** : use this option to create the Mailbox Blocked Report information (available through the [Billing Menu](#)) in a "blocked" format—without titles or summaries. The data can then be redirected to a personal computer, manipulated using a spreadsheet program, and used for invoices or monthly statements.

**Mailbox Dump** :use this option as a troubleshooting aid. It allows you to obtain a comprehensive report on a specific mailbox.

**Mailbox Data** : use this option (in the Reports Menu) to create a complete information report on all mailboxes.

## Mailbox Search

The Search function lets you program the system to display information on all mailboxes that match the mailbox parameters or a group of parameters that you select.

The available selection criteria include:

- |                                    |                                            |
|------------------------------------|--------------------------------------------|
| • FCOS                             | • Mailbox name                             |
| • LCOS                             | • Message waiting type                     |
| • GCOS                             | • Mailboxes without passcodes              |
| • NCOS                             | • Attendant extension number               |
| • Mailbox extension number         | • Attendant extension pre-dial index       |
| • Mailbox extension pre-dial index | • Mailbox number or range of numbers       |
| • Department code                  | • Mailboxes with new user tutorial enabled |

Any of these features may be specified as criteria for your search. The system can search the mailbox data files of all mailboxes or a specified range of mailboxes.

### EXAMPLE:

The following example is a search for all mailboxes in the Accounting Department; it has mailbox code 045 to match the department number, and we want to find out what mailboxes, if any, are not passcode-protected.

Because all mailboxes on the system in the 600 to 900 range are utility mailboxes, we will only search the mailbox range 100 through 599.

### To Perform a Mailbox Search

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(S) Search**. The search criteria list is displayed.
3. Select **(H) Department Code** and enter code (in this example: **045**). The search form display is updated to reflect your choice.

4. Further refine your search by selecting(N) No passcode. The screen is updated to display Department Code 045 mailboxes that have no passcode.
5. Select(R) Range of mailboxes(to restrict the utility mailboxes from the output) and enter the range (in this example,100-599).
6. Select(S) Searchto begin the search. The requested search information is displayed in the following format:

>>>ABC Corporation<<<

Mailbox Search Utility

Fri Jan 29, 1996 8:15 am

MAILBOX: 313

MSGs: 6 UNPLAYED: 0 URGENT: 0 RECEIPT: 0.4

LCOS: Default : 1 FCOS: VIP : 1

GCOS: 1 NCOS: Default : 1

BAD LOGS: 0 LAST LOG: 01/29/96 7:34 am MINS: 0

PASSWD: Y TUTOR: N DAY: M NIGHT: M

NAME: Allan Donald CODE:

EXTEN: INDEX: 0

ATTEN DN: INDEX: 0

TOTAL Mailboxes: 1 Messages: 6 Unplayed: 0 Urgent: 0 Minutes: 0.4

7. Enter **X** to exit to the Mailbox Maintenance Menu after the Search is complete.

## Inquire About Mailboxes

The Inquire About Mailboxes option asks the system to display mailbox information for a specified mailbox number or for a range of mailbox numbers. This option produces the Mailbox Data Inquiry Report.

The Mailbox Data Inquiry Report shows

- Message counts
- Class of service assignments
- Message waiting type
- Passcode status
- Login status

## To Run the Mailbox Data Inquiry Report

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(I) Inquire About Mailboxes**.
3. Select an output routing for your report: (C) Console or (P) Console with Pause.
4. Enter a mailbox **number** or range of numbers in the format first-last (for example: 4000-4999). The system displays a list of all mailboxes specified; the system shows message statistics, classes of service, message waiting type, and login status of each mailbox.

The system displays information in the following format:

| Box | Msgs | Unp | Urg | Rec | Mins | FCOS | LCOS | GCOS | NCOS | MWI         | Pswd  |
|-----|------|-----|-----|-----|------|------|------|------|------|-------------|-------|
| 501 | 2    | 1   | 0   | 0   | 1.3  | 1    | 1    | 13   | 1    | DTMF to PBX | Y     |
| 502 | 2    | 1   | 0   | 0   | 9.7  | 1    | 1    | 12   | 1    | DTMF to PBX | Y     |
| 503 | 11   | 10  | 1   | 0   | 28.2 | 2    | 1    | 1    | 1    | Pager       | Y     |
| 504 | 0    | 1   | 0   | 0   | 0.0  | 7    | 1    | 1    | 1    | DTMF to PBX | Y (t) |

## Reading the Mailbox Data Inquiry Report

Columns of data in the Mailbox Data Report indicate the following information:

|                  |                                                                             |
|------------------|-----------------------------------------------------------------------------|
| Box              | Mailbox number                                                              |
| Msgs             | Total played, unplayed, and urgent messages in the mailbox.                 |
| Unp              | Unplayed messages.                                                          |
| Urg              | Urgent messages.                                                            |
| Rec              | Receipts (requested and forced).                                            |
| Mins             | Length of all messages (in tenths of a minute).                             |
| <b>FCOS LCOS</b> | Classes of service assigned to the mailbox.                                 |
| <b>GCOS NCOS</b> |                                                                             |
| MWI              | Message waiting type assigned to the mailbox.                               |
| Passwd           |                                                                             |
| Y                | There is a passcode for this mailbox, and the mailbox owner has logged in.  |
| N                | There is no passcode for this mailbox, and the mailbox owner has logged in. |

Y(t)

There is a temporary passcode for this mailbox and the owner has not logged in yet. The tutorial is activated (but has not been played yet.)

1. Enter additional mailbox numbers *or press **Enter** to exit.*

## Mailbox Block Inquiry

The Mailbox Block Inquiry option presents the [Mailbox Blocked Report](#) information in a "blocked" format—without titles or summaries. The data can be redirected to a personal computer and manipulated by using a spreadsheet program for an invoice or monthly statement.

### To Run the Mailbox Block Inquiry Report

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(B) Mailbox Block Inquiry**.
3. Select an output routing for your report: (C) Console or (P) Console with Pause.
4. At the **Mailbox to display:** prompt, enter a mailbox number or range of numbers in the format first-last (for example: 4000-4999). The system displays an unformatted report of all billing statistics that have been configured for each mailbox specified and the rate set for each statistic.
5. Enter additional mailbox numbers, *or press **Enter** to exit.*

## Mailbox Dump

The Mailbox Dump option is a useful troubleshooting aid. It allows you to obtain a comprehensive report on a specific mailbox. The report consists of four parts:

- Login status
- Configuration
- Usage statistics (labelled "contents")
- Message queues

These entries show the number of messages free, played, unplayed, urgent, and undelivered; the number of message receipts; and the number of future delivery messages.

### To Run the Mailbox Dump Report

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(E) Mailbox Dump**.
3. At the **Mailbox #** prompt, enter the selected mailbox number. You are prompted to select the labeled report version:

4. Select (M) for mailbox information in ASCII (text) OR
5. Select (D) for mailbox information in hexadecimal

The system displays the login status, configuration, usage statistics, and message queue statistics for the specified mailbox.

6. Enter another mailbox number *or* press **Enter** to exit.

**Note:**

The report can only be displayed on the maintenance console; it cannot be routed as output to an output device (printer).

## Mailbox Data

The Mailbox Data Report provides statistics for every mailbox on the system. Refer to the [Mailbox Data Report](#) in the Reports chapter for instructions to run and interpret this report.

### 1.2.3.4.7 Configure a Rotational Mailbox

To Set the Index:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(R) Rotational Mailbox**.
3. At the **Mailbox number to be rotated:** prompt, enter the number of the rotational mailbox.
4. At the **Period (hours):** prompt, press **Enter**.
5. At the **Index:** prompt, press **Enter** if you want the rotation to begin with the lowest-numbered mailbox in the list. Valid indexes depend on the number of mailboxes that you add to the distribution list.

**Note:**

To reset a period rotation to an index rotation, enter 0 (zero) for the period.

At the **Set start date** for mailbox prompt, press **Enter** to return to the Mailbox Menu

To Set the Period:

1. From the Main Menu, select **(M) Mailbox Maintenance**.



**2. Select (R) Rotational Mailbox.**

**3. At the Mailbox number to be rotated:** prompt, enter the number of the rotational mailbox.

**4. At the Period (hours):** prompt, enter the number of hours that one child greeting will play before rotating

to the next greeting. Valid hours are 1 through 255.

**5. At the Start date (MM-DD-YY):** prompt, enter the month, day, and year when you want to start the cycle

(for example: 06-20-10).

**6. At the Start time (HH:MM [am/pm]):** prompt, enter the hour and minute when you want to start the cycle

(for example: 02:10 indicates 2:10 a.m.). If you do not specify a.m. or p.m., then a.m. is assumed.

**7. At the Set start date for mailbox** prompt, press **Enter** to return to the Mailbox Maintenance Menu.

### 1.2.3.4.8 Set or Clear Mailbox Passcode or Tutorial

The tutorial provides users with basic instructions about setting up a new mailbox. It is automatically enabled when a mailbox is created. There are times when users may not want to hear the tutorial (for example, when setting up a series of chain mailboxes for directory assistance).

This procedure describes how to set or clear a passcode for a mailbox, and how to turn on or off the tutorial. You must also have configured the desired passcode parameters ( [Configure Mailbox Passcode Parameters by Line Group](#) ).

**1. From the Main Menu, select (M) Mailbox Menu.**

**2. Select (P) Set Passcode/Tutorial.**

**3. When prompted, enter the mailbox number** for which to set the passcode.

**4. When prompted for New passcode**, do one of the following:

- Enter a passcode with four to 10 digits (0 to 9) OR
- Press **Enter** to leave passcode unchanged, OR
- Enter **0** (zero) if you want to clear an existing passcode, OR
- Enter **S** to make passcode the same as the mailbox number, OR
- Enter **R** for a random generated number.

5. At the **Tutorial?** prompt, do one of the following:

- Enter **Y** to enable the tutorial. The first time that the system is accessed, it directs the new user to record a name and a greeting for callers and to enter a passcode. The system confirms passcode and tutorial settings.
- Enter **N** to clear the tutorial if the user has already set up the mailbox. The system confirms passcode setting and that the tutorial is cleared.

6. The system prompts you to set the next mailbox passcode. Press **Enter** to return to the Mailbox Maintenance menu.

### 1.2.3.4.9 Set Passcode Expiry

To set a passcode expiry for a mailbox:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(L) Limits COS**.
2. In the Limits COS menu, select **(L) Set Limits for Selected LCOS**.
3. In the Limits Parameters menu, select **(P) Mailbox Passcode Expiry**.
4. Enter a number of days (**1-365**) that passcodes will remain valid before expiring, or enter "0" to disable passcode expiry.
5. Exit the Limits menu and then select **(X) Exit --Save Changes**.

**Note:**

You need to activate this configuration before these changes can take effect in your system.

### 1.2.3.4.10 Test Mailbox Capabilities

To test mailbox capabilities that have been established by an FCOS, LCOS, and GCOS:

1. If you have not already done so, obtain a [System Configuration Report](#). Refer to the report as needed for such information as the FCOS, LCOS, and GCOS that have been assigned to mailboxes.
2. If you have not already done so, obtain these reports:
  - [Feature Class of Service Report](#)
  - [Limits Class of Service Report](#)
  - [Group Class of Service Report](#)

3. Create two test mailboxes ("test mailbox A" and "test mailbox B") that include each FCOS, LCOS, and GCOS used. (See [Create a Standard Mailbox](#).)
4. Refer to the Feature Class of Service Report as needed to identify the feature bits in the FCOS assigned to the mailbox you are going to test.
5. Configure the Event Recorder program to be set for options: (1=Detailed NuPoint Voice, 7=Open Account Admin, 8=DTMF to PBX, and 12=Send NuPoint Voice) and then run the program. These options will provide useful details. (For more information about Event Recorder, see the Troubleshooting chapter of the NuPoint UM Technician's Handbook.)
6. Call test mailbox B and leave a message.
7. Check the called telephone (test mailbox B) to verify that the message waiting indicator (light or tone) is turned on.
8. Log into test mailbox B and play the message.
  - Verify that your message completes under each of the following conditions:
    - You stop speaking and the server hears 3 seconds of silence.
    - You entered a valid DTMF tone (if the Caller's Menu is enabled in the mailbox's FCOS).
    - The server hears 5 seconds of dial tone.
    - You reach the maximum message length established by the LCOS assigned to the mailbox.
  - Test all the capabilities of the mailbox allowed by the feature bits in the FCOS.
  - Leave or make messages as appropriate to test the various feature bits.
  - Verify that all appropriate prompts are played.
  - Pay particular attention to possible feature bit conflicts.
9. Refer to the Limits Class of Service Report as needed to identify the limits parameters.
10. Test the mailbox for all limits parameters that comprise the LCOS. For example, make a message and test the length limit.
11. Log out of test mailbox B.
12. Verify that the message waiting indication is turned off.
13. Log into test mailbox A.
14. Refer to the Group Class of Service Report as needed to identify groups.
  - Make three messages and send them to test mailbox B with these respective special delivery options:
    - Mark one of the messages urgent.
    - Mark one of the messages confidential.
    - Request a receipt for one of the messages.
15. Log into test mailbox B, play the messages, and verify that they are urgent and confidential, respectively.
16. Log out of test mailbox B.

17. Log into test mailbox A and verify that it plays the receipt notice.
18. Create a distribution list that includes test mailbox B.
19. Make a message to the distribution list that includes test mailbox B.
20. Log out of test mailbox A.
21. Log into test mailbox B and play the distribution list message.
22. Log out of test mailbox B.
23. Log into test mail box A and verify the answer from test mailbox B.

## 1.2.3.4.11 Distribution Lists

### 1.2.3.4.11.1 Configure a Mailbox for Distribution Lists

To configure a mailbox for distribution lists:

**Note:**

This procedure assumes that [Distribution Lists Configuration](#) has been completed.

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** or **(M) Modify Mailboxes**.
3. At the **Mailbox to create/modify:** prompt, enter the number of the mailbox to configure for distribution lists. If you want this mailbox to hold master distribution lists, specify the administrator's mailbox number.
4. Press **Enter** until you reach the **Feature Class of Service** prompt.
5. At the (new) **Features class of service:** prompt, enter the **n umber** of the FCOS (1-640) that is customized for distribution lists.
6. Press **Enter** until you reach the **Limits Class of Service** prompt.
7. At the (new) **Limits class of service:** prompt, enter the **n umber** of the LCOS (1-640) that is customized for distribution lists.
8. Press **Enter** until you reach the **Group Class of Service** prompt.
9. At the (new) **Group class of service:** prompt, enter the **n umber** of the GCOS (1-32,000) containing a group that is shared by all members of the same distribution list.

10. Press **Enter** until you reach the **Lists with review rights:** prompt and then enter any of the following:

- **A** for all distribution lists
- A single **list**, for example, 2
- A series of **lists**, for example, 1,3,4,6,
- A **range of lists**, for example, 1-6
- A combination of any of the above entries; for example, 1-5,8,12,50-70,90

**Note:**

This mailbox parameter alone does not allow change rights; you must also include feature bit 74 (create or modify user distribution list) in the FCOS.

11. At the **Lists with change rights:** prompt, make the same entry as you did in step 10.
12. After the last entry, the server displays the mailbox configuration, then prompts for the next mailbox number. The parameter settings are saved. You can continue with mailbox configuration or exit.

### 1.2.3.4.11.2 Create or Modify a List for Mailbox Owners

To add members or delete members in a single distribution list, or a master distribution list:

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(L) List Maintenance**.
2. Select **(C) Create, Modify, or Show Distribution Lists**.
3. At the **Mailbox:** prompt, enter the **n umber** of the mailbox that contains the list you want to add to or delete from. To modify a master distribution list, enter the administrator's mailbox.
4. At the **Distribution List:** prompt, enter the **n umber** of the list you want to add to or delete from (1-99). For mailboxes that rotate on full, tree mailboxes, NP Forms mailboxes, and broadcast mailboxes, specify 1. For a name greet mailbox, specify 9.
5. At the **(S)orted or (U)nsorted list ?** prompt, select **U** if the list is in a tree mailbox OR **S** for all other types of mailboxes. Keep in mind that sorting of lists longer than 190 members can be slow.
6. At the **Check for duplicate before add (y/n) [Y]?** prompt, enter **Y** if you want the server to make sure the member is not already in the list, or **N** to bypass the check.
7. At the **(A)dd, (D)elete, or (S)how list ?** prompt, select **A** to add a member, or **D** to delete a member.
8. At the **Member:** prompt, enter the **member** you want to add or delete. All of the following are valid members:

**9. Mailbox number**

- 10. M** and a remote mailbox with a telephone number for AMIS Analog; the remote mailbox and telephone number are separated by a comma (for example, M3788,4283788)
- 11. N** and a remote mailbox for networking
- 12. T** and a telephone number for off-server messaging
- 13. D** and a distribution list number, except in a broadcast mailbox
- 14. S** and a master distribution list number, except in a broadcast mailbox

Mailbox numbers can be entered in any of the formats shown below; the other numbers must be entered one at a time:

- A single mailbox number, for example, 3788
- A continuous range of mailbox numbers, for example, 3001-3788
- A series of mailbox numbers, for example, 3781,3782,3786,3788

You can mix formats of mailbox number entries, so you can specify all the mailbox numbers necessary in one attempt. For example, this entry is valid:  
208,222-308,333,334,661

1. After the server confirms that the member just specified was added or deleted, continue adding or deleting or complete the activity. At the **(A)dd, (D)delete, or (S)how list ?** prompt, do one of the following:
2. To add or delete more members from the current list, enter A or D as described in step 7.
3. To complete adding or deleting members, press **Enter**. When the server asks if you want to save changes to the distribution list, press Y. The server reports the current members, reflecting members just added or deleted, and your additions and deletions are saved.

### **1.2.3.4.11.3 Delete a Distribution List**

To delete distribution lists from a mailbox:

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(L) List Maintenance**.
2. Select **(D) Delete Distribution Lists**.
3. At the **Mailbox for distribution list to delete:** prompt, enter the **number** of the mailbox containing the distribution list you want to delete.
4. At the **List to delete:** prompt, enter the **number** of the list (1-99) you want to delete from this mailbox. The server shows the current members in the list.

5. At the **Delete (y/n):** prompt, enter **y** to delete. The server confirms that the specified list was deleted.
6. At the **Mailbox for distribution list to delete:** prompt, enter same mailbox **number** as in step 1 if you want to delete more distribution lists from it; otherwise, enter the **number** of another mailbox that has distribution lists you want to delete. When you have finished deleting distribution lists, press **Enter**. You are returned to the List Maintenance Menu.

### *1.2.3.4.11.4 Delete a Member from All Distribution Lists*

To delete a member from all distribution lists in the server:

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(L) List Maintenance**.
2. Select **(F) Find and/or Delete Mailboxes From All Lists**.
3. At the **Mailbox to search for:** prompt, enter the **n umber** of a mailbox to be deleted from all distribution lists.
4. At the **Enter another mailbox or <CR>:** prompt, enter another mailbox **number** of a mailbox to be deleted from all distribution lists, or press **Enter** if you are finished entering mailbox numbers.
5. At the **Delete from lists?** prompt, enter **Y** to remove mailbox(es) from all distribution lists in the server. The server responds with a message telling you which lists the member was deleted from.
6. At the **Mailbox to search for:** prompt, enter another mailbox **number** (member) to delete, or press **Enter** to return to the List Maintenance Menu.

### *1.2.3.4.11.5 View All Lists Containing a Specified Member*

To find and view all distribution lists containing a specified member:

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(L) List Maintenance**.
2. Select **(F) Find and/or Delete Mailboxes From All Lists**.
3. At the **Mailbox to search for:** prompt, enter the **n umber** of a mailbox (member) that you want to find.
4. At the **Enter another mailbox or <CR>:** prompt, enter another mailbox **number** of a mailbox to be found, or press **Enter** if you are finished entering mailbox numbers.
5. At the **Delete from lists?** prompt, enter **N** for no. The server responds with a message telling you which lists in which mailboxes contain the specified member.
6. At the **Mailbox to search for:** prompt, enter the next mailbox **number** (member) to find, or press **Enter** to go back to the List Maintenance Menu.

## 1.2.3.4.11.6 View Members of a Single List

To view the members of a distribution list:

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(L) List Maintenance**.
2. Select **(C) Create, Modify, or Show Distribution Lists**.
3. At the **Mailbox:** prompt, enter the *number* of the mailbox that contains the list you want to view.
4. At the **Distribution list:** prompt, enter the *number* of the list you want to view.
5. At the **(S)orted or (U)nsorted list ?** prompt, enter **U** if the list is in a tree mailbox, or **S** for all other types of mailboxes. Keep in mind that sorting of lists longer than 190 members can be slow.
6. At the **Check for duplicate before add (y/n)?** prompt, enter **N** to bypass the check.
7. At the **(A)dd, (D)delete, or (S)how list ?** prompt, select **S** to show the list. The server lists the current members and their names.
8. At the **Mailbox:** prompt, enter the next mailbox **number** containing a distribution list you want to view, or press **Enter** to return to the List Maintenance Menu.

## 1.2.3.4.12 Mailboxes for Hotel-Motel

### 1.2.3.4.12.1 Schedule Company Greetings

**Note:** This procedure is not available in the Web Console.

To designate when a company day greeting plays and when a company night greeting plays:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
  2. Do one of the following:
  3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  4. Otherwise, select **(E) Modify Active Configuration**.
- 
1. Select **(G) Group Selected** and then enter the **number** of the line group (1-24) for which you want to schedule greetings.
  2. Select **(M) Modify Application**, and then **(N) Day/Night**.
  3. Select **(S) Start Time of the Workday** and enter the **time** a workday starts, which will be the time when the company day greeting begins to play. Enter the time in the format indicated by the prompt; for example, 8:30am. If you do not specify "a.m." or "p.m.," the server assumes that the time is "a.m."



4. Select **(E) End Time of the Workday** and enter the **time** a workday ends, which will be the time when the company night (off hours; after hours) greeting begins to play. Enter the time in the format indicated by the prompt; for example, 5:30pm. If you do not specify "a.m." or "p.m.," the server assumes that the time is "p.m."

**Note:** To have the same greeting play all the time, specify 12:00pm as both the start and end times of the workday.

1. Select **(W) Weekend Days** and enter **N** or **D** in each of seven positions. **N** designates weekend days; **D** designates work days. For example, a work week of Monday through Friday, which is the default, is designated by DDDDDNN. (The company day greeting does not play on weekend days.)
2. Save your entries by exiting to the Main Menu.
3. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### *1.2.3.4.12.2 Enable an Alternate Company Greeting*

**Note:** This procedure is not available in the Web Console.

This procedure describes how to enable an alternate greeting once an alternate greeting has been recorded. This procedure assumes that you have defined an administrator's mailbox for the line group ([Define an Administrator's Mailbox](#)).

To enable an alternate greeting:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(K) Copy/Delete/Enable Mailbox Greetings**.
3. At the **COMMAND (Copy, Delete, or Enable ?):**, enter **E** for enable.
4. At the **Enter mailbox to enable greeting:**, enter the administrator's mailbox **number**.
5. At the **COMMAND (Enter type of greeting to enable (a/d/p) [p]):** prompt, enter **A** for the alternate greeting.
6. At the **COMMAND (Copy, Delete, or Enable ?):** prompt, press **Enter**.
7. Exit to the Main Menu to make the recorded alternate greeting take effect. The alternate greeting plays instead of the company day greeting and night greeting.

### *1.2.3.4.12.3 Copy a Mailbox Greeting*

**Note:**

This procedure is not available in the Web Console.

This procedure describes how to copy a mailbox greeting, or name from one mailbox to another. You must perform this procedure at a server maintenance console, after a greeting has been recorded for the source mailbox. (See the NuPoint UM Web View help for instructions to record source mailbox greetings.)

To copy a mailbox greeting:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(K) Copy/Delete/Enable Mailbox Greetings**.
3. At the **COMMAND (Copy, Delete, or Enable ?)**: prompt, select **C** to copy.
4. At the **Enter mailbox to copy name/greeting from:** prompt, enter the mailbox **number** of the source mailbox.
5. At the **Enter mailbox to copy name/greeting to:** prompt, enter the mailbox **number** of the target mailbox. You can copy the greeting to more than one mailbox by using any of these formats:
  6. A single mailbox number, for example 3788
  7. A continuous range of mailbox numbers, for example 3001-3788
  8. A series of mailbox numbers, for example 3781,3782,3786,3788
  9. A mix of formats, for example 208,222-308,333,334,661
10. At the **COMMAND (Enter source name/greeting number (0-5) [1])**: prompt, select the greeting you want to copy:
  - For a **user's** mailbox:
    - enter **1** for the Personal greeting.
  - For an **administrator's** mailbox:
    - Enter **1** for the Day company greeting,
    - Enter **2** for the Night company greeting,
    - Enter **4** for the Alternate greeting.
  - For an **attendant's** mailbox:
    - Enter **1** for the Message of the Day,
    - Enter **4** for the Alternate greeting.
  - For **all** mailboxes:
    - Enter **0** for the Name,
    - Enter **5** for the Fax Cover Sheet
11. The server confirms that the greeting/name has been copied. You can choose to copy more greetings, or press **Enter** to exit to the Mailbox Maintenance Menu.

## 1.2.3.4.12.4 Select Languages for Prompts

If an additional language (besides the default languages) is required, the appropriate additional language prompts must be licensed and installed before performing this procedure.

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
4. Otherwise, select **(E) Modify Active Configuration**.
5. Select **(G) Group Selected** and enter the number of the line group (1-24) to modify.
6. Select **(M) Modify Application** to modify NP Receptionist.
7. Select **(L) Default Prompt Language**. In the Prompt Language Selection menu, the languages that are licensed for your system are listed.
8. Enter the **number** that corresponds to the language you want. Only languages already installed on the server are displayed.
9. Exit to the Main menu to save your changes.
10. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

To set up a secondary prompt language:

- [Create an LCOS](#) to specify that language. Then [assign](#) the LCOS to the those mailboxes that are to play the secondary prompt language.

## 1.2.3.4.12.5 Disabling a Message of the Day

### Disabling a Message of the Day

You can disable a message of the day by [phone](#) or through the server console:

To disable a message of the day through the server console:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(K) Copy/Delete/Enable Mailbox Greeting**.
3. At the **COMMAND (Copy, Delete, or Enable ?):** prompt, enter **D** to disable.
4. At the **Enter mailbox to delete name/greeting from:** prompt, enter the attendant's mailbox **number**.

5. At the **COMMAND (Enter source name/greeting number (0-5):**, enter **1** for Message of the Day. The server displays a message confirming that greeting 1 (the message of the day) is deleted from the identified attendant's mailbox.
6. At the **COMMAND (Copy, Delete, or Enable ?):** prompt, press **Enter**.
7. Exit to the Main Menu.

## 1.2.3.5 Mailboxes for Hotel/Motel

### 1.2.3.5.1 Overview

In a hotel or motel environment, this system provides an electronic mailbox for each guest. The system provides advantages to guests, callers, and front-desk staff:

- Hotel and motel employees are not dedicated to the task of message-taking.
- Callers and guests are ensured message accuracy.
- Guests can listen to messages at their convenience, and they can discard or keep messages for future reference.
- Hotels and motels can bill guests for mailbox service.
- Optional language features improve usage.

### 1.2.3.5.2 Hotel/Motel Mailbox Structure

Four basic types of mailboxes are used in the Hotel/Motel application

- Guest mailbox
- Full-feature guest mailbox
- Check-in mailbox
- Check-out mailbox

#### Guest Mailbox

Mailboxes with Restricted FCOS (default FCOS 3) or optional Lodging FCOS are assigned to each guest. These FCOS are designed specifically for mailbox users and callers who may be unfamiliar with voice messaging systems.

- Restricted and Lodging mailboxes are controlled by Check-in and Check-out mailboxes. Guests do not need to perform any mailbox set-up (such as recording names and passcodes) before using mailboxes.
- This system integrates with the Hotel/Motel telephone system to allow guests to log in by pressing a button on the telephone keypad and by entering a passcode when prompted.
- After guests log in, the system automatically plays the first message; guests are prompted to keep or discard messages. After the choice is made, the next message (if any) plays without input from guests.

- Expanded prompts are helpful to uninitiated users:

"Press K, the 5 key, to Keep this message..."

**Note:**

Languages other than English are optional features. If an additional language is desired, the appropriate alternate-language prompts blade must be installed. For a list of available languages, contact your authorized dealer.

## Full-Feature Guest Mailbox

A hotel or motel may wish to assign the full-feature guest mailbox. This mailbox has Full Guest FCOS 2, which is the same as Unlimited FCOS (FCOS 1) except that the Check-in/Check-out feature is enabled. The desk clerk must still check this mailbox; however, guests can change names and passcodes, record personal greetings, and make messages for other guests' mailboxes. ([FCOS 2—Full Guest](#) provides a complete description of full-feature guest FCOS capabilities.)

### Check-In Mailbox

The Check-in mailbox is used to record names and passcodes for guests. This mailbox has FCOS 4. Several desk clerks can call into a single Check-in mailbox at one time. This means that you need to create only one Check-in mailbox for your system. ([FCOS 4—Check-In.](#))

### Check-Out Mailbox

A Check-out mailbox is used to clear a recorded name and any messages stored in the guest's mailbox. This mailbox has FCOS 5. Several desk clerks can call into a single Check-out mailbox at one time. You need to create only one Check-out mailbox for your system. ([FCOS 5—Check-Out.](#))

## 1.2.3.5.3 How the Hotel/Motel Application Works

### Check-In

When the guest checks in, the desk clerk calls a Check-in mailbox and records a name and passcode to personalize a mailbox for the guest.

### Mailbox Check-In Procedure

The clerk must perform the following mailbox check-in procedure:

### 1. When the guest checks in

- Dial the system's main extension number. The company greeting plays.
- Press the \* key (star). NP Receptionist says: "Welcome to the Message Centre. Please enter a mailbox number, or wait."
- Enter the number of the Check-in mailbox. If the Check-in mailbox has a **passcode**, you will be prompted to enter it now.

2. The system prompts: "Enter mailbox number to check in." Enter the mailbox number assigned to the room that the guest will occupy.

3. The system prompts: "Record a name" (beep). Record the guest's name.

4. The system requests a passcode. Enter a four-digit passcode.

5. The system confirms: "Passcode set to <number>. Check-in complete. Good-bye." The system disconnects the clerk.

#### Note:

If the system is not fully integrated (the guest cannot pick up messages by pressing a button), the clerk must supply the passcode and mailbox number to the guest.

### During the Guest's Stay

When the guest is out of the room, or when the phone is busy, the operator transfers calls to voice mail. Callers are prompted to "Please leave a message for <guest's name>."

When the guest returns, a message waiting indicator on the telephone notifies the guest when there are unplayed messages in the mailbox. The mailbox passcode provided by the desk clerk at check-in time assures the guest that all messages remain confidential.

### Check-Out

When the guest checks out, the mailbox is also checked out. A mailbox check-out clears the mailbox of the guest's name and passcode, announces the number of unplayed messages, and offers the desk clerk the opportunity to discard any messages stored in the mailbox.

### Mailbox Check-Out Procedure

The clerk must perform the following mailbox check-out procedure:

### 1. When the guest checks out:

- Dial the system's main extension number. The company greeting plays.
- Press the \* key (star). NP Receptionist says: "Welcome to the Message Centre. Please enter a mailbox number or wait."
- Enter the number of the Check-out mailbox. If the Check-in mailbox has a **passcode**, you will be prompted to enter it now.

### 2. The system prompts: "Enter mailbox number to check out." Enter the departing guest's mailbox number. The system responds: "Mailbox <number> has <number> unplayed messages. Press K to keep the messages, D to discard them," OR "Mailbox <number> has no messages. Check-out complete, good-bye."

### 3. Press **D** (the **3** key) to Discard any messages.

#### Note:

To successfully check out the mailbox, **the clerk must discard the messages**. If the remaining messages are not discarded, the system responds: "Check-out canceled, good-bye."

## 1.2.3.5.4 Billing Guests

To bill guests, a Termination Report is run for each mailbox. This report can be run either before or after the mailbox is checked out, but the results will vary.

- If the Termination Report is run **before** the mailbox is checked out and there are unplayed messages, the system does not charge for disk usage for these messages because this resource is calculated after messages are deleted.
- If the Termination Report is run **after** the mailbox is checked out, the system charges for all messages because all messages must be deleted in order to check out the mailbox.

## 1.2.4 Class of Service

### 1.2.4.1 Features Class of Service

#### 1.2.4.1.1 Overview

You can give a mailbox certain features by assigning a Features Class of Service (FCOS) to it. An FCOS is a collection of three-digit numbers, called "feature bits;" each feature bit represents a property of a mailbox, such as the ability to log in, or the ability to keep messages. NuPoint UM includes a set of default Features Classes of Service, or

you can create your own custom FCOS as required. You can assign only one FCOS to each mailbox. If you do not assign an FCOS, the default, FCOS 1, is assigned.

Each FCOS is a list of feature bits that supply different functionality. For example, feature bit 001 means the user can log in to the mailbox; 020, the user can make messages; and 050, the user can keep messages. Each feature bit represents a different, specific feature. NuPoint Voice provides more than 250 feature bits. Certain feature bits require special attention:

- Some feature bits cannot function without a “master feature bit” in an FCOS. For example, an FCOS with feature bit 021 (make and request receipt) must also include the master feature bit 020 (make messages).
- Certain combinations of feature bits are incompatible. For example, if feature bits 039 (notification tone when new message arrives) and 047 (notification prompt with new message arrives) are in the same FCOS, the server uses feature bit 047, not 039.

There are 14 default FCOS, from the basic, like FCOS 1, to the specialized, such as FCOS 4 for hotel check in. You can also create a custom FCOS by copying a default and modifying its feature bits to suit your requirements. We recommend that you maintain the original default set to aid in troubleshooting, if required.

When designing your own FCOS, see the section on [Feature Bits by Category](#). For example, to see which feature bits allow the system administrator to create and use master distribution lists, see Category 4, Master Distribution Lists.

For a detailed description of each feature bit, see the section on [Feature Bit Descriptions](#).

**Note:**

Feature bits are sometimes called “FCOS bits.” This guide uses the term “feature bits” because “FCOS bits” causes confusion between the feature bit and the FCOS. Feature bits are also referred to as “features,” which can also cause confusion because many aspects of the system are also called features.

## 1.2.4.1.2 Default FCOS

Several FCOS are pre-programmed in the default configuration. This section describes the default FCOS. Within the feature bit list for each default FCOS, master feature bits appear in bold type. You can select a default FCOS that matches your needs and assign it to a mailbox, or you can customize your own FCOS, using a default FCOS as a template.

We recommend that you preserve these default COS settings and [customize FCOS](#) when you require extra features.



**Note:**

Operations that involve interactions with other mailboxes (make, give, answer) are limited to those mailboxes with compatible [Group Class of Service](#) (GCOS).

**FCOS 1: Unlimited**

This FCOS contains most standard feature bits, except for the message-addressing options. The user can record name and greeting, change the passcode, and receive messages from other users and outside callers. The user can also play, keep, discard, answer, give messages and make new messages for other system users or for distribution lists, as well as create and modify distribution lists. Although this FCOS suits the needs of users with standard applications, do not think of it as truly “unlimited,” which implies that the mailbox is not restricted. It is, more accurately, the basic FCOS for a system.

**Note:**

New mailboxes have FCOS 1 assigned to them by default unless you specify another FCOS.

FCOS 1 contains the following bits:

- 001 Login to mailbox
- 002 Transfer to mailbox attendant
- 003 Return to welcome prompt
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 006 Rewind and fast forward during playback
- 020 Make messages
- 024 Give messages
- 028 Give with comments
- 029 Answer messages
- 032 Make a user distribution list
- 033 Give to user distribution list

034 Make to master distribution list

035 Give to master distribution list

040 Receive messages from other users

041 Receive messages form outside callers

043 Receive message of the day

044 Receive user dist. list

045 Receive master dist. list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages

066 Login during greeting in greet only mbx

070 User Options Menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/give to mailbox with empty GCOS

## **FCOS 2: Full Guest**

This FCOS is used in the hotel/motel environment where no Property Management System (PMS) integration is available. It has fewer capabilities than FCOS 1 (Unlimited). However, some feature bits allow check-in and check-out mailboxes to reach this type of mailbox.

FCOS 2 contains the following bits:

- 001 Login to mailbox
- 002 Transfer to mailbox attendant
- 003 Return to welcome prompt
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 006 Rewind and fast forward during playback
- 008 Mailbox can be checked in/out
- 020 Make messages
- 024 Give messages
- 028 Give with comments
- 029 Answer messages
- 032 Make a user distribution list
- 033 Give to user distribution list
- 034 Make to master distribution list
- 035 Change to master distribution list
- 040 Receive messages from other users
- 041 Receive messages from outside callers
- 043 Receive message of the day
- 044 Receive user dist. list
- 045 Receive master dist. list messages
- 050 Play messages
- 053 Keep messages
- 055 Discard messages
- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages

066 Login during greeting in greet only mbx

070 User Options Menu

071 Record or change mailbox name

072 Record or change greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

092 User will be in Dial-by-Name database

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/give to mailbox with empty GCOS

161 Conditional greetings

### **FCOS 3: Restricted**

This FCOS is used by hotels. Guests cannot enter or change their names, greetings, or passcodes; make, answer, or give messages; or create or use distribution lists. They can, however, keep and discard messages. Only the attendant can record names and greetings and assign passcodes. For a hotel or motel environment, a name and passcode are usually entered for this mailbox from a special check-in (see default FCOS 4) mailbox. Callers hear the greeting "Please leave a message for [name]."

A guest logs into the mailbox and hears the count of unplayed messages. Unplayed messages play automatically (that is, the guest hears the first message and all succeeding messages without having to press P to play). All messages are automatically kept, unless the guest presses D (to delete messages) within a few seconds.

FCOS 3 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

- 006 Rewind and fast forward during playback
- 008 Mailbox can be checked in/out
- 009 Automatic logout if no message/receipt
- 010 (ISO) Enhanced Outcall Paging Options
- 040 Receive messages from other users
- 041 Receive messages from outside callers
- 043 Receive message of the day
- 044 Receive user dist. list **050 Play messages**
- 052 Auto-play unplayed messages **053 Keep messages**
- 054 Auto-keep messages **055 Discard messages**
- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages
- 066 Login during greeting in greet only mailbox

#### **FCOS 4: Check In**

This FCOS is used by hotels for a check-in mailbox, a special mailbox that manipulates other mailboxes. In a check-in mailbox, the system prompts for the mailbox number to be checked in, then prompts the attendant to record a name and enter a passcode for the mailbox. Guest mailboxes controlled by FCOS 4 must contain feature bit 008 (Mailbox can be checked in/out). Guest mailboxes are therefore usually assigned default FCOS 2 (Full Guest) or default FCOS 3 (Restricted).

FCOS 4 contains the following bits:

- 001 Login to mailbox
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 066 Login during greeting in greet only mailbox
- 070 User Options Menu
- 071 Record or change mailbox name
- 072 Record or change greeting

090 Check in other mailboxes

## FCOS 5: Check Out

This FCOS is used by hotels for a check-out mailbox that is the counterpart of the check-in mailbox. In a check-out mailbox, the server prompts for the mailbox number to be checked out. The attendant can then choose to either keep or discard any messages left in the mailbox. Finally, the server purges the guest's name, greeting, and passcode, and follows the attendant's command about messages. The mailbox is then ready to be checked in for the next guest.

You must create a check-out mailbox to use the hotel check-in/check-out feature. Guest mailboxes controlled by FCOS 4 must contain feature bit 008 (Mailbox can be checked in/out). Guest mailboxes are therefore usually assigned default FCOS 2 (Full Guest) or default FCOS 3 (Restricted).

FCOS 5 contains the following bits:

001 Login to mailbox **004 Outside caller functions**

005 Play Outside Caller Menu prompts

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change greeting

091 Check out other mailboxes

## FCOS 6: Greeting Only

When a caller reaches a Greeting-Only mailbox, the server plays the greeting and then hangs up. For example, a theater manager wants callers to hear an announcement of show times. The manager creates a mailbox with this FCOS, logs in to the mailbox, and records a greeting that announces show times. The mailbox owner can change the mailbox name, greeting, and passcode, but cannot create or use distribution lists. A Greeting-Only mailbox cannot accept messages. A Greeting-Only mailbox must have a greeting; otherwise, the server considers the mailbox invalid. To log into a Greeting-Only mailbox that does not have a greeting, press the \* (star) key, then enter the mailbox number. You can remove feature bit 066 (Login during greeting in greet-only mbx) after you record a greeting for the mailbox.

FCOS 6 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

060 Ignore DTMFs during greeting

062 Hang up immediately after greeting

066 Login during greeting in greet only mbx **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

### **FCOS 7: <TUI Emulation>**

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

**004 Outside caller functions**005 Play outside caller menu prompts

006 Rewind and fast-forward during playback

007 Pause in record or play

016 Deny recycling with \* key

018 Give and mark urgent

019 Answer and mark urgent

**020 Make messages**021 Make and request receipt

022 Make to multiple destinations

023 Make and mark confidential

**024 Give messages**025 Give and request receipt

026 Give to multiple destinations

027 Give and mark confidential

028 Give with comments

**029 Answer messages**

030 Answer and request receipt

- 031 Answer and mark confidential
- 032 Make to user distribution list
- 033 Give to user distribution list
- 034 Make to master distribution list
- 035 Give to master distribution list
- 038 Attach original message to answer
- 039 Notification tone when new msg arrives
- 040 Receive messages from other users
- 041 Receive messages from outside callers
- 043 Receive message of the day
- 044 Receive user dist list messages
- 045 Receive master dist list messages
- 047 Notification prompt when new msg arrives

**050 Play messages 053 Keep messages**

**055 Discard messages**

- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages first
- 066 Login during greeting in greet-only mbx

**070 User options menu**

- 071 Record or change mailbox name
- 072 Record or change mailbox greeting
- 073 Enter and change mailbox passcode
- 074 Create or modify user distribution list
- 077 Change pager schedule
- 078 Activate user tutorial
- 084 Give receipt message with comments



085 Give receipt message to multiple dests

**086 Give receipt message**

087 Make and mark urgent

088 Receive urgent messages

094 Change Message Delivery options

095 Mark message for Future Delivery

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/Give to mailbox with empty GCOS

144 Skip forward to next message

190 Receive fax messages

191 Make fax messages

192 Give fax messages

193 Deliver fax to default number

194 Deliver fax online

195 Specify fax delivery number

196 Change default fax number

204 Message Skip, forward and backward

288 Enable TUI Emulation

**FCOS 8: Chain**

Chain mailboxes play a greeting, then route calls to the mailbox selected by the caller. A chain mailbox cannot accept messages. Assign this chain FCOS to a mailbox and record a greeting for the mailbox. A chain mailbox prompts callers to enter a mailbox number or to wait. If callers enter a mailbox number, the chain mailbox routes the call to that mailbox. If callers wait (do not immediately enter a mailbox number), NuPoint Voice transfers the call to the attendant's mailbox or to the attendant, depending on the configuration. When a mailbox owner logs in to this type of mailbox, NuPoint Voice prompts, "Press U to change user options, X to exit." The mailbox owner can change the mailbox name, greeting, and passcode, but cannot make messages or create or use distribution lists. Chain mailbox is a default, unless the FCOS has one of these feature

bits: 062 (Hang up immediately after greeting), one of the receive message feature bits, or any of the tree, rotational, or broadcast mailbox feature bits. If these feature bits are not included, the general greeting plays, which asks the caller for a mailbox number.

**Note:**

NP Receptionist and the Chain FCOS: NP Receptionist is an optional feature. The server prompts the caller to enter an extension number, then transfers the caller to that extension. If the caller does not enter an extension, the server transfers the call to the attendant's extension, if one is defined; otherwise NP Receptionist transfers the call to the attendant's mailbox. If you include feature bit 141 (Define chain mailbox in Receptionist), a chain mailbox routes a call to an extension even if the chain mailbox has no greeting.

FCOS 8 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

141 Define chain mailbox in Receptionist

## **FCOS 9: Time**

This is a Greeting-Only mailbox that plays its greeting, announces the system time, and asks for a mailbox number. Feature bit 065 (Play system time after greeting) plays the time; if you want this function without announcing the time, you can copy this FCOS to a new number and leave feature bit 065 out of the new version.

A user can log in and change user options (mailbox name, greeting, and passcode), but cannot create or use distribution lists. A time mailbox does not accept messages.

FCOS 9 contains the following bits:

001 Login to mailbox

065 Play system time after greeting

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

## **FCOS 10: VIP**

This FCOS provides advanced options with more feature bits than FCOS 1. It contains these features: Multiple make/give, Attach original message to answer, and Message addressing options (New Message Notification, Mark Confidential, and Return Receipt). This FCOS also includes the Outside Caller's Menu, and will include the mailbox in the Dial-By-Name database.

FCOS 10 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

007 Pause in record or play

015 Change wakeup options

018 Give and mark urgent

019 Answer and mark urgent

020 Make messages

021 Make and request receipt

022 Make to multiple destinations

023 Make and mark confidential

024 Give messages

025 Give and request receipt

026 Give to multiple destinations  
027 Give and mark confidential  
028 Give with comments  
029 Answer messages  
030 Answer and request receipt  
031 Answer and mark confidential  
032 Make to user distribution list  
033 Give to user distribution list  
034 Make to master distribution list  
035 Change to master distribution list  
036 Auto-receipt for user dist list msgs  
038 Attach original message to answer  
040 Receive messages from other users  
041 Receive messages from outside callers  
043 Receive message of the day  
044 Receive user dist. list  
045 Receive master dist list messages  
046 Announce-receipt at login  
047 Notification prompt when new msg arrives  
050 Play messages  
053 Keep messages  
055 Discard messages  
058 Play unplayed messages in FIFO order  
059 Play unplayed messages  
061 Wait to record (timeout = # key)  
066 Login during greeting in greet-only mbx

- 070 User Options Menu
- 071 Record or change mailbox name
- 072 Record or change mailbox greeting
- 073 Enter and change mailbox passcode
- 074 Create or modify user distribution list
- 075 Audit receipt message
- 076 Play urgent messages in FIFO order
- 077 Change pager schedule
- 078 Activate user tutorial
- 082 Soft play (interrupt) message count
- 083 Soft play (interrupt) most prompts
- 084 Give receipt message with comments
- 085 Give receipt message to multiple dests
- 086 Give receipt message
- 087 Make and mark urgent
- 088 Receive urgent messages
- 092 User will be in Dial-by-Name database
- 094 Change message delivery options
- 095 Mark message for future delivery
- 096 Make messages before keep/discard
- 098 Say "Press 0" to caller before beep
- 110 Make/give to telephone number
- 124 Change paging phone number
- 125 Clear user passcode
- 126 Make/give to mailbox with empty GCOS
- 161 Conditional greetings

250 Allow NP PWG View login.

251 Allow NP PWG View telephone playback/record

261 Allow NP PWG View WEB access to messages

289 Enable UM-SMTP

290 Enable UM-WebView

291 Enable RAC (Record a call)

292 Enable NP Director

295 Enable Advanced UM

### **FCOS 11 - 13: Reserved**

### **FCOS 14: MiCollab**

This FCOS is assigned by default to NuPoint Unified Messaging mailboxes when they are created using the MiCollab platform. This includes a set of features relevant to the license configuration bundled with the MiCollab product.

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play outside caller menu prompts

006 Rewind and fast-forward during playback

020 Make messages

024 Give messages

028 Give with comments

029 Answer messages

032 Make to user distribution list

033 Give to user distribution list

034 Make to master distribution list

035 Give to master distribution list

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist list messages

045 Receive master dist list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages first

066 Login during greeting in greet-only mbx

070 User options menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

081 Only One Correct Passcode for Login

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/Give to mailbox with empty GCOS

130 Passcode cannot be same as mailbox

201 Deny Trivial Passcode

290 Enable UM-WebView

291 Enable RAC (Record a call)

292 Enable NP Director

295 Enable Advanced UM

304 Enable UM Standard

## **FCOS 15: Tree**

This FCOS is used to specify a tree mailbox. It plays a greeting and waits for the caller to enter a single digit. When the caller presses a digit, the call is transferred to another mailbox.

FCOS 15 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet-only mbx **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Record or change mailbox greeting **121 Define tree mailbox**

## **FCOS 16: NP Forms**

This “template” FCOS is used with NP Forms, an optional feature used to record information from callers in templates, “voice forms.” A mailbox with this FCOS plays the greetings stored in its child mailboxes, sequentially, and records a message after each greeting. A typical application might have a rotational mailbox (see FCOS 17), with several child NP Forms mailboxes, all pointing to the same list of Greeting-Only mailboxes. You can also use feature bit 139 (Template: assume last greet mbox FCOS).

FCOS 16 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt **004 Outside caller functions**

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback



007 Pause in record or play **020 Make messages**

041 Receive messages from outside callers

043 Receive message of the day

048 Receive messages of the day

049 No auto-time stamp of played messages **050 Play messages**

052 Auto-play unplayed messages **053 Keep messages**

054 Auto-keep messages **055 Discard messages**

058 Play unplayed messages in FIFO order

059 Play unplayed messages first

066 Login during greeting in greet-only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

133 Don't say: "You may start your msg now"

135 Define template mailbox (NP Forms)

136 Don't say: "End of message"

138 Don't say: "Message complete"

## **FCOS 17: Rotational Mailboxes**

Rotational mailboxes allow the caller to hear greetings that change. Greetings change either by time and date (in a "period" rotational mailbox) or with every call (in an "index" rotational mailbox).

FCOS 17 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet-only mailbox

**068 Define rotational mailboxes 070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

You can also assign any one of the following additional feature bits to a rotational mailbox:

062 Hang up immediately after greeting

063 Call mailbox attendant after greeting

064 Call mailbox user ext after greeting

You can use rotational mailboxes with NP Forms (see FCOS 16) to route the caller to an NP Forms “template” mailbox; this requires feature bit 149 (Login to template thru rotational mbx).

**Note:**

Do not include feature bit 041 (Receive messages from outside callers) because it disables the mailbox’s rotation features.

**FCOS 18: Financial**

This FCOS provides advanced options with more feature bits than FCOS 1, for administrator convenience. It contains the following features: Multiple make/give, Attach original message to answer, and Message addressing options (New Message Notification, Mark Confidential, and Return Receipt), the Outside Caller’s Menu, and it will include the mailbox in the Dial-By-Name database. In addition, the FCOS gives users access to Unified Messaging Web access and access to the embedded secure media player.

FCOS 18 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

024 Give messages

028 Give with comments

029 Answer messages

032 Make to user distribution list

033 Give to user distribution list

034 Make to master distribution list

035 Change to master distribution list

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist. list

045 Receive master dist list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages

066 Login during greeting in greet-only mbx

070 User Options Menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/give to mailbox with empty GCOS

290 Enable UM Web View

293 Disable the <Save> <Reply> and <Forward> buttons on the UM Standard Web View web pages

294 Enable the Mitel embedded player on the UM\_Std+MWI web pages

### 1.2.4.1.3 Suggested Additional FCOS

These additional FCOS are not defaults, but are suggestions for you to number and assign if needed. Create an FCOS, give it an unused number, assign the feature bits listed here, then assign the new FCOS to mailboxes as needed. Any FCOS number from 18- 20 or 25-640 is acceptable. See [Customizing FCOS](#) for more details.

#### Lodging

This FCOS, designed for hotel or motel applications, has fewer features for guests than default FCOS 2 (Full Guest), but more than FCOS 3 (Restricted). Also see "Hotel Guest: Basic" following this description.

You can create the Lodging FCOS with the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant **004 Outside caller functions**

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

008 Mailbox can be checked in/out

009 Automatic logout if no messages/receipts

040 Receive messages from other users

041 Receive messages from outside callers **050 Play messages**

052 Auto-play unplayed messages **053 Keep messages 055 Discard messages**

057 Play saved messages in FIFO order

059 Play unplayed messages first

## Hotel Guest: Basic

This FCOS is designed for hotel or motel environments, and has fewer features than FCOS 3 (Restricted). It provides basic play, keep, and discard capabilities and results in the simplest, most user-friendly menus for guests. Mailboxes using this FCOS require no passcodes, recorded names, or personal greetings. You can use this FCOS with a PMS integration or with NuPoint Voice alone. When using this FCOS, disable the passcode and user tutorial in the mailbox, and at the Temporary Passcode prompt, enter 0000.

You can create the Hotel Guest: Basic FCOS with the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

006 Rewind and fast-forward during playback

008 Mailbox can be checked in/out

009 Automatic logout if no messages/receipts

016 Deny recycling with \* key

040 Receive messages from other users

041 Receive messages from outside callers **050 Play messages**

052 Auto-play unplayed messages **053 Keep messages 055 Discard messages**

057 Play saved messages in FIFO order

058 Play unplayed messages in FIFO order

059 Play unplayed messages first

122 Define broadcast mailbox

123 Announce broadcast mailbox name

## Broadcast

With this FCOS, both system users and outside callers can send a single message to multiple users.

You can create the Broadcast FCOS with the following required and optional feature bits:

### Required Features

001 Login to mailbox

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist list messages

045 Receive master dist list messages

### Optional Features

070 User Options Menu

071 Record or change mailbox name

073 Enter and change mailbox passcode

074 Create or modify user distribution list

122 Define broadcast mailbox

123 Announce broadcast mailbox name

**Note:** Feature bit 043 (Receive message of the day) is needed only if the broadcast mailbox is also the user's only mailbox. You can use other feature bits with broadcasting. They are not included in the Broadcast FCOS definition, but you can add or substitute them in a custom FCOS. See the [feature bit descriptions](#) for more information on these capabilities:

- 134 (Broadcast message waiting status)
- 174 (Define broadcast greeting mailbox)
- 178 (Define broadcast name mailbox)

### Administrator's "No Login" Class of Service

This FCOS allows you to set up the administrator's mailbox to record company greetings and compile master distribution lists, and to prevent unauthorized access. The No Login FCOS is a copy of the FCOS 10 (VIP), but without feature bit 001 (Login to mailbox). Initially, assign the VIP FCOS to the administrator's mailbox. After you record company greetings and compile master lists, change the FCOS to No Login to prevent unauthorized use of the administrator's mailbox. You can switch the FCOS back to VIP whenever you need to access the administrator's mailbox again.

## 1.2.4.1.4 Customizing FCOS

There are two ways to create customized FCOS selections if you need to apply special features to mailboxes. You can:

- copy an existing default FCOS, rename it, re-number it, and add or delete feature bits as required

OR

- create a new FCOS from scratch

**Note:**

We recommend that you do NOT modify the default FCOS selections for two reasons:

1. When you modify an FCOS already assigned to a mailbox, all mailboxes with that FCOS behave according to the new definition, and
2. You may need to restore a default FCOS to help in troubleshooting a problem.

Use an [FCOS Worksheet](#) and the guidelines in this section to design a customized FCOS. To customize an FCOS, you can either copy a default FCOS or create a new FCOS. If you copy an FCOS, you start with a copy of an existing FCOS, then add or delete the required feature bits. Give this copy a new name and new FCOS number; for example, “10-NoLogin,” if the new FCOS is a copy of FCOS 10 (VIP) without feature bit 001. Although creating a new FCOS gives the experienced system administrator the maximum flexibility to customize call processing, this is the more complex option. Be aware that not all feature bits are compatible. For more information, see [Suggested Additional FCOS](#), [Feature Bits by Category](#) and [Feature Bit Descriptions](#) in this chapter.

## COS Interactions

When you assign an FCOS, a Limits Class of Service (LCOS), and a Group Class of Service (GCOS) to a mailbox, certain options interact within and between each class of service. Some options require the presence of other options, and some combinations are not compatible. For more information see Other Classes of Service. Carefully analyze the intended function of each mailbox before you begin assigning classes of service.

Keep the following interactions in mind:

- The LCOS that you assign can affect the function of an FCOS feature. *For example:* If you give a mailbox the ability to receive user messages (feature bit 040), but you assign an LCOS with a User Message Length limit of 0 seconds, the mailbox will be unable to store an unplayed (or played) user message.
- Interaction between mailboxes is limited by the GCOS that you assign to each mailbox when it is created and by the FCOS assigned to other mailboxes within this GCOS. *For example:* If an FCOS allows a user to make private messages (feature bit 023), other users within the same GCOS must be able to receive messages from other

users (feature bit 040) and to play confidential messages (feature bit 051); otherwise, the make private message feature is ineffective.

**Note:** When you create a COS using the Web console, you must provide a name for it. When you are using the Text console, however, you can create a COS with no name. Since the Web console does not allow you to view or edit an unnamed COS, you must use the Text console to modify (or name) any unnamed COS.

## FCOS

Some features require a master feature bit in an FCOS, and some feature bits override others within the same FCOS. See [Feature Bit by Category](#) and [Feature Bit Descriptions](#).

## LCOS

The LCOS that you assign to each mailbox can affect how a feature functions. For example, if you assign an FCOS that allows a mailbox to make messages (feature bit 020), but you assign an LCOS with a User Message Length limit of 0 seconds, the mailbox user cannot record a message.

## GCOS

The GCOS that you assign to each mailbox limits interaction between mailboxes. A user in one GCOS may not be able to receive any messages from a user in another GCOS, regardless of the FCOS. Also, the FCOS for the other mailboxes within one GCOS can affect mailbox interaction. For example, if an FCOS allows a user to make confidential messages (feature bit 023), the other users within the same GCOS must be able to receive messages (feature bit 040) and play messages (feature bit 050).

## FCOS Worksheet

When you are familiar with the features you can add to an FCOS, use the FCOS and Feature Bit Descriptions in this section as a basis for completing your FCOS Worksheet. Fill in an FCOS number ("FCOS to modify") and name, and indicate if it is based on an existing FCOS ("FCOS to copy"). Circle all feature bits you wish to include. If you are including all the feature bits in a category, just circle the category name. Assign any number from 18-20 or 25-640 to your FCOS, and any name that helps you easily identify it. Complete one worksheet for each FCOS you design. Keep your completed sheets for future reference.



**Note:**

FCOS information is stored in blocks of 64 FCOS per OAA record. To save disk space, use all FCOS from 1 to 64 before using higher numbers. Then use 65 to 128, and so forth. You probably will not use all categories listed. For any categories you do use, be sure to include the master feature bits, those feature bits that enable other feature bits within the same category.

## 1.2.4.1.5 Procedures (Web Console)

### 1.2.4.1.5.1 Managing FCOS

- [Add an FCOS](#)
- [Edit an FCOS](#)
- [Delete an FCOS](#)
- [Assign a new FCOS to a Mailbox](#)
- See [FCOS Field Descriptions](#)

#### Add an FCOS

1. In the navigation tree, click Class of Service, and then click Feature COS. The Feature COS list is displayed.
2. Click Add. The Add FCOS form is displayed.
3. Do one of the following:
  - Copy an existing FCOS by selecting one from the list and clicking the **Copy from** button. The parameters of that FCOS will be copied into your new FCOS, which you can then edit as required. The Next Available FCOS number is automatically applied.

OR

  - Chose to manually select the feature bits for the new FCOS. In the **Number** field, enter a **number** for this FCOS, or click **Next Available** to automatically assign the next number.
4. In the **Name** field, enter a **name** (up to 15 alphanumeric characters) for this FCOS.
5. By default, the **Category** list displays a sorted list of all feature bits. If you know what category contains the feature bits you want to enable, you can expand the Category list and select the category. Only the feature bits that apply to that category appear.
6. In the **Display** section, you can select how you want to display the available feature bits (All, Checked, Unchecked).
7. Select the check box beside each feature bit that you want to enable for this FCOS. Clear a check box to disable the feature. See [FCOS Fields Description](#) in the table below for information.

8. Repeat steps 5 to 7 for additional categories, if required.
9. To save the FCOS and return to the Features COS list, click Save.

### **Edit an FCOS (Customize)**

Best practices for troubleshooting dictate that you always keep your default FCOS settings intact. If you need to modify an FCOS, we suggest that you copy the most appropriate of the default FCOS into a new FCOS (see "Add an FCOS" above) and modify it there. After you save the new FCOS, you need to assign it to the appropriate mailboxes. If you have problems/conflicts with the new COS, you can always restore the default COS until you have finished troubleshooting.

### **Delete an FCOS**

Deleting an FCOS that is in use by mailboxes will cause all of those mailboxes to be assigned the default (1) FCOS. A warning message will be displayed to allow you to cancel the operation. If you are deleting the default FCOS, the mailboxes that have it assigned will automatically be assigned the next available FCOS. You cannot delete the last remaining FCOS in the system; therefore, you cannot select all FCOS for deletion.

To delete one or multiple FCOS:

1. In the Feature COS list, select one or multiple FCOS, and then click Delete. The system will prompt you to confirm the deletion.
2. To confirm the deletion, click Yes to delete a single FCOS or Yes to all to delete all selected FCOS.

OR

To reject the deletion, click No.

### **Assign a New FCOS to a Mailbox**

- Follow the procedure to [edit a mailbox](#) and when instructed to edit mailbox parameters, enter the new FCOS on the Class of Service tab.

## FCOS Fields Descriptions

| Field  | Description                                                                                                                                                                                                                                                                             | Values                                                                                                                                                |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number | <p>*Required field.</p> <p>Determines the number of the new FCOS. You can manually enter a number from 1-640 as long as it is not already assigned to an FCOS. You can also click the <b>Next Available</b> button to have the system assign the next available number to the FCOS.</p> | <p>Enter a number in the range of 1-640. The number must not be already used for an existing FCOS. Or click the "Use next available number" link.</p> |
| Name   | <p>*Required field. This is the name of the FCOS. (Note: You can create unnamed FCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed FCOS, use the Text console to name it.)</p>                                                      | <p>Maximum 15 alphanumeric characters.</p>                                                                                                            |

| Field    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Values                                      |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Category | <p>Allows you to filter the list of features for easier selection. The categories are:</p> <ul style="list-style-type: none"> <li>• Greeting Features</li> <li>• Login Features</li> <li>• Logout Features</li> <li>• Attendant Call Features</li> <li>• Outside Caller Features</li> <li>• Prompts Features</li> <li>• Receive Messages Features</li> <li>• Play Messages Features</li> <li>• Answer Messages Features</li> <li>• Keep or Discard Messages Features</li> <li>• Make Messages Features</li> <li>• Give Messages Features</li> <li>• Message Addressing Features</li> <li>• User Options</li> <li>• User Distribution Lists Features</li> <li>• Master Distribution Lists Features</li> <li>• Check-In./Check-out</li> <li>• Super User Features</li> <li>• Message Waiting Indicator Features</li> <li>• NP-UM Fax Features</li> <li>• Paging and Message Delivery Features</li> <li>• Voice Gateway and E-mail Features</li> <li>• Network and NP-UM Forms</li> <li>• NP View Features</li> <li>• ISO User Interface Features</li> <li>• Short Message Service Features</li> </ul> | Select a category (see Description column). |

| Field                    | Description                                                                                                                                                                                                                                                                           | Values                                    |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Display                  | Allows you to choose how to display the feature bits that are displayed for the category you have selected. You can choose to display all the feature bits (both checked and unchecked), only the selected (checked) bits, or only the cleared bits.                                  | Select either All, Checked, or Unchecked. |
| Feature bit display area | This area displays the feature bits for the Category you have selected above and filtered with the Display settings. Select the check boxes beside the feature bits that you want to enable for the FCOS. Clear the boxes for the feature bits that you want to disable for the FCOS. | (Variable. See Description.)              |

## 1.2.4.1.6 Procedures (Text Console)

### 1.2.4.1.6.1 Customize Your FCOS

When you are ready to customize an FCOS, use the FCOS and feature bit descriptions in this section to complete the [FCOS Worksheet](#).

#### Modify a Copy of an Existing FCOS:

1. Select the existing FCOS that you want to use as a basis for your customized FCOS.
2. Complete an [FCOS Worksheet](#).
3. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (F) Feature COS**.

#### Note:

You can quit at any point in the following steps before you exit the Feature Class of Service Menu. Quitting discards all entries you have made and leaves the FCOS settings the way they were before you reached the Feature Class of Service Menu. To quit, select (Q) Quit - Forget Changes from the Feature COS menu.

4. Select **(C) Current FCOS** and enter a **number** for your customized FCOS (18-20 or 25-640).
5. Select **(N) Name FCOS** and enter a descriptive **name** for the customized FCOS.
6. Select **(K) Copy FCOS** and enter the number of the FCOS you want to use as the basis for your customized FCOS. A copy of this FCOS is created and given the number and name you assigned above.

7. To add feature bits to the customized FCOS, select **(A) Add Features** OR to delete feature bits, select **(D) Delete Features** and enter feature bits in the following format:
  - a single bit, for example: 208
  - a range of bits, for example: 202-208
  - a series of bits, for example: 39,40,207,208
  - a mixed entry, for example: 37, 49, 52-72, 201,202 (do not enter spaces after commas and do not end the entry with a comma)
8. To verify that the information you have entered is correct, select **(S) Show FCOS** and enter the **number** of the customized FCOS version.
9. After verification, save the customized FCOS by exiting from the FCOS menu.

## Create a New FCOS

To customize an FCOS by creating a new one:

1. Complete an [FCOS Worksheet](#).
2. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(F) Feature COS**.
3. Select **(C) Current FCOS** and enter a **number** for your new FCOS (18-20 or 25-640).
4. Select **(N) Name FCOS** and enter a descriptive **name** for the new FCOS.
5. Select **(A) Add Features** and enter the feature bits that comprise the new FCOS in the following format:
  - a single bit, for example: 208
  - a range of bits, for example: 202-208
  - a series of bits, for example: 39,40,207,208
  - a mixed entry, for example: 37, 49, 52-72, 201,202 (do not enter spaces after commas and do not end the entry with a comma)
6. To verify that the information you have entered is correct, select **(S) Show FCOS** and enter the **number** of the customized FCOS version.
7. After verification, save the new FCOS by exiting from the FCOS menu.

### 1.2.4.1.6.2 Assign an FCOS to a Mailbox

The steps below assume you have already chosen the default FCOS desired or have already customized an FCOS.

To assign an FCOS to a new or existing mailbox:

1. From the Main Menu, select **(M) Mailbox maintenance**.

2. Select **(C) Create New Mailboxes** and enter the *number* of the new mailbox you want to configure.

OR

Select **(M) Modify Mailboxes** to modify an existing mailbox.

**Note:**

Prompts are almost the same for creating a new mailbox and modifying an existing one, except that "New" precedes a prompt when you select Modify Mailboxes.

1. Press **Enter** until the **Feature Class of Service** or **New FCOS** prompt appears.
2. Enter the **number** (1-640) of the FCOS that will govern this mailbox. The default value is 1. Press **?** for a list of defined FCOS. If you are modifying a mailbox, the FCOS you just entered replaces the existing FCOS.
3. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number. At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.2.4.1.6.3 Add or Delete Feature Bits for an Existing FCOS

It is possible to add or delete feature bits from an existing FCOS, however, we recommend that you do NOT use this as a method of customizing an FCOS. This procedure should only be used to make **global** changes to an existing customized FCOS. Do not add or delete feature bits to a default FCOS - customize an FCOS instead.

Example 1:

All Sales users have custom FCOS 97. You are asked to add feature bit **200 Personal Fax Cover Page** to ALL users who have FCOS 97. In this case, you can add the feature bit to the existing FCOS because ALL users will be affected.

Example 2:

All Sales and Security mailboxes have custom FCOS 92. You are asked to update only the **Sales** mailboxes so that user passcodes are optional, so you'll need to add feature bits 70, 73, and 125. If you add these bits to the FCOS, then ALL mailboxes, (including Security mailboxes), are given the optional passcode feature. In this case, you

would copy FCOS 92, re-number it, add the new bits to it, and then apply it to the Sales mailboxes.

To add/delete feature bits to an existing customized FCOS:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (F) Feature COS**.
2. Select **(C) Current FCOS** and enter the **number** of the customized FCOS you want to modify.
3. Select **(A) Add Features** OR to delete feature bits, select **(D) Delete Features** and enter feature bits in the following format:
  1. • a single bit, for example: 208
  - a range of bits, for example: 202-208
  - a series of bits, for example: 39,40,207,208
  - a mixed entry, for example: 37, 49, 52-72, 201,202 (do not enter spaces after commas and do not end the entry with a comma)
1. After confirming that additions and/or deletions are correct, exit from the Feature Class of Service Menu to save changes.

#### 1.2.4.1.6.4 View FCOS Information

To display summary and detailed lists of FCOS, FCOS bits, and bit descriptions:

##### To View a Summary of FCOS

You can view FCOS summary information through the System Configuration Menu or the Reports Menu. A summary consists of the FCOS name, its number, and the numbers of the feature bits in the FCOS. FCOS are numbered from 1 to 640.



**Sample Summary Report:**

## FEATURE CLASS OF SERVICE

Mon Oct 26 14:36:08 20XX

FCOS: Basic : 1

001 002 003 004 005 006 007 015 017 018 019 020 021 022 023 024 025 026 027  
028029 030 031 032 033 034 035 036 038 040 041 043 044 045 046 047 050 053 055  
058059 061 066 070 071 072 073 074 075 076 077 078 082 083 084 085 086 087 088  
092094 095 096 098 110 124 126 130 132 143 145 147 153 157 158 161 162 169 201 204  
215 227

FCOS: CentrexCD 15.00 : 2

001 002 003 004 005 006 007 015 018 019 020 021 022 023 024 025 026 027 028  
029030 031 032 033 034 035 036 038 040 041 043 044 045 046 047 050 053 055 058  
059061 066 070 071 072 073 074 075 076 077 078 082 083 084 085 086 087 088 092  
094

095 096 098 110 124 125 126 161 201 204 215 227 292

**System Configuration Menu**

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(F) Feature COS**.

2. **Select (S) Show FCOS** and enter your choice of summary in one of the formats shown below.

- A single FCOS **number**, for example 10
- A range of FCOS **numbers**, for example 1-6
- A series of FCOS **numbers**, for example, 1,4,5,12
- **A** for a summary of all FCOS
- **E** for a summary of even-numbered FCOS
- **O** for a summary of odd-numbered FCOS
- **L** for a summary of the lower half of FCOS
- **U** for a summary of the upper half of FCOS

### ***Reports Menu***

1. From the Main Menu, select **(R) Reports**.

2. Select **(F) FCOS**.

3. At the output routing prompt, select one of the following:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills,
- **F** to send the report to a file on the server,
- **A** to append the report to an existing file on the server, or
- **X** to exit report output options (no report)

### **To View a Description of FCOS**

This report consists of the FCOS name, its number, and a description of each feature bit in the FCOS.

FCOS: CHECK IN : 4

001 Login to mailbox

004 Outside caller functions

005 Play outside caller menu prompts

066 Login during greeting in greet-only mbx

070 User options menu

071 Record or change mailbox name

072 Record or change mailbox greeting

090 Check in other mailboxes

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(F) Feature COS**.
2. Select **(R) Report FCOS** and enter your choice of summary in one of the formats shown below.
  - A single FCOS **number**, for example 10
  - A range of FCOS **numbers**, for example 1-6
  - A series of FCOS **numbers**, for example, 1,4,5,12
  - **A** for a summary of all FCOS
  - **E** for a summary of even-numbered FCOS
  - **O** for a summary of odd-numbered FCOS
  - **L** for a summary of the lower half of FCOS
  - **U** for a summary of the upper half of FCOS

### To View a Description of All Feature Bits

To list all feature bits in numerical order, with a one-line description of each feature bit:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(F) Feature COS**.
2. Select **(H) Help FCOS**.

## 1.2.4.1.7 Feature Bits by Category

### 1.2.4.1.7.1 Feature Bits by Category - Overview

The following pages summarize all feature bits according to category (as presented in the Web Console). The category numbers are not used for FCOS configuration input, but are provided for reference when designing an FCOS.

Master feature bits appear in bold type. Not all categories have master feature bits. Some feature bit categories require optional feature software, which is described in the summary for each category. Other categories require optional feature software for specific feature bits, only. This is noted by an asterisk (\*) at the beginning of the feature bit description. Certain feature bits require that a recipient's mailbox contain "message receiving feature bits," such as those listed under Category 7. Those feature bits are listed beside the required feature bits for making and sending messages. Refer to the [Feature Bit Descriptions](#) section for detailed information about each feature bit.

### 1.2.4.1.7.2 Category 1: Greeting Feature Bits

These feature bits control events that occur during or immediately after the mailbox greeting is played.

To allow the mailbox user to record the mailbox greeting, the FCOS must also contain the following feature bits:

- 070 (User Options Menu)
- 072 (Record or change mailbox greeting)

| Bit | Description                                  | Required | Incompatible  |
|-----|----------------------------------------------|----------|---------------|
| 060 | Ignore DTMF's during greeting                |          | 164           |
| 062 | Hang up immediately after greeting           |          | 063, 064, 065 |
| 063 | Call mailbox attendant after greeting        |          | 062, 064      |
| 064 | Call mailbox user extension after greeting   |          | 062, 063      |
| 065 | Play system time after greeting              |          |               |
| 161 | Conditional greetings                        | 070      |               |
| 162 | General greetings                            | 070      |               |
| 164 | Skip/pause greeting in greeting only mailbox | 062      | 060           |
| 224 | *Auto transfer to task before greeting       | 170      |               |
| 297 | Enable Extended Absence Greeting             | 161      |               |

| Bit | Description                                                        | Required | Incompatible |
|-----|--------------------------------------------------------------------|----------|--------------|
| 298 | Disable Message Delivery when Extended Absence Greeting is Enabled | 297      | 133          |

### 1.2.4.1.7.3 Category 2: Login Feature Bits

These feature bits control processing when a user logs into a mailbox.

**Note:** Zero is an acceptable login character for a line group only when the Configuration Report shows “Key 0 for transfer to attendant during greeting = [N].”

| Bit     | Description                                 | Required   | Incompatible |
|---------|---------------------------------------------|------------|--------------|
| 001     | Login to mailbox                            |            |              |
| 016     | Deny recycling with * key                   |            |              |
| 066     | Login during greeting in greet-only mailbox |            |              |
| 069     | Passcode required for mobile DID            |            |              |
| 081     | Only one correct passcode needed for log in |            |              |
| 101-109 | Deny login on line groups 1-9               |            |              |
| 132     | Bad passcode lockout if over limit          |            |              |
| 151     | Deny 333 access from mobile DID             |            |              |
| 152     | Deny login within tree                      | 121        |              |
| 156     | Deny login after greeting                   |            |              |
| 160     | Caller must enter line group access code    |            |              |
| 165     | Pound key (#) login                         |            |              |
| 218     | Passcode not needed on direct calls         |            |              |
| 219     | Login in with 0 using cut through paging    | 171 or 172 |              |
| 225     | *Auto transfer to task upon login           | 170        |              |

### 1.2.4.1.7.4 Category 3: Logout Feature Bits

These feature bits control exiting a mailbox. If users can log in, they automatically can log out, either by pressing X, by hanging up, or by not responding to repeated system prompts.

| Bit | Description                                     | Required      | Incompatible |
|-----|-------------------------------------------------|---------------|--------------|
| 003 | Return to welcome prompt                        |               |              |
| 009 | Automatic Logout if no messages/receipts        | 052 or 089    |              |
| 170 | *Transfer to Email System                       | 004, 005, 176 |              |
| 220 | No dial extension or Email if unplayed messages | 170           |              |
| 283 | Say number of unplayed messages on last logout  |               |              |

### 1.2.4.1.7.5 Category 4: Attendant Call Feature Bits

These feature bits control the process to reach an attendant. They allow the user or caller to call the mailbox attendant while logged into the mailbox, such as by pressing 0 (zero).

| Bit | Description                             | Required | Incompatible |
|-----|-----------------------------------------|----------|--------------|
| 002 | Transfer to mailbox attendant           | 004      |              |
| 013 | Operator Transfer via "6" key           |          |              |
| 098 | Say "Press 0" to caller before beep     |          |              |
| 159 | Say "Press 0 to return to Receptionist" |          |              |

### 1.2.4.1.7.6 Category 5: Outside Caller Feature Bits

These feature bits control the prompts and privileges that allow outside callers to review, discard, and append to their messages. This category also contains feature bits that require a caller to enter an access code before leaving a message.

| Bit | Description                                | Required      | Incompatible |
|-----|--------------------------------------------|---------------|--------------|
| 002 | Transfer to mailbox attendant              |               |              |
| 004 | Outside caller functions (Master)          | 041           |              |
| 005 | Play outside caller menu prompts           | 004, 041, 088 | 213          |
| 017 | Fast line release from outside caller      |               |              |
| 041 | Receive messages from outside callers      |               | 068, 121     |
| 051 | Do not switch language for outside callers |               |              |

| Bit     | Description                                       | Required | Incompatible |
|---------|---------------------------------------------------|----------|--------------|
| 092     | User will be in dial-by-name database             |          |              |
| 098     | Say "Press 0" to caller before<br><br>beep        |          |              |
| 111-119 | Deny message receipt on line groups 1-9           |          |              |
| 137     | Caller must enter access code                     |          |              |
| 160     | Caller must enter line group access code          |          |              |
| 176     | Say "Press pound [#] for more options" to callers | 004, 005 |              |
| 203     | *Walkaway fax for callers                         |          |              |
| 198     |                                                   |          |              |
| 221     | Deny caller transfer to Email                     | 170      | 176          |
| 279     | Enable TollSaver for out sider leaving message    |          |              |

### 1.2.4.1.7.7 Category 6: Prompts Feature Bits

Prompts feature bits allow the user to interrupt (soft play) prompts and to modify the prompts that the user hears. Also, these feature bits affect some NP Receptionist prompts.

| Bit | Description                                                    | Required | Incompatible |
|-----|----------------------------------------------------------------|----------|--------------|
| 051 | Do not switch language for outside callers                     |          |              |
| 082 | Soft play (interrupt) message count                            |          |              |
| 083 | Soft play (interrupt) most prompts                             |          |              |
| 097 | *Do not say "I will ring (recipients name)" in NP Receptionist |          |              |
| 098 | Say "Press 0" to caller before beep                            |          |              |
| 131 | Don't say limits of liability statement                        |          |              |
| 133 | Don't say "You may start your msg. now"                        | 004, 041 |              |
| 136 | Don't say "End of message"                                     | 050      |              |

| Bit | Description                                                                                                 | Required          | Incompatible  |
|-----|-------------------------------------------------------------------------------------------------------------|-------------------|---------------|
| 138 | Don't say "Message complete"                                                                                | 020               |               |
| 140 | Say full date when playing messages                                                                         | 050               | 048, 049, 204 |
| 146 | Don't say "NuPoint Voice storage is full"                                                                   |                   |               |
| 157 | Repeat message for a answering machine                                                                      |                   |               |
| 159 | Say "Press 0 to return to Receptionist"                                                                     |                   |               |
| 163 | *Don't play message count                                                                                   |                   |               |
| 176 | *Say "Press pound [#] for more options" to callers                                                          | 004, 005          |               |
| 202 | Do not play mailbox name or extension number                                                                | 020               |               |
| 208 | *Play reorder tone after CTP or greet-only                                                                  | 171 or 172 or 062 |               |
| 209 | Tone only pager mailbox interface                                                                           |                   |               |
| 210 | Numeric display pager mailbox interface                                                                     |                   |               |
| 211 | Voice pager mailbox interface                                                                               |                   |               |
| 283 | Say number of unplayed messages on last logout                                                              |                   |               |
| 299 | Allow choice of unplayed or saved messages during playback                                                  |                   |               |
| 301 | Enable "Press # when you are finished recording" prompt to make, forward, or answer a message for a mailbox |                   |               |

### 1.2.4.1.7.8 Category 7: Receive Messages Feature Bits

These feature bits control processing of messages the user can and cannot receive, as well as notification of the arrival of new messages. Several message sending capabilities require one or more of these feature bits in a recipient's mailbox in order for messages to send properly.

| Bit | Description                                | Required | Incompatible |
|-----|--------------------------------------------|----------|--------------|
| 039 | Notification tone when new message arrives |          | 047          |
| 040 | Receive messages from other users          |          |              |



| Bit     | Description                                         | Required                 | Incompatible |
|---------|-----------------------------------------------------|--------------------------|--------------|
| 041     | Receive messages from outside callers               |                          | 68, 121      |
| 043     | Receive message of the day                          |                          |              |
| 044     | Receive user distribution list messages             | 040                      |              |
| 045     | Receive master distribution lists messages          | 040                      |              |
| 046     | Announce receipt count at login                     | 050                      |              |
| 047     | Notification prompt when new msg arrives            |                          | 039          |
| 088     | Receive urgent messages                             |                          |              |
| 111-119 | Deny message receipts on line groups 1-9            |                          |              |
| 127     | Deny receipt of messages before tutorial run        | 070; 040 and/or 041      |              |
| 173     | *Receive cut-through page notify receipt            | 070, 075, and 171 or 172 |              |
| 175     | Receive broadcast greeting                          | 161, 162                 |              |
| 179     | Receive broadcast name                              |                          |              |
| 185     | *Receive wake-up call notification receipt          | 015, 070                 |              |
| 190     | *Receive fax messages                               | 040 or 041               |              |
| 198     | *Receive fax messages only                          | 190                      |              |
| 199     | *Auto-receipt for fax send                          | 020, 070, 095, 190       |              |
| 223     | Delay requested receipt for 24 hours                | 020, 021, 050            |              |
| 241     | Suppress broadcast forced receipt number            |                          |              |
| 279     | Enable TollSaver for outside caller leaving message |                          |              |
| 286     | To allow Mailbox to accept calls without charge     |                          |              |

### 1.2.4.1.7.9 Category 8: Play Messages Feature Bits

Play Messages feature bits control processing when the user plays messages. This category also contains notification, time stamp, confidential and/or urgent, and order-of-play feature bits.

| Bit | Description                                | Required                 | Incompatible  |
|-----|--------------------------------------------|--------------------------|---------------|
| 006 | Rewind and fast forward during playback    | 050                      |               |
| 007 | Pause in record or play                    | 020 or 050 or 024 or 029 |               |
| 039 | Notification tone when new message arrives |                          | 047           |
| 046 | Announce receipt count at login            | 050                      |               |
| 047 | Notification prompt when new msg arrives   |                          | 039           |
| 048 | No auto-time stamp of unplayed msgs        | 050                      |               |
| 049 | No auto-time stamp of played msgs          | 050, 053                 |               |
| 050 | Play messages (Master)                     |                          |               |
| 052 | Auto-play unplayed messages                | 050                      | 089, 227      |
| 057 | Play saved messages in FIFO order          | 050, 053                 |               |
| 058 | Play unplayed messages in FIFO order       | 050                      |               |
| 059 | Play unplayed messages first               | 050, 053                 |               |
| 075 | Audit receipt message                      | 050                      |               |
| 076 | Play urgent messages in FIFO order         | 050, 088                 |               |
| 089 | Auto-play all msgs (new and saved)         | 050, 053                 | 052, 227      |
| 144 | Skip forward to next message               |                          | 048, 049, 204 |
| 145 | Message stays in original queue            |                          |               |
| 147 | Send receipt after full play               | 145                      |               |
| 153 | Don't jump to new message from saved queue | 050, 053, and 039 or 047 |               |
| 163 | Don't play message count                   |                          |               |
| 204 | Message skip, forward and backward         |                          | 048, 049, 144 |
| 215 | Don't auto-play first msg (w/autoplay)     | 050, and 052 or 089      |               |
| 216 | Play receipts after urgent messages        | 050, 088                 |               |
| 255 | Delete mailbox without unplayed messages   | 041, 050                 |               |
| 305 | Do not play back the message Caller ID     | 050                      |               |

| Bit | Description                  | Required | Incompatible |
|-----|------------------------------|----------|--------------|
| 306 | Play back Caller ID after ID | 050      | 305          |

### 1.2.4.1.7.10 Category 9: Answer Message Feature Bits

This category controls the Answer function, including attach-message feature bits. Answer messages feature bits allow the user to directly answer messages from other users. For information about marking an answer “confidential,” and activating a return receipt for the answer, see Message Addressing, Category 13.

| Bit | Description                       | Required          | Incompatible |
|-----|-----------------------------------|-------------------|--------------|
| 019 | Answer and mark urgent            | 029, 040          |              |
| 029 | Answer messages (Master)          |                   |              |
| 030 | Answer and request receipt        | 029, 040          |              |
| 031 | Answer and mark confidential      | 029, 040          |              |
| 038 | Attach original message to answer | 029               |              |
| 147 | Send receipt after full play      | 145               |              |
| 158 | Continue sending message          | 020 or 024 or 029 |              |
| 270 | Enable Dial-back feature          | 263, 264, 280     |              |

### 1.2.4.1.7.11 Category 10: Keep or Discard Messages Feature Bits

These feature bits control options for keeping and discarding messages after users play them. Include feature bit 050 (Play messages) for all keep and discard options. Include 053 (Keep messages) and/or 055 (Discard messages) for any mailbox that can receive messages; otherwise, the user cannot play more than one message during a single session.

| Bit | Description                      | Required | Incompatible  |
|-----|----------------------------------|----------|---------------|
| 053 | Keep messages (Master)           | 050      |               |
| 054 | Auto-keep messages               | 050, 053 | 056           |
| 055 | Discard messages (Master)        | 050      |               |
| 056 | Auto discard messages            | 050, 055 | 054, 227      |
| 145 | Message stays in original queue  |          |               |
| 227 | Undelete last message with * key | 050, 055 | 052, 056, 089 |

### 1.2.4.1.7.12 Category 11: Make Messages Feature Bits

These feature bits allow a user to record (Make) a message and send it to one or more users. This category also contains two feature bits for timing. Message Addressing, Category 13, controls marking messages “confidential,” and activating return receipts for the messages.

| Bit | Description                                | Required          | Incompatible |
|-----|--------------------------------------------|-------------------|--------------|
| 020 | Make messages (Master)                     | 040               |              |
| 021 | Make and request receipt                   | 020, 040          |              |
| 022 | Make to multiple destinations              | 020, 040          |              |
| 023 | Make and mark confidential                 | 020, 040          |              |
| 032 | Make to user distribution list             | 020, 040, 044     |              |
| 034 | Make to master distribution list           | 020, 040, 045     |              |
| 061 | Wait to record                             | 022 or 026        |              |
| 087 | Make and mark urgent                       | 020, 040          |              |
| 092 | User will be in Dial-by-Name database      |                   |              |
| 096 | Make messages before keep/discard          | 020, 040          |              |
| 110 | Make/give to telephone number              | 020, 024, 040     |              |
| 126 | Make/give to mailbox with empty GCOS       | 020, 040, 041     |              |
| 157 | Repeat message from answering machine      | 110               |              |
| 158 | Continue sending message                   | 020 or 024 or 029 |              |
| 171 | Cut-through Paging                         | 070               |              |
| 172 | Cut-through Paging and messaging           | 070               |              |
| 188 | Append # to end of cut-through page number | 070, 171 or 172   |              |
| 191 | Make fax messages                          | 020               |              |

### 1.2.4.1.7.13 Category 12: Give Messages Feature Bits

These feature bits control processing when users forward messages to single or multiple users, with or without additional comments. This category also contains receipt feature bits. This category does not allow users to send or broadcast messages marked “confidential.”

| Bit | Description                                   | Required          | Incompatible |
|-----|-----------------------------------------------|-------------------|--------------|
| 018 | Give and mark urgent                          | 024, 040          |              |
| 024 | Give messages (Master)                        | 040               |              |
| 025 | Give and request receipt                      | 024, 040          | 036          |
| 026 | Give to multiple destination                  | 024, 040          | 036          |
| 027 | Give and mark confidential                    | 024, 040          |              |
| 028 | Give with comments                            | 024, 040          |              |
| 033 | Give to user distribution list                | 024, 040, 044     |              |
| 035 | Give to master distribution list              | 024, 040, 045     |              |
| 061 | Wait to record                                | 022 or 026        |              |
| 084 | Give receipt message with comments            | 040, 075, 086     |              |
| 085 | Give receipt message to multiple destinations | 024, 040, 086     |              |
| 086 | Give receipt message (Master)                 | 040               |              |
| 110 | Make/give to telephone number                 | 020 or 024, 040   |              |
| 126 | Make/give to mailbox with empty GCOS          | 020, 040          |              |
| 157 | Repeat message for a answering machine        | 110               |              |
| 158 | Continue sending message                      | 020 or 024 or 029 |              |
| 192 | Give fax messages                             | 024, 190          |              |

### 1.2.4.1.7.14 Category 13: Message Addressing Feature Bits

These feature bits control processing after a user makes, gives, or answers a message. They allow a user to make a message confidential, to make a message urgent, to request a return receipt, or to set future delivery.

| Bit | Description                | Required | Incompatible |
|-----|----------------------------|----------|--------------|
| 018 | Give and mark urgent       | 024, 040 |              |
| 019 | Answer and mark urgent     | 029, 040 |              |
| 021 | Make and request receipt   | 020, 040 |              |
| 023 | Make and mark confidential | 020, 040 |              |
| 025 | Give and request receipt   | 024, 040 |              |
| 027 | Give and mark confidential | 024, 040 |              |
| 030 | Answer and request receipt | 029, 040 |              |

| Bit | Description                              | Required | Incompatible |
|-----|------------------------------------------|----------|--------------|
| 031 | Answer and mark confidential             | 029, 040 |              |
| 087 | Make and mark urgent                     | 020, 040 |              |
| 095 | Mark message for future delivery         | 020, 040 |              |
| 284 | Provide Callback Number Delivery Options |          |              |

### 1.2.4.1.7.15 Category 14: User Options Feature Bits

These feature bits, some of which require optional feature software, allow users to reach the User Options menu and record names and greetings, set passcodes, make distribution lists, activate the user tutorial, allow a pager, and activate NP WakeUp.

| Bit | Description                                  | Required                | Incompatible |
|-----|----------------------------------------------|-------------------------|--------------|
| 015 | *Change wakeup options                       | 070                     | 287          |
| 070 | User Option Menu (Master)                    |                         |              |
| 071 | Record or change mailbox name                | 070                     |              |
| 072 | Record or change mailbox greeting            | 070                     |              |
| 073 | Enter or change mailbox passcode             | 070                     |              |
| 074 | Create or modify user distribution list      | 032 and/or 033, and 070 |              |
| 077 | Change pager schedule                        | 070                     |              |
| 078 | Activate user tutorial                       | 070                     |              |
| 093 | Deny change of passcode in first tutorial    |                         |              |
| 094 | Change message delivery options              | 070                     |              |
| 095 | Mark message for future delivery             | 020, 040                |              |
| 124 | Change paging phone number                   | 070                     |              |
| 125 | Clear user passcode                          | 070, 073                |              |
| 127 | Deny receipt of messages before tutorial run | 040, 041, 070           |              |
| 130 | Passcode cannot be same as mailbox           | 070, 073                |              |
| 142 | Must run tutorial from own phone (SMDI)      | 070, 073, 093           |              |
| 143 | Change message delivery phone number         | 070                     |              |

| Bit | Description                                                                            | Required | Incompatible |
|-----|----------------------------------------------------------------------------------------|----------|--------------|
| 148 | *Change wakeup phone number                                                            | 015, 070 |              |
| 180 | Record personal wake up message                                                        |          |              |
| 195 | Specify fax delivery number                                                            |          |              |
| 196 | Change default fax number                                                              |          |              |
| 201 | Deny Trivial Passcode                                                                  |          |              |
| 242 | Save variable passcode prompts for business guest mailboxes                            |          |              |
| 249 | Allow Transfer to Help Desk during tutorial                                            |          |              |
| 287 | *Enhanced auto wakeup                                                                  |          | 015          |
| 289 | Enable UM - SMTP                                                                       | 161      |              |
| 290 | Enable UM - Web View                                                                   |          |              |
| 291 | Enable RAC (Record a call)                                                             |          |              |
| 292 | Enable NP Call Director                                                                |          |              |
| 293 | Disable the <Save> <Reply> and <Forward> buttons on the UM Standard Web View web pages |          |              |
| 294 | Enable the Mitel embedded player on the UM Standard Web View web pages                 |          |              |
| 300 | Enable secure tutorial                                                                 |          |              |

### 1.2.4.1.7.16 Category 15: User Distribution Lists Feature Bits

These feature bits allow a user to create and use distribution lists, which designate a group of mailboxes to send a single message to. A user distribution list can have up to 65,535 members. Each mailbox can have up to 99 distribution lists. User distribution lists can be used only by the user who is logged in to the mailbox where the list is stored.

| Bit | Description                             | Required                      | Incompatible |
|-----|-----------------------------------------|-------------------------------|--------------|
| 032 | Make to user distribution list          | 020, 040, 044                 |              |
| 033 | Give to user distribution list          | 024, 040, 044                 |              |
| 036 | Auto receipt for user distribution list | 020, 032 and/or 033, 040, 044 | 021, 025     |
| 044 | Receive user distribution list messages | 040                           |              |

| Bit | Description                             | Required                 | Incompatible |
|-----|-----------------------------------------|--------------------------|--------------|
| 074 | Create or modify user distribution list | 032 and/or 033, 070      |              |
| 134 | Broadcast message waiting status        | 040 and/or 044, 070, 074 | 122          |
| 222 | Deny nesting of distribution lists      | 070, 074                 |              |

### 1.2.4.1.7.17 Category 16: Master Distribution Lists Feature Bits

These feature bits allow the system administrator to create and use master distribution lists. They also allow a user to make messages for a Master List and to receive Master List messages. Master Distribution Lists are stored in the administrator's mailbox and designate groups of mailboxes that a user can send a single message to. Master distribution lists are available to any mailbox with the appropriate feature bits, listed below. There are 99 master lists available. Master distribution list numbers use two leading zeros. To address a message to master list 1, enter 001. For master list 99, enter 0099.

| Bit | Description                        | Required      | Incompatible |
|-----|------------------------------------|---------------|--------------|
| 034 | Make to distribution list          | 020, 040, 045 |              |
| 035 | Give to distribution list          | 024, 040, 045 |              |
| 045 | Receive distribution list messages | 040           |              |

### 1.2.4.1.7.18 Category 17: Check In/Check Out Feature Bits

These feature bits allow a hotel, motel, or telephone answering service (TAS) operator to set up mailboxes for a guest or client by recording a name or greeting, setting a passcode, or activating the tutorial. The operator can also clear messages after a guest or client leaves.

| Bit | Description                   | Required | Incompatible |
|-----|-------------------------------|----------|--------------|
| 008 | Mailbox can be checked in/out |          |              |
| 090 | Check in other mailboxes      | 008      |              |
| 091 | Check out other mailboxes     | 008      |              |

### 1.2.4.1.7.19 Category 18: Super User Feature Bits

These feature bits allow the user to create tree, broadcast, and rotational mailboxes. These mailboxes require that the distribution lists indicate which child mailboxes the lists branch to.



| Bit | Description                                 | Required                      | Incompatible  |
|-----|---------------------------------------------|-------------------------------|---------------|
| 068 | Define rotational mailbox                   |                               | 041, 121, 122 |
| 120 | Default to first child of tree mailbox      | 121                           | 186           |
| 121 | Define tree mailbox (Master)                | 070, 072                      | 041, 122, 187 |
| 122 | Define broadcast mailbox (Master)           | 040 and/or 044                | 068, 121, 134 |
| 123 | Announce broadcast mailbox name             | 040 and/or 044, 070, 071, 122 |               |
| 141 | *Define chain mailbox in Receptionist       |                               |               |
| 147 | Send receipt after full play                | 145                           |               |
| 152 | Deny login with tree                        | 121                           |               |
| 174 | Define greeting for broadcast mailbox       | 161, 162, 175                 |               |
| 178 | Define name for broadcast mailbox           | 179                           |               |
| 186 | Default to last child of tree mailbox       | 121                           | 120           |
| 187 | *Receptionist call-transfer tree mailbox    |                               | 121           |
| 189 | Rotate on full mailbox                      |                               |               |
| 229 | Play names of list 1 children               |                               |               |
| 231 | Broadcast Mailbox passcode                  | 232                           |               |
| 232 | Allow receipt of Broadcast passcode         |                               |               |
| 234 | Check message wait status of children       | 070, 072, 121, 134, 229       |               |
| 255 | Delete Mailbox if no unplayed messages      |                               |               |
| 277 | Send Mail Waiting Notice after Mbox Deletes |                               |               |

### 1.2.4.1.7.20

#### 1.2.4.1.7.21 Category 20: NuPoint Fax Feature Bits

These feature bits control use of the NuPoint Fax optional feature. To use these feature bits, you must have purchased the Fax feature and installed it on the NuPoint Unified Messaging server.

| Bit | Description          | Required   | Incompatible |
|-----|----------------------|------------|--------------|
| 190 | Receive fax messages | 040 or 041 |              |

| Bit | Description                                          | Required                                                                                          | Incompatible |
|-----|------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------|
| 191 | Make fax messages                                    | 020                                                                                               |              |
| 192 | Give fax messages                                    | 024, 190                                                                                          |              |
| 193 | Deliver fax to default number                        | 070, 190                                                                                          |              |
|     |                                                      | *110 is required to send a fax to an external machine. It is not required to send internal faxes. |              |
| 194 | Deliver fax online                                   | 190                                                                                               |              |
| 195 | *Specify fax delivery number                         | 070, 190                                                                                          |              |
|     |                                                      | *110 is required to send a fax to an external machine. It is not required to send internal faxes. |              |
| 196 | *Change default fax number                           | 070, 190, 193                                                                                     |              |
| 197 | Fax-on-Demand for Greeting Only mailbox              | 004, 005, 190                                                                                     |              |
| 198 | Receive fax messages only                            | 190                                                                                               |              |
| 199 | Auto-receipt for successful fax send                 | 020, 070, 095, 190                                                                                |              |
| 200 | Personal fax cover page                              | 190                                                                                               |              |
| 203 | Walkaway fax for callers                             | 190                                                                                               |              |
| 206 | Discard fax message after delivery                   |                                                                                                   | 237          |
| 207 | Fax Verify (sending system not self)                 |                                                                                                   | 198          |
| 230 | Deny change of fax cover page options                | 070, 190                                                                                          |              |
| 235 | Display FROM field on fax cover page                 | 190                                                                                               |              |
| 236 | Display Promotional Message on fax cover page        | 190                                                                                               |              |
| 237 | Automatically delivers fax message to default number | 070, 190                                                                                          | 206          |
| 239 | Retrieve fax on voice recording timeout              | 070, 190                                                                                          |              |

| Bit | Description                                             | Required | Incompatible |
|-----|---------------------------------------------------------|----------|--------------|
| 240 | Receive fax on voice recording timeout                  | 070, 190 |              |
| 247 | Don't play any prompt to fax call placement recipient   |          |              |
| 256 | Enable fixed greet 'Press1 or wait...' for walkaway fax | 203      |              |
| 290 | Enable UM - Web View                                    |          |              |

### 1.2.4.1.7.22 Category 21: Paging and Message Delivery Feature Bits

These feature bits control paging and message delivery options. Some of these feature bits allow a user to override a default schedule or pager number. Set up the Pager application to use these feature bits. Cut-through Paging is an optional feature.

| Bit | Description                                                            | Required             | Incompatible        |
|-----|------------------------------------------------------------------------|----------------------|---------------------|
| 077 | Change pager schedule                                                  | 070                  |                     |
| 079 | Set message wait #1 for urgent messages only                           | 040, 041, 088        | 080, 228            |
| 080 | Set message wait #2 for urgent messages only                           | 040, 041, 088        | 079, 228            |
| 124 | Change paging phone number                                             |                      | 070                 |
| 163 | Don't play message count                                               |                      | 40-45, 88, 175, 179 |
| 168 | Message wait 1, pager requeue                                          |                      |                     |
| 169 | Message wait 2, pager requeue                                          |                      |                     |
| 171 | Cut-through Paging                                                     | 070                  |                     |
| 172 | Cut-through Paging and messaging                                       | 070                  |                     |
| 173 | Receive cut-through page notify receipt                                | 070, 075, 171 or 172 |                     |
| 181 | Paging over message delivery, message waiting 1 over message waiting 2 | 070, 077             |                     |
| 188 | Append # to end of cut-through page number                             | 070, 171 or 172      |                     |
| 208 | Play reorder tone after CTP or greet-only                              | 171 or 172           |                     |
| 209 | Tone only pager interface                                              |                      |                     |
| 210 | Numeric display pager mailbox interface                                |                      |                     |

| Bit | Description                                  | Required                | Incompatible |
|-----|----------------------------------------------|-------------------------|--------------|
| 211 | Voice pager mailbox interface                |                         |              |
| 212 | Send page upon answer, greet-only mbox       |                         |              |
| 213 | Edit CTP number with * key if no caller menu | 171 or 172              | 005          |
| 219 | Login with 0 using cut-through paging        | 171 or 172              |              |
| 228 | Set msg wait #3 for urgent msgs only         | 040 and/or 041, and 088 | 079, 080     |

### 1.2.4.1.7.23 Category 22: Email Feature Bits

These feature bits control use of the Email interface or the text counter. Other applications can use the text counter; for example, a hotel can use the text counter to show physical (written) messages waiting for a guest. The Email interface is optional.

| Bit | Description                                     | Required      | Incompatible |
|-----|-------------------------------------------------|---------------|--------------|
| 154 | Announce text (Email) message count             |               | 217          |
| 170 | Transfer to Email System                        | 004, 005, 176 |              |
| 184 | Append mailbox number to transfer               |               |              |
| 205 | Do not use text count for message waiting       |               |              |
| 217 | Announce text messages without count            |               | 154          |
| 220 | No dial extension or Email if unplayed messages | 170           |              |
| 221 | Deny caller transfer to Email                   | 170           | 176          |
| 224 | Auto-transfer to task before greeting           | 170           |              |
| 225 | Auto-transfer to task upon login                | 170           |              |
| 226 | Auto-transfer to task after unplayed messages   | 170           |              |

### 1.2.4.1.7.24 Category 23: Network and NP Forms Feature Bits

These feature bits control processing for the AMIS Analog or NP Forms optional features.

| Bit | Description                                  | Required | Incompatible |
|-----|----------------------------------------------|----------|--------------|
| 135 | Define template mailbox (NP Forms)           |          |              |
| 139 | Template: Assume last greet mailbox FCOS     | 135      |              |
| 149 | Login to template through rotational mailbox | 135      |              |
| 166 | AMIS Analog networking                       |          |              |

### 1.2.4.1.7.25 Category 24: Web View (NP PWG) Feature Bits

The Web View (or Personal Web GUI -- PWG) optional feature integrates multimedia messaging by allowing a personal computer user to send, receive, create, edit, and store voice and fax messages in a Microsoft Windows environment.

| Bit | Description                                            | Required      | Incompatible |
|-----|--------------------------------------------------------|---------------|--------------|
| 110 | Make/Give to telephone number                          | 020, 024, 040 |              |
| 250 | Allow NP PWG login                                     |               |              |
| 251 | Allow NP PWG telephone playback/record                 | 250           | 259          |
| 252 | Allow NP PWG client to change mailbox ID               | 250           |              |
| 257 | Prevent NP PWG client voice playback/record            | 250           | 251          |
| 258 | Prevent NP PWG client from using local storage         | 250           |              |
| 259 | Restrict NP PWG client to play only faxes              | 250           | 251          |
| 260 | Allow NP PWG user to have caller ID lookup             | 250           |              |
| 261 | Allow NP PWG View WEB access to messages               |               |              |
| 262 | Store caller line ID as a phone number                 | 250, 260      |              |
| 263 | Store caller line ID as phone number or mailbox number |               |              |

### 1.2.4.1.7.26 Category 26: Short Message Service Feature

| Bit | Description                         | Required | Incompatible |
|-----|-------------------------------------|----------|--------------|
| 014 | Outdial for SMSC                    |          |              |
| 167 | (ISO) SMS Short Text Option Enabled |          |              |

| Bit | Description                              | Required | Incompatible |
|-----|------------------------------------------|----------|--------------|
| 214 | (ISO) SMS Voice Messaging Option Enabled |          |              |
| 266 | Enable SMSC for Callback Numbers         |          |              |
| 267 | Enable SMSC for Short Text Messages      |          |              |
| 268 | Enable SMSC Receipts                     |          |              |
| 269 | (ISO) SMS Allow Urgent Delivery          |          |              |
| 271 | Send SMSC Cancel VMNs for ML_OFF         |          |              |
| 272 | Send SMSC Cancel CBNs for ML_OFF         |          |              |
| 275 | Enable SMSC customized text messages     |          |              |
| 278 | (ISO) SMS Callback Number Enabled        |          |              |

### 1.2.4.1.7.27 Category 27: NP Talk Features

| Bit | Description           | Required | Incompatible |
|-----|-----------------------|----------|--------------|
| 099 | NP Talk with talkover |          |              |
| 100 | Disable talkover      |          |              |

### 1.2.4.1.7.28 Category 28: Dial-back and CLI Features

| Bit | Description                                             | Required | Incompatible |
|-----|---------------------------------------------------------|----------|--------------|
| 262 | Store Caller Line ID as a phone number                  |          |              |
| 263 | Store Caller Line ID as a phone or mailbox number       |          |              |
| 264 | Play outside caller user interface (with FCOS bit 280)  |          |              |
| 265 | Enable NP RapidDial Features                            |          |              |
| 270 | Enable Dial-back Feature                                |          |              |
| 280 | Enable CLI Outside Caller interface (with FCOS bit 264) |          |              |

## 1.2.4.1.8 Feature Bit Descriptions

## 1.2.4.1.8.1 Feature Bits 001 to 049

This section describes all feature bits, listed in numeric order. Master feature bits are identified in the feature bit title. If one feature bit overrides or conflicts with another, this fact is noted.

### Note:

Remember that not only FCOS determine how NuPoint Voice behaves. Check that LCOS and GCOS are also set properly. For example, if you use bitmapped GCOS, and some mailboxes do not share GCOS, one mailbox cannot send a message to another, even though the FCOS contains the send and receive feature bits. For details, see chapter 8.

### 001 Login to Mailbox

Allows the user to reach the user's mailbox. If a passcode is set, the user must enter it to gain access. Without this feature bit, the server tells the user that the mailbox cannot be reached, then hangs up; this forces a user to contact the system administrator.

### 002 Transfer to Mailbox Attendant

Allows a user who is logged in—to press 0 at any time during the session, to reach an attendant for assistance. This feature also allows a caller—while connected to a mailbox—to press 0, which transfers the call to an attendant. If the configuration is set for “Key 0 to reach attendant during greeting = N,” then a caller must wait until after the greeting. If a caller does not wait, the 0 is interpreted as a login character. The server transfers the caller or user to the system attendant's extension; if that extension is not defined, the server connects the call to the attendant's mailbox, which has special privileges. If neither attendant is configured, the user or caller hears, “I'm sorry. I don't understand that command.” Requires feature bit 004 (Outside caller functions).

### 003 Return to Welcome Prompt

Also known as the “recycle” feature. Allows the user to log out by pressing X, then press any key to return to the main company greeting. Otherwise, a user must hang up and call back. This allows the user to avoid toll charges for succeeding calls.

If the user logs out from a port configured for NP Receptionist:

- The server prompts the user to press 0 to return to NP Receptionist. If the user presses 0, NP Receptionist prompts the user to enter an extension number.
- If the user presses any key other than 0, the server prompts the user to enter a mailbox number. After this point, users can be connected only to a mailbox, not transferred to an extension.

If the user logs out from a port configured as a message center, the user can press any key, including \* or 0, during the logout prompt to interrupt and return to the welcome prompt. No prompts play for the recycle feature.

### 004 Outside Caller Functions (Master Feature Bit)

Allows outside callers to review, discard, append to, and re-record messages, and also to mark messages urgent. Without this bit, callers cannot use these options, and messages are delivered after five seconds of silence or when the caller hangs up.

This feature bit is also used for the [Cut-Through Paging](#) (CTP) optional feature. To activate CTP when outside caller functions are on, the caller presses the i key. To activate CTP when outside caller functions are off, the caller enters the telephone number directly. Requires feature bit 041 (Receive messages from outside callers).

**Note:** Include feature bit 005 (Play Outside Caller Menu prompts) allow the server to prompt for outside caller functions; however, prompts are not required.

### 005 Play Outside Caller Menu Prompts

Allows a caller to hear prompts in the caller's menu: "Press R to review a message, A to append it, D to discard it, U for urgent, X to exit the system, and 0 to return to attendant."

Requires the following feature bits:

- 004 (Outside caller functions)
- 041 (Receive messages from outside callers)
- 088 (Receive messages marked urgent)

Do not use with feature bit 213 (Edit CTP num with \* key if no caller menu).

### 006 Rewind and Fast Forward During Playback

Although the system is not tape-based, it simulates a tape recorder. Allows a user playing a message to press the \* (star) key to rewind the message or the # (pound) key to fast forward. Each time the user presses a key, a portion of the message rewinds or fast-forwards.

Requires feature bit 050 (Play messages).

### 007 Pause in Record or Play

Allows the mailbox user to press the 1 key to pause while recording or playing back a message. When the user presses the 1 key again, play resumes. No prompts play for this feature, and outside callers cannot use it.

Allows the mailbox user to press the 1 key to pause for 90 seconds while recording or playing back a message. When the user presses any other key, play resumes after the



beep. No prompts play for this feature, and outside callers cannot use it. You should users if they have this capability. Users hear a beep every five seconds during the pause.

Requires at least one of the following feature bits:

- 020 (Make messages)
- 024 (Give messages)
- 029 (Answer messages)
- 050 (Play messages)

### 008 Mailbox Can be Checked In/Out

Allows a hotel desk clerk to:

- Record a name and greeting, and to assign a passcode to the mailbox of each new guest or customer.
- Clear the name, greeting, passcode, and messages from the mailbox of a departing guest or customer.

This is required for guest mailboxes, those assigned to individual guests, or customers.

### 009 Automatic Logout If No Messages/Receipts

Automatically logs the user out after the last message in the mailbox is either kept or discarded; the user can go through the queue of unplayed and played messages only once. If the user has no unplayed messages when logging in, the server Prompts, “You have no unplayed messages in your mailbox,” and automatically logs the user out.

Interacts with the following feature bits:

- 052 (Auto-play unplayed messages)
- 089 (Auto-play all msgs, new and saved)

The following table describes how feature bits 009, 052, and 089 interact in an FCOS.

| Table: Logout Interaction with Auto-Play |                   |                                              |                                              |
|------------------------------------------|-------------------|----------------------------------------------|----------------------------------------------|
| Message State                            | Feature Bit 052   | Feature Bit 089                              | NuPoint Voice Action                         |
| No messages                              | In or out of FCOS | In or out of FCOS                            | Logs user out immediately.                   |
| All unplayed                             | In FCOS           |                                              | Logs user out after user plays all messages. |
| In or out of FCOS                        | In FCOS           | Logs user out after user plays all messages. |                                              |
| Receipts only                            | In or out of FCOS | In FCOS                                      | Logs user out after user plays all messages. |
| Receipts and all unplayed                | In or out of FCOS | In FCOS                                      | Logs user out after user plays all messages. |

| Table: Logout Interaction with Auto-Play |                   |                                                      |                                                                    |
|------------------------------------------|-------------------|------------------------------------------------------|--------------------------------------------------------------------|
| Message State                            | Feature Bit 052   | Feature Bit 089                                      | NuPoint Voice Action                                               |
| Played only                              | In FCOS           |                                                      | Prompts user to play messages.                                     |
| In or out of FCOS                        | In FCOS           | Automatically plays all messages, the logs user out. |                                                                    |
| Played and receipts                      | In or out of FCOS | In FCOS                                              | Automatically plays all receipts and messages, then logs user out. |

## 010 (ISO) Enhanced Outcall Paging Options

There are two different outcall/paging features in the ISO user interface. When this feature bit is off, the basic outcall/paging feature is activated, and the enhanced outcall/paging feature is deactivated. When this feature bit is on, the basic outcall/paging feature is deactivated and the enhanced outcall/paging feature is activated.

### Basic Outcall/Paging Feature

Users are prompted to set outcall/paging schedule and phone number in a particular sequence.

### Enhanced Outcall Paging Options

Users are provided with an outcall/paging setup menu. The outcall/paging schedule and phone number can be set up in different sequences with the menu options. For information about enabling the phone number and schedule options in the outcall/paging setup menu, refer to bits 77, 94, 124 and 143.

## 011 (ISO) Play Standard Greeting

When this feature bit is on and a greeting name is not recorded, the company standard greeting will be played. When this feature bit is off, a general greeting is played.

## 012 (ISO) Short Message Service

When this feature bit is on and the ISO SMS optional feature is installed, the ISO SMS main menu is activated. The ISO SMS main menu provides options for sending a callback number, leaving a voice message, and leaving a short text message.

Related bits: 167, 214, 269, 278 and 284.

This feature bit also works with SMPP MWI and SMPP CBN.

## 013 Operator Transfer Via "6" Key

Not Used.

**014 Outdial for SMSC**

This feature bit is only used in SMS MWI software. With this feature on, the NuPoint system will dial the subscriber and log the user in to their mailbox whenever there are unplayed messages. This feature is not available with CDMS or SMPP software.

**015 Change Wakeup Options**

Allows the user to schedule wakeup calls through the TUI from the User Options menu. Do not use this with feature bit 287 (Enhanced auto wakeup).

Requires the following elements:

- Feature bit 070 (User Options Menu)
- A defined pager port
- NP WakeUp optional feature; for details, see the NP WakeUp Guide

**016 Deny Recycling with \* Key**

Prevents the user from pressing the \* (star) key to return to the company greeting during the prompt for a passcode. This prevents an unauthorized user or caller from “cycling” through mailboxes in search of one that is not passcode-protected.

You might want to omit this feature bit in an integrated environment to allow users to log in to their mailboxes from other users’ phones.

**017 Fast Line Release from Outside Caller**

Plays the caller’s menu only once. If the caller does not respond within ten seconds, the server thanks the caller and hangs up. Otherwise, the caller’s menu plays three times unless the caller presses X before hanging up. If the caller does not press X and hangs up, the line can be tied up until the menu plays three times. The exact length of the tie-up varies with the PBX.

**018 Give and Mark Urgent**

Allows the user to mark a message for another user as urgent. The user presses G to give the message and records any desired comments. To mark the message urgent, the user presses M to reach the Message Addressing menu, then presses U for urgent. (To cancel urgent, the user presses U again.) To send the message, the user presses X until the server announces “your message sent.” Urgent messages play before all other messages only if the recipient’s FCOS includes feature bit 088 (Receive urgent messages). Otherwise, the message plays with all other unplayed messages in the order received.

Requires feature bits:

- 024 (Give messages)

- 040 (Receive messages from other users) in the recipient mailbox.

### **019 Answer and Mark Urgent**

Allows the user to mark an answer urgent to another user as urgent. The user presses A to answer the message. To mark the answer urgent, the user presses M to reach the Message Addressing menu, then presses U for urgent. (To cancel urgent, the user presses U again.) To send the message, the user presses X until the server announces “your answer sent.” Urgent messages play before all other messages only if the recipient’s FCOS includes feature bit 088 (Receive urgent messages). Otherwise, the message plays with all other unplayed messages in the order received.

Requires feature bits:

- 029 (Answer messages)
- 040 (Receive messages from other users) in the recipient mailbox.

### **020 Make Messages**

Allows the user to make a message when in the mailbox by pressing M (for make), entering the recipient’s mailbox number, recording a message, and pressing X to send it.

Requires feature bit 040 (Receive messages from other users) in the recipient mailbox.

### **021 Make and Request Receipt**

Allows the user to make a message and request a return receipt after the recipient plays the message. The user presses M to make a message. To request a receipt, the user presses M to reach the Message Addressing menu, then presses R to request a receipt. (To cancel the receipt, the user

presses R again.) To send the message, the user presses X until the server announces that it has sent the message. The return receipt works like the Auto-receipt feature for distribution lists described in feature bit 036 (Auto-receipt for user dist list msgs).

Requires feature bits:

- 020 (make messages)
- 040 (Receive messages from other users) in the recipient mailbox.

### **022 Make to Multiple Destinations**

Allows the user to make a message and send it to up to 200 addresses per message without using a distribution list. After the user presses M for make, the server prompts for a mailbox number. The user adds mailboxes, presses the # (pound) key when done adding recipients, then records a message. The address list that the user builds can include other mailboxes or distribution lists, if the FCOS includes feature bit 032 (Make to user distribution list).

Requires feature bits:

- 020 (Make messages)
- 040 (receive messages from other users) in the recipient mailbox

### **023 Make and Mark Confidential**

Allows the user to make a message that cannot be given by the recipient to another user. The user presses M to make a message, and records a message. To mark the message confidential, the user presses M to reach the Message Addressing menu, then presses C for confidential. (To cancel confidential, the user presses C again.) To send the message, the user presses X until the server announces that the message has been sent.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **024 Give Messages**

Allows the user to send a copy of a message to another user by pressing G, entering the mailbox number of the recipient, and pressing X to send the message. The message cannot have been marked confidential by the original sender.

Requires feature bit 040 (Receive messages from other users) in the recipient mailbox.

### **025 Give and Request Receipt**

Allows the user to give a message to another user and request a return receipt. The user presses G to give a message and records comments. To request a receipt, the user presses M to reach the Message Addressing menu, then presses R to request a receipt. (To cancel the receipt, the user presses R again.) To give the message, the user presses X until the server tells the user it has sent the message.

Overrides feature bit 036 (Auto-receipt for user dist list msg).

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other user) in the recipient mailbox

### **026 Give to Multiple Destinations**

Allows a user to give a message to up to 200 addresses per message without using a distribution list. After the user presses G to give a message, the server prompts for a mailbox number. The user adds mailboxes, then presses the # (pound) key to send the message. The address list that the user builds can include distribution lists if the FCOS also includes feature bit 033 (Give to user distribution list).

Overrides feature bit 036 (Auto-receipt for user dist list msg).

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **027 Give and Mark Confidential**

Allows the user to give a message that cannot then be given by the recipient to another user. The user presses G to give a message, and then records comments. To mark the message as confidential, the user presses M to reach the Message Addressing menu, and then presses C for confidential. (To cancel confidential, the user presses C again.) To give the message, the user presses X until the server announces it has sent the message.

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **028 Give with Comments**

Requires the user to record additional comments when giving a message to one or more users.

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other users) in the recipient mailbox Do not add this to an attendant's mailbox.

### **029 Answer Messages**

Allows the user to answer messages from other users. When a user plays a message from another user, the user can press A to answer the message. The server automatically enters the mailbox number of the sender, so a recipient does not need to know or enter the sender's mailbox number.

### **030 Answer and Request Receipt**

Allows the user to request a return receipt when answering a message from another user. The user presses A to answer a message, and then records comments. To request a receipt, the user presses M to reach the Message Addressing menu, then presses R to request a receipt. (To cancel the receipt, the user presses R again.) To send the message, the user presses X until the server announces that the answer was sent.

Requires feature bits:

- 029 (Answer messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **031 Answer and Mark Confidential**

Allows the user to answer a message with a reply that cannot then be given by the recipient to another user. The user presses A to answer a message, then records an answer. To mark the message as confidential, the user presses M to reach the Message Addressing menu, and then presses C for confidential. (To cancel confidential, the user presses C again.) To send the message, the user presses X until the server announces that it has sent the message.

Requires feature bits:

- 029 (Answer messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **032 Make To User Distribution List**

Allows users to make and send messages to distribution lists or mailboxes and distribution lists, instead of entering each mailbox number individually.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) and 044 (Receive user dist list messages) in the recipient mailbox

### **033 Give To User Distribution List**

Allows a user to give a message to a distribution list, instead of entering each mailbox number individually. The message cannot have been marked confidential by the original sender. (A user can also enter both individual mailboxes and distribution lists.)

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other users) and 044 (Receive user dist list messages) in the recipient mailbox

### **034 Make To Master Distribution List**

Allows the user to record a message for delivery to a master distribution list.

Requires feature bits:

- 020 (Make messages)

- 040 (Receive messages from other users) and 045 (Receive master dist list messages) in the recipient mailbox.

### **035 Give To Master Distribution List**

Allows the user to give a message to a master distribution list. The message cannot have been marked confidential by the original sender.

Requires feature bits:

- 024 (Give messages)
- 040 (Receive messages from other users) and 045 (Receive master dist list messages) in the recipient mailbox.

### **036 Auto-receipt for User Dist List Msgs**

Allows the server to automatically generate a receipt for a message sent to a distribution list. When the user logs in to a mailbox, the receipt announces which users have not played the message and which users have played the message and when they played it. Each time the user logs in, the updated receipt plays. Receipts are updated until the user discards them. You can cancel Auto-receipt if the FCOS contains either feature bit 021 (Make and request receipt) or 025 (Give and request receipt).

Requires feature bits:

- 020 (Make messages)
- 032 (Make to user distribution list) and/or 033 (Give to user distribution list)
- 040 (Receive messages from other users) and 044 (Receive user dist list messages) in the recipient mailbox

### **037 Not Used**

### **038 Attach Original Message to Answer**

Attaches the original message to the answer. The server plays the answer first, then all attached messages in reverse order. This can help users track questions and answers in a “conversation” because an answer is always accompanied by the original message, but it uses extra disk space. If a user gives an answer from this conversation to another mailbox, that answer includes the original message and all accumulated answers.

Requires feature bit 029 (Answer messages).

### **039 Notification Tone When New Msg Arrives**

Notifies the user of any new message that arrives while the user is logged in. When the user presses a key after finishing any transaction, the user hears a beep.



Feature bit 047 (Notification prompt when new msg arrives) overrides this.

### **040 Receive Messages from Other Users**

Allows a user to receive messages from other users. If you use bitmapped GCOS, the mailboxes must have a GCOS with at least one matching group.

### **041 Receive Messages from Outside Callers**

Allows a mailbox to receive messages from outside callers.

Overrides feature bits:

- 068 (Define rotational mailbox)
- 121 (Define tree mailbox)

### **042 Not Used**

### **043 Receive Message of the Day**

Allows the user to receive the message of the day, an announcement from the attendant's mailbox. The message plays automatically, immediately after a user logs in, and does not play again after it plays twice. The first play is a hard play (the user must hear it); the second play is a soft play (if the user enters a command, the rest of the message is ignored).

### **044 Receive User Dist List Messages**

Allows a mailbox to be added to the distribution lists of other users, and to receive messages from these distribution lists.

Requires feature bit 040 (Receive messages from other users) in the recipient mailbox.

### **045 Receive Master Dist List Messages**

Allows a mailbox included in a master distribution list to receive user messages that are addressed to the master distribution list. Mailboxes with feature bits 034 (Make to master distribution list) or 035 (Give to master distribution list) can make or give messages to mailboxes with this feature.

Requires feature bit 040 (Receive messages from other users) in the recipient mailbox.

### **046 Announce Receipt Count at Login**

Allows users to hear, when they log in, how many receipts are in the mailbox. Receipts are kept until users delete them. Otherwise, users can play receipts but do not hear how many receipts they have when they log in.

Requires feature bit 050 (Play messages).

### **047 Notification Prompt When New Msg Arrives**

Plays a prompt that tells the user, who has completed a transaction in the mailbox, how many new messages have arrived since the previous transaction.

Overrides feature bit 039 (Notification tone when new msg arrives).

### **048 No Auto-timestamp of Unplayed Msgs**

The server will not play time stamps for previously unplayed messages, and the user will not know when messages were actually received. Use this when the user has a voice pager with limited time. To hear the time stamp, the user presses T while the message plays, or T-1 if the FCOS includes feature bit 204 (Message skip, forward and backward). The user cannot play the time stamp if the FCOS includes feature bit 144 (Skip forward to next message). When a user replays a message, the time stamp plays if feature bit 049 (No auto-time stamp of played msgs) is not in the FCOS.

Requires feature bit 050 (Play messages).

### **049 No Auto-timestamp of Played Msgs**

The server will not play time stamps for previously played messages, and the user will not know when messages were actually received. However, if that user gives a message to a mailbox without this feature bit, the time stamp plays for the recipient. To hear the time stamp, the user presses T while the message plays, or T-1 if the FCOS includes feature bit 204 (Message skip, forward and backward). The user cannot play the time stamp if the FCOS includes feature bit 144 (Skip forward to next message).

Requires feature bits:

- 050 (Play messages)
- 053 (Keep messages)

## **1.2.4.1.8.2 Feature Bits 050 to 099**

### **050 Play Messages (Master Feature Bit)**

Allows the user to play all messages received by the mailbox. The ability to receive messages is controlled by feature bits in the Receive Messages category. The Keep/Discard category also requires this feature.

### **051 Do Not Switch Language for Outside Callers**

Plays prompts for the outside caller in the language of the caller's mailbox. For example, with this, an outside caller hears prompts in Spanish if a call from a mailbox set to

Spanish reaches a chain mailbox set to English. Otherwise, the prompts play in the language of the called mailbox. Languages are set in the line group and the mailbox LCOS.

Mailbox LCOS language settings take priority over Line Group language settings so callers may receive prompts in an unexpected language when they reach the mailbox level. (For example, callers to a multilingual system select English prompts but connect to a mailbox with a French LCOS setting. Even though they have selected English, the prompts at the mailbox level will be in French.) If you want callers to continue to be prompted in their selected language, assign this feature bit to the FCOS of the user mailbox.

## 052 Auto-play Unplayed Messages

The server automatically plays the next unplayed message in the queue after the user keeps or discards the current message.

**Note:** Feature bit 089 (Auto-play all msgs, new and saved) overrides this. See [Logout Interaction with Auto-play](#) for more information. With feature bit 215 (Don't auto-play first msg, w/auto-play), a mailbox does not automatically play the first message and the user can perform other functions in the mailbox. If the user presses P to play the first unplayed or saved message, all subsequent unplayed messages then play.

Requires feature bit 050 (Play messages).

You cannot use this with feature bit 227 (Undelete last message with \* key).

## 053 Keep Messages (master Feature Bit)

Allows the user to save messages by pressing K for keep. NuPoint Voice plays the "message kept" prompt and stores the message in the played messages queue. Include this in any mailbox that can receive messages.

Requires feature bit 050 (Play messages).

## 054 Auto-keep Messages

**WARNING** - To prevent a system malfunction, never put feature bits 054 and 056 in the same FCOS.

The server automatically keeps a message after it has been played, then plays a prompt that the message has been kept. If the FCOS includes feature bit 055 (Discard messages), the user has a few seconds to manually keep or delete the message before it is kept.

Requires feature bits:

- 050 (Play messages)

- 053 (Keep messages)

### **055 Discard Messages (Master Feature Bit)**

Allows the user to delete a message by pressing D for discard. Include this in any mailbox that can receive messages. If a user can receive messages but cannot discard them, messages can be deleted only by automatic or manual purge them. (The LCOS assigned to a mailbox determines the timing of automatic purges.)

Requires feature bit 050 (Play messages).

### **056 Auto-discard Messages**

**WARNING** - To prevent a system malfunction, never put feature bits 054 and 056 in the same FCOS.

The server automatically discards a message after it plays. If feature bit 053 (Keep messages) is included, the user has a few seconds to manually keep or delete the message before it is discarded. Use care when assigning this feature bit. If a user is disconnected while a message plays, that message is considered played and is discarded.

Requires feature bits:

- 050 (Play messages)
- 055 (Discard messages) You cannot use this with feature bit 227 (Undelete last message with \* key).

### **057 Play Saved Messages in FIFO Order**

Plays kept messages in first-in-first-out (FIFO) order so that earlier saved messages play first. Otherwise, saved messages play in last-in-first-out (LIFO) order.

Requires feature bits:

- 050 (Play messages)
- 053 (Keep messages)

### **058 Play Unplayed Messages in FIFO Order**

Plays unplayed messages in first-in-first-out (FIFO) order so that earlier unplayed messages play first. Otherwise, unplayed messages play in last-in-first-out (LIFO) order.

Requires feature bit 050 (Play messages).

## 059 Play Unplayed Messages First

Plays new messages first. Otherwise, the server plays kept messages, then plays new messages.

Requires feature bits:

- 050 (Play messages)
- 053 (Keep messages)

## 060 Ignore DTMFs During Greeting

If the user enters a command while the mailbox greeting plays, the server will finish playing the greeting before processing the command. This effectively makes the greeting hard-play. In a Greeting-Only mailbox, if the FCOS also contains feature bit 066 (Login during greeting in greet-only mbx), the user must log in (press the \* (star) key or 0) before entering a mailbox number or while the greeting is playing; otherwise, the server hangs up. The server does not prompt for the passcode until after the greeting plays.

Do not use this with feature bit 164 (Skip/pause during greeting in Greeting-only mailbox).

## 061 Wait to Record (Time-out = # Key)

Allows a user who presses M for make or G for give to either wait to start recording or press the # (pound) key to avoid the delay. This applies also to multiple make or give. For example, if the user wants to make or give a message to mailboxes 100, 101, and 102, the user can enter either this sequence, 100101102#, or enter a mailbox number and wait for the prompt to enter another mailbox number. After entering the last mailbox number, the user can wait to start recording or press the # (pound) key. If the user presses M to make a message but does not enter a mailbox number, the user hears a prompt to enter the mailbox number.

Use this when the users have phone calling cards because the # (pound) key signals some long distance providers to end the call and place another.

Requires either of these feature bits:

- 022 (Make to multiple destinations)
- 026 (Give to multiple destinations)

## 062 Hang Up Immediately After Greeting

The server plays the greeting, then immediately hangs up. No prompt plays before disconnect, and outside callers cannot record messages. Use this for Greeting-Only mailboxes, where no other interaction between the caller and the server is desired.

If the FCOS contains feature bit 066 (Login during greeting in greet-only mbx), the user must log in (press the \* (star) key or 0) before entering a mailbox number or while the greeting plays; otherwise, the server hangs up. If the FCOS contains feature bits 060 (Ignore DTMFs during greeting) and 066 (Login during greeting in greet-only mbx), the server does not prompt for a passcode until the greeting plays.

Do not use this with these feature bits:

- 063 (Call mailbox attendant after greeting)
- 064 (Call mailbox user ext after greeting)
- 065 (Play system time after greeting)

### **063 Call Mailbox Attendant After Greeting**

The server plays the mailbox greeting, then automatically transfers the call to the mailbox attendant's extension. The caller does not hear a prompt that the call is being transferred to the attendant. If no attendant's extension number is defined in the mailbox data file, the server transfers the call to the system attendant. If neither attendant is configured, the server tells the caller that no attendant is available, and the server hangs up.

The server does not supervise the transfer, so the caller may fail to reach the attendant and be disconnected.

If the FCOS contains feature bit 066 (Login during greeting in greet-only mbx) in a Greeting-Only mailbox, the user must log in (press the \* (star) key or 0) before entering a mailbox number or while the greeting plays; otherwise, the server continues with the transfer.

Do not use this with these feature bits:

- 062 (Hang up immediately after greeting)
- 064 (Call mailbox user ext after greeting)

### **064 Call Mailbox User Ext After Greeting**

The server plays the mailbox greeting, then automatically transfers the call to the mailbox extension. The server does not supervise the transfer, so the caller may fail to reach the extension and be disconnected. If no extension number is defined in the mailbox, the server tells the caller that the transfer failed, then hangs up.

If the FCOS contains feature bit 066 (Login during greeting in greet-only mbx) in a Greeting-Only mailbox, the user must log in (press the \* (star) key or 0) before entering a mailbox number or while the greeting plays; otherwise, the server continues with the transfer

Do not use this with these feature bits:

- 062 (Hang up immediately after greeting)

- 063 (Call mailbox attendant after greeting)

### **065 Play System Time After Greeting**

The server plays the greeting, then the system time. This feature bit is required with a TCOS.

### **066 Login During Greeting in Greet-only Mbx**

Allows a user to press the \* (star) key or 0 to log in to a Greeting-Only mailbox while the greeting plays. It also works in mailboxes that can receive messages. Otherwise, a user must press \* and enter the mailbox number to log in.

### **067 Not Used**

### **068 Define Rotational Mailbox**

Allows the caller to hear the greeting of the called mailbox, then the greeting of a mailbox in distribution list 1 of the called mailbox. The server cycles through each of the mailboxes in the distribution list, either on a call-by-call basis or by time.

Any mailbox with this feature bit must also have distribution list 01, which controls cycling callers through up to 190 child mailboxes. For example, the mailbox 100 distribution list 01 has mailboxes 101, 102, and 103. On a call-by-call basis, the first caller hears the greetings for mailboxes 100 and 101. The second caller hears the greetings for mailboxes 100 and 102. The third caller hears the greetings for mailboxes 100 and 103. The fourth caller hears the greetings for mailboxes 100 and 101.

On a time basis, such as one hour, for the first hour callers hear the greetings for mailboxes 100 and 101; for the second hour, for mailboxes 100 and 102; for the third hour, for mailboxes 100 and 103; for the fourth hour, for mailboxes 100 and 101.

For details on rotational mailboxes, see FCOS 17: Rotational Mailboxes, in this chapter, or chapter 6.

Feature bit 041 (Receive messages from outside callers) overrides this and disables the mailbox's rotation.

### **069 Passcode Required for Mobile DID**

Used with the DID NuPoint Voice application. If the Mobile DID option is configured for a DID group, users must always enter their passcodes when logging in. Otherwise, users who call in from their own mobile phones need no passcode, even if one is programmed into the mailbox.

### **070 User Options Menu (Master Feature Bit)**

Allows the user to press U in the Main menu to reach the user options.

Required to use any combination of the User Options features. For a list of all feature bits that require 070, see Category 14, User Option feature bits.

### **071 Record or Change Mailbox Name**

Allows the user to record and change the mailbox name.

The user logs in and presses U to reach the User Options menu, then N to record a name. The server announces this recorded name any time one user makes a message for, or gives a message to another user. NP Receptionist uses this for certain operations. The maximum recorded length of the name is controlled in the LCOS assigned to the mailbox. For details, see chapter 8.

Requires feature bit 070 (User Options Menu).

### **072 Record or Change Mailbox Greeting**

Allows the user to record or change a personal mailbox greeting, which plays to outside callers who reach the mailbox. The user logs in and presses U to reach the User Options menu, then G to record the greeting. The maximum recorded length of the greeting is controlled in the LCOS assigned to the mailbox.

Requires feature bit 070 (User Options Menu).

### **073 Enter and Change Mailbox Passcode**

Allows the user to set or change the mailbox passcode. The user logs in, presses U to reach the User Options menu, then presses P to change the passcode. Passcodes defined by users cannot appear on the console. Also, users cannot clear passcodes, or delete them entirely, unless the FCOS includes feature bit 125 (Clear user passcode).

Requires feature bit 070 (User Options Menu).

See also feature bit 093 (Deny change of passcode in first tutorial).

### **074 Create or Modify User Distribution List**

Allows the user to create or modify a distribution list. A distribution list allows the user to make one message and send it to multiple mailboxes. An individual mailbox can store up to 99 lists, with a up to 65,535 recipient mailboxes per list. To create or modify a distribution list, the user presses U to reach the User Options menu, then presses L for lists.

Otherwise, only system administrators can create and change distribution lists from the console.

Requires feature bits:



- 032 (Make to user distribution list) and/or 033 (Give to user distribution list)
- 070 (User Options Menu)

Feature bits 032, 033, 070, and 074 alone do not allow all distribution lists to be modified; you must also allow change rights in the mailbox configuration.

**Note:** Tree mailboxes do not require either feature bit 032 or 033.

### **075 Audit Receipt Message**

Allows the user to press A to audit (play) a message for which a receipt was requested. When users play a receipt, they may want to listen to the original message.

The Cut-through Paging optional feature does not require this feature bit.

Requires feature bit 050 (Play Messages).

### **076 Play Urgent Messages in FIFO Order**

Plays urgent messages in first-in-first-out (FIFO) order so that earlier urgent messages play first. Otherwise, urgent messages play in last-in-first-out (LIFO) order.

Requires feature bits:

- 050 (Play messages)
- 088 (Receive urgent messages)

### **077 Change Pager Schedule**

Allows the user to schedule the mailbox paging function if the mailbox message waiting type is 5 (Pagers/Message Delivery). The user can schedule when the server places a pager call to indicate unplayed messages in the mailbox, such as for only during work hours, not during off hours.

Requires:

- Feature bit 070 (User Options Menu)
- Message waiting type 1 or 2 defined as 5 (Pagers/Message Delivery) in a mailbox
- A configured pager port

### **078 Activate User Tutorial**

Allows users to activate the user tutorial. The user logs in, presses U to reach the User Options menu, then T for tutorial, which plays immediately. The tutorial is a series of instructions that guide users through setting passcodes, recording greetings, and

recording their names. The system administrator can record a site tutorial, a greeting that plays after the NuPoint Voice tutorial, in the system attendant's mailbox. Otherwise, the tutorial plays only when a new user first logs in or when the administrator activates it from the console.

Use this feature bit for mailbox demonstrations.

If the FCOS does not include feature bit 073 (Enter and change mailbox passcode), the tutorial asks for a passcode only the first time it runs on a new mailbox. This feature bit also interacts with feature bit 093 (Deny change of passcode in first tutorial).

Requires feature bit 070 (User Options Menu).

### **079 Set Msg Wait #1 for Urgent Msgs Only**

Activates the message waiting type 1 for urgent messages, only, and not for other unplayed messages.

Requires:

- Feature bits 040 (Receive messages from other users) and/or 041 (Receive messages from outside callers)
- Feature bit 088 (Receive urgent messages)
- Message waiting type 1 defined for the mailbox.

### **080 Set Msg Wait #2 for Urgent Msgs Only**

Activates the message waiting type 2 for urgent messages, only, and not for other unplayed messages.

Requires:

- Feature bits 040 (Receive messages from other users) and/or 041 (Receive messages from outside callers)
- Feature bit 088 (Receive urgent messages)
- Message waiting type 2 defined in the mailbox

### **081 Only One Correct Passcode for Login**

Requires a user who has entered an incorrect passcode to enter the correct passcode only one more time. Without this feature bit, the server requires a user to enter the passcode twice after an incorrect entry. As a security measure, the server tells a user that it did not get the user's passcode after the first of the two correct entries. (NuPoint Voice limits users to three tries.) Including this feature bit increases vulnerability to hackers and other unauthorized callers. This feature bit is included in [FCOS 14 \(MiCollab\)](#) by default.

## 082 Soft Play (Interrupt) Message Count

Allows the user to interrupt the “number-of-messages” prompt by pressing a command key, then immediately begin using the mailbox.

## 083 Soft Play (Interrupt) Most Prompts

Many NuPoint Voice Prompts are soft-play; that is, users can interrupt them by pressing a command key, but others are hard-play. This allows users to soft-play the Prompts listed in the following table..

Because callers reach the administrator’s mailbox when they call the system directly, you can let callers use soft-play prompts by including this in the administrator’s mailbox.

Table: Prompts that Soft-Play Only with Feature Bit 083

| Prompt                                                                | Application Used In                                                    |
|-----------------------------------------------------------------------|------------------------------------------------------------------------|
| I'm sorry, but I don't understand what you pressed; please try again. | Paging, Message Delivery, NP WakeUp, NuPoint Voice                     |
| That is not a valid mailbox number; please try again.                 | NP Receptionist, NuPoint Voice, Hotel guest application                |
| That is not a valid passcode; please try again.                       | Hotel guest application, NuPoint Voice                                 |
| I'm sorry; I did not get your passcode. Please try again.             | NuPoint Voice                                                          |
| Mailbox [number] has [x] unplayed messages, [y] urgent messages.      | Hotel guest application (guest mailbox reached from check-out mailbox) |
| OR                                                                    |                                                                        |
| Mailbox [number] has no messages.                                     |                                                                        |
| I don't understand that command.                                      | Hotel guest application, Main Menu, NuPoint Voice                      |
| Press P to enter your new passcode.                                   | User Options                                                           |
| Enter 4 to [max. passcode length] digits for your passcode.           | User Options                                                           |
| If you do not wish to have a passcode, enter 4 zeros.                 | User Options                                                           |
| I'm sorry; that is not a user option.                                 | User Options                                                           |
| You cannot have a message for this mailbox. Please try again.         | NuPoint Voice                                                          |

## 084 Give Receipt Message with Comments

Requires the user to record additional comments when giving a message attached to a receipt.

Requires feature bits:

- 086 (Give receipt message)
- 040 (Receive messages from other users) in the recipient mailbox

Feature bit 075 (Audit receipt message) is recommended.

### **085 Give Receipt Message to Multiple Dests**

Allows the user to give a message attached to a receipt to up to 200 destinations. If allowed, any of the destinations can be distribution lists, networked mailboxes, or off-system numbers.

Requires feature bits:

- 024 (Give messages)
- 086 (Give receipt message)
- 040 (Receive messages from other users) in the recipient mailbox

Feature bit 075 (Audit receipt message) is recommended.

### **086 Give Receipt Message (Master Feature Bit)**

Allows users to re-send a message that originally had a receipt. When users play a receipt, they can press G to give the original message that was originally sent with a receipt. The receipt portion of the original message is not sent.

Feature bit 040 (Receive messages from other users) must be in the recipient mailbox.

### **087 Make and Mark Urgent**

Allows the user to make a message and mark it urgent. The user presses M to make a message, then records a message. To mark the message urgent, the user presses M to reach the Message Addressing menu, then presses U for urgent. (To cancel urgent, the user presses U again.) To send the message, the user presses X until the server responds “message sent.” If you include feature bit 203 (Walk-away fax) in the FCOS, you must train the users and callers to press 8 twice to mark a fax urgent. The server plays urgent messages first only if the recipient’s FCOS includes

feature bit 088 (Receive urgent messages). Otherwise, the message plays with all other unplayed messages in the order received.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **088 Receive Urgent Messages**

Plays an urgent message a separate queue of urgent messages before playing any other unplayed messages. Otherwise, any urgent message plays as a regular unplayed message with other unplayed messages in the order that the urgent message was received.

## 089 Auto-play All Messages (New and Saved)

The server automatically plays the next message, either played or unplayed, after the user keeps or discards the current message. If the FCOS does not include feature bit 054 (Auto-keep messages), the message stays in the unplayed queue if the user hangs up before keeping or discarding it.

With feature bit 215 (Don't auto-play first msg, w/auto-play), a mailbox does not automatically play the first message and the user can perform other functions in the mailbox. When the user presses P to play the first unplayed or saved message, all subsequent messages then play.

Do not use this with feature bit 227 (Undelete last message with \* key).

Requires feature bits:

- 050 (Play messages)
- 053 (Keep Messages)

Overrides feature bit 052 (Auto-play unplayed messages). For more information, see [Logout Interaction with Auto-Play](#).

## 090 Check In Other Mailboxes

Allows a desk clerk or TAS operator to record a name and assign a passcode to each guest mailbox. Although you only need one check-in mailbox per server, you can create one for each employee's telephone station.

A guest mailbox must have:

- Feature bit 008 (Mailbox can be checked in/out)
- The same GCOS as the check-in mailbox

## 091 Check Out Other Mailboxes

Allows a desk clerk or TAS operator to clear the name, greeting, passcode, and messages from each guest mailbox. Although you only need one checkout mailbox per server, you may want to create one for each employee's telephone station.

A guest mailbox must have:

- Feature bit 008 (Mailbox can be checked in/out)
- The same GCOS as the check-out mailbox

## 092 User will be in Dial-by-Name Database

Includes the mailbox owner's name in the two Dial-by-Name databases. The databases are identical but their format is different, with one listing users by last name and the other

by first name. The server searches these databases for entries to match a caller's input. For example, if a caller is prompted to dial by last name, when the caller begins typing letters the system will search through the database that lists users by last name. If the caller is prompted to dial by first name, the system will search through the database that lists users by first name.

In addition, modify this information:

- Set one digit in the dialing plan to A or the optional star prefix; if you do not set the dialing plan, you can create a phonebook, but cannot use Dial-by-Name
- Set the [line group parameters](#) (Last Name First flag, Exact Match Break, Number of Names Threshold)
- Include the name of the mailbox owner when defining the mailbox, such as "Smith Jim"

**Note:** Do not use punctuation characters such as "-" or ",".

### 093 Deny Change of Passcode in First Tutorial

Prevents the mailbox owner from changing the passcode during the first time through the tutorial. Include feature bit 078 (Activate user tutorial) and exclude 073 (Enter and change mailbox passcode), to disable the Prompt for a new passcode in the tutorial.

The server still Prompts the mailbox owner for the passcode when logging in.

**Note:** This feature bit only works with NuPoint UM Standalone deployments. It is inoperable with NuPoint UM on MiCollab .

### 094 Change Message Delivery Options

Allows the user to schedule the message delivery function if the mailbox message waiting type is 5 (Pagers/Message Delivery). The user can schedule when the server places a message delivery call to indicate unplayed messages in the mailbox, such as for only during work hours, and not during off hours.

Requires:

- Feature bit 070 (User Options Menu)
- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- Message delivery set to Yes in the mailbox configuration
- A configured pager port

### 095 Mark Message for Future Delivery

Allows the user to make a message for another mailbox, mark it for future delivery, and audit future delivery messages. Future delivery dates can be up to one year from when the message is marked. The auditing function allows the mailbox owner to listen to

messages sent, but not yet delivered. The key sequence is U for User Options, C for Call Schedule Options, then F for Future Delivery Audit.

The user presses M and records a message. To mark the message for future delivery, the user presses M to reach the Message Addressing menu, then presses F for future delivery. The user hears Prompts for month of delivery (1 through 12), then day (1 through 31), time, and a.m. or p.m. (A or P). To cancel future delivery during the date and time input, press the \* (star) key. To cancel future delivery after entering the date and time, press the F key at any time before exiting the Message-Addressing menu. To send the message, the user presses X until the server announces that the message has been sent.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) in the recipient mailbox
- 070 (User Options Menu) to allow Audit Future Delivery

**Note:** In addition, set the [LCOS](#) parameter “Max days - future delivery” for the absolute number of days for future delivery.

### **096 Make Messages Before Keep/Discard**

Allows a user to make a new message while another message plays or after it has played without first keeping or discarding that message. Otherwise, the user (while playing a message) must first keep or discard the message before pressing M to make a new message.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) in the recipient mailbox

### **097 Do Not Say "I will ring <name>" in AR**

Used with NP Receptionist optional feature software. When a caller enters an extension, NP Receptionist says only, “Please hold.” If call screening is included, NP Receptionist asks the caller’s name. Otherwise, NP Receptionist asks the caller to hold and says, “I will ring [recipient’s name].”

### **098 Say "Press 0" to Caller Before Beep**

The caller hears this prompt, “You may start your message now. Press 0 (zero) to return to the attendant” and a beep. If the caller presses 0, the server transfers the call to the system attendant’s extension, or if that number is not configured, to the system attendant’s mailbox. If neither is configured, the “Press zero. . .” portion of the prompt does not play.

NP Receptionist Usage -- With NP Receptionist, this feature bit works the same way unless you include feature bit 003 (Return to Welcome prompt), which plays the Receptionist greeting after the caller presses 0.

## 99 Speech Navigation

Allows users to manage their messages and reach the operator by with spoken commands. The Speech Navigation license defines the total number of users that may use the feature. The licenses are automatically assigned to low-numbered mailboxes first, so if you have purchased three licenses and your system has three mailboxes, 1234, 1235, 1236, then only 1234 and 1235 will be licensed to use Speech Navigation. You can, however, manually reassign a user license by disabling Speech Navigation on one mailbox and enabling it on another.

### 099 NP Talk with Talkover

This feature is used with OneTalk optional feature software, which allows for commands through voice. This feature bit gives the user the ability to speak voice commands while the server is playing a prompt or message.

#### Notes:

- At the beginning of a call, the server does a calibration of the line. If it is too noisy, then Talkover will not be allowed even if bit 099 is set.
- Do not include this bit in the same FCOS with bit 100.

## 1.2.4.1.8.3 Feature Bits 100 to 149

### 100 Disable Talkover

This feature is used with OneTalk optional feature software, which allows for commands through voice. This feature bit disables the Talkover feature. As a result, the user cannot give spoken commands while the server is playing prompts or messages.

#### Note:

Do not include this bit in the same FCOS with bit 099 unless you want to disable Talkover.

### 101 - 109 Deny Login on Line Group <1 - 9>

Allows the system administrator to deny users access to mailboxes through certain line groups. The line group number is the feature bit number minus 100: 101 = line group 1, 109 = line group 9, and so on.



For example, if line group 7 consists of “800” numbers meant only for customers’ messages, add feature bit 107 to all mailbox FCOS to prevent mailbox owners (employees) from calling on these lines to log in to their mailboxes.

### **110 Make/Give to Telephone Number**

Allows a mailbox owner to make or give a message to a telephone number outside the mailbox system; known as “call placement.” To use this, the mailbox owner specifies the number by dialing the call placement digit (set in the dialing plan) and then the telephone number, instead of specifying a mailbox while making or giving a message.

The server Prompts the mailbox owner to record the name of the recipient. Modify these parameters:

- Set the dialing plan digit for call placement messaging to T or the optional star prefix.
- Set LCOS definitions for call placement in the More Limits Parameters menu.
- Set the Call Placement Access Index Code, also known as a predial string, in the user’s mailbox. The server inserts these digits before the call placement number when dialing out on the pager port.
- Configure an outdial (pager) port.

Requires feature bits:

- 020 (Make messages)
- 024 (Give messages)
- 040 (Receive messages from other users).

### **111 - 119 Deny Message Receipt on Line Group <1 - 9>**

Allows the system administrator to deny callers access to mailboxes through certain line groups. The line group number is the feature number minus 110: 111 = line group 1, 119 = line group 9, and so on.

For example, if line group 7 consists of “800” numbers meant only for a company’s sales or service force to retrieve messages, adding FCOS feature bit 117 to all FCOS prevents customers from calling in on these lines to leave messages.

As another example, if company A (using line group 1) and company B (using line group 2) share a PBX, company B’s system administrator can assign feature bit 111 (Deny message receipt from line group 1) to every FCOS to ensure that callers do not use company A’s lines to reach company B’s mailboxes.

### **120 Default to First Child of Tree Mailbox**

Applies to tree mailboxes. When a time out occurs, causes the server to default to the first mailbox in distribution list 01. For details about tree mailboxes, see FCOS 15 (Tree), chapter 6, and feature bit 121 (Define tree mailbox).

With this, the server routes callers who do not enter a digit promptly after the tree mailbox greeting to the first child mailbox in the tree mailbox distribution list. Otherwise, the server routes those callers to the attendant's mailbox. Use this feature for calls from rotary telephones.

Requires feature bit 121 (Define tree mailbox).

Overridden by feature bit 186 (Default to last child of tree mailbox).

### 121 Define Tree Mailbox (Master Feature Bit)

The tree mailbox routes callers to “child” mailboxes or “members” of the tree mailbox distribution list 01. When a caller reaches this mailbox, the greeting plays, then the server waits for DTMF input to route the call to the next mailbox.

For details about tree mailboxes, see FCOS 15 (Tree) and [Tree Mailbox](#).

Requires feature bits:

- 070 (User Options Menu)
- 072 (Record or change mailbox greeting)

Feature bit 041 (Receive messages from outside callers) overrides this and disables the mailbox's tree function.

Tree Mailboxes and NP Receptionist -- If the administrator's mailbox is a tree, callers can press the # key to exit from the tree structure any time during the greeting. NP Receptionist then prompts the caller to enter an extension number and transfers the call to that number. If the administrator's mailbox is not a tree, and if, for example, a caller presses the # key, reaches the administrator's mailbox, and enters mailbox number 3530, the call will transfer to extension 3530. If that number does not answer and the caller presses 3531 during the mailbox greeting, the call will transfer to 3531, and so forth. This feature is also called “pound (#) dial around.” It does not work if the caller dials a DID number and forwards to a NuPoint Voice line group. The call must either originate from a line group programmed to use NP Receptionist, or the call must be call forwarded to such a line group.

The server does not announce the “pound (#) dial around” feature; the user's greeting must refer to the option.

Do not use this with feature bit 187 (Receptionist call-transfer tree mailbox).

### 122 Define Broadcast Mailbox (Master Feature Bit)

When a message is made for a mailbox with this, it is deposited in the mailboxes of all members of distribution list 01. When the recipients play the message, the server announces the name that is recorded in the sender's mailbox (or the sender's mailbox number if no name is recorded). If feature bit 123 (Announce broadcast mailbox name) is

in the FCOS, the server announces the [broadcast mailbox](#) name. Do not use with feature bit 291 (Enable Record A Call).

- Overrides feature bit 134 (Broadcast message waiting status).
- Requires feature bit 040 (Receive messages from other users) and/or 044 (Receive user dist list messages)

### 123 Announce Broadcast Mailbox Name

Used with broadcast mailboxes. The server announces the name that is recorded in the broadcast mailbox. Otherwise, the server announces the sender's name (or the sender's mailbox number if no name is recorded).

Requires feature bits:

- 040 (Receive messages from other users) and/or 044 (Receive user dist list messages)
- 070 (User Options Menu)
- 071 (Record or change mailbox name)
- 122 (Define broadcast mailbox)

### 124 Change Paging Phone Number

Allows the mailbox owner to use a pushbutton telephone to change the paging telephone number. This does not affect the post-pager dial string, which is programmed in the mailbox.

Requires:

- Feature bit 070 (User Options Menu)
- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

#### Note:

- Do not confuse this feature bit with feature bit 143 (Change message delivery phone number).
- This feature bit only works with NuPoint UM Standalone deployments. It is inoperable with NuPoint UM on MiCollab .

## 125 Clear User Passcode

Allows users to eliminate their passcodes if they do not want to enter a passcode when they log in. Otherwise, users can change the passcodes, but not remove it. For security reasons, be careful when you use this feature bit. The user logs in, presses U to reach the User Options Menu, then presses P to change the passcode. The user enters four zeros, 0000, at the prompt to clear the passcode. This also applies during the tutorial.

Requires feature bits:

- 070 (User Options Menu)
- 073 (Enter and change mailbox passcode)

## 126 Make/Give to Mailbox with Empty GCOS

Allows one-way communication to a mailbox that has a GCOS with no groups entered or has GCOS 2 (Self). The recipient mailbox cannot answer the message, even if the FCOS contains feature bit 029 (Answer messages). Service bureau operators or hotel staff mailboxes can use this to send messages to customers.

Requires feature bits:

- 020 (Make messages)
- 040 (Receive messages from other users) in the recipient mailbox

## 127 Deny Receipt of Messages Before Tutorial Run

Prevents a mailbox from receiving messages before the mailbox owner plays the tutorial and sets up the mailbox.

Requires feature bits:

- 040 (Receive messages from other users) and/or 041 (Receive messages from outside callers)
- 070 (User Options Menu)

## 128 Family Head

## 129 Host Mailbox

## 130 Passcode Cannot be Same as Mailbox

Prohibits a user from assigning a passcode that is the same as the mailbox number. This security feature helps prevent hackers from breaking in to the system.

Requires feature bits:

- 070 (User Options Menu)

- 073 (Enter and change mailbox passcode)

**Note:**

This feature bit only works with NuPoint UM Standalone deployments. It is inoperable with NuPoint UM on MiCollab .

### **131 Don't Say Limits of Liability Statement**

This feature bit is only used with VMUIF, a custom user interface, and with ISO UI, a user interface based on ISO/IEC International Standard 13714.

### **132 Bad Passcode Lockout if Over Limit**

Each mailbox tracks bad passcode attempts within a specified time limit. If the count reaches the limit, the mailbox owner hears "I'm sorry. You cannot reach your mailbox at this time. Good-bye." The system administrator must clear the mailbox either at the console or by phone.

Otherwise, the mailbox owner hears, "Warning! There have been excessive bad passcodes entered for your mailbox." The bad passcode count is automatically cleared after the time limit. You can modify the time limit and bad passcode attempts in the [NuPoint Voice application](#).

### **133 Don't say: "You may start your msg now"**

Before an outside caller leaves a message, the server prompts the caller to start the message. This feature bit omits that prompt. Use this when line usage time is an issue, or if callers know what to do at the beep.

Requires feature bits:

- 004 (Outside caller functions)
- 041 (Receive messages from outside callers)

### **134 Broadcast Message Waiting Status**

Sets the server to broadcast the message waiting, rather than the message itself, to distribution list 01.

Requires feature bits:

- 040 (Receive messages from other users) and/or 044 (Receive user dist list messages)
- 070 (User Options Menu)
- 074 (Create or modify user distribution list)

Feature bit 122 (Define broadcast mailbox) overrides this.

### **135 Define Template Mailbox (NP Forms)**

Used with the [NP Forms](#) optional feature. The mailbox plays the greetings stored in its child mailboxes, sequentially, and records a message after each greeting.

### **136 Don't say: "End of message"**

Omits the "End of Message" prompt that occurs after a message plays. Use this when line usage time is an issue.

Requires feature bit 050 (Play messages).

### **137 Caller Must Enter Access Code**

Requires that callers enter a valid access code ("authorization code" in NP Receptionist) before they can leave messages. Codes can include up to ten digits, any of the numeric keys on a pushbutton phone. A mailbox owner can require that callers enter a specific mailbox number plus the passcode in order to leave a message.

The mailbox owner or system administrator creates this access code when setting up the mailbox.

See also feature bit 160 (Caller must enter line group access code), which requires an access code before playing the greeting.

### **138 Don't say: "Message complete"**

Omits the "Message complete" prompt after recording of a message. Use this when line usage time is an issue.

Requires feature bit 020 (Make messages).

### **139 Template: Assume Last Greet Box FCOS**

Used with the NP Forms optional feature. For more information, see the NP Forms guide.

Requires feature bit 135 (Define template mailbox).

### **140 Say Full Date When Playing Messages**

Announces the full date (time, day, date, month, and year) before playing all messages. Otherwise, when a mailbox user plays a message, the delivery date is shortened as much as possible. If the message was delivered the same day, only the time plays; if it came the same week, only the day of week plays; and so on.

Requires feature bit 050 (Play messages).

Do not include feature bits 048 (No auto-time stamp of unplayed msgs) or 049 (No auto-time stamp of played msgs) in the FCOS.

**Note:**

Using this feature bit can significantly increase how long users are connected to the server, increasing line usage time.

**141 Define Chain Mailbox in NP Receptionist**

Works with [NP Receptionist](#) Chain mailboxes route calls to an extension even if the chain mailbox has no greeting. In addition, NP Receptionist can route a call from a chain mailbox to an extension that the caller enters.

**142 Must Run Tutorial from Own Phone (SMDI)**

Used for Centrex and Unified integrations. Requires that the user play the tutorial from the telephone assigned to the mailbox, rather than any telephone. Use this where users are assigned default passcodes because it prevents “stealing” mailbox access by dialing in and changing the passcode.

Requires feature bits:

- 070 (User Options Menu)
- 073 (Enter and change mailbox passcode)
- 093 (Deny change of passcode in first tutorial)

**143 Change Message Delivery Phone Number**

Allows the mailbox owner to use a pushbutton phone to change the message delivery telephone number. Mailbox owners can use this when they expect a call and are at a different telephone number than the message delivery number currently programmed in the mailbox.

This feature bit requires:

- Feature bit 070 (User Options Menu)
- Feature bit 094 (Change Message Delivery Options)
- Message-waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

**144 Skip Forward to Next Message**

Allows a user to skip forward from the current message to the “top” of the next message by pressing the T key without first keeping, giving, or discarding. When a user skips a

message, the server treats the message as unplayed. The next time the user logs in, the server includes skipped messages in the count of unplayed messages.


This feature bit:

- is overridden by feature bit 204 (Message Skip, Forward and Backward).
- conflicts with feature bits 048 (No Auto-timestamp of Unplayed msgs) and 049 (No Auto-timestamp of Played Msgs).

### 145 Message Stays in Original Queue on Hangup

Determines how the server classifies a message if a mailbox owner does not either press K to keep it or press D to discard it. The message stays in the original (unplayed or urgent) queue if the mailbox owner hangs up or logs out after starting to play it. See below:

#### Decision Process for Unplayed Messages

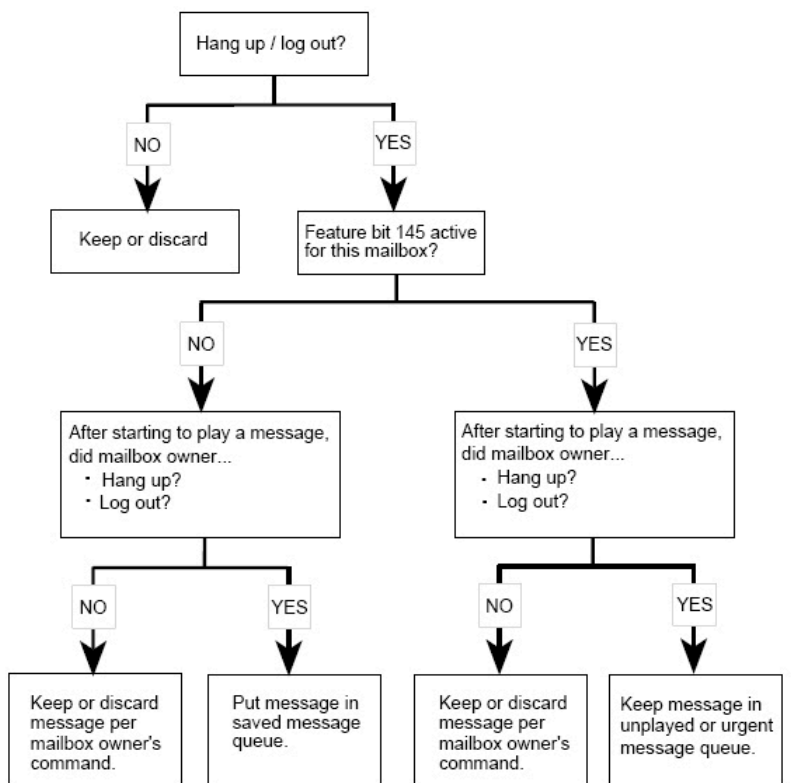

NP0040

Otherwise, a message moves to the saved queue when the mailbox owner hangs up or logs out while playing it.

If a mailbox owner has feature bit 089 (Auto-play all msgs, new and saved) but not feature bit 054 (Auto-keep messages), and hangs up before keeping or discarding a message, it always stays the unplayed queue.



Feature bit 144 (Skip Forward to Next Message) overrides this feature bit. If a mailbox owner has feature bit 144 and uses it to skip forward to a new message, then hangs up before keeping or discarding the message, both messages (skipped and played) will stay in the unplayed queue. This occurs even if feature bit 145 is disabled.

See also feature bit 147 (Send receipt after full play) for information on how 145 and 147 interact.

### **146 Don't say: "NuPoint Voice storage is full"**

Suppresses a warning that the system issues if the voice storage is 80% full, encouraging mailbox owners to delete unneeded messages. The warning is sent in two formats:

- An audible prompt played when the user logs in to his or her mailbox.
- An email message sent to the user's Standard or Advanced UM address (programmed in the mailbox parameters).

Use this when the site policy does not allow mailbox owners to receive audible or email system warnings.

### **147 Send Receipt After Full Play**

Sends a receipt for a message after a user plays the entire message, even if the user does not press K to keep it or D to discard it. If the FCOS includes feature bit 145 (Message stays in original queue), the message stays in the unplayed queue; without 145, it moves to the saved queue.

If the user skips past the message, hangs up, or logs out before it finishes playing, and the FCOS includes feature bit 145, the server does not send the receipt and the message stays in the unplayed queue.

If the user skips past the message, hangs up, or logs out before it finishes playing, and the FCOS does not include feature bit 145, the server sends the receipt and the message moves to the saved queue.

### **148 Change NP Wakeup Phone Number**

Allows a user to use a pushbutton telephone to change the phone number for [NP WakeUp](#). An LCOS, "NP WakeUp--Phone Length", sets the length of the phone number.

Requires:

- Feature bit 015 (Change wakeup options)|
- Feature bit 070 (User Options Menu)
- NP WakeUp optional feature
- A configured outdial or pager port

**149 Login to Template Thru Rotational Mailbox**

Used with the [NP Forms](#) optional feature.

Requires feature bit 135 (Define template mailbox, NP Forms).

**1.2.4.1.8.4 Feature Bits 150 to 199****150 (ISO) Simple Message Delivery**

This feature bit is only used with ISO UI, a user interface based on ISO/IEC International Standard 13714. When this bit is on, the receiver gets a future delivery message without an option menu. When this bit is off, the receiver gets a future delivery message with an option menu.

**151 Deny 333 Access for Mobile DID**

Used only with the DID NuPoint Voice application. Requires mailbox owners to log into their mailboxes only from the mobile phone, not from a “land line.”

The “333” refers to an internal code for land line access. Configure the DID line group for the Mobile DID option.

**152 Deny Login Within Tree**

Prohibits callers from logging in from a tree mailbox or any of its child mailboxes. Use this to restrict mailboxes to information retrieval only.

Requires feature bit 121 (Define tree mailbox).

**153 Don't Jump to New Message from Saved Queue**

Allows the user to continue playing saved messages after a new message arrives, without losing place. After the Prompt for the new message, the user can either play all saved messages, then hear the new message, or, if the FCOS includes feature bit 204 (Message skip, forward and backward), skip forward or backward to the new message.

Otherwise, the server immediately plays any new message that arrives while a user is playing saved messages.

Requires feature bits:

- 039 (Notification tone when new msg arrives) or 047 (Notification prompt when new msg arrives)
- 050 (Play messages)
- 053 (Keep messages)

**154 Announce Text (Email) Message Count**

Plays the Prompts that announce text messages, such as email, messages, or faxes at a hotel front desk.

Feature bit 217 (Announce text msgs without count) overrides this.

**155 Payphone User/Recipient Interface**

This feature bit is reserved for future use.

**156 Deny Login After Greeting**

Allows a mailbox owner to log in only before or while the greeting plays, not afterward.

**157 Repeat Message for Answering Machine**

Used with call placement. If the called party does not press a key, the message plays twice to allow an answering machine to receive the message. Otherwise, the message does not play because the server waits for DTMF input and a timeout.

Requires:

- Feature bit 110 (Make/give to telephone number)
- A mailbox configured for call placement
- Outdial (paging) port

**158 Continue Sending Message (\* Key)**

Allows the mailbox owner to press the \* (star) key to continue giving, sending, or answering a message. After making, giving, or answering a message, the mailbox owner hears a Prompt to press the \* (star) key to add an additional mailbox. If the FCOS includes feature bits 022 (Make to multiple destinations) and 026 (Give to multiple destinations) the mailbox owner can enter more than one mailbox number.

Also allows a user to send the most recently made message to additional mailboxes, unless the user skips to the next message.

Requires at least one of these feature bits:

- 020 (Make messages)
- 024 (Give messages)
- 029 (Answer messages)

**159 Say "Press 0 to return to NP Receptionist"**

Plays a Prompt, "Press zero to return to automated receptionist," after the caller leaves a message, then presses the # (pound) key to return to the Receptionist menu.

Requires the [NP Receptionist](#) optional feature.

### **160 Caller Must Enter Line Group Access Code**

Requires an outside caller to enter an access code to continue. Otherwise, the server hangs up.

Use this for the administrator's mailbox, for a line group that has 800 (toll free) service, or for a modem. This function is required by law in some countries.

See also feature bit 137 (Caller must enter access code), which requires callers to enter an access code to leave a message in the mailbox.

### **161 Conditional Greetings**

Allows the mailbox owner to use separate, personal or system greetings for each forwarding condition: Busy, Forward, or Ring No Answer.

Requires:

- Feature bit 070 (User Options Menu)
- Call forwarding information from the PBX

### **162 General Greetings**

Allows the mailbox owner to choose the general system greetings for all call types. The system greeting is the default greeting used when a user has not recorded a personal greeting. When used with feature bit 161, allows four general greetings: Primary, Busy, Call Forward, and Ring No Answer.

Requires feature bit 070 (User Options Menu).

### **163 Don't Play Message Count**

Suppresses the message count prompt ("You have no messages in your mailbox") to allow callers to enter DTMF digits rather than voice messages. To use this function, create a new FCOS based on FCOS 10. Delete feature bits 4, 20, and 41; add feature bits 133, 138, 163, 171, and 213.

Used with the Cut-Through Paging optional feature. Do not use this for mailboxes that receive messages.

### **164 Skip/Pause During Greeting in Greeting-only Mailbox**

Allows a caller to press the # (pound) key to skip forward (fast forward), press the \* (star) key to skip backward (rewind), press 1 to pause, or press 7 to restart while listening to a greeting. This is similar to skipping and pausing when playing messages (see feature

bits 006 and 007). Use this for long greetings so callers can verify the information without having to call the mailbox again.

To log in to this mailbox, you must use the \* (star) key and mailbox number sequence, not the mailbox number and \* (star) key sequence.

Requires:

- Feature bit 062 (Hang up immediately after greeting)
- Greeting-Only mailbox.

Dial-by-Name overrides this because it hard-plays the mailbox greeting.

Overrides feature bit 060 (Ignore DTMFs during greeting).

### **165 Pound Key (#) Login**

Allows a user to log in by dialing in from any server port, pressing the # (pound) key, and entering the mailbox number.

Overrides Dial an Extension and Email.

### **166 AMIS Analog Networking**

Used with the AMIS Analog Networking optional feature. For details, see the AMIS Analog Guide.

### **167 (ISO) SMS Short Text Option Enabled**

This feature bit enables a short text message option in the ISO SMS main menu. If this bit is on, bit 12 must also be on.

Related bits: 12, 214, 269, 278 and 284.

### **168 Message Wait 1, Pager Requeue**

If a message arrives during a time period when paging is not scheduled, queues the server to page at the start of the next scheduled paging period for schedule one (Message Waiting type 1). Otherwise, the server does not page unless a message arrives during the scheduled paging period.

Applies to both paging and message delivery.

### **169 Message Wait 2, Pager Requeue**

If a message arrives during a time period when paging is not scheduled, queues the server to page at the start of the next scheduled paging period for schedule two

(Message Waiting type 2). Otherwise, the server does not page unless a message arrives during the scheduled paging period.

Applies to both paging and message delivery.

## 170 Transfer to Email System

Prompts an outside caller to transfer into the Email system. Do not include this feature bit unless your system is part of an Email system.

Requires feature bits:

- 040 (Outside caller functions)
- 005 (Play Outside Caller Menu prompts)
- 176 (Say “Press pound [#] for more options” to callers)

## 171 Cut-through Paging

Activates either of two types of Cut-through Paging for the mailbox. A Caller can leave either a telephone number or a message, but not both. You can use this with feature bit 173 (Receive cut-through page notify receipt).

Requires:

- Feature bit 070 (User Options Menu)
- Cut-through Paging optional feature
- Message waiting type 5 defined in the mailbox

## 172 Cut-through Paging and Messaging

Activates either of two types of Cut-through Paging for the mailbox. A Caller can leave either a telephone number, a message, or both. You can use this with feature bit 173.

If the FCOS includes feature bit 004 (Outside caller functions), the caller must press i, the feature activation key, to activate Cut-through Paging. Otherwise, the caller can enter the telephone number without pressing i.

If the FCOS does not include feature bit 005 (Play Outside Caller Menu prompts), the caller does not hear the function prompts. Feature bit 005 requires feature bit 004.

Requires:

- Feature bit 070 (User Options Menu)
- Cut-through Paging optional feature
- Message waiting type 5 defined in the mailbox

### 173 Receive Cut-through page Notify Receipt

Works with the Cut-through Paging optional feature to generate receipts for all paging attempts. You can use this with feature bit 171 or 172.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 075 (Audit receipt message)
- Feature bit 171 (Cut-through Paging) or 172 (Cut-through Paging and messaging)
- Cut-through Paging optional feature
- Message waiting type 5 defined in the mailbox

### 174 Define Broadcast Greeting Mailbox

Allows a mailbox to send recorded greetings to a list of other mailboxes, like a broadcast mailbox sends messages it receives to other mailboxes. Use distribution list 09 for the broadcast greeting mailbox list.

Requires these feature bits in mailboxes that receive the broadcast greeting:

- 161 (Conditional greetings) for multiple mailbox greetings
- 162 (General greetings) for multiple mailbox greetings
- 175 (Receive broadcast greeting)

A broadcast greeting mailbox can also be a tree mailbox or a broadcast message mailbox. Use distribution list 01 for the tree or message broadcast feature. Use distribution list 09 for the greeting broadcast.

Can be used with feature bit 178 (Define broadcast name mailbox). Both use the same distribution list 09.

### 175 Receive Broadcast Greeting

Allows a mailbox to receive the greeting from a broadcast greeting mailbox. For information on the broadcast greeting mailbox, see feature bit 174 (Define broadcast greeting mailbox).

Requires feature bits to change multiple mailbox greetings:

- 161 (Conditional greetings)
- 162 (General greetings)

### 176 Say: "Press pound [#] for more options" to Callers

Plays Prompts for outside callers if more options, such as Dial an Extension or transferring to Email. The user hears, "Press the pound [#] key for more options." If the

user presses the # (pound) key, the server then plays, “Press 1 to dial an extension, 2 to transfer to Email,” if both optional features are available. If only one option is installed, pressing the # (pound) key initiates that option.

Requires feature bits:

- 004 (Outside caller functions)
- 005 (Play Outside Caller Menu prompts)
- 170 (Transfer to Email System) for the prompt to include Email.

## **177 (ISO) Reminder Calls**

This feature bit is only used with ISO UI, a user interface based on ISO/IEC International Standard 13714. This feature bit allows mailbox users to create reminder calls.

## **178 Define Broadcast Name Mailbox**

Broadcasts all recorded names that are created or modified to a list of mailboxes, like a broadcast mailbox sends a message to other mailboxes. Use distribution list 09 for the broadcast name mailbox list.

Mailboxes that receive the broadcast name must include feature bit 179 (Receive broadcast name).

- A broadcast name mailbox can also be a tree mailbox or a broadcast message mailbox. Use distribution list 01 for the tree or broadcast message feature. Use distribution list 09 to broadcast the name.

Can be used with feature bit 174 (Define broadcast greeting mailbox). Both use the same distribution list 09.

## **179 Receive Broadcast Name**

Allows a mailbox to receive a recorded name from a broadcast name mailbox. For information on the broadcast name mailbox, see feature bit 178 (Define broadcast name mailbox).

## **180 Record Personal Wakeup Message**

This feature bit is used with VMUIF, a custom interface. It allows the mailbox owner to record a personal message for the next wakeup call, which is used instead of the normal wakeup message. This feature bit requires the Auto Wakeup optional feature.

## **181 Paging over msgdel, mwi 1 over mwi 2**

Sets the selection order for pagers:



- If either message waiting type 1 or message waiting type 2 is a pager, selects the pager instead of message delivery
- If both types are for pagers, selects message waiting type 1

Use this when paging schedules overlap.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 077 (Change pager schedule)
- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

### **182 Use pri/alt as Week/Weekend for mwi 1**

Changes the operation of the primary and alternate message waiting type 1 (MWI 1). Uses primary message waiting type 1 for weekday messages and uses the alternate for weekend messages. Use this for paging or message delivery if the telephone numbers differ for weekday and weekend. The server assumes that weekends are Saturday and Sunday, independent of the day/night configuration.

Otherwise, the server tries the primary message waiting type until all tries are exhausted, and tries the alternate.

Requires that message waiting type 1 be configured for the mailbox.

### **183 Use pri/alt as Week/Weekend for mwi 2**

Changes the operation of the primary and alternate message waiting type 2 (MWI 2). Uses primary message waiting type 2 for weekday messages and uses the alternate for weekend messages. Use this for paging or message delivery if the telephone numbers differ for weekday and weekend. The server assumes that weekends are Saturday and Sunday, independent of the day/night configuration.

Otherwise, the server tries the primary message waiting type until all tries are exhausted, and tries the alternate.

Requires that message waiting type 2 be configured for the mailbox.

### **184 Append Mailbox Number to Transfer**

Used when transferring to another system, such as Email, from the NuPoint Unified Messaging server. Allows NuPoint Voice to append the mailbox number to the end of the Email transfer string to inform the other system of the mailbox number when transferring the call transfer. Configure the transfer number in the online option for an Email string.

### 185 Receive Wakeup Call Notification Receipt

Use this in the hotel/motel environment to give users a receipt for any wakeup calls that were not delivered because of a Busy or Ring No Answer.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 015 (Change Wakeup Options)
- NP WakeUp optional feature

### 186 Default to Last Child of Tree Mailbox

When a time out occurs, causes the server to default to the last mailbox in distribution list 01.

Requires feature bit 121 (Define Tree Mailbox).

Overrides feature bit 120 (Default to First Child of Tree Mailbox).

### 187 NP Receptionist Call-transfer Tree Mailbox

Used with the NP Receptionist optional feature. Allows a call to be transferred to the first child mailbox on a Ring No-Answer, and to the second child mailbox on a Busy. Record greetings for the tree mailbox and its child mailboxes. Use this to track statistics for extensions in high traffic conditions.

Do not use with feature bit 121 (Define tree mailbox).

### 188 Append # to End of Cut-thru Page Number

Used with the cut-through paging optional feature. Allows a caller to enter a number, then press the # (pound) key to indicate that the number is complete. Otherwise, the server waits for the time out set in the LCOS before sending the page.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 171 (Cut-through Paging) or 172 (Cut-through Paging and messaging)
- Cut-through Paging optional feature
- Message waiting type 5 set up in the mailbox

### 189 Rotate on Full Mailbox

Allows a caller to leave a message even if the original mailbox is full by routing the message to the first available mailbox in distribution list 01 of the full mailbox. When logging in to the primary mailbox, the mailbox owner hears "Your overflow mailbox has

messages.” The mailbox owner must log into the child mailbox(es) to retrieve overflow messages.

Otherwise, when a mailbox reaches the maximum number of messages allowed by its LCOS, the caller hears “I’m sorry, mailbox for [mailbox owner] is full” and the caller cannot leave a message.

Use this to override the server limit for maximum messages per mailbox. For example, to set a limit of 250 messages for a mailbox owner, set the limits to 200 (the maximum) for the parent mailbox and to 50 for the child mailbox.

## **190 Receive Fax Messages**

Allows a mailbox to receive fax messages with voice comments. Callers hear a Prompt to leave a voice message and to press L to leave a fax with the voice message. A caller can ignore the voice message prompt and press L to only leave a fax.

Requires:

- Feature bits 040 (Receive Messages from Other Users) or 041 (Receive Messages from Outside Callers)
- NuPoint Fax optional feature

## **191 Make Fax Messages**

Allows a mailbox owner to press L to make a fax message. The fax message can include voice comments; both are delivered to the recipient.

Requires:

- Feature bit 020 (Make messages)
- NuPoint Fax optional feature

## **192 Give Fax Messages**

Allows a mailbox owner to forward a received fax, with voice comments, to another user or an outside line. Another fax is not considered a comment.

Requires:

- Feature bit 024 (Give Messages)
- Feature bit 190 (Receive Fax Messages)
- [NuPoint Fax](#) optional feature

## **193 Deliver Fax to Default Number**

Allows a user to listen to the voice comments, then deliver the fax to a personal (default) fax telephone number. The system administrator can set this to a specific fax machine

during configuration. In the mailbox, the user can set the default fax number by pressing U (User Options), F (Fax), then D (Default Fax Number), and enter the number. This requires feature bit 070 (User Options Menu).

Requires:

- Feature bit 190 (Receive Fax Messages)
- Feature bit 110 is required to send a fax to an external machine. It is not required to send internal faxes.
- [NuPoint Fax](#) optional feature

### **194 Deliver Fax Online**

Allows the user to call from a fax telephone to retrieve a stored fax message. The user must first listen to any voice comments.

Requires:

- Feature bit 190 (Receive Fax Messages)
- [NuPoint Fax](#) optional feature

### **195 Specify Fax Delivery Number**

Plays a Prompt, "Press i to input a number for this fax" that allows a user or caller to press i and enter a telephone number for the fax machine.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 190 (Receive Fax Messages)
- Feature bit 110 is required to send a fax to an external machine. It is not required to send internal faxes.
- [NuPoint Fax](#) optional feature

### **196 Change Default Fax Number**

Allows a user to change the default fax phone number. Use this for people who travel between several offices so they can set the default number when arriving at an office.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 190 (Receive Fax Messages)
- Feature bit 193 (Deliver Fax to Default Number)
- [NuPoint Fax](#) optional feature

## 197 Fax-on-Demand for Greeting Only Mailbox

Used for fax publishing. Set up a Greeting-Only mailbox, and include this feature bit so callers can retrieve faxes from the mailbox. The feature bit 194 (Deliver fax online) function is included in this feature bit. To allow the user to input a different number for the fax, include feature bit 195 (Specify fax delivery number).

Requires:

- Feature bit 004 (Outside Caller Functions)
- Feature bit 005 (Play Outside Caller Menu prompts)
- Feature bit 190 (Receive Fax Messages)
- [NuPoint Fax](#) optional feature

## 198 Receive Fax Messages Only

Used for both fax mail and guaranteed fax. Callers do not hear a greeting or prompts, and the mailbox receives only faxes, not voice messages. A fax session starts as soon as the server answers the call.

Requires:

- Feature bit 190 (Receive Fax Messages)
- [NuPoint Fax](#) optional feature

## 199 Auto-receipt for Successful Fax Transmissions

Creates a time-stamped voicemail receipt when a user sends a fax transmission that succeeds. The receipt is placed in the sending user's mailbox.

Note that regardless of whether this feature is enabled:

- Failed fax transmissions always cause a voicemail receipt to be placed in the sending user's mailbox.
- If an [Email Fax Confirmation](#) address is configured, both failed and successful fax transmissions cause an email confirmation message to be sent to the user. The subject line of the email includes the following information: success/failure status, number of pages, and date and time of transmission attempt.

Requires:

- Feature bit 020 (Make Messages)
- Feature bit 070 (User Options Menu)
- Feature bit 095 (Mark Message for Future Delivery)
- Feature bit 190 (Receive Fax Messages)
- Feature bit 193 (Deliver Fax to Default Number) or Feature bit 195 (Specify Fax Delivery Number)

- [NuPoint Fax](#) optional feature

### *1.2.4.1.8.5 Feature Bits 200 to 249*

#### **200 Personal Fax Cover Page**

Allows the user to enter a personal fax cover page that identifies the user as the recipient that will be attached to any faxes the user retrieves. In the system administrator's mailbox, the cover page becomes the company fax cover page, and is delivered with any faxes for users who do not have a personal cover page.

If there is no personal or company cover page, then the server does not auto-generate a default cover page.

Requires:

- Feature bit 190 (Receive fax messages)
- [NuPoint Fax](#) optional feature

#### **201 Deny Trivial Passcode**

Checks passcodes to prohibit sequential numbers, such as 1234, and a sequence of a single digit, such as 1111. (However, 21111 is allowed.)

Requires feature bits:

- 070 (User Options Menu)
- 073 (Enter and change passcode)

#### **Note:**

This feature bit only works with NuPoint UM Standalone deployments. It is inoperable with NuPoint UM on MiCollab .

#### **202 Do Not Play Mailbox Name or Ext Number**

Use this in the hotel/motel environment to suppress the name or extension number of a guest who leaves a message in another guest's mailbox. This keeps hotel guests' names and room numbers confidential.

Requires feature bit 020 (Make messages).

## 203 Walkaway Fax for Callers

Allows callers to dial a mailbox and send a fax without voice comments. If the server detects an incoming fax tone, it processes the incoming fax. Without a fax tone, the caller hears the normal mailbox greeting and prompts. If the mailbox includes feature bit 087 (Make and mark urgent), you must train the users and callers to press 8 twice if they wish to mark a fax urgent.

Requires the [NuPoint Fax](#) optional feature.

## 204 Message Skip, Forward and Backward

Allows the user to press two keys to skip forward to the next message or backward to the previous message:

|    |                               |
|----|-------------------------------|
| T# | Skip forward                  |
| T* | Skip backward                 |
| TI | Replay the message time stamp |
| TO | User Options                  |

Pressing T without pressing another key within two seconds causes a skip forward. To use this function with NuPoint Fax, these key combinations apply:

|    |                               |
|----|-------------------------------|
| T  | Fax Transmittal options       |
| T# | Skip forward                  |
| TT | Skip forward                  |
| T* | Skip backward                 |
| TI | Replay the message time stamp |
| TO | User Options                  |

Overrides feature bits 048 (No auto-time stamp of unplayed messages), 049 (No auto-time stamp of played messages), and 144 (Skip forward to next message).

## 205 Do Not Use Text Count for Message Waiting

Sets the server to ignore the text count for the message waiting indicator, even if the text count is one or more.

## 206 Discard Fax Message After Delivery

Automatically deletes a fax after sending it. Used in guaranteed fax to prevent res-ending the same fax.

Requires the NuPoint Fax optional feature. For more information, see the NuPoint Fax Manual.

Feature bit 237 (Automatically deliver fax to default number) overrides this.

## 207 Fax Verify (Sending System Not Self)

Used with guaranteed fax mailboxes that can call a system port. It prevents an outgoing call to its own mailbox number.

Requires the [NuPoint Fax](#) optional feature.

## 208 Play Reorder Tone After CTP or Greet-only

Plays a reorder tone (fast busy signal) after a caller enters a number for cut-through paging, or hears the greeting on a Greeting-Only mailbox to encourage callers to hang up.

Requires feature bit 171 (Cut-through Paging) or 172 (Cut-through Paging and messaging) or a Greeting-Only mailbox.

## 209 Tone Only Pager Mailbox Interface

Used for special mailboxes that use tones rather than greetings to simulate a paging terminal; intended for DID lines only.

When a caller reaches the mailbox, the server immediately generates a page, according to the schedule set in the mailbox. Callers cannot leave messages. Overrides all feature bits in the Receive Message category.

Requires:

- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

## 210 Numeric Display Pager Mailbox Interface

Used for special mailboxes that use tones rather than greetings to simulate a paging terminal; intended for DID lines only. When a caller reaches the mailbox and enters a number, the server immediately generates a page, according to the schedule set in the mailbox. Callers cannot leave messages. Overrides all feature bits in the Receive Message category.

Requires:

- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

## 211 Voice Pager Mailbox Interface

Used for special mailboxes that use tones rather than greetings to simulate a paging terminal; intended for DID lines only. When a caller leaves a voice message, the server



immediately generates a page, according to the schedule set in the mailbox. Callers do not hear greetings or Prompts.

Requires:

- Message waiting type 1 or 2 defined as 5 (pager) in the mailbox
- A configured pager port

## **212 Send Page Upon Answer, Greet-only Mbx**

When this feature bit is used with a Greeting-Only mailbox and the BBL Terminal Emulation optional feature, the mailbox can send out a page in accordance with its pager schedule as soon as a call is received, regardless of when the outside caller hangs up.

This feature bit requires:

- Message waiting type 1 or 2 defined as 5 (pager) in a mailbox owner's mailbox
- A pager port defined in the VoiceMemo configuration
- The BBL Terminal Emulation optional feature must be installed and enabled

## **213 Edit CTP Num with \* Key if No Caller Menu**

Used for cut-through paging. Allows callers to edit the cut-through page number no caller menu is activated. The caller can press the \* (star) key to delete the cut-through page number and enter a new one. The caller then hears: "The number you have entered is [nnnnnn]. Press star to delete this number and enter another. You can press X or hang up to send your page."

Requires feature bit 171 (Cut-through Paging) or 172 (Cut-through Paging and messaging).

Do not include feature bit 005 (Play Outside Caller Menu prompts).

## **214 (ISO) SMS Voice Messaging Option Enabled**

This feature bit enables a voice message option in ISO SMS main menu. If this bit is on, bit 12 must also be on.

Related bits: 12, 167, 269, 278 and 284.

## **215 Don't Auto-play First Msg (w/auto-play)**

Used with feature bits 052 (Auto-play unplayed messages) or 089 (Auto-play all msgs, new and saved), to not automatically play the first message and allow the user to perform other functions in the mailbox. After the user presses P to play the first unplayed or saved message, all subsequent messages then auto-play according to feature bit 052 or 089.

Requires feature bits:

- 050 (Play messages)
- 052 (Auto-play unplayed messages) or 089 (Auto play all msgs, new and saved)

### **216 Play Receipts After Urgent Messages**

Plays urgent messages, then receipts, and then unplayed (non-urgent) messages. Otherwise, unplayed messages play before receipts.

Requires feature bits:

- 050 (Play messages)
- 088 (Receive urgent messages); without feature bit 088, receipts play before all unplayed messages

### **217 Announce Text Msgs without Count**

Alerts a mailbox owner when the text counter is greater than zero, but does not give a count. Use this for integrations that cannot give a text message count to the server, but can indicate the presence of one or more messages.

Overrides feature bit 154 (Announce text (Email) message count).

### **218 Passcode NOT Needed on Direct Calls**

Allows users to log in to their mailboxes from their own telephones without entering a passcode. The integration must provide the telephone number.

### **219 Login with 0 Using Cut-thru paging**

Allows a caller to press 0 to log in to a cut-through paging mailbox; the server sends all other input to the pager display.

Requires feature bit 171 (Cut-through Paging) or 172 (Cut-through Paging and messaging).

### **220 No Dial Ext or Email if Unplayed Msgs**

Disables the user transfer to Dial an Extension or Email if there are unplayed messages in the queue. After the user plays all unplayed messages, the transfer is allowed.

Requires either NP Receptionist or the Email interface optional feature, which requires feature bit 170 (Transfer to Email system).

### **221 Deny Caller Transfer to Email**

Prevents an outside caller transfer to Email if the Email interface is installed.

Do not use feature bit 176 (Say “Press pound [#] for more options” to callers) with this, unless the system has Dial-an-Extension for outside callers.

## **222 Deny Nesting of Distribution Lists**

Prevents mailbox owners from nesting distribution lists. Otherwise, a distribution list number can be a member of another distribution list.

Requires feature bits:

- 070 (User Options Menu)
- 074 (Create or modify user distribution list)

## **223 Delay Requested Receipt for 24 Hours**

Causes the server to wait 24 hours before delivering receipts so that a mailbox owner can use receipts as “ticklers” to follow up calls. The receipt arrives 24 hours after the user sends the message and indicates whether or not the recipient played the message.

Requires feature bits:

- 020 (Make messages)
- 021 (Make and request receipt)
- 050 (Play messages)

### **Note:**

Does not delay automatic (forced) receipts.

## **224 Auto-transfer to Task Before Greeting**

Transfers all outside callers to Email or another phone number. Used with the Email interface, which requires feature bit 170 (Transfer to Email System).

## **225 Auto-transfer to Task Upon Login**

Transfers the mailbox user to Email or another phone number when logging in. Used with the Email interface, which requires feature bit 170 (Transfer to Email System).

## **226 Auto-transfer to Task After Unplayed Msgs**

Transfers the mailbox user to Email or another phone number after the user plays all unplayed messages, but before playing receipts and played messages; therefore the user does not hear Prompts for these. Used with the Email interface.

Requires feature bit 170 (Transfer to Email System).

## 227 Undelete last Message with \* Key

Allows a mailbox owner to undelete a message after deleting it. After pressing D to delete a message, the user can immediately press the \* (star) key to retrieve the message. This does not work if the user presses any other key immediately after pressing D.

You can use this with other feature bits that use the \* (star) key, such as 144 (Skip forward to next message) or 158 (Continue sending message, \* key), because they use the star (\*) key in a different context. However, you cannot use this with feature bits 052 (Auto-play unplayed messages), 056 (Autodiscard messages), or 089 (Auto-play all msgs, new and saved).

Requires feature bits:

- 050 (Play messages)
- 055 (Discard messages)

## 228 Set Msg Wait #3 for Urgent Msgs Only

Activates message waiting type 3 for urgent messages only, and not for other unplayed messages.

Requires:

- Feature bit 040 (Receive messages from other users) and/or 041 (Receive messages from outside callers)
- Feature bit 088 (Receive urgent messages)
- Message waiting type 3 defined for the mailbox

## 229 Play Names of Lists 1 Children

Used with a shared extension mailbox to play the name of each child mailbox defined in distribution list 01. You can specify up to 190 child mailboxes.

For details on shared extension mailboxes, see the Shared Extension Suggested Additional FCOS and FCOS 15 (Tree).

## 230 Deny Change of Fax Cover Page Options

Prevents a user from changing a fax cover page through the User Options menu. A user can use a default company cover page, or a personal cover page that the system administrator entered through the server console.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 190 (Receive fax messages)

- [NuPoint Fax](#) optional feature

### **231 Passcode Broadcast Mailbox**

Broadcasts the passcode to a list of mailboxes, like a broadcast mailbox sends a message to other mailboxes. Use distribution list 09 for the broadcast passcode mailbox list. Typically used in a network environment such as NP Net.

Mailboxes that receive the passcode must include feature bit 232 (Allow receipt of passcode broadcasts).

A broadcast passcode mailbox can also be a tree mailbox or a broadcast message mailbox. Use distribution list 01 for the tree or broadcast message feature. Use distribution list 09 to broadcast the passcode.

Can be used with feature bit 174 (Define broadcast greeting mailbox) or 178 (Define broadcast name mailbox). Both use the same distribution list 09.

### **232 Allow Receipt of Passcode Broadcasts**

Allows a mailbox to receive a passcode from a passcode broadcast mailbox. For information on the broadcast passcode mailbox, see feature bit 231 (Passcode broadcast mailbox) for more information.

### **233 Not Used**

### **234 Check Message Wait Status of Children**

Used with a shared extension mailbox to check the message waiting status of all child mailboxes defined in distribution list 01, up to 190. For details on shared extension mailboxes, see the Suggested Additional FCOS, Shared Extension, and FCOS 15 (Tree).

When a child mailbox broadcasts its message waiting status to the shared extension mailbox, this causes the parent mailbox to check all other child mailboxes for messages before turning off the message waiting indicator. Otherwise, if two child mailboxes receive new messages, and one user retrieves the message, the message waiting indicator turns off, even though the other child mailbox still has a message waiting.

Child mailboxes require:

- Feature bit 134 (Broadcast message waiting status)
- Distribution list 01 with parent mailbox as only member
- Feature bit 229 (Play names of list 1 children)

The parent mailbox requires:

- Feature bit 070 (User Options Menu)
- Feature bit 072 (Record or change mailbox greeting)

- Feature bit 121 (Define tree mailbox)
- Configured message waiting indicator

### 235 Display FROM Field on Fax Cover Page

Adds the “From” field to the default fax cover page to show who sent the fax.

Requires:

- Feature bit 190 (Receive fax messages)
- **NuPoint Fax** optional feature

### 236 Display Promotional Messages on Fax Cover Page

Adds a promotional message field to the default fax cover page.

Requires:

- Feature bit 190 (Receive fax messages)
- [NuPoint Fax](#) optional feature

### 237 Automatically Delivers Fax Message to Default Number

Allows the user to automatically send faxes to a default fax number when they arrive in the mailbox to make it easier for users who regularly use the same fax machine to retrieve their faxes. The fax or voice/fax message automatically moves to the saved queue without turning on the message waiting indicator. The user can set this in the User Options menu.

Requires:

- 070 (User Options Menu)
- 190 (Receive fax messages)
- [NuPoint Fax](#) optional feature

Overrides feature bit 206 (Discard fax message after delivery). Use 206 for guaranteed fax mailboxes only.

### 238 End-of-session Multiple Fax Delivery Number

Enables the server to make only one outbound call for all faxes sent to the same number during a mailbox session. This is invisible to users and saves on outbound fax calls.

Requires:

- Feature bit 191 (Make fax messages)
- [NuPoint Fax](#) optional feature

### 239 Retrieve All Unplayed Faxes Through User Option

Groups multiple unplayed faxes in a mailbox for a single delivery to the fax machine rather than sending each fax to the fax machine individually. The user can select this option in the User Options menu.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 190 (Receive fax messages)
- A default fax number
- [NuPoint Fax](#) optional feature

### 240 Receive Fax on Voice Recording Timeout

Allows a caller to dial a mailbox from a manually operated fax machine, press start, and walk away, or, if adding voice comments, to skip pressing L to send the fax.

Requires:

- Feature bit 070 (User Options Menu)
- Feature bit 190 (Receive fax messages)
- [NuPoint Fax](#) optional feature

### 241 Suppress Broadcast Forced Receipt Number

If a name, greeting, or passcode cannot be broadcast from a Broadcast mailbox to a recipient's mailbox, this logs a message in the system log file and prevents the server from creating forced receipts in a recipient's mailbox.

### 242 Say Variable Passcode Prompts for Business Guest Mailboxes Number

Used for guest mailboxes in a business environment. Causes the server to prompt the mailbox owner (usually the administrator) to enter a passcode within a set range of digits. Passcodes can be changed for guest mailboxes even without feature bit 073 (Allow to change passcode). Other feature bits, such as 130 (Passcode cannot be same as mailbox), 201 (Passcode not simple series), or 125 (Allow user to clear passcode) affect which passcodes can be used.

This feature bit is not recommended for a hotel/motel environment.

### 243 (ISO) Transfer to API on Main Menu Key 4

This bit enables menu option key '4' on the Main Menu. This option key can be used for the following prompts:

- "To hear a NewsMemo category, press 4"

- "To erase this message, press 4"
- "Pressing 4 to hear a NewsMemo lets you review a story for a NewsMemo category"

#### **244 (ISO) Transfer to API on Main Menu Key 5**

#### **245 (ISO) Transfer to API on Personal Options Menu Key 6**

#### **246 (ISO) Transfer to API on Personal Options Menu Key 7**

#### **247 Don't Play Any Prompt to Fax Call Placement Recipient**

Suppresses prompts to a call placement recipient for a fax message. Use this when broadcasting a fax message to multiple telephone numbers.

Requires:

- Feature bit 020 (Make messages)
- Feature bit 110 (Make/give to telephone number)
- Feature bit 191 (Send fax messages)
- [NuPoint Fax](#) optional feature

#### **248 (ISO) Deny Transfer to API for Guest Mailboxes**

#### **249 Allow Transfer to Help Desk During Tutorial**

#### ***1.2.4.1.8.6 Feature Bits 250 to 306***

#### **250 Allow NP PWG View Login**

Allows a user to log in to NP View. Requires the NP View optional feature. For more information, see the NP View Administrator's Guide.

#### **251 Allow NP PWG View Telephone Playback/Record**

Allows a user to use a telephone to play and record NP View messages.

Requires:

- Feature bit 250 (Allow NP View login)
- NP View optional feature; for more information, see the NP View Administrator's Guide
- Feature bit 259 (Restrict NP View user to play only faxes) overrides this.

#### **252 Allow NP PWG View Client to Change Mailbox ID**

Allows a user to change the ASCII name of the mailbox during an NP View session. This affects the mailbox name in NP View, Dial-by-Name, and Mailbox Maintenance.



Requires:

- Feature bit 250 (Allow NP View login)
- NP View optional feature; for more information, see the NP View Administrator's Guide

## **253 Not Used**

## **254 Turn on Mailbox Message Trace**

Enables a utility that traces, or tracks, activity for the mailbox and stores it in a record that you can retrieve through the Mailbox Maintenance menu. Use this feature bit only to troubleshoot a specific mailbox.

## **255 Delete Mailbox if No Unplayed Messages**

Used with the NP OnDemand optional feature to allow users to have temporary mailboxes that are created only when a message arrives for them. This deletes the temporary mailbox after the user plays the message or when the unplayed message reaches the retention limit set in the LCOS. Deleting occurs at midnight, when Automatic Purge runs.

Requires:

- Feature bit 041 (Receive messages from outside callers)
- Feature bit 050 (Play messages)
- Mailbox on Demand optional feature; for more information, see the NP OnDemand Manual

Feature bit 218 (Passcode not needed on direct calls) is recommended.

## **256 Enable Fixed Greet "Press 1 or wait" for Walkaway Fax**

Plays a fixed greeting, "r;Press 1 or wait," for walkaway fax that sets a mailbox to expect calls from fax machines rather than from live callers.

Requires:

- Feature bit 203 (Walkaway fax for callers)
- NuPoint Fax optional feature; for more information, see the NuPoint Fax Manual

## **257 Prevent NP PWG View User Voice Playback/Record**

For security purposes, prevents users from playing or recording voice messages on their PCs. Users can view faxes and see the list of messages, but they must use a telephone, not speakers, to hear voice messages. Do not include feature bit 251 (Allow NP View telephone playback/record) unless you include feature bit 259 (Restrict NP View client to play only faxes). Here are the possible combinations of the three feature bits:

|     |     |     |                                                                                           |
|-----|-----|-----|-------------------------------------------------------------------------------------------|
| 251 | 257 | 259 | Result                                                                                    |
| In  | Out | Out | Users can play/record with sound card or with Call-Me/Meet-Me                             |
| In  | In  | Out | Users can play/record with Call-Me/Meet-Me only                                           |
| Out | Out | Out | Users can play/record with sound card only                                                |
| Out | In  | In  | Users cannot play/record voice messages; users can only Make, View, and Save fax messages |

Requires:

- Feature bit 250 (Allow NP View login)
- NP View optional feature; for more information, see the NP View Administrator's Guide

### 258 Prevent NP PWG View Client from Using Local Storage

By default, NP View saves on the server. For security purposes, this prevents users from saving messages to local folders.

Requires:

- Feature bit 250 (Allow NP View login)
- NP View optional feature; for more information, see the NP View Administrator's Guide

### 259 Restrict NP PWG View Client to Play Only Faxes

Allows users to view, make, and save faxes, but not to view, make, and play voice messages. Do not use with feature bit 251 (Allow NP View telephone playback/record).

Requires:

- Feature bit 250 (Allow NP View login)
- NP View optional feature; for more information, see the NP View Administrator's Guide

### 260 Allow NP PWG View Client to have Caller ID Lookup

If Caller ID information is available from the switch, allows the user to use the local database for phone number-to-caller name look-up. Use this with feature bit 262 (Store caller line ID as a phone number).

To determine if Caller ID is available, contact your telecommunications representative.

Requires:

- Feature bit 250 (Allow NP View login)

- NP View optional feature; for more information, see the NP View Administrator's Guide

## **261 Allow NP PWG View WEB Access to Messages**

## **262 Store Caller Line ID as a Phone Number**

Allows users to receive CLI information in the NP View Inbox as a phone number rather than as a mailbox, which is the default. The caller's phone number appears in the "Mailbox#" field and the caller's name appears in the "Caller" field.

This feature bit requires:

- Feature bit 250 (Allow NP View login)
- Feature bit 260 (Allow NP View user to have Caller ID lookup)
- NP View optional feature. For more information, see the NP View Administrator's Guide.

## **263 Store Caller Line ID as a Phone or Mailbox Number**

Allows users to receive CLI information in the NP View Inbox "Mailbox#" field as either a mailbox or a phone number associated with the message. The user hears that mailbox or phone number when retrieving the message by telephone. If the caller's phone number matches the dial plan and a mailbox number, the mailbox number is associated with the message. Otherwise, the phone number is associated with the message.

## **264 Play Outside Caller User Interface for CLI Capture**

Allows an outside caller to enter a callback number manually, from the keypad, to be captured as the CLI callback number.

## **265 Enable NP RapidDial Features**

Enables the NP RapidDial optional feature in the mailbox. For details, see the NP RapidDial Manual.

## **266 Enable SMSC for Callback Numbers**

## **267 Enable SMSC for Short Text Messages**

## **268 Enable SMSC Receipts**

## **269 (ISO) SMS Allow Urgent Deliver**

## **270 Enable Dial-Back Feature**

Allows users to dial back a caller who leaves a voice mail. Used in conjunction with feature bits

263 (Store Caller Line Id as a phone or mailbox number ), 264 (Play outside caller user interface (with FCOS bit 280)), and 280 (Enable CLI outside caller interface (with FCOS bit 264)) to enable the Dial-back feature.

#### **271 Send SMSC Cancel VMNs for ML\_OFF**

#### **272 Send SMSC Cancel CBNs for ML\_OFF**

#### **273 Send MWN Via SS7 Information Directives**

#### **274 Not Used**

#### **275 Enable SMSC Customized Text Messages**

#### **276 Press 0 for More Billing Info**

Allows the user to check billing information from the mailbox. After the user listens to an unplayed message, the Prompt includes "r;Press 0 for billing information." Pressing 0 transfers the user to a greeting-only mailbox that plays billing information specific to that user, then returns the user to the main menu.

**Note:** For information about using this to collect billing information, see the Call Detail Recorder Manual. To set this up, reach the Mailbox Maintenance screen for the mailbox, then enter a greeting-only mailbox number in the "r;Attend DN" field. Do not use "r;H" or "r;S+" in the transfer string. Users cannot press 0 to transfer to the attendant.

Requires a greeting-only mailbox.

#### **277 Send Mail Waiting Notice After Mbox Deletes**

#### **278 (ISO) SMS Callback Number Enabled**

#### **279 Enable TollSaver for Outsider Leaving Message**

#### **280 Enable CLI Outside Caller Interface**

Must be used with feature bit 264 to activate the CLI outside caller interface for the mailbox. Allows an outside caller to enter a callback number manually, from the keypad, to be captured as the CLI callback number.

#### **281 Enable NP Boomerang Manual Callback Number Option 'N'**

#### **282 Enable Call Screening in MBOD for Callers and Users**

Enables the user to screen calls by prompting outside callers to state their names before leaving a message. The user hears the caller's name before playing the message.

Requires:

- Feature bit 133 (Don't say: "You may start your message now.")
- NP OnDemand optional feature

### **283 Say Number of Unplayed Messages on Last Logout**

Allows users to hear the number of messages left unplayed.

### **284 Provide Callback Number Delivery Options**

Captures the caller line ID number.

Requires NP Boomerang or CLI optional features.

### **285 Enable Speech to Text**

Allows users to access transcription of voice mail messages to text. Can be used alone or in conjunction with the following bits to provide specific features:

- For automatic transcription, UM Advanced users also require feature bit 295; UM Standard users require bit 304.
- To provide transcription request link in UM email messages, feature bit 289 OR 295 (and a UM Advanced license)
- Features bit 290 to view and/or save a text transcription of a voice mail message in the Web View

### **286 To Allow Mailbox to Accept Calls without Charge**

### **287 Enable Enhanced Auto Wakeup**

Allows users to reach the wakeup menu directly from Main menu, rather than through the User Options menu. For details, see the NP WakeUp Guide.

Requires the NP WakeUp optional feature.

Do not use with feature bit 015 (Change wakeup options).

### **288 Enable TUI Emulation**

Provides a telephone user interface (TUI) that emulates the first level of the Octel/Avia voice mail system. This feature can be employed by customers who have migrated to the NuPoint Unified Messaging platform from a competitive system and wish to continue using well-known TUI commands for common functions.

**289 Enable UM - SMTP**

Allows Unified Messaging users to have their voice mail messages forwarded to their email address via SMTP forwarding.

**290 Enable UM - Web View**

Allows Unified Messaging users to access their voice mail messages from a Web browser or email client. To use their email client, the client must be configured for Web access.

**291 Enable RAC (Record A Call)**

Enables soft keys on the user's phone, to allow the user to save phone conversations to their NuPoint mailbox.

Do not use with feature bit 122 (Define Broadcast Mailbox).

**292 Enable NP Call Director**

Allows the current mailbox to create a personal call flow to direct callers.

**293 Disable the <Save> <Reply> and <Forward> Buttons on the UM Standard Web View Web Pages**

Removes the save, reply, and forward buttons from the Unified Messaging user's Web View interface so that the user cannot manipulate their voice mail messages.

**294 Enable the Mitel Embedded Player on the UM Standard Web View Web Pages**

Enables a secure, embedded applet that will play voice mail messages through the user's PC speakers. Does not create temporary files on the user's PC.

**295 Enable Advanced UM**

Enables Advanced UM options for users who also have the Standard UM option. Allows users to access messages from the Web View in an email client or Web browser. Also allows users to access messages from the TUI. (E-mail can be accessed through the TUI via Text-to-Speech functionality.)

Requirements:

- Each Advanced UM user must have a mailbox configured with an Email Alias (Microsoft) , Full Name (Lotus), or UM Email Address (Google). All required fields must be completed; if they are left blank or misconfigured, the user will not be found and a service interruption may occur.
- If a password changes in the client, it must also be changed in the mailbox.
- Licenses must be purchased for all Advanced UM users.

## 296 Enable Text-to-Speech Playback

Requires feature bit 295.

## 297 Enable Extended Absence Greeting

An Extended Absence Greeting (EAG) tells callers that the person they are calling is away for an extended period of time. Callers do not have the option to skip the greeting. At the end of the greeting, callers can leave a message, transfer to the line-group attendant, or end the call.

**Note:** The Extended Absence Greeting supports only Mnemonic and UK English prompts.

You must assign FCOS 297 (Enable Extended Absence Greeting) to a mailbox to allow the user to record and enable an EAG. You can also assign 298 (Disable message delivery when Extended Absence Greeting is enabled). For information on how users record and enable an EAG greeting for their mailbox, refer to the NuPoint Unified Messaging *Messaging User Guide*.

EAG is included in the base software and can be enabled for any NuPoint Unified Messaging user.

## 298 Disable message delivery when Extended Absence Greeting is enabled

Prevents callers from leaving a message for the mailbox user when that user has an Extended Absence Greeting enabled. Callers can transfer to the line-group attendant for further options, or they can end the call.

Requires feature bit 297.

**Note:** This bit has a conflict with feature bit 133: Don't say: "You may start your msg now". If the mailbox user has also enabled feature bit 133, then messages are not prevented from being left.

## 299 Allow choice of unplayed or saved messages during playback

Provides mailbox users with the choice to play unplayed or saved messages first.

## 300 Enable secure tutorial

Prevents the mailbox PIN from being played back to the user for confirmation during the tutorial. Instead, the user is required to confirm the passcode by entering it twice.

## 301 Text-To-Speech playback new messages only

When a user employs the Text-to-Speech feature to listen to email messages, only new messages will be played. Messages that have already been read will not be played.

Requires feature bit 296.

### **301 Enable "Press # when you are finished recording" prompt to make, forward, or answer a message for a mailbox**

Enables the prompt to inform users to press the pound key (#) when they are finished recording a voice message. This prompt applies to mailbox-to-mailbox messaging and to messages recorded after being forwarded to a user's mailbox.

### **302 Enable Alternate MWI for Skipped Messages**

Enables users to skip a new message (if bit 204 is enabled), have it remain in the unplayed queue (if bit 145 is enabled) and when the user logs out have the MWI lamp turn off. The user is still able to log in at any time and listen to the skipped messages that were still marked as unplayed and are announced as such.

### **303 Disable Web View Downloads**

FCOS 303 is used to disable downloading of the Outlook Client Plug-in (OCP) installation or Fax Printer installation executables from the Web View interface (Downloads page). The OCP installation is enabled by default when FCOS 295 (Advanced UM) is enabled. The new FCOS 303 must be set in order to disable downloads from the Web View.

### **304 Enable UM Standard**

Allows Unified Messaging users with the Standard UM option to access their voice mail messages from any email client. This feature bit enables the configuration of three email addresses for the user.

### **305 Do not Play Back the Message Caller ID**

The server will not play the caller ID (CLID) during message playback. Instead of hearing a time stamp and CLID, users will only hear a time stamp before the message is played. This feature bit is intended for users who receive many messages or who have a limited amount of time to listen to messages. Requires feature bit 050 (Play messages).

### **306 Play Back Caller ID After ID**

By default, the caller ID (CLID) of the person who has left the message is played prior to the message. Enabling this feature bit will cause the CLID to be played after message playback. While the CLID is playing, the user can skip ahead to the voice message menu by pressing any key. Requires feature bit 050 (Play messages).

#### **Notes:**

- If feature bit 305 is enabled, feature bit 306 is disabled and the CLID will *not* be played.



- This feature only applies to voice messages, not FAX messages. If feature bit 306 is enabled and you use the TUI to retrieve a fax message, the sender's CLID will *not* be played.

## 1.2.4.2 Other Class of Service

### 1.2.4.2.1 Other Classes of Service - Overview

A class of service differentiates privileges and functions for mailboxes. The previous section discusses the Features Class of Service (FCOS), which controls the features in mailboxes. This section discusses three other classes of service:

- **Limits Class of Service (LCOS)** controls time and storage parameters within mailboxes, such as the number of messages the mailbox can store, as well as the set of Prompts
- **Group Class of Service (GCOS)** manages communication between mailboxes
- **Restriction Class of Service (RCOS)** controls the outdial applications, such as Call Placement, message delivery, and pages, and limits these telephone calls by either area code or prefix.

The two remaining classes of service are described in detail outside of this section:

- A **Network Class of Service (NCOS)** controls network access for users; see the [NP Net application section](#).
- A **Tenant Class of Service (TCOS)** manages mailbox interaction between user communities; see "ESMDI Integration" in the *NuPoint Unified Messaging Optional Integrations Guide* for more information.

## 1.2.4.2.2 Limits Class of Service

### 1.2.4.2.2.1 Limits Class of Service - Overview

The Limits Class of Service (LCOS) consists of a set of limits parameters configured to a value of your choice. As the administrator, an LCOS is the best resource available to you to control the use of disk storage.

The LCOS assigned to a mailbox's configuration controls the time and storage parameters associated with that mailbox. For example, the LCOS can control message-length and the total number of messages stored in a mailbox. You can also modify an LCOS to specify alternate language prompts.

Be aware that certain options interact within and between these Classes of Service; some options require other options, and some combinations of options conflict. In particular, the LCOS can affect how the FCOS functions. For example, if you allow a mailbox owner to make messages and then assign an LCOS that has a user message length of 0 seconds, the user cannot record a message.

## Pre-Programmed LCOS

LCOS 1 is pre-programmed. You can copy this LCOS and customize it as required. The LCOS parameters and their default settings for LCOS 1 are listed in [LCOS Limits Parameters and Defaults](#). Up to 640 LCOS can be configured in this system; each can have different limits for all parameters in the Limits Parameters Menu.

## LCOS for the Administrator or Attendant Mailbox

For best results, assign the default LCOS (LCOS 1) to both the administrator's and the attendant's mailboxes. LCOS 1, with the appropriate FCOS and GCOS, supports the special functions for these mailboxes.

## Selecting Alternate Language Prompts

The default language for all line groups is English; all languages other than English are optional features.

You can modify a line group or LCOS so that users receive prompts in an alternate language. In addition, you can specify a second alternate language for line groups. This enables users to select between multiple languages (for example, English and French) when they call into the Message Center or NuPoint Receptionist application.

Before you can specify alternate languages for a line group or an LCOS, you must install the alternate-language prompt software.

If your server is running more than one language at the line group level (one or two per line group) and you want to control the line groups that callers reach, specify a prompts language for each LCOS. This process ensures that callers hear mailbox prompts in the correct language.

### 1.2.4.2.2.2 Procedures (Web Console)

#### 1.2.4.2.2.2.1 Managing LCOS

You can

- [List LCOS](#)
- [Add an LCOS](#)
- [Edit an LCOS](#)
- [Delete an LCOS](#)
- [Assign a New LCOS to a Mailbox](#)
- Review the list of [LCOS Parameters and their Default Values](#)

## Listing LCOS

To display a list of all LCOS that have been created:

- In the navigation tree, **Class of Service** and then click Limits COS.

## Add an LCOS

1. In the navigation tree, click **Class of Service** > Limits COS. The LCOS list is displayed.
2. Click Add. The Add LCOS form is displayed.
3. Do one of the following:
  - Copy an existing LCOS by selecting one from the list and clicking the **Copy from** button. The parameters of that LCOS will be copied into your new LCOS, which you can then edit as required. The Next Available LCOS number is automatically applied.
- OR
- Chose to manually select all limits for the new LCOS
4. In the **Number** field, enter a **number** for this LCOS, or click **Next Available** to automatically assign the next number.
5. In the **Name** field, enter a **name** (up to 15 alphanumeric characters) for this LCOS. For example, "Passcode Expiry" for an LCOS that controls users passcode expiry period.
6. To manually select values for limits, or to edit the limits values in a copied LCOS, see [LCOS Fields Description](#) in the tables below.
7. To save the LCOS and return to the Limits COS list, click Save.

## Edit an LCOS

Best practices dictate that you always keep your default LCOS settings intact. If you need to modify an LCOS, we suggest that you copy the most appropriate of the default LCOS into a new LCOS (see "Add an LCOS" above) and modify it there. After you save the new LCOS, you need to assign it to the appropriate mailboxes. This way, if you have problems/conflicts with the new COS, you can always restore the default until you have finished troubleshooting.

## Delete an LCOS

Deleting an LCOS that is in use by mailboxes will cause all of those mailboxes to be assigned the default (1) LCOS. A warning message will be displayed to allowing you to cancel the operation. If you are deleting the default LCOS, the mailboxes assigned to it will be assigned to the next available LCOS. You cannot delete the last remaining LCOS in the system; therefore, you cannot select all LCOS for deletion.

To delete one or multiple LCOS:

1. In the Limit COS list, select one or multiple LCOS, and then click Delete. The system prompts you to confirm the deletion.

2. To confirm the deletion, click Yes for a single deletion or Yes to all for a range.

OR

To reject the deletion, click No.

### Assign a New LCOS to a Mailbox

- Follow the procedure to [edit a mailbox](#) and when instructed to edit mailbox parameters, enter the new LCOS on the Class of Service tab.

### LCOS Fields Description

| Field  | Description                                                                                                                                                                                                                                                                                        | Values                                                                                                                                                 |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number | <p><b>*Required field.</b></p> <p>Determines the number of the new LCOS. You can manually enter a number from 1-640 as long as it is not already assigned to an LCOS. You can also click the "Use next available number" link to have the system assign the next available number to the LCOS.</p> | <p>Enter a number in the range of 1 -640. The number must not be already used for an existing LCOS. Or click the "Use next available number" link.</p> |
| Name   | <p>This is the name of the LCOS.</p> <p><b>*Required field. (Note:</b> You can create unnamed LCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed LCOS, use the Text console to name it.)</p>                                                   | <p>Maximum 15 alphanumeric characters.</p>                                                                                                             |

| Field                          | Description                                                                                                                                                                                                                                                                                                                                                                                            | Values                             |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| (Limits values drop-down list) | Limits are organized into 12 categories in this drop-down list. You select a limit in the drop-down list to modify it. For every limit, you must enter a numeric value within the allowed range (see the Limits Values table). Entering 0 means unlimited unless otherwise specified in the table. When creating a new LCOS, limits are assigned a default value, as described in the following table. | See Parameters and Default Values. |

## 1.2.4.2.2.2 LCOS Parameters and Default Values (Web Console)

LCOS 1 is pre-configured; it contains the default values for all parameters. All mailboxes are assigned LCOS 1 by default, unless otherwise configured by the system administrator.

### Limits Values - Web Console Layout

| General Limits   | Unit    | Default | Minimum | Maximum |
|------------------|---------|---------|---------|---------|
| Greeting length  | Minutes | 2       | 0       | 60      |
| User name length | Seconds | 2       | 0       | 240     |

| General Limits               | Unit    | Default       | Minimum | Maximum |
|------------------------------|---------|---------------|---------|---------|
| Message count                |         | 200           | 0       | 200     |
| User message length          | Minutes | 5             | 0       | 60      |
| Caller message length        | Minutes | 5             | 0       | 60      |
| Maximum login time           | Minutes | 0 (unlimited) | 0       | 50      |
| Maximum attachments per page |         | 199           | 0       | 199     |

| General Limits                | Unit             | Default       | Minimum       | Maximum |
|-------------------------------|------------------|---------------|---------------|---------|
| Future delivery message count |                  | 99            | 1             | 99      |
| Future delivery maximum days  | Days             | 60            | 1             | 365     |
| Minimum message length        | Seconds          | 0 (unlimited) | 0             | 5       |
| Minimum recipients count      |                  | 65535         | 0             | 65535   |
| Maximum recipients count      |                  | 65535         | 0             | 65535   |
| Passcode Expiry Period        | Days             | 0             | 0             | 365     |
| Wake UP Limits                | Unit             | Default       | Minimum       | Maximum |
| Phone length                  | Number of Digits | 11            | 1             | 24      |
| Maximum days                  | Days             | 0 (unlimited) | 0 (unlimited) | 365     |
| Billing Limits                | Unit             | Default       | Minimum       | Maximum |
| Maximum pages per billing     |                  | 0 (unlimited) | 0 (unlimited) | 999     |
| Maximum wake-up per billing   |                  | 5             | 0 (unlimited) | 999     |
| Minimum billed number length  | Number of Digits | 0             | 0             | 25      |
| Call Placement Limits         | Unit             | Default       | Minimum       | Maximum |
| RNA retry limit               | Retries          | 5             | 1             | 255     |
| RNA retry interval            | Minutes          | 5             | 1             | 255     |

| General Limits                     | Unit             | Default       | Minimum       | Maximum |
|------------------------------------|------------------|---------------|---------------|---------|
| Busy retry limit                   | Retries          | 5             | 1             | 255     |
| Busy retry interval                | Minutes          | 5             | 1             | 255     |
| Message phone length               | Number of Digits | 11            | 1             | 25      |
| Recipient count                    |                  | 190           | 0             | 190     |
| Maximum message length             | Minutes          | 5             | 0 (unlimited) | 60      |
| Distribution List Limits           | Unit             | Default       | Minimum       | Maximum |
| Maximum members per list           |                  | 200           | 0 (unlimited) | 65535   |
| Maximum number of lists            |                  | 99            | 0 (unlimited) | 99      |
| Fax Limits                         | Unit             | Default       | Minimum       | Maximum |
| Maximum number of digits           | Digits           | 11            | 1             | 25      |
| Fax message count                  |                  | 199           | 0             | 199     |
| CNG tone detection length          | Seconds          | 0 (unlimited) |               |         |
|                                    |                  |               |               |         |
| Fax delivery retry limit           | Retries          | 5             | 1             | 255     |
| Fax delivery retry interval        | Minutes          | 5             | 1             | 255     |
| ISO User Interface Limits          | Unit             | Default       | Minimum       | Maximum |
| Maximum family members or guests   |                  | 0 (unlimited) |               |         |
| Reminder calls maximum days        | Days             | 0 (unlimited) |               |         |
| Maximum reminder calls per billing |                  | 0 (unlimited) |               |         |



| General Limits                    | Unit  | Default       | Minimum | Maximum |
|-----------------------------------|-------|---------------|---------|---------|
| Maximum destinations per reminder |       | 0 (unlimited) |         |         |
| Language                          | Unit  | Default       | Minimum | Maximum |
| Language                          |       | Default       | N/A     | N/A     |
| Message Age Limits                | Unit  | Default       | Minimum | Maximum |
| Played messages retention         | Hours | 672           | 1       | 8760    |
| Unplayed messages retention       | Hours | 336           | 1       | 8760    |
| Urgent messages retention         | Hours | 336           | 1       | 8760    |
| Cut-thru paging receipt retention | Hours | 672           | 1       | 8760    |
| Receipt retention                 | Hours | 672           | 1       | 8760    |
| Played fax retention              | Hours | 672           | 1       | 8760    |

| General Limits                           | Unit    | Default       | Minimum | Maximum |
|------------------------------------------|---------|---------------|---------|---------|
| Unplayed fax retention                   | Hours   | 336           | 1       | 8760    |
| Urgent fax retention                     | Hours   | 336           | 1       | 8760    |
| Fax receipt retention                    | Hours   | 672           | 1       | 8760    |
| Absolute message retention               | Hours   | 0             | 0       | 8760    |
| MWI Limits                               | Unit    | Default       | Minimum | Maximum |
| Paging Phone Length                      | Digits  | 11            | 1       | 24      |
| Message delivery phone length            | Digits  | 11            | 1       | 24      |
| MWI message length                       | Minutes | 0 (unlimited) | 0       | 5       |
| Network Limits                           | Unit    | Default       | Minimum | Maximum |
| Network queue message count              |         | 99            | 1       | 99      |
| Maximum attachment per network message   |         | 199           | 1       | 199     |
| Maximum hours to wait for reply from NIB | Hours   | 0             |         |         |
| Outdial Applications Limits              | Unit    | Default       | Minimum | Maximum |

| General Limits               | Unit   | Default     | Minimum | Maximum |
|------------------------------|--------|-------------|---------|---------|
| Minimum billed number length | Digits | 0           | 0       | 25      |
| Call Director Template       | Unit   | Default     | Minimum | Maximum |
| Template                     |        | No Template | N/A     | N/A     |
| Unified Messaging Limits     | Unit   | Default     | Minimum | Maximum |
| Unified Messaging Limits     |        | Yes         |         |         |

### 1.2.4.2.2.3 Procedures (Text Console)

#### 1.2.4.2.2.3.1 Create a New LCOS from a Copy

Creating a new LCOS consists of assigning:

- a number (we recommend that you use consecutive numbering to conserve database space)
- a name (a descriptive name, up to 15 alphanumeric characters, for example, "ForContractors")
- the required limits (for example, you might set the Mailbox passcode expiry parameter for all contractors to 90 days)
- the prompt language, if other than the default English

Use the [LCOS worksheet](#) to organize the information you need. (See a [sample worksheet](#).)

To create a new LCOS based on an existing LCOS:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration**, and then **(L) Limits COS**.
2. Select **(C) Choose Limits COS to Modify** and enter the **number** of the new LCOS you want to create (1-640), or just press **Enter** if the displayed LCOS is correct.
3. Select **(N) Name Selected LCOS** and enter a descriptive **name** for the LCOS, from 1 through 15 characters.

4. Select **(K) Copy LCOS** and enter the **n umber** of the existing LCOS you want to copy (1-640).
5. Select the required parameters menu in which you want to make changes. (For example, to change the Passcode Expiry parameter, select **(L) Set Limits for selected LCOS**; to change a message retention parameter, select **(D) Set Mailbox & Message Age Limits**.) See [LCOS Parameters and Default Values](#) for the menu location of parameters.
6. Select the parameters you want to change and enter the new values.
7. You can verify your entries by selecting the "Show" menu option for the various parameters menus (for example, **(T) Show More LCOS States**, or **(Y) Show Message Age Limits**.)
8. After confirming that modifications are correct, save the modified limits by exiting the LCOS menu.

### 1.2.4.2.2.3.2 LCOS Parameters and Default Values (Text Console)

LCOS 1 is pre-configured; it contains the default values for all parameters. All mailboxes are assigned LCOS 1 by default, unless otherwise configured by the system administrator.

The tables below provide a quick reference to all the limits parameters, with default values.

| Limits Parameters Menu                      | Default Value     |
|---------------------------------------------|-------------------|
| (G) Greeting length                         | 2.0 (minutes)     |
| (N) User name length                        | 2 (seconds)       |
| (M) Message count                           | 200*              |
| (B) Messages per billing                    | 0 (no limit)      |
| (L) User message length                     | 5.0 (minutes)     |
| (C) Caller message length                   | 5.0 (minutes)     |
| (E) End of message warning time             | 0 (seconds)       |
| (T) Maximum login time                      | 0 (no limit)      |
| (O) Maximum NP View Inactivity Timeout      | 59 (minutes)      |
| (W) Network queue message count             | 99                |
| (S) Maximum attachments per message         | 199               |
| (I) Maximum attachments per network message | 199               |
| (D) Message delivery login delay            | 5 (seconds)       |
| (P) Mailbox passcode expiry                 | 0=disabled (days) |
| More Limits Parameters Menu                 | Default Value     |
| (A) NP WakeUp - phone length                | 11 (digits)       |

|                                                |                |
|------------------------------------------------|----------------|
| (B) Paging - phone length                      | 11 (digits)    |
| (C) Message delivery - phone length            | 11 (digits)    |
| (D) Future delivery - message count            | 99             |
| (E) Max days - future delivery                 | 60 (days)      |
| (F) Max family member or guest                 | 0 (not used)   |
| (G) Message waiting indicator - message length | 0 (no minimum) |
| (H) Minimum message length                     | 0 (no minimum) |
| (I) Maximum pages per billing                  | 0 (no limit)   |
| (J) Maximum wakeups per billing                | 0 (no limit)   |
| (K) Maximum outstanding wakeup calls           | 0 (not used)   |
| (L) Callback number length                     | 11 (digits)    |

|                                                  |                   |
|--------------------------------------------------|-------------------|
| Even More Limits Parameters Menu                 | Default Value     |
| (A) Max days - NP WakeUp                         | 0 (no limit)      |
| (B) Max days - reminder call                     | 0 (not used)      |
| (C) Max reminder calls per billing               | 0 (not used)      |
| (D) Max destinations per reminder call           | 0 (not used)      |
| (E) Max members per distribution list            | 200               |
| (F) Max recipients count                         | 190 (per message) |
| (G) Max number of distribution lists             | 99 (lists)        |
| (H) Min number of recipients for receipt summary | 0 (no recipients) |
| (I) Minimum billed number length                 | 0 (digits)        |
| (J) Max hours to wait for reply from NIB         | 0 (not used)      |

|                                      |               |
|--------------------------------------|---------------|
| Call Placement Menu                  | Default Value |
| (A) Ring No Answer (RNA) retry limit | 5 (retries)   |
| (B) RNA retry interval               | 5(minutes)    |
| (C) Busy retry limit                 | 5(retries)    |
| (D) Busy retry interval              | 5(minutes)    |
| (E) Message phone length             | 11 (digits)   |
| (F) Recipient count                  | 190           |
| (G) Maximum message length           | 5 (minutes)   |

|                                                                  |                |
|------------------------------------------------------------------|----------------|
| Fax Limits Parameters Menu                                       | Default Value  |
| (A) Maximum Number of digits for telephone number                | 11 (digits)    |
| (B) Fax Message count                                            | 199 (quantity) |
| (C) Pre-greet silence interval to improve walkaway CNG detection | 0 (seconds)    |
| (D) Fax delivery retry frequency                                 | 5              |
| (E) Fax delivery retry interval                                  | 5 (minutes)    |

|                              |               |
|------------------------------|---------------|
| Message Retention Limit Menu | Default Value |
|------------------------------|---------------|

|                                          |              |
|------------------------------------------|--------------|
| (M) Message retention                    | 0 (no limit) |
| (P) Played message retention             | 672 (hours)  |
| (U) Unplayed message retention           | 336 (hours)  |
| (R) Urgent message retention             | 336 (hours)  |
| (S) Cut-through paging receipt retention | 672 (hours)  |
| (T) Receipt retention                    | 672 (hours)  |
| (A) Played Fax Message Retention         | 672 (hours)  |
| (B) Unplayed Fax Message Retention       | 336 (hours)  |
| (C) Urgent Fax Message Retention         | 336 (hours)  |
| (D) Fax Receipt Retention                | 672 (hours)  |
| (E) Absolute message retention           | 0 (no limit) |

|                                                                                   |               |
|-----------------------------------------------------------------------------------|---------------|
| Prompt Language Selection Menu                                                    | Default Value |
| (D) Use default                                                                   |               |
| Other Prompt set options are listed according to the optional features installed. |               |

\*For systems that upgrade to release 4.1 or later from a pre-4.1 release, this LCOS parameter carries forward a default of 73 messages.

### 1.2.4.2.2.3.3 Assign an LCOS to a Mailbox

**Note:** Before a custom LCOS can take effect, you must define it.

To assign an LCOS to a mailbox configuration:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** and enter the *number* of the new mailbox you want to configure.

OR

3. Select **(M) Modify Mailboxes** and enter a mailbox number to modify an existing mailbox.
4. Press **Enter** until the **Limits Class of Service** or **New LCOS** prompt appears and then enter the number of the LCOS that will govern this mailbox. (If you are modifying a mailbox, the LCOS you just entered replaces the existing LCOS.)
5. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number. At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.2.4.2.2.3.4 View LCOS Information

You can view LCOS information through the System Configuration Menu or the Reports Menu.

To display all defined LCOS and the limits parameters that comprise them:

### Using the System Configuration Menu

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(L) Limits COS**.
2. To view limits parameters in defined LCOS, select an option (for example, **(T) Show More LCOS States**), and then enter the number of the LCOS(s) you want to view (1-640) in one of the formats shown here:
3. A single LCOS **number**, for example 3
4. A range of FCOS **numbers**, for example 2-4
5. A series of FCOS **numbers**, for example, 2,4,5,12
6. **A** for a summary of all FCOS
7. **E** for a summary of even-numbered FCOS
8. **O** for a summary of odd-numbered FCOS
9. **L** for a summary of the lower half of FCOS
10. **U** for a summary of the upper half of FCOS
11. The server displays a list of all defined LCOS that shows the values set for general limits parameters contained in them.

```
LCOS to show (? for help)= 1

Max Netq Max User Callr Name Greet Max Msg Net MsgDI 1View
# Name Msgs Msgs Bill Len Len Len Len Log Sib Sib Delay Tmout
-----
1 Default 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
```

12. To view any other limits parameters, select from the following list and enter the LCOS number you want to view:
13. **(U)** Show Call Placement LCOS States
14. **(W)** Show NuPoint Fax LCOS states
15. **(Y)** Show Message Age Limits for Selected LCOS
16. **(Z)** Show Language for Selected LCOS

### Using the Reports Menu

1. From the Main Menu, select **(R) Reports Menu**.

2. Select **(E) LCOS**.
3. At the output routing prompt, select one of the following:
4. **C** to send the report to the console without pausing
5. **P** to send the report to the console, pausing as the screen fills,
6. **F** to send the report to a file on the server,
7. **A** to append the report to an existing file on the server, or
8. **X** to exit report output options (no report).

| LIMITS                                                        |                |     |    |   |     |     |   |     |   |     |     |   |    |
|---------------------------------------------------------------|----------------|-----|----|---|-----|-----|---|-----|---|-----|-----|---|----|
| CLASS OF SERVICE                                              |                |     |    |   |     |     |   |     |   |     |     |   |    |
| Wed Oct 28 13:47:08 20XX                                      |                |     |    |   |     |     |   |     |   |     |     |   |    |
| Max Netq Max User Callr Name Greet Max Msg Net MsgDI 1View    |                |     |    |   |     |     |   |     |   |     |     |   |    |
| # Name Msgs Msgs Bill Len Len Len Len Log Sib Sib Delay Tmout |                |     |    |   |     |     |   |     |   |     |     |   |    |
| -----                                                         |                |     |    |   |     |     |   |     |   |     |     |   |    |
| 1                                                             | Default        | 200 | 99 | 0 | 5.0 | 5.0 | 2 | 2.0 | 0 | 199 | 199 | 5 | 59 |
| 2                                                             | NYNEX-Basic    | 200 | 99 | 0 | 2.0 | 2.0 | 2 | 2.0 | 0 | 199 | 199 | 5 | 59 |
| 3                                                             | NYNEX-Advanced | 200 | 99 | 0 | 2.0 | 2.0 | 2 | 2.0 | 0 | 199 | 199 | 5 | 59 |
| 4                                                             | <No name>      | 200 | 99 | 0 | 5.0 | 5.0 | 2 | 2.0 | 0 | 199 | 199 | 5 | 59 |

### 1.2.4.2.3 Group Class of Service

#### 1.2.4.2.3.1 Group Class of Service - Overview

Group Class of Service (GCOS) provides a way to manage communication between mailboxes for a particular set of users. For example, if two departments need to communicate with a supervisor but not with each other, the GCOS of the supervisor needs only to contain the group numbers of the two departments. Each department's GCOS will contain only the group number of the supervisor.

GCOS usage is essential to the operation of the system, and especially for large systems with many mailbox owners, or owners who have multiple mailboxes.

NuPoint Unified Messaging supplies a default GCOS (GCOS1) that includes all groups and so allows communications between all mailboxes. You can create your own custom GCOS as required to a maximum of 32,000.



There are two types of GCOS: bitmapped and affinity.

### Bitmapped GCOS

This GCOS must be defined as containing a number (up to 128) of groups. Two users can exchange messages if their GCOS has any group number in common. Bitmapped GCOS can have several groups defined, or none, allowing for a range of complexity in message exchange. Although bitmapped GCOS are more complex than Affinity, they are also much more flexible.

Bitmapped GCOS are numbered from 1-64.

### Affinity GCOS

This GCOS is not defined - all mailboxes with the same Affinity GCOS can communicate with each other (but not with anyone else). Affinity GCOS works well when mailboxes require communication within particular groups but not across groups. Easier to use than bitmapped GCOS, they are also less flexible.

Affinity GCOS are numbered 65 - 32,267

### Which Type of GCOS Should I Use?

When choosing GCOS, consider the following factors:

- To allow all mailboxes to exchange messages, assign the Default GCOS 1, which contains all 128 groups.
- Mailboxes with bitmapped GCOS and those with affinity group GCOS cannot interact.
- If you assign GCOS 1 to one mailbox and GCOS 65 to another, these mailboxes cannot exchange messages. If you mix the two types, one mailbox cannot communicate with another.
- Every mailbox that shares the same group in a bitmapped GCOS or shares the same affinity GCOS can exchange messages (even if the shared group is in a different GCOS).
- Bitmapped GCOS are useful when you need to develop complex relationships.
- Although mailbox owners may be in the same Dial-by-Name database, they can only reach others in the database who share the same GCOS group (in a bitmapped GCOS) or affinity group.


### 1.2.4.2.3.2 How a GCOS Works

There are two types of GCOS: bitmapped GCOS and affinity GCOS. Bitmapped GCOS are GCOS 1 through 64. Affinity group GCOS are GCOS 65 through 32,000. The two types work very differently, though you can mix both types in one system.

Bitmapped GCOS

A bitmapped GCOS is a collection of groups. A group is nothing more than a number from 1 through 128. Two users can exchange messages if their bitmapped GCOS have any of the same groups. To allow all users to communicate with each other, use the default GCOS 1. It contains all groups.

Figure 2 shows three possible ways to set up the same bitmapped GCOS. As the illustration shows, a bitmapped GCOS can have many groups, a few groups, or no groups defined.

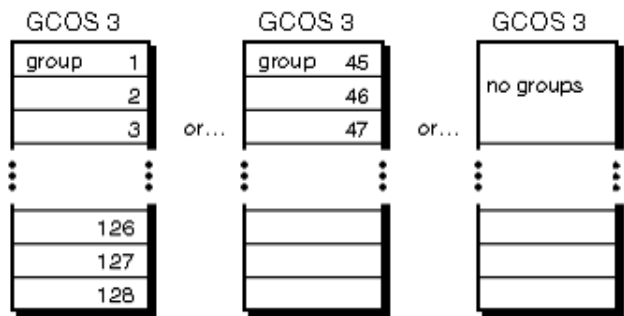


You can enable message exchange ranging from simple to complex, depending on which groups you include or exclude in bitmapped GCOS and which bitmapped GCOS you assign to mailboxes.

As an example, suppose that a scientist directs an experiment using target subjects and control subjects. The target subjects and control subjects do not communicate with each other, but both must communicate with the scientist. The scientist communicates with every subject. Using bitmapped GCOS, you can put the target subjects in a GCOS with one group, the control subjects in another GCOS with a different group, and the scientist in a third GCOS, with both groups.

For example:

| Tenant              | GCOS | Groups in GCOS |
|---------------------|------|----------------|
| Directing scientist | 3    | 1, 2           |
| Target subjects     | 4    | 1              |
| Control subjects    | 5    | 2              |

The following diagram illustrates this message exchange scheme:

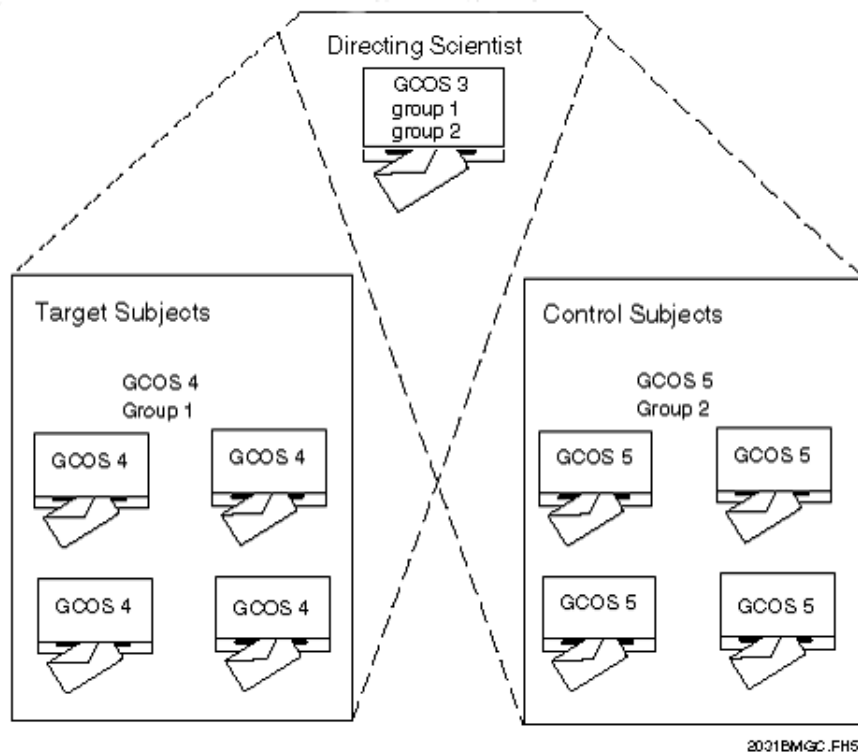


Bitmapped GCOS work well when the mailboxes in your system have different communication needs. Some mailboxes require universal communication, while others must be tightly restricted. This is the more flexible, more complex of the two methods. If you want to use a bitmapped GCOS other than default GCOS 1, you must define it before assigning it to mailboxes.

### Affinity Group GCOS

Affinity group GCOS work well when mailboxes require communication within particular groups, but not across groups. This is the simpler of the two methods; all mailboxes that have the same affinity group GCOS can communicate with each other but cannot communicate with anyone else. Affinity group GCOS are never defined in the system; you simply assign one, numbered from 65 through 32,000, to mailboxes.

The example shows how affinity groups can create several communication groups within a single system.

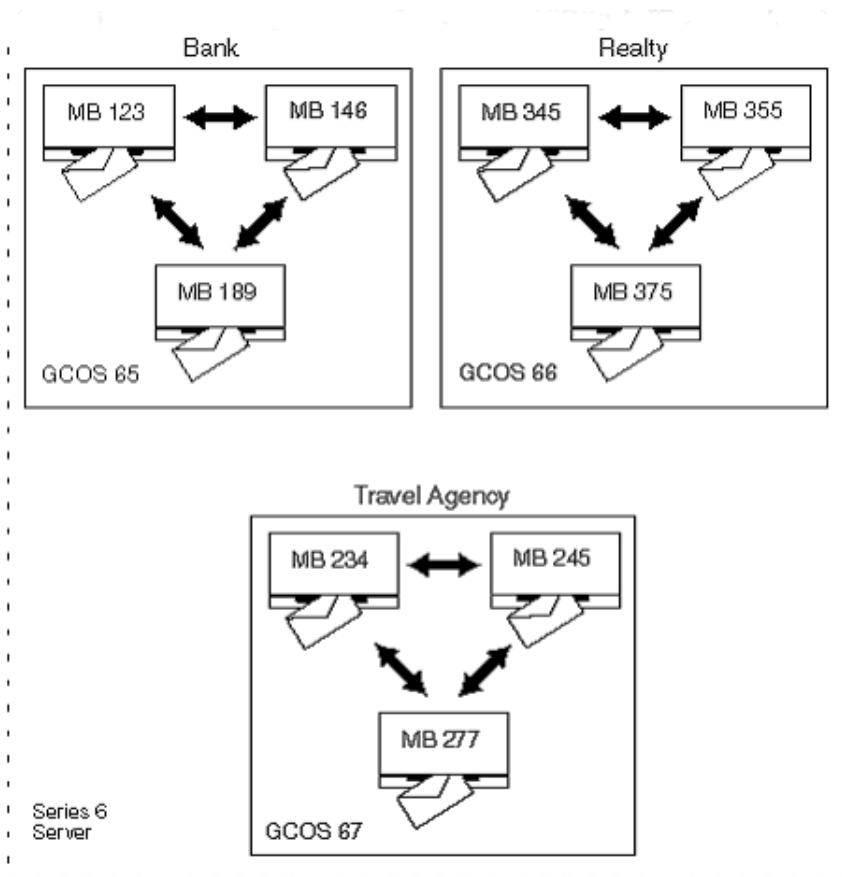

## Guidelines for Deciding Which Type of GCOS to use


When deciding which type of GCOS to use, consider the following factors:

- If you want all mailboxes to be able to exchange messages, just assign GCOS 1, a bitmapped GCOS that contains all 128 groups.
- You can mix the two GCOS types, but mailboxes with bitmapped GCOS (numbered 1-64) cannot interact with mailboxes that have affinity group GCOS (numbered 65-32000), and no single mailbox can communicate with all the mailboxes. If you assign the bitmapped GCOS 1 to one mailbox and the affinity GCOS 65 to another, those two mailboxes cannot exchange messages.
- With bitmapped GCOS, every mailbox that shares the same group can exchange messages, even if the shared group is in a different bitmapped GCOS.
- Bitmapped GCOS are useful when you need to develop complex relationships. The communication links required for the arrangement shown below, for example, are possible only with a bitmapped GCOS.

## Dial-by-Name Considerations

Even though mailbox owners may all be in the same Dial-by-Name database, they can only reach others in the database if they share either the same affinity group or if their bitmapped GCOS have any of the same groups. For example, Jane Doe, Lee Bau, and

John Smith are all in the Dial-by-Name database, but Jane's mailbox and Lee's mailbox are configured with GCOS 1, a bitmapped GCOS, and John's mailbox is configured with GCOS 65, an affinity group GCOS. Jane and Lee can reach each other but not John. This grouping, sometimes called "Partitioned Dial-by-Name," is illustrated in the figure below.

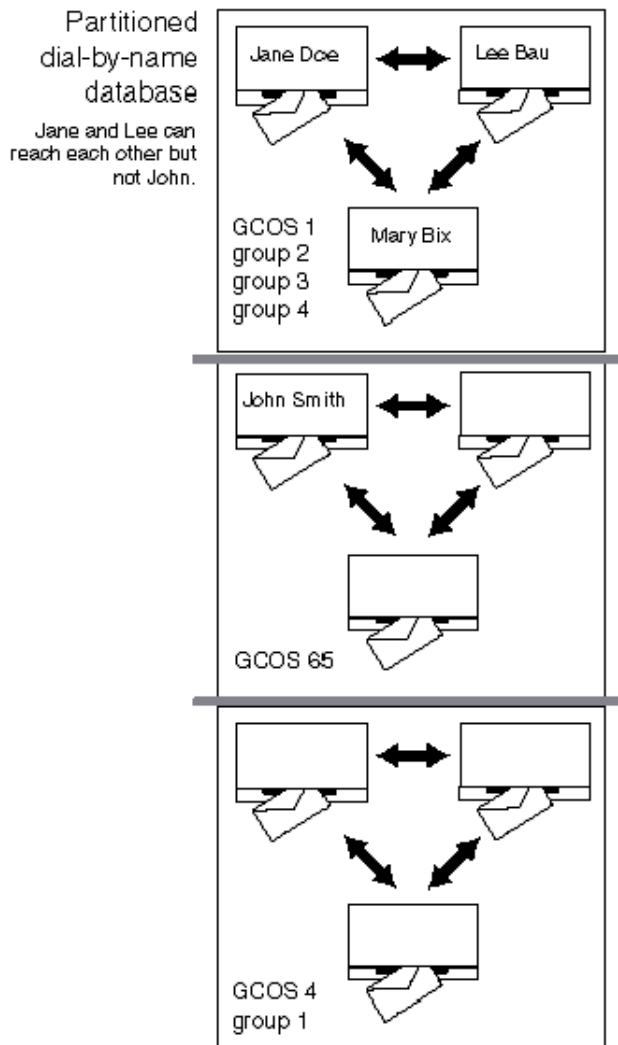

Jane and Lee can be in different bitmapped GCOS but can still communicate if both GCOS include each of their group numbers.

### Interaction Between FCOS and GCOS

Interaction between mailboxes is limited by the GCOS and FCOS that are assigned to them. If, for example, an FCOS allows a user to make confidential messages (feature bit 023), other users within the same GCOS must be able to receive messages from other users (feature bit 040), and to play messages (050). Otherwise, the make confidential message feature is useless.

## Recommendations for GCOS Flexibility

By default, GCOS 1 has all 128 groups defined, giving a mailbox with this GCOS the maximum flexibility in exchanging messages. It is recommended that you do not alter this GCOS.

It is also recommended that you create GCOS 2, but define no groups for it. This “empty” GCOS is useful in restricting the capabilities of a mailbox. It is also used to enable one-way communication, as described in [One-Way Communication Using an Empty GCOS](#).

### 1.2.4.2.3.3 One-Way Communication Using an Empty GCOS

You can prevent contact between users, but you can also allow them to receive certain kinds of messages, using an empty GCOS. For example, you probably want to notify all users before a system shutdown. The empty GCOS is one that is assigned a name and number but no groups.

To enable this one-way communication, the originating (or sending) mailbox must have an FCOS that allows it to make messages and also allows the mailbox owner to make or give (messages) to a mailbox with an empty GCOS. The FCOS feature bits to accomplish this are:

- 020 (Make messages)
- 126 (Make/give to mailbox with empty GCOS)

The receiving mailbox must also have an FCOS that allows it to receive messages from other users (FCOS bit 040). These features enable a user to make a message, as well as give messages from other users, to the mailbox with the empty GCOS.

For example, suppose the local phone company notifies an answering service that maintenance on buried phone cables will disrupt service for two hours next week. If all customers have mailboxes with the FCOS and empty GCOS just described, and if the system administrator’s mailbox has the same FCOS, then the system administrator can use one-way communication to notify users in advance of the system shut down.

To use an empty GCOS and feature bits to enable one-way communication from one set of mailboxes to another:

1. [Customize an FCOS](#) to assign to the **originating** mailbox (the mailbox that sends the one-way messages), that includes the following feature bits:
  - **020** (Make messages)
  - **126** (Make/give to mailbox with empty GCOS)
2. Customize the FCOS assigned to the **receiving** mailbox to include feature bit **040** (Receive messages from other users).

3. Assign an empty GCOS to the receiving mailbox.

## 1.2.4.2.3.4 Procedures (Web Console)

### 1.2.4.2.3.4.1 Managing GCOS

GCOS is mainly used when a single NuPoint Unified Messaging system serves more than one company and you want to prevent people belonging to different companies from sending messages to each other.

You can:

- [List GCOS](#)
- [Add a GCOS](#)
- [Edit a GCOS](#)
- [Delete a GCOS](#)
- [Assign a New GCOS to a Mailbox](#)
- See a [Description of GCOS fields](#)

#### Listing GCOS

To display a list of all GCOS in the system

- In the navigation tree, click Class of Service, and then click Group COS.

#### Add a GCOS

1. In the navigation tree, click Class of Service, and then click Group COS. The Group COS list is displayed.
2. Click Add. The Add GCOS form is displayed.
3. Do one of the following:

- Copy an existing GCOS by selecting one from the list and clicking the **Copy from** button. The parameters of that GCOS will be copied into your new GCOS, which you can then edit as required. The Next Available GCOS number is automatically applied.

OR

- Chose to manually select all limits for the new GCOS
4. In the **Number** field, enter a **number** for this COS, or click **Next Available** to automatically assign the next number.
  5. In the **Name** field, enter a **name** (up to 15 alphanumeric characters) for this GCOS.
  6. From the Groups listing, select all groups that will be included in this GCOS.
  7. To save the GCOS and return to the Group COS list, click Save.

## Edit a GCOS

1. In the navigation tree, click Class of Service, and then click Group COS. The Group COS list is displayed.
2. Select the GCOS you want to modify and then click **Edit**.
3. Select or clear group check boxes as required.
4. To save the GCOS and return to the Group COS list, click Save.

## Delete a GCOS

Deleting a GCOS that is in use by mailboxes will cause all of those mailboxes to be assigned the default (1) GCOS. A warning message is displayed to allow you to cancel the operation. If you are deleting the default GCOS, the mailboxes assigned to it will be assigned to the next available GCOS. You cannot delete the last remaining GCOS in the system; therefore, you cannot select all GCOS for deletion.

**Note:** At any time during the deletion of a GCOS (but before you confirm the deletion), you can click the Cancel button to discard your changes and return to the Group COS list.

To delete one or multiple GCOS

1. In the Group COS list, select one or multiple GCOS, and then click Delete. The system will prompt you to confirm the deletion.
2. To confirm the deletion, click Yes for a single deletion or Yes to all for a range.

OR

To reject the deletion, click No.

## Assign a New GCOS to a Mailbox

- Follow the procedure to [edit a mailbox](#) and when instructed to edit mailbox parameters, enter the new GCOS on the Class of Service tab.



## GCOS Fields Description

| Field           | Description                                                                                                                                                                                                                                                                               | Values                                                                                                                                               |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number          | <p>*Required field.</p> <p>Determines the number of the new GCOS. You can manually enter a number from 1-64 as long as it is not already assigned to a GCOS. You can also click the "Use next available number" link to have the system assign the next available number to the GCOS.</p> | <p>Enter a number in the range of 1-64. The number must not be already used for an existing GCOS. Or click the "Use next available number" link.</p> |
| Name            | <p>*Required field.</p> <p>This is the name of the GCOS.</p> <p>(<b>Note:</b> You can create unnamed GCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed GCOS, use the Text console to name it.)</p>                                   | <p>Maximum 15 alphanumeric characters.</p>                                                                                                           |
| (Group numbers) | <p>Select the groups (by number) that you want to include in the GCOS. Mail boxes that are assigned this GCOS will be members of the groups that you select here. There are 128 groups.</p>                                                                                               | <p>Select any combination of groups from 1 to 128.</p>                                                                                               |

### 1.2.4.2.3.5 Procedures (Text Console)

#### 1.2.4.2.3.5.1 Define a Bitmapped GCOS

Defining a new GCOS consists of assigning:

- a number (of the new GCOS you are defining, or an existing GCOS you are modifying. We recommend that you do NOT modify the default GCOS1.) Bitmapped GCOS are numbered 1-64. Affinity GCOS are numbered 65-32267.

- a name (a descriptive name up to 15 alphanumeric characters. Not required for Affinity GCOS.)
- the required groups (all groups to include in this GCOS. Affinity GCOS does not contain groups.)

To define a bitmapped GCOS: (You can use this procedure to define a new GCOS or to modify an existing GCOS.)

1. Complete a [GCOS Worksheet](#). (See a [sample worksheet](#).)
2. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(G) Group COS**.
3. Select **(C) Current GCOS** and enter the **number** (1-64) of the bitmapped GCOS you are defining.
4. Select **(N) Name GCOS** and enter a descriptive **name for the new GCOS**.
5. Select **(A) Add Group** and then enter the one- to three-digit **numbers** of all groups that comprise this GCOS in one of the following formats:
  - A single group, for example, 3
  - A range of groups, for example, 1-128
  - A series of groups, for example, 3,4,6,7
  - **L** to specify the lower half (1-64)
  - **U** to specify the upper half (65-128)
  - **A** to specify all group numbers
  - **E** to specify even group numbers
  - **O** to specify odd group numbers

You can mix types of entries, so you can specify all the bits necessary in one attempt. For example, this entry is valid: 1,3,4-19,U. Do not enter spaces after commas, and do not end the entry with a comma.

6. If necessary, you can delete groups from the GCOS by selecting **(D) Delete Group** and entering the group **number(s)** to delete. Use the same format as for adding groups.
7. To verify that the information you have entered matches your worksheet, select **(S) Show GCOS** and enter the GCOS number.
8. When you are finished defining the GCOS, save it by exiting from the Group Class of Service Menu.
9. Copy the number of this defined GCOS from your GCOS worksheet to the appropriate mailbox worksheet.

## 1.2.4.2.3.5.2 Modify a Bitmapped GCOS Group

This procedure describes how to modify a bitmapped GCOS by adding or deleting groups.

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(G) Group COS**.
2. Select **(C) Current GCOS** and then enter the **number** of the bitmapped GCOS (1-64) you want to modify, or press **Enter** if the displayed GCOS is correct.
3. At the **Enter GCOS name** prompt, enter a descriptive name for the GCOS (up to 15 characters), or press **Enter** if the displayed name is correct.
4. Select **(A) Add Group** or **(D) Delete Group**, as required, and then enter the Group **number(s)** to add or delete (1-128) in one of the following formats:
  - A single group, for example 7
  - A continuous range of groups, for example 2-7
  - A series of groups, for example 1,2,6,7
  - You can mix types of entries, so you can specify all the groups necessary in one attempt. For example, this entry is valid: 1-4,8,9,12. Do not enter spaces after commas, and do not end the entry with a comma.

### 1.2.4.2.3.5.3 Assign a GCOS to a Mailbox

Before you can assign a bitmapped GCOS, you must [define](#) its parameters.

To assign a bitmapped or affinity group GCOS to a mailbox configuration.

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** and enter the *number* of the new mailbox you want to configure.

OR

3. Select **(M) Modify Mailboxes** and enter a mailbox number to modify an existing mailbox.
4. Press **Enter** until the **Group Class of Service** or **New GCOS** prompt appears and then enter **number** of the bitmapped GCOS (1-64) or affinity group GCOS (65-32,000) that governs this mailbox. (If you are modifying a mailbox, the GCOS you just entered replaces the existing GCOS.)
5. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.2.4.2.3.5.4 View GCOS Information

You can view GCOS information through the System Configuration Menu or the Reports Menu.

### Using the System Configuration Menu

To display a list of defined bitmapped GCOS:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(G) Group COS**.
2. Select **(S) Show GCOS** and then enter the number(s) of the GCOS(s) you want to view in any of these formats:
  - A single GCOS **number**, for example 3
  - A range of GCOS **numbers**, for example 3-6
  - A series of GCOS **numbers**, for example, 3,4,5,12
  - **E** for a summary of even-numbered GCOS
  - **O** for a summary of odd-numbered GCOS
  - **L** for a summary of the lower half of GCOS (1-32)
  - **U** for a summary of the upper half of GCOS (33-64)
  - **A** for a summary of all GCOS

GCOS to show (? for help) = 1,2

GCOS: Default GCOS 1 : 1

001 002 003 004 005 006 007 008 009 010 011 012 013 014 015 016 017 018 019 020

021 022 023 024 025 026 027 028 029 030 031 032 033 034 035 036 037 038 039  
040

041 042 043 044 045 046 047 048 049 050 051 052 053 054 055 056 057 058 059  
060

061 062 063 064 065 066 067 068 069 070 071 072 073 074 075 076 077 078 079  
080

081 082 083 084 085 086 087 088 089 090 091 092 093 094 095 096 097 098 099  
100

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120

121 122 123 124 125 126 127 128

GCOS: Contractors : 2

001 007 009 013 041 056 099

## Using the Reports Menu

1. From the Main Menu, select **(R) Reports Menu**.
2. Select **(G) GCOS**.
3. At the output routing prompt, select one of the following:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills,
  - **F** to send the report to a file on the server,
  - **A** to append the report to an existing file on the server, or
  - **X** to exit report output options (no report).

**GROUP CLASS OF SERVICE**

Thu Oct 29 09:15:23 2009

**GCOS: Default GCOS 1 : 1**

001 002 003 004 005 006 007 008 009 010 011 012 013 014 015 016 017 018 019 020

021 022 023 024 025 026 027 028 029 030 031 032 033 034 035 036 037 038 039  
040041 042 043 044 045 046 047 048 049 050 051 052 053 054 055 056 057 058 059  
060061 062 063 064 065 066 067 068 069 070 071 072 073 074 075 076 077 078 079  
080081 082 083 084 085 086 087 088 089 090 091 092 093 094 095 096 097 098 099  
100

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120

121 122 123 124 125 126 127 128

**GCOS: Contractors : 2**

001 007 009 013 041 056 099

## 1.2.4.2.4 Restriction Class of Service

### 1.2.4.2.4.1 Restriction Class of Service - Overview

The Restriction Class of Service (RCOS) acts to restrict system outdials. Restrictions can be programmed by number of digits to dial (for example, a limit of 7 digits effectively restricts long-distance calling), by screening for certain area codes and Central Office codes, using NPA/NXX screening.

#### NPA/NXX Screening

NPA (or Numbering Plan Area) is the 3 digit code in a telephone number that represents the area. (For example, one area code for Ottawa is 613.) The NXX digits represent the Central Office or exchange that is assigned to the CO that serves this telephone number. (For example, the NXX digits for the CO that serves Mitel are 592.)

<sup>NPA</sup>  
**613** - <sup>NXX</sup>  
**592** - <sup>Subscriber #</sup>  
**2122**

NP0123

### 1.2.4.2.4.2 Sequence of NPA/NXX Screening

Without NPA/NXX call screening, the system restricts outdials only by the number of digits to be dialed. With NPA/NXX call screening, the system restricts the outdial capabilities for a mailbox by allowing calls to be made only to certain area codes or to certain prefixes within an area code.

The system prioritizes the screening process in the following manner:

1. Removes the absorption digits (numbers at the beginning of the dial string that allow access to outside lines) from the dialing string prior to the screening process. These numbers were entered in the Digit Absorption Table, one of the RCOS menus.
2. Compares the number called to the Exact Match Table, one of the RCOS menus, which specifies whether the number is allowed or disallowed. The first table shows the screening method.
3. Counts the remaining number of digits. If the dial string does not contain an NPA (area code), it adds the home NPA.
4. If the system does not receive an exact match for the dial string, it then continues with the NPA/NXX screening.
5. Passes the NPA to the NPA Table, one of the RCOS menus, and determines if the area code is allowed or disallowed. The second table shows the screening method.
6. If the NPA contains an NXX Table, another RCOS menu, the system disregards the selection of the allow or disallow status for the area code. The determination of whether to allow the call is based only on whether the prefix is allowed or disallowed in the NXX Table.
7. Screens the number with the NXX table. The third table shows the screening method.
8. Allows the number or notifies the mailbox owner that the number is not within the mailbox owner's calling area.

| Exact Match Number Table    |                                                  |                                                     |
|-----------------------------|--------------------------------------------------|-----------------------------------------------------|
| Is the number in the table? | If the table is to allow the call, the system... | If the table is to disallow the call, the system... |
| Yes                         | Allows the call                                  | Blocks the call                                     |
| No                          | Blocks the call                                  | Allows the call                                     |

| NPA Table                |                                                  |                                                     |
|--------------------------|--------------------------------------------------|-----------------------------------------------------|
| Is the NPA in the table? | If the table is to allow the call, the system... | If the table is to disallow the call, the system... |

|     |                                                                |                                                            |
|-----|----------------------------------------------------------------|------------------------------------------------------------|
| Yes | Checks for NXX table. If no NXX table exists, places the call. | Blocks the call                                            |
| No  | Blocks the call                                                | Checks NXX table. If no NXX table exists, places the call. |

| NXX Table                |                                                  |                                                     |
|--------------------------|--------------------------------------------------|-----------------------------------------------------|
| Is the NXX in the table? | If the table is to allow the call, the system... | If the table is to disallow the call, the system... |
| Yes                      | Allows the Call                                  | Blocks the Call                                     |
| No                       | Blocks the Call                                  | Allows the Call                                     |

### 1.2.4.2.4.3 Screening Examples

Several configuration examples are offered here to show how the RCOS works. If you were to configure an RCOS as shown in the table, the system would process dial strings as shown in the following examples.

| Example Configuration                        |             |
|----------------------------------------------|-------------|
| Parameter                                    | Value       |
| Home NPA                                     | 408         |
| Starting digit position of NPA               | 10          |
| Ending digit position of NPA                 | 8           |
| Starting digit position of NXX               | 7           |
| Ending NXX digit position of NXX             | 5           |
| Digits to be absorbed                        | 9,1,91      |
| Exact match table is set to disallow         | 5551212,411 |
| NPA table is set to allow                    | 408,415,510 |
| NXX table for the NPA 408 is set to disallow | 662,684,728 |

**If a dial string is 914084283558, the system:**

1. Removes the 91 in accordance with the absorption table.
2. Compares to the exact match table and finds no match.
3. Compares the NPA 408. Because the NPA 408 has an associated NXX table, it is used.
4. Places the call because the NXX table is a disallow table and does not contain the prefix 428.

**If a dial string is 2551234, the system:**

1. Compares to the exact match table.
2. Adds the home NPA.



3. Compares the NPA 408. Because the NPA 408 has an associated NXX table, it is used.
4. Places the call because the NXX table is a disallow table and does not contain the prefix 255.

**If a dial string is 14154244567, the system:**

1. Removes the 1 in accordance with the absorption table.
2. Compares to the exact match table.
3. Compares the NPA 415. Because the NPA 415 has an associated NXX table, it is used.
4. Blocks the call because the NXX table is a disallow table and contains the prefix 424.

**If a dial string is 95551212, the system:**

1. Removes the 9 in accordance with the absorption table.
2. Compares to the exact match table and blocks the call because the number matches and the table is a disallow table.

**If a dial string is 15102265678, the system:**

1. Removes the 1 in accordance with the absorption table.
2. Compares to the exact match table.
3. Compares the NPA 510. Places the call because the NPA 510 does not have an associated NXX table and the NPA table is set to allow.

As the preceding examples show, NPA/NXX call screening works well for domestic outdials. For restricting international outdials, the best method is to limit the number of digits that can be dialed to less than the length of an international telephone number. Do this with an LCOS that includes any of these limits parameters, as appropriate:

- NP WakeUp – Phone Length
- Maximum Number of Digits for Telephone Number
- Message Delivery – Phone Length
- Message Phone Length
- Paging – Phone Length


Then assign this LCOS to the desired mailboxes. Refer to the [Limits Class of Service](#) section for information about LCOS configuration.

## 1.2.4.2.4.4 RCOS Worksheet Configuration

Organize the data you need to configure an RCOS using an [RCOS Worksheet](#). The worksheet will help you set the parameters in the RCOS menu. The areas of the worksheet are described in detail below.

To configure an RCOS using the RCOS worksheet:

1. Identify the RCOS with a number from 1 through 64 and enter this number in the “RCOS to modify” box of the worksheet.
2. You have the option of naming the RCOS to easily identify it; you can enter up to 15 characters in the “RCOS name” box on the worksheet.
3. In the **System Wide Parameters** section, you define the NPA/NXX starting and ending positions that will apply to all RCOS. Any change you make here will affect the entire system. When specifying digit positions, be aware that the system counts the positions from right to left as shown here:

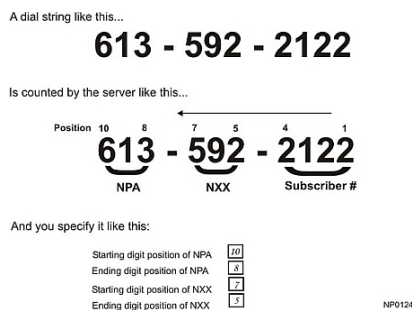

4. In the RCOS-specific section, you will define parameters that provide the following calling capabilities:
5. Home NPA: Because a system can connect to foreign exchange trunks, you must specify the “local” NPA for each RCOS. If a dial string does not contain an NPA, this number is added for the screening process. The system can accept a number of up to three digits for the NPA.
6. Digits to be Absorbed: Many calls contain numbers at the beginning of the dial string that allow access to outside lines, international calling, or pager systems. You must remove these numbers before the actual screening process can begin. Numbers entered in the Absorption Table are removed from the dial string before the screening process occurs. If the dial string does not contain any digits to be absorbed, there is an option to skip the balance of the call screening process. This facilitates outdial placement to other mailboxes on the system. The system absorbs the longest matching string in the absorption table from the dial string starting from the first digit. The table capacity is 16 patterns, with a maximum of 10 digits per pattern.
7. Exact Match Numbers Database: You can enter numbers in the exact match database and specify if they are to be allowed or disallowed. The table capacity is 100 patterns, with a maximum of 25 digits per pattern. Entries to this database should include common numbers that you do not want used for message addressing. Such numbers include 911, 411, 5551212, and 0.

8. **NPA Database:** The NPA database contains area codes that are screened. You can configure the database to either allow or disallow access to specific area codes. For example, you can restrict the mailbox to only the local NPA or restrict access to NPAs such as 900 numbers.

It is possible to restrict outdial access to only one NPA by setting the NPA allow/disallow status to allow and creating an NPA table with only one NPA entry. Remember that if you want to set any outdial restrictions for the home NPA, you must enter that NPA in the table.

9. **NXX Database:** After you specify an NPA, the system asks if you want NXX screening for the specific NPA. You must also set the allow/disallow status for the NXX field. The NXX allow or disallow setting takes priority over the NPA setting. This is useful for restricting the use of an NPA to only specific NXXs. The setting for the NPA in this situation is not used in determining if the call is placed. Call placement is determined only by the NXX allow/disallow setting. The system treats the combined NPA/NXX (408/415 for example) in light of the NXX allow/disallow setting, regardless of the NPA setting.

10. See a [Sample RCOS Worksheet](#).

## Distribution Lists

If an RCOS is changed, it is possible for a distribution list created before the RCOS change to contain some restricted telephone numbers. A restriction check is performed before each outdialing sequence to avoid calls being placed to restricted telephone numbers. If a telephone number fails the check, a receipt is generated stating “The following telephone numbers are restricted: [number 1], [number 2], etc.” This receipt is always generated, regardless of a mailbox owner request for cancellation of a receipt.

### 1.2.4.2.4.5 Default FCOS

Several FCOS are pre-programmed in the default configuration. This section describes the default FCOS. Within the feature bit list for each default FCOS, master feature bits appear in bold type. You can select a default FCOS that matches your needs and assign it to a mailbox, or you can customize your own FCOS, using a default FCOS as a template.

We recommend that you preserve these default COS settings and [customize FCOS](#) when you require extra features.

#### Note:

Operations that involve interactions with other mailboxes (make, give, answer) are limited to those mailboxes with compatible [Group Class of Service](#) (GCOS).

## FCOS 1: Unlimited

This FCOS contains most standard feature bits, except for the message-addressing options. The user can record name and greeting, change the passcode, and receive messages from other users and outside callers. The user can also play, keep, discard, answer, give messages and make new messages for other system users or for distribution lists, as well as create and modify distribution lists. Although this FCOS suits the needs of users with standard applications, do not think of it as truly “unlimited,” which implies that the mailbox is not restricted. It is, more accurately, the basic FCOS for a system.

**Note:**

New mailboxes have FCOS 1 assigned to them by default unless you specify another FCOS.

FCOS 1 contains the following bits:

- 001 Login to mailbox
- 002 Transfer to mailbox attendant
- 003 Return to welcome prompt
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 006 Rewind and fast forward during playback
- 020 Make messages
- 024 Give messages
- 028 Give with comments
- 029 Answer messages
- 032 Make a user distribution list
- 033 Give to user distribution list
- 034 Make to master distribution list
- 035 Give to master distribution list
- 040 Receive messages from other users

- 041 Receive messages form outside callers
- 043 Receive message of the day
- 044 Receive user dist. list
- 045 Receive master dist. list messages
- 050 Play messages
- 053 Keep messages
- 055 Discard messages
- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages
- 066 Login during greeting in greet only mbx
- 070 User Options Menu
- 071 Record or change mailbox name
- 072 Record or change mailbox greeting
- 073 Enter and change mailbox passcode
- 074 Create or modify user distribution list
- 077 Change pager schedule
- 098 Say "Press 0" to caller before beep
- 125 Clear user passcode
- 126 Make/give to mailbox with empty GCOS

## **FCOS 2: Full Guest**

This FCOS is used in the hotel/motel environment where no Property Management System (PMS) integration is available. It has fewer capabilities than FCOS 1 (Unlimited). However, some feature bits allow check-in and check-out mailboxes to reach this type of mailbox.

FCOS 2 contains the following bits:

- 001 Login to mailbox
- 002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

008 Mailbox can be checked in/out

020 Make messages

024 Give messages

028 Give with comments

029 Answer messages

032 Make a user distribution list

033 Give to user distribution list

034 Make to master distribution list

035 Change to master distribution list

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist. list

045 Receive master dist. list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages

066 Login during greeting in greet only mbx

070 User Options Menu

071 Record or change mailbox name

- 072 Record or change greeting
- 073 Enter and change mailbox passcode
- 074 Create or modify user distribution list
- 077 Change pager schedule
- 092 User will be in Dial-by-Name database
- 098 Say "Press 0" to caller before beep
- 125 Clear user passcode
- 126 Make/give to mailbox with empty GCOS
- 161 Conditional greetings

### **FCOS 3: Restricted**

This FCOS is used by hotels. Guests cannot enter or change their names, greetings, or passcodes; make, answer, or give messages; or create or use distribution lists. They can, however, keep and discard messages. Only the attendant can record names and greetings and assign passcodes. For a hotel or motel environment, a name and passcode are usually entered for this mailbox from a special check-in (see default FCOS 4) mailbox. Callers hear the greeting "Please leave a message for [name]."

A guest logs into the mailbox and hears the count of unplayed messages. Unplayed messages play automatically (that is, the guest hears the first message and all succeeding messages without having to press P to play). All messages are automatically kept, unless the guest presses D (to delete messages) within a few seconds.

FCOS 3 contains the following bits:

- 001 Login to mailbox
- 002 Transfer to mailbox attendant
- 003 Return to welcome prompt
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 006 Rewind and fast forward during playback
- 008 Mailbox can be checked in/out
- 009 Automatic logout if no message/receipt

- 010 (ISO) Enhanced Outcall Paging Options
- 040 Receive messages from other users
- 041 Receive messages from outside callers
- 043 Receive message of the day
- 044 Receive user dist. list **050 Play messages**
- 052 Auto-play unplayed messages **053 Keep messages**
- 054 Auto-keep messages **055 Discard messages**
- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages
- 066 Login during greeting in greet only mailbox

#### **FCOS 4: Check In**

This FCOS is used by hotels for a check-in mailbox, a special mailbox that manipulates other mailboxes. In a check-in mailbox, the system prompts for the mailbox number to be checked in, then prompts the attendant to record a name and enter a passcode for the mailbox. Guest mailboxes controlled by FCOS 4 must contain feature bit 008 (Mailbox can be checked in/out). Guest mailboxes are therefore usually assigned default FCOS 2 (Full Guest) or default FCOS 3 (Restricted).

FCOS 4 contains the following bits:

- 001 Login to mailbox
- 004 Outside caller functions
- 005 Play Outside Caller Menu prompts
- 066 Login during greeting in greet only mailbox
- 070 User Options Menu
- 071 Record or change mailbox name
- 072 Record or change greeting
- 090 Check in other mailboxes



## FCOS 5: Check Out

This FCOS is used by hotels for a check-out mailbox that is the counterpart of the check-in mailbox. In a check-out mailbox, the server prompts for the mailbox number to be checked out. The attendant can then choose to either keep or discard any messages left in the mailbox. Finally, the server purges the guest's name, greeting, and passcode, and follows the attendant's command about messages. The mailbox is then ready to be checked in for the next guest.

You must create a check-out mailbox to use the hotel check-in/check-out feature. Guest mailboxes controlled by FCOS 4 must contain feature bit 008 (Mailbox can be checked in/out). Guest mailboxes are therefore usually assigned default FCOS 2 (Full Guest) or default FCOS 3 (Restricted).

FCOS 5 contains the following bits:

001 Login to mailbox **004 Outside caller functions**

005 Play Outside Caller Menu prompts

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change greeting

091 Check out other mailboxes

## FCOS 6: Greeting Only

When a caller reaches a Greeting-Only mailbox, the server plays the greeting and then hangs up. For example, a theater manager wants callers to hear an announcement of show times. The manager creates a mailbox with this FCOS, logs in to the mailbox, and records a greeting that announces show times. The mailbox owner can change the mailbox name, greeting, and passcode, but cannot create or use distribution lists. A Greeting-Only mailbox cannot accept messages. A Greeting-Only mailbox must have a greeting; otherwise, the server considers the mailbox invalid. To log into a Greeting-Only mailbox that does not have a greeting, press the \* (star) key, then enter the mailbox number. You can remove feature bit 066 (Login during greeting in greet-only mbx) after you record a greeting for the mailbox.

FCOS 6 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

060 Ignore DTMFs during greeting

062 Hang up immediately after greeting

066 Login during greeting in greet only mbx **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

### **FCOS 7: <TUI Emulation>**

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

**004 Outside caller functions**005 Play outside caller menu prompts

006 Rewind and fast-forward during playback

007 Pause in record or play

016 Deny recycling with \* key

018 Give and mark urgent

019 Answer and mark urgent

**020 Make messages**021 Make and request receipt

022 Make to multiple destinations

023 Make and mark confidential

**024 Give messages**025 Give and request receipt

026 Give to multiple destinations

027 Give and mark confidential

028 Give with comments

### **029 Answer messages**

030 Answer and request receipt

031 Answer and mark confidential

- 032 Make to user distribution list
- 033 Give to user distribution list
- 034 Make to master distribution list
- 035 Give to master distribution list
- 038 Attach original message to answer
- 039 Notification tone when new msg arrives
- 040 Receive messages from other users
- 041 Receive messages from outside callers
- 043 Receive message of the day
- 044 Receive user dist list messages
- 045 Receive master dist list messages
- 047 Notification prompt when new msg arrives

**050 Play messages 053 Keep messages**

**055 Discard messages**

- 058 Play unplayed messages in FIFO order
- 059 Play unplayed messages first
- 066 Login during greeting in greet-only mbx

**070 User options menu**

- 071 Record or change mailbox name
- 072 Record or change mailbox greeting
- 073 Enter and change mailbox passcode
- 074 Create or modify user distribution list
- 077 Change pager schedule
- 078 Activate user tutorial
- 084 Give receipt message with comments
- 085 Give receipt message to multiple dests

**086 Give receipt message**

087 Make and mark urgent

088 Receive urgent messages

094 Change Message Delivery options

095 Mark message for Future Delivery

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/Give to mailbox with empty GCOS

144 Skip forward to next message

190 Receive fax messages

191 Make fax messages

192 Give fax messages

193 Deliver fax to default number

194 Deliver fax online

195 Specify fax delivery number

196 Change default fax number

204 Message Skip, forward and backward

288 Enable TUI Emulation

**FCOS 8: Chain**

Chain mailboxes play a greeting, then route calls to the mailbox selected by the caller. A chain mailbox cannot accept messages. Assign this chain FCOS to a mailbox and record a greeting for the mailbox. A chain mailbox prompts callers to enter a mailbox number or to wait. If callers enter a mailbox number, the chain mailbox routes the call to that mailbox. If callers wait (do not immediately enter a mailbox number), NuPoint Voice transfers the call to the attendant's mailbox or to the attendant, depending on the configuration. When a mailbox owner logs in to this type of mailbox, NuPoint Voice prompts, "Press U to change user options, X to exit." The mailbox owner can change the mailbox name, greeting, and passcode, but cannot make messages or create or use distribution lists. Chain mailbox is a default, unless the FCOS has one of these feature bits: 062 (Hang up immediately after greeting), one of the receive message feature bits,

or any of the tree, rotational, or broadcast mailbox feature bits. If these feature bits are not included, the general greeting plays, which asks the caller for a mailbox number.

**Note:**

NP Receptionist and the Chain FCOS: NP Receptionist is an optional feature. The server prompts the caller to enter an extension number, then transfers the caller to that extension. If the caller does not enter an extension, the server transfers the call to the attendant's extension, if one is defined; otherwise NP Receptionist transfers the call to the attendant's mailbox. If you include feature bit 141 (Define chain mailbox in Receptionist), a chain mailbox routes a call to an extension even if the chain mailbox has no greeting.

FCOS 8 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

141 Define chain mailbox in Receptionist

## **FCOS 9: Time**

This is a Greeting-Only mailbox that plays its greeting, announces the system time, and asks for a mailbox number. Feature bit 065 (Play system time after greeting) plays the time; if you want this function without announcing the time, you can copy this FCOS to a new number and leave feature bit 065 out of the new version.

A user can log in and change user options (mailbox name, greeting, and passcode), but cannot create or use distribution lists. A time mailbox does not accept messages.

FCOS 9 contains the following bits:

001 Login to mailbox

065 Play system time after greeting

066 Login during greeting in greet only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

## **FCOS 10: VIP**

This FCOS provides advanced options with more feature bits than FCOS 1. It contains these features: Multiple make/give, Attach original message to answer, and Message addressing options (New Message Notification, Mark Confidential, and Return Receipt). This FCOS also includes the Outside Caller's Menu, and will include the mailbox in the Dial-By-Name database.

FCOS 10 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

007 Pause in record or play

015 Change wakeup options

018 Give and mark urgent

019 Answer and mark urgent

020 Make messages

021 Make and request receipt

022 Make to multiple destinations

023 Make and mark confidential

024 Give messages

025 Give and request receipt

026 Give to multiple destinations  
027 Give and mark confidential  
028 Give with comments  
029 Answer messages  
030 Answer and request receipt  
031 Answer and mark confidential  
032 Make to user distribution list  
033 Give to user distribution list  
034 Make to master distribution list  
035 Change to master distribution list  
036 Auto-receipt for user dist list msgs  
038 Attach original message to answer  
040 Receive messages from other users  
041 Receive messages from outside callers  
043 Receive message of the day  
044 Receive user dist. list  
045 Receive master dist list messages  
046 Announce-receipt at login  
047 Notification prompt when new msg arrives  
050 Play messages  
053 Keep messages  
055 Discard messages  
058 Play unplayed messages in FIFO order  
059 Play unplayed messages  
061 Wait to record (timeout = # key)  
066 Login during greeting in greet-only mbx

070 User Options Menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

075 Audit receipt message

076 Play urgent messages in FIFO order

077 Change pager schedule

078 Activate user tutorial

082 Soft play (interrupt) message count

083 Soft play (interrupt) most prompts

084 Give receipt message with comments

085 Give receipt message to multiple dests

086 Give receipt message

087 Make and mark urgent

088 Receive urgent messages

092 User will be in Dial-by-Name database

094 Change message delivery options

095 Mark message for future delivery

096 Make messages before keep/discard

098 Say "Press 0" to caller before beep

110 Make/give to telephone number

124 Change paging phone number

125 Clear user passcode

126 Make/give to mailbox with empty GCOS

161 Conditional greetings



250 Allow NP PWG View login.

251 Allow NP PWG View telephone playback/record

261 Allow NP PWG View WEB access to messages

289 Enable UM-SMTP

290 Enable UM-WebView

291 Enable RAC (Record a call)

292 Enable NP Director

295 Enable Advanced UM

### **FCOS 11 - 13: Reserved**

### **FCOS 14: MiCollab**

This FCOS is assigned by default to NuPoint Unified Messaging mailboxes when they are created using the MiCollab platform. This includes a set of features relevant to the license configuration bundled with the MiCollab product.

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play outside caller menu prompts

006 Rewind and fast-forward during playback

020 Make messages

024 Give messages

028 Give with comments

029 Answer messages

032 Make to user distribution list

033 Give to user distribution list

034 Make to master distribution list

035 Give to master distribution list

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist list messages

045 Receive master dist list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages first

066 Login during greeting in greet-only mbx

070 User options menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

081 Only One Correct Passcode for Login

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/Give to mailbox with empty GCOS

130 Passcode cannot be same as mailbox

201 Deny Trivial Passcode

290 Enable UM-WebView

291 Enable RAC (Record a call)

292 Enable NP Director

295 Enable Advanced UM

304 Enable UM Standard

### **FCOS 15: Tree**

This FCOS is used to specify a tree mailbox. It plays a greeting and waits for the caller to enter a single digit. When the caller presses a digit, the call is transferred to another mailbox.

FCOS 15 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet-only mbx **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Record or change mailbox greeting **121 Define tree mailbox**

### **FCOS 16: NP Forms**

This “template” FCOS is used with NP Forms, an optional feature used to record information from callers in templates, “voice forms.” A mailbox with this FCOS plays the greetings stored in its child mailboxes, sequentially, and records a message after each greeting. A typical application might have a rotational mailbox (see FCOS 17), with several child NP Forms mailboxes, all pointing to the same list of Greeting-Only mailboxes. You can also use feature bit 139 (Template: assume last greet mbox FCOS).

FCOS 16 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt **004 Outside caller functions**

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

007 Pause in record or play **020 Make messages**

041 Receive messages from outside callers

043 Receive message of the day

048 Receive messages of the day

049 No auto-time stamp of played messages **050 Play messages**

052 Auto-play unplayed messages **053 Keep messages**

054 Auto-keep messages **055 Discard messages**

058 Play unplayed messages in FIFO order

059 Play unplayed messages first

066 Login during greeting in greet-only mailbox **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

133 Don't say: "You may start your msg now"

135 Define template mailbox (NP Forms)

136 Don't say: "End of message"

138 Don't say: "Message complete"

## **FCOS 17: Rotational Mailboxes**

Rotational mailboxes allow the caller to hear greetings that change. Greetings change either by time and date (in a "period" rotational mailbox) or with every call (in an "index" rotational mailbox).

FCOS 17 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

066 Login during greeting in greet-only mailbox

## 068 Define rotational mailboxes **070 User Options Menu**

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

You can also assign any one of the following additional feature bits to a rotational mailbox:

062 Hang up immediately after greeting

063 Call mailbox attendant after greeting

064 Call mailbox user ext after greeting

You can use rotational mailboxes with NP Forms (see FCOS 16) to route the caller to an NP Forms “template” mailbox; this requires feature bit 149 (Login to template thru rotational mbx).

### **Note:**

Do not include feature bit 041 (Receive messages from outside callers) because it disables the mailbox’s rotation features.

## **FCOS 18: Financial**

This FCOS provides advanced options with more feature bits than FCOS 1, for administrator convenience. It contains the following features: Multiple make/give, Attach original message to answer, and Message addressing options (New Message Notification, Mark Confidential, and Return Receipt), the Outside Caller’s Menu, and it will include the mailbox in the Dial-By-Name database. In addition, the FCOS gives users access to Unified Messaging Web access and access to the embedded secure media player.

FCOS 18 contains the following bits:

001 Login to mailbox

002 Transfer to mailbox attendant

003 Return to welcome prompt

004 Outside caller functions

005 Play Outside Caller Menu prompts

006 Rewind and fast forward during playback

024 Give messages

028 Give with comments

029 Answer messages

032 Make to user distribution list

033 Give to user distribution list

034 Make to master distribution list

035 Change to master distribution list

040 Receive messages from other users

041 Receive messages from outside callers

043 Receive message of the day

044 Receive user dist. list

045 Receive master dist list messages

050 Play messages

053 Keep messages

055 Discard messages

058 Play unplayed messages in FIFO order

059 Play unplayed messages

066 Login during greeting in greet-only mbx

070 User Options Menu

071 Record or change mailbox name

072 Record or change mailbox greeting

073 Enter and change mailbox passcode

074 Create or modify user distribution list

077 Change pager schedule

098 Say "Press 0" to caller before beep

125 Clear user passcode

126 Make/give to mailbox with empty GCOS

290 Enable UM Web View

293 Disable the <Save> <Reply> and <Forward> buttons on the UM Standard Web View web pages

294 Enable the Mitel embedded player on the UM\_Std+MWI web pages

### *1.2.4.2.4.6 Procedures (Web Console)*

#### 1.2.4.2.4.6.1 Managing RCOS

You can

- [List RCOS](#)
- [Add an RCOS](#)
- [Edit an RCOS](#)
- [Delete an RCOS](#)
- Assign a New RCOS to a Mailbox
- See a list of [RCOS Fields Description](#)

##### **List RCOS**

To display a list of all RCOS on the system

- In the navigation tree, click Class of Service and then click Restriction COS.

##### **Add an RCOS**

1. In the navigation tree, click Class of Service and then click Restriction COS. The Restriction COS list is displayed.

2. Click Add. The Add RCOS form is displayed.

3. Do one of the following:

- Copy an existing RCOS by selecting one from the list and clicking the **Copy from** button. The parameters of that RCOS will be copied into your new RCOS, which you can then edit as required. The Next Available RCOS number is automatically applied.

OR

- Chose to manually select all limits for the new RCOS

4. In the **Number** field, enter a **number** (1-64) for this RCOS, or click **Next Available** to automatically assign the next number.
5. In the **Name** field, enter a **name** (up to 15 alphanumeric characters) for this RCOS.
6. In the drop-down list, select any of the RCOS properties and configure the parameters that are associated with the properties (see [RCOS Fields Description](#)).
7. To save the RCOS and return to the Restriction COS list, click Save.

## Edit an RCOS

You can edit any RCOS data except for the RCOS number.

1. In the navigation tree, click Class of Service and then click Restriction COS. The Restriction COS list is displayed.
2. Select an RCOS to modify, and click Edit. The Edit RCOS form is displayed.
3. Modify RCOS data as required. For information about the RCOS data fields, see [RCOS Fields Description](#).
4. To save the RCOS and return to the Restriction COS list, click Save.

## Delete an RCOS

Deleting an RCOS that is in use by mailboxes causes all of those mailboxes to be assigned the default (1) RCOS. A warning message is displayed to allow you to cancel the operation. If you are deleting the default RCOS, the mailboxes assigned to it will be assigned to the next available RCOS. You cannot delete the last remaining RCOS in the system; therefore, you cannot select all RCOS for deletion.

To delete one or multiple RCOS:

1. In the Restriction COS list, select one or multiple RCOS, and then click Delete. The system will prompt you to confirm the deletion.
2. To confirm the deletion, Yes for a single deletion or Yes to all for a range.

OR

To reject the deletion, click No.

## Assign a New RCOS to a Mailbox

- Follow the procedure to [edit a mailbox](#) and when instructed to edit mailbox parameters, enter the new RCOS on the Class of Service tab.



## RCOS Fields Description

| Fields | Description                                                                                                                                                                                                                                                                     | Values                                                                                                                                    |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Number | <p>*Required field.</p> <p>Determines the number of the new RCOS. You can manually enter a number from 1-64 as long as it is not already assigned to an RCOS. You can also click the Next Available button to have the system assign the next available number to the RCOS.</p> | <p>Enter a number in the range of 1-64. The number must not be already used for an existing RCOS. Or click the Next Available button.</p> |
| Name   | <p>*Required field.</p> <p>This is the name of the RCOS.</p> <p><b>(Note:</b> You can create unnamed LCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed LCOS, use the Text console to name it.)</p>                         | <p>Maximum of 15 alphanumeric characters.</p>                                                                                             |

| Fields                           | Description                                                                                                                                                                                            | Values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (RCOS properties drop-down list) | RCOS properties are organized in to four categories. You select a category from the drop-down list to modify the limits that are associated with this category, as displayed in the following figures. | <p>Select one of the following four categories:</p> <ul style="list-style-type: none"> <li>• <a href="#">Absorption Table</a></li> </ul> <p>This table can contain up to 16 entries of up to 10 digits each. NPA must be a 3-digit number.</p> <ul style="list-style-type: none"> <li>• <a href="#">Exact Match Table</a></li> </ul> <p>This table can contain up to 100 25-digit entries.</p> <ul style="list-style-type: none"> <li>• <a href="#">System-wide RCOS settings</a></li> </ul> <p>Enter the starting and ending digit position for NPA and NXX</p> <ul style="list-style-type: none"> <li>• <a href="#">NPA/NXX</a></li> </ul> <p>The NPA table can contain all 999 possible 3-digit numbers (except "000"). Each 3-digit string can only be added once it is in the NPA table. For each NPA entry, you can define up to 999 NXX entries, using a similar table. Selecting an NPA in the NPA table will automatically fill the NXX table with the corresponding NXX entries. The NPA and NXX starting and ending digit positions must be digits from 0-25.</p> |

## 1.2.4.2.4.7 Procedures (Text Console)

### 1.2.4.2.4.7.1 Configure an RCOS

You must configure the [RCOS System-wide parameters](#) before you can use an RCOS.

To configure an RCOS:

1. Complete an [RCOS Worksheet](#). (Blank worksheets are [here](#).)
2. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(M) Restriction COS**.
3. Select **(A) Select RCOS** and enter the **n umber** (1 through 64) of the RCOS group to be modified.
4. Select **(M) Modify Selected RCOS**.
5. Select **(N) Name of Selected RCOS** and enter a descriptive **name** (up to 15 characters)
6. Select **(H) Home NPA** and enter the **n umber** of the NPA (1- to 3-digit number representing area code).
7. Select **(C) Check Numbers Which Do Not Have Absorb Digits** and enter **Y** to continue screening the numbers, or **N** to skip screening and allow call placement unconditionally.
8. Select **(M) Modify Digit Absorption Table** if you need to specify digits to be absorbed. (Refer to your RCOS worksheet.)
9. Select **(A) Add a number** and enter the number to be absorbed in one of the following formats:
  - a single pattern (for example 91)
  - a series of patterns separated by commas (for example, 91,1,102880). Do not enter spaces after the commas and do not end the entry with a comma.
10. Press **Enter** to exit the add menu and then press **(X)** to exit the Absorb menu.
11. In the Modify RCOS menu, select **(A) Set Exact Match Numbers to Allow/Disallow** if you want to set up an [Exact Match database](#):
12. Enter **A** to allow these numbers or **D** to disallow them.
13. Select **(E) Modify Exact Match Table**.
14. Select **(A) Add a number** and enter the **number** to be matched against. Number patterns can be entered in the following formats:
  - A single pattern, for example, 5551212,
  - A series of patterns, for example, 911,411. Do not enter spaces after commas and do not end the entry with a comma.
  - Press **Enter** to exit the add menu and then press **(X)** to exit the **Exact Match** menu.
15. In the Modify RCOS menu, select **(S) Set NPA Screening to Allow/Disallow** if you want to set up an [NPA Database](#).

16. Enter **A** to allow these numbers, or **D** to disallow them.
17. Select **(T) Modify NPA/NXX Table**.
18. Select **(P) Select NPA** and enter the **number** of the NPA to add.
19. Select **(A) Add NPA**. The system confirms the addition.
20. Select **(N ) Add NXX** if you want to set up an [NXX Database](#).
21. Select **(B) Set NXX Screening to Allow/Disallow** and enter **A** to allow these numbers, or **D** to disallow them.
22. Select **(X)** to exit the NPA/NXX menu.
23. You can verify your changes using the instructions to [View RCOS Information](#).
24. Exit the Restriction Class of Service Menu to make the changes take effect.
25. Copy the number of this RCOS from your RCOS Worksheet to the appropriate mailbox worksheet.

### 1.2.4.2.4.7.2 Set RCOS System-Wide Parameters

To enter the starting and ending NPA (area code) and NXX (three-digit prefix) digit positions:

1. Complete an [RCOS worksheet](#).
2. • From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (M) Restriction COS**, and then **(D) Define System Wide Parameters**.
3. • Count an example dial string your server can use to locate the starting and ending digit positions for the NPA (area code) and the NXX (three-digit prefix). For example, the settings for a [North American ten-digit phone number](#) are:
  - The starting NPA digit position is 10
  - The ending NPA digit position is 8
  - The starting NXX digit position is 7
  - The ending NXX digit position is 5
4. Select **(A) Starting Digit Position of NPA** and enter the **number** of the digit position at the start of the NPA.
5. Select **(B) Ending Digit Position of NPA** and enter the **number** of the digit position at the end of the NPA.
6. Select **(C) Starting Digit Position of NXX** and enter the **number** of the digit position at the start of the NXX.
7. Select **(D) Ending Digit Position of NXX** and enter the **number** of the digit position at the end of the NXX.
8. Exit the RCOS menu to save your settings.

### 1.2.4.2.4.7.3 Modify the Absorption Table

To add or remove dial strings from the absorption table:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (M) Restriction COS, (M) Modify selected RCOS**, and then **(M) Modify Digit Absorption table**.
2. Select **(A) Add a number** and enter the number to be absorbed, (OR select **(R) Remove a number** to remove one) in one of the following formats:
  - a single pattern (for example 91)
  - a series of patterns separated by commas (for example, 91,1,102880). Do not enter spaces after the commas and do not end the entry with a comma.
3. To verify your changes, select **(S) Show Table**. The system displays your table.
4. Exit the RCOS Menu to save your changes.

#### 1.2.4.2.4.7.4 Modify the Exact Match Table

To add or remove dial strings from the exact match table:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (M) Restriction COS, (M) Modify selected RCOS**, and then **(E) Modify Exact Match table**.
2. Select **(A) Add a number** and enter the **number** to be matched against (OR select **(R) Remove a number** to remove one). Number patterns can be entered in the following formats:
  - A single pattern, for example, 5551212,
  - A series of patterns, for example, 911,411. Do not enter spaces after commas and do not end the entry with a comma.
3. To verify your changes, select **(S) Show Table**. The system displays your table and options.
4. Exit the RCOS Menu to save your changes.

#### 1.2.4.2.4.7.5 Modify NPA/NXX Tables

To make changes to the NPA (area code) and NXX (3-digit prefix) tables.

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (M) Restriction COS, (M) Modify selected RCOS**, and then **(T) Modify NPA/NXX Table**.

2. Select **(P) Select NPA** and enter the **number** of the NPA to add.

- If you are creating the NPA, select **(A) Add NPA**.
- If you are deleting the NPA, select **(R) Remove NPA**.
- The system confirms the modification.

3. To create/modify an associated NXX table, if necessary, select **(N) Add NXX** and enter the **number(s)** of prefix(es) to be added. NXX numbers can be entered in the following formats:

- A single pattern, for example 252
- A series of patterns, for example 252,428,354. Do not enter spaces after commas and do not end the entry with a comma.

4. To remove prefixes that you no longer need screened, select **(D) Remove NXX** and enter the number(s) of prefix(es) to be removed.

5. Select **(B) Set NXX Screening to Allow/Disallow** and **A** for Allow, or **D** for disallow.

6. To verify your changes, select **(S) Show Table**. The system displays your table and options.

7. To add another NPA, repeat this process starting from step 2.

8. Exit the RCOS Menu to save your changes.

## 1.2.4.2.4.7.6 Assign an RCOS to a Mailbox

To assign an RCOS to a mailbox configuration:

1. From the Main Menu, select **(M) Mailbox Maintenance**.

2. Select **(C) Create New Mailboxes** and enter the *number* of the new mailbox you want to configure.

OR

1. Select **(M) Modify Mailboxes** to modify an existing mailbox.

### Note:

Prompts are almost the same for creating a new mailbox and modifying an existing one, except that "New" precedes a prompt when you select Modify Mailboxes.

2. Press **Enter** until the **Restriction Class of Service** or **New RCOS** prompt appears and then enter the **number** of the RCOS (1 through 64) configured for the outcall capabilities for this mailbox. If you are modifying a mailbox, the RCOS you just entered replaces the existing RCOS.

1. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number. At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

## 1.2.4.2.4.7.7 View RCOS Information

You have a choice of information levels to view:

- System-wide parameters, which includes a list of configured RCOS and their names
- Home NPA and screening settings for a specific RCOS
- Configuration of a specific RCOS
- Configuration of all RCOS

### Viewing System-Wide Parameters

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(M) Restriction COS**.
2. Select **(P) Show System Wide Parameters**. The server displays a list of the defined RCOS with their names at the server maintenance console, followed by the system-wide parameters.

### Viewing Home NPA and Screening Settings for a Selected RCOS

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(M) Restriction COS**.
2. Select **(A) Select RCOS** and enter the **n umber** (1 through 64) of the RCOS to view.
3. Select **(S) Show Selected RCOS**. The server displays the home NPA, whether numbers without digits to be absorbed are checked, whether exact match numbers are allowed, and whether NPA screening is allowed, for the selected RCOS.

### Viewing the Configuration of a Specific RCOS

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(M) Restriction COS**.
2. Select **(A) Select RCOS** and enter the **n umber** (1 through 64) of the RCOS to view.

3. Select **(R) Report Selected RCOS**. The server displays the following information about the current RCOS:

- Home NPA
- Whether numbers without absorb digits are checked
- Whether exact match numbers are allowed or disallowed
- Whether NPA screening is allowed or disallowed
- Digit absorption table
- Exact match table
- NPA/NXX table

### Viewing the Configuration of All RCOS

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(M) Restriction COS**.
2. Select **(T) Report All RCOS**. The server displays a report of all the defined RCOS with all of their parameter settings.
3. If you are displaying it at the console, use the following commands to control scrolling:
  - To stop scrolling: Press **Ctrl-S**
  - To restart scrolling: Press **Ctrl-Q**

## 1.2.4.2.5 Tenant Class of Service

### 1.2.4.2.5.1 Managing TCOS

Background information and programming for Tenant Class of Service (TCOS) is supplied in the ESMDI section of the *NuPoint Unified Messaging Optional Integrations Guide* available at Mitel OnLine. See [About Product Documentation](#).

## 1.2.5 NuPoint Voice Application

### 1.2.5.1 Description - NuPoint Voice Application

#### Overview

This page provides a description of the configuration and available features for the NuPoint Voice application. Click any link for more details about that item. For programming instructions, see the Procedures section.

The NuPoint Voice application is the standard message-taking and retrieval application providing voice messaging capability for each user's personal mailbox. The NuPoint



Voice application can be used with most Central Offices (COs) and some PBXs (check the compatibility list supplied with the Dialogic Media Gateway documentation).

Numerous customized integrations (variations of the NuPoint Voice application) are also available. These are optional features; they provide message waiting control, and functions like personal greetings for forwarded calls.

To use the NuPoint Voice application on your server, you must do the following:

1. Define a line group (assign server ports to the NuPoint Voice application).
2. Configure the application to establish the following parameters:

- [day/night hours](#)
- a [mailbox dialing plan](#)
- the use of [transfers/attendants](#)

and, optionally:

- customize [administrator's mailbox](#) and [attendant's mailbox](#) as required
- configure [Dial-by-Name](#)
- enable the [Dial-back](#) feature
- add a [wait prompt](#)
- change the [default language](#) for system prompts
- configure NuPoint [TDD](#) (Telecommunications Device for the Deaf)
- configure [mailbox passcodes](#)
- configure an [answer delay](#) if required

After the initial configuration is complete and you have activated the changes, you can create mailboxes and record a company greeting.

The NuPoint Voice application can issue different company greetings for day answering and night/weekend answering. With the NP Receptionist optional feature, the software can treat individual extensions differently when calls are received during night and weekend hours, rather than during normal business hours. The hours that constitute a normal work day, and the days of the week that are considered a weekend, can be customized for the individual installation. The company greeting is the greeting in the administrator's mailbox.

Day and night hours are scheduled for each line group. If you have different day and night/weekend hours for each line group on the server, the greeting that an outside caller hears depends on the line group used to access the mailbox. Of course, if you do not record any custom greetings then all callers hear the same default greeting.

The NuPoint Voice application is configured with default settings from the factory. [View default settings](#).

## Day and Night Hours

### Start Time of the Work Day

This is the time for the start of the work day in the format “hh:mm AM (or PM)”; where hh is the hour and mm is the minute. The default start time for the work day is 8 a.m. If neither AM nor PM is specified, the server assumes that the time is AM.

### End Time of the Work Day

This is the time for the end of the work day in the format “hh:mm AM (or PM)”; where hh is the hour and mm is the minute. The default end time for the work day is 5 p.m. If neither AM nor PM is specified, the server assumes that the time is PM.

If you want to use the same greeting 24 hours a day, enter “12:00AM” in both Start and End time.

### Weekend Days Table

This is a table that tells the NuPoint Voice application when to treat calls that are answered during the work day interval (as specified in the two entries above) as day calls, and when to treat these calls as night/weekend calls. The table starts with Monday. The default value is DDDDDNN, which means that the work days are Monday through Friday, and the weekend days are Saturday and Sunday.

## Transfers and Attendants

The NuPoint Voice application allows you to specify dial strings and methods for transferring callers, and to specify the use of a wait prompt. If the NP Receptionist optional feature is installed, you can specify the conditions for a company greeting and mailbox greeting.

### Attendant's Transfer String and System Attendant's Extension

These two dial strings together describe the steps needed to transfer a call to a live attendant, or other general assistance number. These steps are PBX-dependent, and can be determined by actually transferring a call to the attendant from a station set. Use the dial string characters in Table 2-6.

The attendant's transfer string contains the coding for all the steps that the PBX must take before dialing the attendant's extension number. The default attendant's transfer string is S+ which means “do a switch hook flash, then pause for one second.” This string is also used when transferring a caller to a mailbox attendant's extension number.

The system attendant's extension consists of the PBX extension number of the live attendant (or a "must answer" number, with no mailbox), plus coding that describes any subsequent steps necessary to complete the call. Up to 30 characters can be entered in this field.

| Character | Explanation                                                                                                                          |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------|
| 0-9, *, # | Keys on a standard pushbutton telephone                                                                                              |
| (         | The following digits should be dial pulsed (10 PPS)                                                                                  |
| )         | Stop pulsing; resume sending DTMF tones                                                                                              |
| +         | Pause for one second                                                                                                                 |
| A-D       | Fourth column DTMF keys                                                                                                              |
| E         | Go off-hook, wait for dial tone or other steady tone (pager go-ahead or confirmation tone, for example), then do next item in string |
| F         | Switch hook flash and wait for dial tone                                                                                             |
| G         | Greet - Wait for a voice or computer tone answer                                                                                     |
| H         | Hang up (go on-hook)                                                                                                                 |
| L         | Answer supervision - Wait for telephony signal from destination. Use only with trunk (four-wire) connections.                        |
| N         | Start a new activity; do not go off-hook                                                                                             |
| O         | Ring once                                                                                                                            |
| P         | Go off-hook, do not wait for dial tone                                                                                               |
| S         | Switch hook flash, no wait required                                                                                                  |
| T         | Go off-hook, wait for dial tone                                                                                                      |
| V         | Voice pager: play the first unplayed message and update mailbox                                                                      |

The default system attendant's extension number is 0. In addition, the NuPoint Voice application automatically appends an H (hang up) command to the end of the string. This allows the PBX to drop the call if the caller hangs up before the NuPoint Unified Messaging server completes the transfer to the attendant. If your PBX does not allow blind transfers to the attendant, add a G (the code for "wait for a greeting") to the end of the system attendant's extension.

If the PBX allows trunk-to-trunk transfer, you can program an off-site system attendant's extension number.

Each mailbox can be programmed to direct calls to an intermediate attendant when the caller requires assistance. In the absence of an intermediate attendant, calls are routed to the system attendant. Transfer to an attendant can occur in the following situations:

1. When the Key\_0 for Attendant Transfer During Greeting parameter is enabled, a caller can press 0 while listening either to the server greeting or to a mailbox greeting. When 0 is pressed during the server greeting, the caller is transferred to the system attendant's extension. When 0 is pressed during a mailbox greeting, the server first

checks the mailbox for the attendant's extension number; if none is present, the caller is transferred to the system attendant's extension.

2. While logged in, a mailbox owner can press 0 to be transferred to an attendant, if the mailbox's FCOS includes feature bit 002 (Can Reach Mailbox Attendant). The server first checks the mailbox for the attendant's extension number; if none is present, the caller is transferred to the system attendant's extension. (See the [Features Class of Service](#) section for more information about FCOS and feature bits.)
3. If the called party's mailbox FCOS includes outside caller functions, a caller can press 0, after recording a message, to send the message and transfer to an attendant. If the message is left in the attendant's mailbox, the caller is always transferred to the system attendant. If the message is left in a personal mailbox, the caller is transferred to the system attendant only if no attendant's extension number is present in the mailbox.
4. If the attendant's mailbox has been deleted, or has a Greeting-Only FCOS, and the wait prompt is enabled, the outside caller who waits is transferred to the system attendant's extension.

### Key\_0 for Attendant Transfer During Greeting

This function designates the 0 key as either an attendant access number or a log in code. The default is N, or disabled.

To enable the Key\_0 function, you must enter Y. If this function is enabled, be sure to define a suitable system attendant's extension number and dial string.

When the Key\_0 for Attendant Transfer During Greeting parameter is enabled:

- The server allows an outside caller to press the zero key, while either the company greeting or a mailbox greeting is playing, to be transferred to the system attendant's extension.
- Mailbox owners must log in by pressing the star (\*) key either before or after entering their mailbox numbers. The zero key cannot be used to signal a login.

When the Key\_0 for Attendant Transfer During Greeting parameter is disabled:

- Mailbox owners can press either the zero or star (\*) key, before or after entering their mailbox number, to log in. (The zero option is essential when telephones at the installation-site do not have a \* key.)
- Callers will trip the bad passcode attempt counters. This will cause a higher account for mailboxes getting locked out.
- The server does not allow an outside caller to press 0 while either the company greeting or a mailbox greeting is playing. Therefore, an outside caller cannot be transferred to the system attendant's extension.

Automatic access to the attendant on time out (that is, when the caller waits in response to the "Please enter a mailbox number or wait" prompt) can be provided, if necessary, by

assigning a Greeting-Only class of service to the attendant's mailbox. The attendant's mailbox can then be used only to make messages of the day.

### Pre-Company Name Dial String

The NuPoint Voice application outputs this dial string immediately after going off-hook, and before playing the Company Greeting (either the standard "Welcome to the message center" prompt, or the Administrator's mailbox greeting).

This string is used only if the NP Receptionist (Receptionist) optional feature has been installed on your server, *and* employees can manually call forward their phones directly to the message center number. In this situation, an NP Receptionist port may inadvertently be connected to one of the ports that is running the message center application. The pre-company name dial string forces NP Receptionist to drop the call, and instructs the server to wait a designated number of seconds before playing the company greeting.

There is no pre-programmed default.

- The pre-company name dial string must include a pound sign (#). You can configure DTMF A (fourth column DTMF key) in place of the pound sign if the PBX recognizes the pound tone as a code for some other function. The port that answers the call issues this tone, which forces NP Receptionist to release the call. Be aware that callers and mailbox owners always hear this dial string when a mailbox is reached through the NuPoint Voice application.
- To give the PBX time to make the connection before the company greeting is played, program a series of plus signs (+++) after the # or A. Each + in the NuPoint Voice application configuration means "wait one second." To determine how many pluses are needed, forward one station to another station, make a test call to the first station, then count the number of seconds that elapse before the second station rings.
- If the test call showed that it takes two seconds for a forwarded call to connect to the second extension, for example, use "#++" for the pre-company name dial string.
- You can experiment to find the optimum number of seconds to wait for call connection. If the first half of the message center greeting does not play when NP Receptionist calls are forwarded, add more pluses to the string. If there is a long silence before the greeting is played, delete pluses from the string.

### Pre-Mailbox Greeting Dial String

The NuPoint Voice application outputs this dial string immediately after receiving a valid mailbox number, and before playing the mailbox's greeting.

This string is used only if 1) the NP Receptionist optional feature has been installed on your server and 2) employees may manually call forward their phones directly to their mailboxes. In this situation, an NP Receptionist port may inadvertently be connected to one of the ports that is running the message center application. The pre-mailbox greeting

dial string forces NP Receptionist to drop the call, and instructs the server to wait a designated number of seconds before playing the mailbox greeting.

There is no pre-programmed default. The same conditions apply as listed above in “Pre-Company Name Dial String.”

## Customize Administrator Mailbox

The NuPoint Unified Messaging software is installed with a default [dialing plan](#) of 3,3,3,3,3,3,3,3 and one administrator's mailbox, which is 998. If you change the dialing plan (i.e. the number of digits in valid mailboxes that start with the digit 9), then you must also change the Administrator's mailbox to match the new criteria. (For example, if your dialing plan were configured as 4,4,4,4,4,4,4,4, then mailboxes that start with 9 must have 4 digits - 9998.) An error message is generated if the administrator mailbox number does not match the dialing plan.

The default administrator's mailbox, 998, does not have a default passcode. You must set a passcode for this mailbox before you can access it. The passcode you set must not be trivial (for example, 1111 or 1234).

The administrator's mailbox number has special privileges:

- The administrator's mailbox day and night greetings are the day and night company greetings. If you do not record one or both of these greetings, the default (💎💎Welcome to the message center”) is played instead.
- Distribution lists that are created from the administrator's mailbox are server-wide master lists that can be used by any mailbox owner on the server. See [Distribution Lists](#).
- The system administrator may add/delete/modify mailboxes over the telephone, from the Telephone Administration Menu. See [Telephone Administration](#).

## Mailbox Security

For increased server security, you can change the administrator's mailbox number from the default. You can use any mailbox number on the server; but if you select a mailbox number other than one of the defaults, you must create the mailbox before it can be used. The mailbox number you select must also be valid for the dialing plan. (See [Administrator's Mailbox](#).) You must also identify the new mailbox in the line group for NuPoint Voice as the administrator mailbox to enable it to perform specialized administrator functions. The recommended FCOS for both mailboxes is 10 (VIP), the LCOS is 1 (Default), the GCOS is 1, and the message waiting type should be whatever is available for your server.

For highest security, you can also delete the Administrator's mailbox and re-create it only when you need to make changes.

## Administrator Passcodes

When creating the administrator mailbox, you must ensure that the passcode you enter is not trivial. If you use the following types of passcodes, NuPoint UM will accept the entry but you will not be able to log in to the admin mailbox on subsequent attempts:

- do not use the mailbox number
- do not use consecutive digits (like 1234)
- do not use repeated digits (like 1111)

Examples of valid passcodes are: 1397 or 2684 (as long as the mailbox number is not the same).

## Customize Attendant Mailbox

The NuPoint Unified Messaging software is installed with a default [dialing plan](#) of 3,3,3,3,3,3,3,3 and one attendant's mailbox, which is 999. If you change the dialing plan (i.e. the number of digits in valid mailboxes that start with the digit 9), then you must also change the Attendant's mailbox to match the new criteria. (For example, if your dialing plan were configured as 4,4,4,4,4,4,4,4, then mailboxes that start with 9 must have 4 digits - 9999.) An error message is generated if the attendant mailbox number does not match the dialing plan.

The default attendant's mailbox, 999, does not have a default passcode. You must set a passcode for this mailbox before you can access it. The passcode you set must not be trivial (for example, 1111 or 1234).

**Note:** For increased server security, you can change the attendant's mailbox number from the default. The attendant's mailbox can be any mailbox number on the server; but if you select a mailbox number other than one of the defaults, you must create the mailbox before it can be used. The mailbox number you select must be allowed by the Dialing Plan. (See [Attendant Mailbox](#).)

The attendant's mailbox also has special privileges:

- Its greeting is the message of the day. This message is heard by all mailbox owners whose FCOSs include feature bit 043 immediately after they log in. The message is played twice (after two separate logins), the first time hard-played and the second time soft-played. (Hard-played prompts cannot be interrupted; soft-played prompts can.)
- The message of the day is stored only in the attendant's mailbox. Once it has been deleted, no mailbox owners hear the message, even if they have not logged in since the last message was created. Conversely, if an old message of the day is not deleted, or replaced by a new message, all newly created mailboxes receive the outdated message. For procedures to record and enable a message of the day, see [Record/Delete the Message of the Day](#) or [Enable/Disable the Message of the Day](#).
- A customized site tutorial greeting can also be recorded from the attendant's mailbox. When the system administrator presses G to record a company greeting, the server prompts, "Press M to record the message of the day; press T to record a site tutorial." See [Record a Site Tutorial](#) for procedures.



- When outside callers access the message center, they are prompted to “Please enter a mailbox number or wait” after the company greeting is played. Callers who wait (because they have rotary dial phones, or do not know the correct mailbox number, for example) are then prompted, “Please leave your name, the name of the person you are calling, and a message.” These unaddressed messages go into the attendant’s mailbox.

### Multiple Attendant’s Mailboxes

If a large number of unaddressed messages is expected, up to five Attendant’s Mailboxes can be configured by entering the mailbox numbers, separated by commas (for example, 999, 910, 911, 912, 913). The message of the day and the site tutorial can be made only from the first attendant’s mailbox that is configured; the other mailboxes are used only for storing unaddressed messages. When the first mailbox is full, NuPoint Voice begins using the second mailbox until it is full, and so on until all attendant’s mailboxes are full.

You can configure any mailbox as the attendant’s mailbox by entering the mailbox number in this field. If you select a mailbox number other than one of the defaults, you must create the mailbox before it can be used. (See [Attendant Mailbox](#).)

### Disabling the Attendant’s Mailbox

When an outside caller accesses the message center number, NuPoint Voice issues the prompt, “Please enter a mailbox number or wait.” Callers who wait are prompted to leave a message in the attendant’s mailbox. Some installations require these callers to be transferred to the system attendant’s extension, instead. There are two ways to do this:

- If the system administrator does not issue messages of the day, delete the attendant’s mailbox.
- Assign a Greeting-Only FCOS to the attendant’s mailbox.

**Note:** If you disable the attendant’s mailbox, and you do not define a system attendant’s extension number, be sure to disable the Wait prompt. Otherwise, when a caller waits, NuPoint Voice says “Thank you for calling,” then hangs up!

### Dial By Name

Dial-by-Name is a feature of NuPoint Voice that allows callers to dial a user’s number by saying that user’s name. See [Dial-by-Name](#) for configuration.

### Dial-back

The dial-back feature gives users a second option when answering voice mail messages. When enabled, dial-back allows users to dial the caller who left the voice mail, with the option to either keep or delete the original message. See [Dial-back](#) for configuration.



## Wait Prompts

When the Wait prompt is enabled, the server issues the prompt “Please enter a mailbox number, or wait” immediately after the server greeting is played. The default value is Y (enabled).

To disable this prompt, you must enter N. In some cases, you must disable the Wait prompt for any number of reasons, among them:

- To record the company greeting (administrator’s mailbox greeting) and the Wait prompt in the same voice. The text of the Wait prompt is recorded as the last sentence of the company greeting.
- When neither a system attendant’s number nor an attendant’s mailbox is defined, and the Wait prompt is enabled, callers who wait are thanked for calling, then disconnected.
- If you disable the Wait prompt and are using the Dial-by-Name function, you must record the “Press [digit] to dial by name” prompt in your own voice. The server prompt for Dial-by-Name plays if the Wait prompt is enabled.

## Default Language for Prompts

The default language of voice prompts is English. You must purchase and install language prompts in order to use any other language on your server. For information about installing language prompts, see the NuPoint Unified Messaging Technician's Handbook.

Refer to the General Information Guide for more information about supported languages, or contact your distributor for further information.

A mailbox’s LCOS can specify a different prompts language. Prompts in a secondary language must be installed before these mailboxes issue any prompts in these languages. Callers hear prompts in the default language.

A server can have one default language and up to seven alternate languages, depending on the number and size of the hard drives. For more details about the number and kinds of languages supported, see [LCOS](#).

NP TDD can be installed like any of the language prompts. If NP TDD is installed, selecting it as a response to the Default Language for Prompts parameter enables the NP TDD feature of the NuPoint Voice application in the current line group. When any mailbox owner receives or makes a call through that line group, NP TDD replaces voice prompts with TDD tones. (See “NP TDD for the Hearing Impaired” below for more information.)

## NP TDD for the Hearing Impaired

The NP TDD feature of the NuPoint Voice application supports telecommunications devices for the deaf (TDDs). With NP TDD, hearing-impaired mailbox owners can receive TDD-generated text from other users.

NP TDD users can be notified about messages by message waiting lights or any other message waiting indication supported by a NuPoint Unified Messaging server, just as other users can.

Outside callers with a TDD can call a mailbox configured for NP TDD prompts, be answered by a TDD greeting, and leave a message for the mailbox owner. Standard user options such as reviewing and recording over a message, making a message urgent, appending to a message, and dialing an extension are also allowed.

## Configuring NP TDD

You can configure NP TDD to apply to either an entire line group or specific mailboxes. To configure NP TDD, make the following changes:

- Set the default language for prompts to TDD in the NuPoint Voice application (if configuring the line group).
- Assign an NP TDD LCOS or another LCOS specifying NP TDD as the prompts language to any mailboxes using NP TDD. This LCOS should also have the Greeting Length and User Name Length limits parameters appropriately set for NP TDD.

## Effect of NP TDD on Other Server Features

Certain NuPoint Unified Messaging server features and user options are not available to any mailbox associated with the line group in which NP TDD is configured. These features are:

- NP WakeUp optional feature
- Call scheduling for pages
- Future delivery
- Standard tutorial

## Mailbox Passcodes

NuPoint Unified Messaging includes security devices to protect your installation at a server level and mailbox level. A device for use at the mailbox level is mailbox passcodes, which you configure through the NuPoint Voice application. The following paragraphs outline the configuration of mailbox passcodes; for more complete information, see [Server Security](#).

## Minimum and Maximum Passcode Length

Minimum and maximum passcode length sets the range for the number of digits a passcode can have.

Enter the minimum number of digits that constitute a valid passcode for users of this line group. The minimum passcode length can be any number from 4 through 10. The default value is 4. This means no user can enter a new passcode shorter than 4 digits. If you want users to have longer passcodes (for security reasons) then you can specify a larger minimum length.

Enter the maximum number of digits that constitute a valid passcode for users of this line group. The maximum passcode length can be any number from 4 through 10. The default value is 10.

If you leave the maximum passcode length at the default, 10, then all passcodes can be no longer than 10 digits. You cannot enter a value greater than 10, and users cannot enter a passcode longer than 10 digits.

## Passcode Trip Count, Passcode Trip Period

These two entries set the parameters for the passcode break-in warning, which is a server security feature. The default values for the passcode trip count and the passcode trip period are 5 and 24. This means that a warning is issued to a mailbox if someone attempts to enter an incorrect passcode for that mailbox at least 5 times (the passcode trip count) within a 24 hour period (the passcode trip period).

The passcode trip count can be set to any value from 0 to 255. The passcode trip period can range from 0 to 240 hours. In both cases, zero means the passcode break-in warning function is disabled.

The passcode break-in warning function is enabled when you configure both a trip count and trip period.

## Answer Delay

You may set a variable answer delay with the Delay Before Answer parameter. The default for this parameter is zero (no delay), and in most cases, it does not need to be changed.

Users need to use this delay if the application software sometimes answers an incoming call before all the digits are received, causing the switch to stop sending digits. This can happen when E & M trunks are being used.

**Note:**

The answer delay for the first call into a port after any online configuration change (FCOS, LCOS, GCOS, NCOS, line group, phoneline exceptions) is up to a second longer than for subsequent calls on the port. Consequently, changes to the answer delay parameter do not become effective until the second call is made into the port.

## 1.2.5.2 Default Configuration Settings

The NuPoint Voice application is the only application that is pre-installed in the factory configuration. To add capabilities, and to meet the requirements of a particular site, you may need to change one or more of the defaults. You can use the Web Console or Text console to change the defaults.

The default configuration has the values shown in the following table.

| Parameter                                  | NuPoint Voice Default Setting  |
|--------------------------------------------|--------------------------------|
| Administrator's mailbox number             | 998                            |
| Allow dial an extension for callers        | N                              |
| Allow dial an extension for users          | N                              |
| Allow multiple messages for outside caller | Y                              |
| Answer delay                               | 0                              |
| Attendant's mailbox number                 | 999                            |
| Attendant transfer string                  | S+                             |
| Dial by name, last name first              | Y                              |
| Exact match break                          | Y                              |
| General greeting mailbox number            | None                           |
| Group name                                 | None                           |
| Key 0 for attendant transfer               | N                              |
| Line group number                          | 1                              |
| Line(s) in group                           | All on server                  |
| Mailbox dialing plan                       | 3,3,3,3,3,3,3,3,3              |
| Number of names threshold                  | 3 names                        |
| Passcode length                            | 4 digits min. – 10 digits max. |
| Passcode trip count                        | 5                              |
| Passcode trip period                       | 24 hours                       |
| Pre-company name dial string               | None                           |
| Pre-mailbox greeting dial string           | None                           |
| Prompts language                           | English                        |
| Single digit access                        | None                           |
| Suppress mailbox number                    | None                           |

| Parameter                    | NuPoint Voice Default Setting |
|------------------------------|-------------------------------|
| System attendant's extension | 0                             |
| Wait prompt                  | Y                             |
| Weekend days table           | DDDDNN                        |
| Work day                     | 8 a.m. – 5 p.m.               |

### 1.2.5.3 Dial-by-Name

Dial by Name is a NuPoint UM feature that allows callers to dial a NuPoint UM user by entering some, or all, of the letters of the user's name.

To configure the Dial-by-Name function, you need to perform the following tasks (for more detail, see the explanations below the list):

- Change the dialing plan to specify a digit for Dial-by-Name.
- Specify the name dialing sequence that callers must use, last name-first or first name-first.
- Set a threshold for playing matching names.
- Specify whether a caller must enter a complete name or just enough letters to get a match.
- Specify whether a caller can press a single digit to reach a mailbox or must enter the entire mailbox number.
- Specify whether a caller hears matched names and mailbox numbers or just the matched names.
- Determine the grouping of access within the Dial-by-Name database (sometimes called "Partitioned Dial-by-Name"). Even though mailbox owners may all be in the same Dial-by-Name database, they can only reach others in the database who share the same [GCOS group](#) (in a bit-mapped GCOS) or affinity group.

#### Dialing Plan

In the [Dialing Plan](#), coding a digit with the A element reserves that digit for dialing names. For example, a Dial-by-Name dialing plan might look like this: 3,3,3,3,3,3,A,3 which would trigger the prompt, "Please enter a mailbox number or press 8 to dial by name."

#### Name Dialing Sequence

You specify the name dialing sequence with the Last Name First Flag parameter. This parameter determines whether a user's name must be dialed in the last name-first name sequence or the first name-last name sequence. In most cases, callers need not enter user's full name. When a caller finishes pressing a series of keys, the NuPoint Unified Messaging server searches special files for entries that match the series. If it finds more than one match, it plays the names and mailbox numbers of the partial matches. If the server finds a unique match, it plays either the user's name or personal greeting.

## Matching Threshold

Setting a threshold for playing matching names determines the maximum number of names and mailboxes the server plays in response to a partial name match. A partial name match occurs in either of these cases:

- Callers enter some portion, but not all, of a recipient's name.
- Callers enter a complete name, but the server finds more than one recipient that matches the entry.

If more than one name is found that matches the name dialed, the server plays the specified number of matching names. A threshold of 3, for example, means that up to three matching names will be recited, even if there are more than three. If the number of names for a partial match is greater than the threshold, the server prompts a caller to continue entering letters.

## Exact Match Break

Specifying an exact match break determines how callers can enter the partial name of a user. When “yes” is specified, the caller hears the name and mailbox number play as soon as there is a match. The caller can, however, end a name entry with the pound (#) key; the caller hears whatever names match. When “no” is specified and a caller stops entering letters, the server waits for a time out period before responding; if a caller presses the # key, the server responds immediately. If the server can determine exactly who the intended recipient is, it plays that recipient's name (and mailbox number if not suppressed). Alternatively, the server plays, for outside callers, that recipient's personal greeting. If more than one recipient's name matches the caller's input, the server plays the names and mailbox numbers of the possible recipients. A caller can interrupt the server during name or greeting play by pressing any key on the telephone keypad.

## Single Digit Access

Specifying single digit access means that a caller can enter a single digit to reach a mailbox after matched names have been played, similar to a tree mailbox operation. When single digit access is allowed, a match with the name dialed by a caller causes the server to play a prompt such as:

“There are three entries: Jean Brown, mailbox 4321, press 1; John Brown, mailbox 4222, press 2; Jill Brown, mailbox 4567, press 3. Enter a mailbox number. Press 0 to return to Dial-by-Name.”

The caller can then press the appropriate digit to reach the desired person instead of entering the entire mailbox number.

When no single digit access is allowed, a caller must enter an entire mailbox number to reach a mailbox after matched names have been played. A match with the name dialed by a caller causes the server to play a prompt like the one shown above except that there is no single digit stated. The caller must enter the entire mailbox number.

## Suppressing Mailbox Numbers

Suppressing the mailbox number means the server omits the mailbox numbers in the list of names played when there is a match with a dialed name. The default is to include the mailbox number.

## Dial-by-Name Databases

Each mailbox that can be reached by name must be configured with an FCOS that includes feature bit 92, which places users' mailbox numbers in the two Dial-by-Name databases. The databases are identical but their format is different, with one listing users by last name and the other by first name. The server searches these databases for entries to match a caller's input. For example, if the caller is prompted to dial by last name, when the caller begins entering a name the system will search through the database that lists users by last name. If the caller is prompted to dial by first name, the system will search through the database that lists users by first name. See the [FCOS](#) section for more information on this feature bit and how to implement a Feature Class of Service.

Even with all the parameters just described set, a mailbox owner's name can be listed only when the mailbox owner's name is specified in the mailbox configuration. Once all these requirements are met, the name goes into the databases when you exit from the respective configuration menu.

To make sure there is only one mailbox per user's name, you can print out a phone book for your site. This phone book shows the mailbox owners accessible through the Dial-by-Name function and their mailbox numbers.

## Same Digit for Dial-by-Name and Mailbox Numbers

Occasionally you may need the same digit for a Dial-by-Name trigger *and* in a mailbox number. With the optional star prefix dialing plan (described above), the digit specified for Dial-by-Name can still be used for mailbox numbers when the digit is *not* followed by a star (\*). Suppose, for example, that your server has mailboxes beginning with 1 but you also need the digit 1 for Dial-by-Name. You can specify 1 as the Dial-by-Name dialing plan digit, which causes the server to prompt the caller to press 1 and \* to dial by name.

## Using a Telephone to Dial by Name

The Dial-by-Name feature allows callers to reach a mailbox user by dialing the user's name on the telephone keypad. By default, the system expects the last name to be dialed before the first name. However, the dialing sequence can be reversed so that the first name is required before the last name. If there is more than one match, the attendant lists the names of the matches along with the key to press to call each match.

Example 1:

You are trying to reach Sarah Jones on a system that requires the last name to be dialed name first. In the Auto Attendant, you hear "Please enter a mailbox number or press <x> to dial by name." You enter 5 6 6 3 7 for JONES. There is only one voice mail user with the last name spelled by the letters 5 6 6 3 and 7, so you hear "You are being transferred to Sarah Jones", and the attendant transfers you.

#### Example 2:

You are trying to reach Jamal Singh on a system that requires the first name to be dialed name first. In the Auto Attendant, you hear "Please enter a mailbox number or press <x> to dial by name." You enter 5 2 6 for JAM and wait. There is more than one user with the first name starting with the letters on 5 2 and 6, and you hear "3 matches were found. To reach Jamal Singh, press 1. To reach Sarah Jones, press 2. To reach Jamie Beauchamp, press 3". You press 1 and the attendant transfers you.

#### Using the Phone Keypad:

Callers use their phone keypad to enter letters. For example, to enter A, B or C, a caller presses **2**, and to enter D, E or F, a caller presses **3**. To enter an accented character, callers must press the key for the equivalent unaccented (or "English") character. For example, to enter À, a caller presses 2 (A), and to enter Ø, a caller presses 6 (O). The following table illustrates which keys should be pressed to enter accented and unaccented characters:

| Accented Characters |   | Unaccented Characters |   | Keypad Key |
|---------------------|---|-----------------------|---|------------|
| À                   | à | A                     | a | 2          |
| Â                   | â | A                     | a | 2          |
| Ä                   | ä | A                     | a | 2          |
| Å                   | å | A                     | a | 2          |
| À                   | à | A                     | a | 2          |
| Æ                   | æ | E                     | e | 3          |
| Ç                   | ç | C                     | c | 2          |
| È                   | è | E                     | e | 3          |
| É                   | é | E                     | e | 3          |
| Ê                   | ê | E                     | e | 3          |
| Ë                   | ë | E                     | e | 3          |
| Î                   | î | I                     | i | 4          |
| Ï                   | ï | I                     | i | 4          |
| Ô                   | ô | O                     | o | 6          |
| Ö                   | ö | O                     | o | 6          |
| Ø                   | ø | O                     | o | 6          |
| Œ                   | œ | O                     | o | 6          |
| Š                   | š | S                     | s | 7          |
| Ù                   | ù | U                     | u | 8          |



| Accented Characters |   | Unaccented Characters |   | Keypad Key |
|---------------------|---|-----------------------|---|------------|
| Û                   | û | U                     | u | 8          |
| Ü                   | ü | U                     | u | 8          |
| Ÿ                   | ÿ | U                     | u | 8          |
| Ž                   | ž | Z                     | z | 9          |
| ß                   |   | S                     | s | 7          |

### 1.2.5.4 Dial-Back

The dial-back feature gives users a second option when answering voice mail messages. When enabled, dial-back allows users to dial the caller who left the voice mail, with the option to either keep or delete the original message.

To enable Dial-back, [customize an FCOS](#) to include the following feature bits and assign to the mailbox:

- 263 - Store Caller Line Id as a phone or mailbox number
- 264 - Play outside caller user interface (with FCOS bit 280)
- 270 - Enable Dial-Back feature
- 280 - Enable CLI outside caller interface (with FCOS bit 264)

Program an outgoing call prefix for the MiVoice Business ICP:

- Access the *MiVoice Business System Administration Tool*.
- In the **System Options Form**, set **Outgoing External Call Prefix for Applications** to the digit that users dial to access an outside line (this is often "9").

Prompts received by voice mail users are dependent upon FCOS programming. The voice mail "Answer" operation is independent of dial-back operation so you can enable feature bits for one, both, or neither. The table below describes NuPoint voice prompts for each scenario:

| If your system is configured for... | and the voice mail you receive is from...     | when you press the Answer key, the NP-UM TUI responds with...                                                                                                   |
|-------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Answer AND Dial-back                | another mailbox on the network                | the following options:<br><br>- press 8 for Voice mail answer<br><br>- press 3 for Dial-back and delete message<br><br>- press 5 for Dial-back and keep message |
|                                     | an external (local or long distance) caller * | the following options:<br><br>- press 3 for Dial-back and delete message<br><br>- press 5 for Dial-back and keep message                                        |
| Answer only                         | another mailbox on the network                | with immediate "answer with a voice mail" operation                                                                                                             |
|                                     | an external (local or long distance) caller   | [No Answer key option is available in the TUI menu.]                                                                                                            |
| Dial-back only                      | another mailbox on the network                | with dial-back options:<br><br>- press 3 for Dial-back and delete<br><br>- press 5 for Dial-back and keep                                                       |
|                                     | an external (local or long distance) caller * |                                                                                                                                                                 |
| Neither Answer nor Dial-back        | Any call                                      | [No Answer key option is available in the TUI menu.]                                                                                                            |

\*Dial-back will attempt to dial the numbers in the Calling Line Identification. Correct dial-back for long distance and International calls is dependent upon programming in the MiVoice Business ICP. For more information, see the *Automatic Route Selection* topic in the *Features Reference* section of the *MiVoice Business ICP System Administration Tool Help*.

## Conditions

- The dial-back feature requires MiVoice Business Release 4.0 (formerly MiVoice Business ICP Release 10.0) or later software on the MiVoice Business ICP
- Dial-back is not supported for SIP integrations like the 5000 CP.
- If a user selects the option to "dial-back and delete message", and then the call is not completed, the original message is restored to the voice mailbox.
- The dial-back feature will not work for messages that have been stored using a version of NP-UM prior to Release 4.0.

## Wait Prompts

When the Wait prompt is enabled, the server issues the prompt "Please enter a mailbox number, or wait" immediately after the server greeting is played. The default value is Y (enabled).

To disable this prompt, you must enter N. In some cases, you must disable the Wait prompt for any number of reasons, among them:

- To record the company greeting (administrator's mailbox greeting) and the Wait prompt in the same voice. The text of the Wait prompt is recorded as the last sentence of the company greeting.
- When neither a system attendant's number nor an attendant's mailbox is defined, and the Wait prompt is enabled, callers who wait are thanked for calling, then disconnected.
- If you disable the Wait prompt and are using the Dial-by-Name function, you must record the "Press [digit] to dial by name  prompt in your own voice. The server prompt for Dial-by-Name plays if the Wait prompt is enabled.

## 1.2.5.5 NuPoint Voice Application Programming - Task List

This procedure summarizes the steps necessary to configure the NuPoint Voice application. It assumes that the appropriate server hardware and NuPoint Voice software have been installed.

1. Complete a NuPoint Voice Application Worksheet. Blank worksheets are [here](#).
2. Define a line group to be used for the NuPoint Voice application.
3. Configure the [company greetings schedule](#). Use the Day/Night Menu to configure working hours and weekends.
4. Establish a [dialing plan](#).
5. Enable Call Placement, if required.
6. Configure for transfer to a system attendant, if required.
7. If you want to use an administrator mailbox other than the default for this application, you need to create a new mailbox and then define it as an administrator mailbox.

8. If you want to use an attendant mailbox other than the default for this application, you need to create a new mailbox and then define it as an attendant mailbox.
9. Prevent unaddressed messages from being left in the attendant mailbox (i.e. always transfer callers to the attendant).
10. Enable multiple messages for outside callers, if required. (Text console only.)
11. If you want to use a prompt language other than the default North American English, select a prompt language.
12. Enable Dial-by-Name if required.
13. Configure the mailbox passcode parameters as required. (See [Security](#).)
14. Verify the configuration parameters.
15. Activate the configuration to make your parameter settings take effect.

## 1.2.5.6 Procedures (Web Console)

### 1.2.5.6.1 Line Groups

#### 1.2.5.6.1.1 Add a Line Group

**Note:**

For MiCollab deployments of NuPoint UM, you must use the MiCollab Users and Services Provisioning application to set up one or more Network Elements before configuring Line Groups.

To add a line group to your system configuration:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups** and then click **Add**.
4. Configure the following parameters:

| Parameter         | Description                                                                              | Value                  |
|-------------------|------------------------------------------------------------------------------------------|------------------------|
| Line Group Number | Assign a number to this line group or click Next Available to add an unused list number. | 1 - 24                 |
| Name              | Enter a name for this line group.                                                        | Maximum 25 characters. |
| Pilot Number      | For SIP GATEWAY nodes only. See step 7 for information.                                  |                        |

| Parameter      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Value                  |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Application    | <p>Select the application to associate with this line group. A set of custom tabs appears for each application. Choices are:</p> <ul style="list-style-type: none"> <li>• NuPoint Voice</li> <li>• NP Receptionist</li> <li>• Outbound (Pager) Dialer</li> <li>• Centrex</li> <li>• Unified Integration</li> <li>• Enhanced InBand</li> <li>• DTMF to PBX Dialer</li> <li>• Speech Recognition</li> <li>• Direct Drop</li> <li>• Disabled</li> </ul> <p>Click the links in step 5 for a description of configuration parameters for each application.</p> | Default: NuPoint Voice |
| User Interface | <p>Select the user interface that corresponds to this line group. Choices are:</p> <ul style="list-style-type: none"> <li>• None</li> <li>• NuPoint Voice</li> <li>• Call Director</li> </ul>                                                                                                                                                                                                                                                                                                                                                             | Default: None          |

| Parameter            | Description                                                                                                                                                                                                    | Value         |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Fax Group Connection | <p>Select a fax group from your configured fax groups to associate with this line group.</p> <div><b>Note:</b><br/>If you select a fax group, you cannot enable <a href="#">G.729</a> audio compression.</div> | Default: None |

| Parameter    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Value            |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Enable G.729 | <p>Select the check box to enable G.729 audio compression for this line group. Clear the check box to restrict the line group to G.711.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>If you enable G.729, you cannot select a <a href="#">Fax Group Connection</a> for the line group.</li> <li>This field is available only if a G.729 license has been purchased for the system.</li> <li>Before implementing G.729, check the NuPoint UM Engineering Guidelines to ensure that you do not exceed the recommended port usage limits. This is necessary because G.729 uses more system resources than G.711.</li> <li>For a Mitel 5000 CP integration, access the Speech Encoding Setting field on the 5000 CP (located in System\Devices and Feature Codes\Node IP Connection Groups \&lt;Pxxxx&gt;IP Call Configuration or System\IP-Related Information\Call</li> </ul> | Default: Cleared |

5. Using the interface tabs, configure the parameters required for your application:

- The [Lines tab](#) is common to all applications.
- [NuPoint Voice/Direct Drop parameters](#)
- [NP Receptionist parameters](#)
- [DTMF to PBX Dialer parameters](#)
- [Outbound Pager/Dialer parameters](#)
- [Centrex](#)
- [Unified Integration parameters](#)
- [Enhanced InBand parameters](#)
- [Speech Recognition parameters](#)

6. Click **Add** to save the configuration data.

7. For SIP GATEWAY nodes only: A "Pilot Number" field appears after a Line Triplet if the line group is mapped to the network element of type [SIP GATEWAY](#). Enter a value for the Pilot Number in this field. A pilot number is made up of 1 to 6 digits.

**Note:**

- For a Mitel 5000 CP integration, enter a pilot number in the field that matches the Pilot Number defined on the SIP Gateway for NuPoint Unified Messaging.
- All lines in a line group must be mapped to one Network Element item of type SIP GATEWAY. This means that if the first line in a line group is mapped to a SIP GATEWAY port, then other added lines must also be mapped to the same SIP GATEWAY.
- When you map a line-triplet (e.g. 1:0:0) to a port number (e.g. 3), the port number must start from 1 and not zero. The port numbers that can be used in the mapping depend on the number of ports programmed on the menu for Network Element of type SIP GATEWAY (see Number of Ports in [Add a Network Element](#)). For example, if the Number of Ports in the Network Element is 16, then the valid port numbers are: 1, 2, 3, etc. up to 16. You cannot not map a line triplet to port 17 or 0, or to any other port that is larger than 16. Also, you cannot map two line triplets to the same port number. For example, you cannot map both of the line triplets 1:0:0 and 1:0:2 to port number 2.

8. Click **Add** again to add the new line group to the list of existing line groups.

9. A confirmation message regarding the configuration changes appears. Click **OK**.

10. In the navigation tree, select **Commit Changes and Exit**. Confirm the **Commit**. Your changes are now saved to the inactive (duplicate) configuration.



**Note:**

Configuration changes will not take effect until you have [activated the inactive configuration](#).

### 1.2.5.6.1.2 Edit a Line Group

Follow the steps below to edit a line group:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups**, select a line group to edit, and then click **Edit**.
4. The existing line group configuration parameters appear. Change the parameters as required.
5. Click **Save**. A confirmation message regarding the configuration changes appears. Click **OK**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **Commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

### 1.2.5.6.1.3 Delete a Line Group

Follow the steps below to delete a line group:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups**, select the line group to delete, and then click **Delete**.
4. A confirmation message appears. Click **OK** to delete the line group.
5. The line group is now deleted and disappears from the list shown in the Offline configuration.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **Commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.5.6.1.4 Application Parameters

When you select an application to assign to a line group, the onscreen tabs are customized for the selected application. The Lines and Dialing Plan tabs are the same for all applications.

### The Lines tab (common to ALL applications):

| Parameter                                                                                                                                                                                                                                                            | Description                                                                                                    | Value                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Line Triplet                                                                                                                                                                                                                                                         | Enter a line number for this line group or click Next Available to use the next unused line number.            |                                               |
| Number of Lines                                                                                                                                                                                                                                                      | Enter the number of lines in this line group.                                                                  |                                               |
| PBX                                                                                                                                                                                                                                                                  | Select the PBX to use for this line group.                                                                     |                                               |
| Mapping                                                                                                                                                                                                                                                              | Enter the module number, line card number, port designator, or directory number (DN) to add to the line group. |                                               |
| <p><b>Note:</b><br/>If you are adding multiple DNs (<b>Number of Lines</b> is greater than one) that are consecutive, then you only have to enter the first DN. If you are adding multiple DNs that are not consecutive, then you must enter them one at a time.</p> |                                                                                                                |                                               |
| Terminal Number                                                                                                                                                                                                                                                      | For CENTREX application only. Enter the terminal number required for Centrex for this triplet.                 | Valid values are 0 - 9. Cannot use leading 0. |

### NuPoint Voice/Direct Drop Application Parameters

| Tab   | Parameter | Description   | Value |
|-------|-----------|---------------|-------|
| Lines |           | See Lines Tab |       |

| Tab          | Parameter                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                          | Value           |
|--------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Dialing Plan | Standard Mode / Length<br>Classic Mode / Dialing Plan | See Dialing Plan Configuration                                                                                                                                                                                                                                                                                                                                                                                                       |                 |
| Voice mail   | Mailbox Numbers<br>Administrator's mailbox number     | <p>A special mailbox reserved for administrative purposes. Each line group can have its own admin mailbox.</p> <p>The admin mailbox has special privileges:</p> <ul style="list-style-type: none"> <li>• add/delete/modify mailboxes through the ADMIN menu, using Admin Dialer</li> <li>• Admin's distribution lists are system-wide "master lists" (accessed as 001 - 009)</li> <li>• Admins GREETING is "Company Name"</li> </ul> | Default is 998. |

| Tab | Parameter                       | Description                                                                                                                                                                                                                                                                                                                                                                                                            | Value                                                                                                         |
|-----|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|     | Attendant's mailbox number      | <p>A special Attendant's mailbox. You can chain up to 5 comma-separated mailbox numbers. Each line group can have it's own attendant mailbox.</p> <p>The attendant mailbox has special privileges:</p> <ul style="list-style-type: none"> <li>• "unaddressed" messages go into the Attendant mailbox (for example, callers with rotary dial phones)</li> <li>• Attendant's GREETING is "Message of the Day"</li> </ul> | Default is 999.                                                                                               |
|     | General Greeting mailbox number | A special mailbox whose greetings have a special purpose. Each line group can have a different general greeting mailbox.                                                                                                                                                                                                                                                                                               |                                                                                                               |
|     | System Attendant's extension    | A number dialed by the application to connect the caller to the PBX attendant.                                                                                                                                                                                                                                                                                                                                         | Default is 0. Number of digits in the PBX directory number is determined by the NP Receptionist dialing plan. |
|     | NP Receptionist Dialing Plan    |                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                               |

| Tab | Parameter                                    | Description                                                                                                                                                                                                                                      | Value                                                               |
|-----|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
|     | Dialing Plan                                 | <p>Defines the number of digits a PBX DN has:</p> <ul style="list-style-type: none"> <li>• 0 specifies that no valid DN begins with that digit</li> <li>• V specifies a variable number of digits</li> <li>• A specifies dial by name</li> </ul> | Default is 3,3,3,3,3,3,3,3.                                         |
|     | PBX Console Attendant                        |                                                                                                                                                                                                                                                  |                                                                     |
|     | Day Access Code                              | This entry connects the caller to the PBX attendant available to take the call during Day hours.                                                                                                                                                 | Default is 0H. Valid characters are 0-9, #, *, +, (,), A_H, L, N-U. |
|     | Night Access Code                            | This entry connects the caller to the PBX attendant available to take the call during Night hours.                                                                                                                                               |                                                                     |
|     | Options                                      |                                                                                                                                                                                                                                                  |                                                                     |
|     | Key_0 for Attendant transfer during greeting | <p>Select this checkbox to allow "key 0 for attendant" transfer during a greeting.</p> <p>Clear this check box to allow "key 0 for attendant" transfer only during the login sequence.</p>                                                       | Default is cleared.                                                 |

| Tab          | Parameter                           | Description                                                                                                                                                                                                                                  | Value                                                               |
|--------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Dial Strings | Allow dial an extension for Callers | <p>Select this check box to make the application allow an external caller to dial an extension from inside NuPoint Voice.</p> <p>Clear this check box to prevent an external caller from dialing an extension from inside NuPoint Voice.</p> | Default is cleared.                                                 |
|              | Allow dial an extension for Users   | <p>Select this check box to make the application allow another user on the same NP-UM server to dial an extension from NuPoint Voice.</p> <p>Clear this check box to prevent another user from dialing an extension from NuPoint Voice.</p>  | Default is cleared.                                                 |
|              | PBX Dial Strings                    |                                                                                                                                                                                                                                              |                                                                     |
|              | Post DN dial string                 | Enter the dial string to be output when the PBX DN has been dialed.                                                                                                                                                                          | Default is +. Valid characters are 0-9, #, *, +, (,), A_H, L, N-U.  |
|              | Dial Strings                        |                                                                                                                                                                                                                                              |                                                                     |
|              | Attendant's transfer string         | Enter the dial string that will put the caller on hold so the application can dial the PBX attendant.                                                                                                                                        | Default is S+. Valid characters are 0-9, #, *, +, (,), A_H, L, N-U. |
|              | E-mail transfer string              | Enter the string that is dialed to connect the caller to an electronic mail system                                                                                                                                                           | Valid characters are 0-9, #, *, +, (,), A_H, L, N-U.                |
|              | Disconnect string                   | Enter a dial string that NP Voice ports should dial to cause NP Receptionist ports to disconnect.                                                                                                                                            | Valid characters are 0-9, #, *, +.                                  |
|              |                                     |                                                                                                                                                                                                                                              |                                                                     |
|              |                                     |                                                                                                                                                                                                                                              |                                                                     |

| Tab | Parameter                                 | Description                                                                                                         | Value                                                |
|-----|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
|     | Pre-company name dial string              | Enter the number to be dialed immediately after going off-hook and before playing the Company Greeting.             | Valid characters are 0-9, #, *, +, (,), A_H, L, N-U. |
|     | Pre-mailbox greeting dial string          | Enter the number to dial after receiving a valid mailbox number and prior to playing the greeting for that mailbox. |                                                      |
|     | '6' Key Operator transfer dial string     | Not used.                                                                                                           |                                                      |
|     | '6' Key Operator transfer pre-dial string | Not used.                                                                                                           |                                                      |

### NP Receptionist Application Parameters

| Tab          | Parameter                                          | Description                                                     | Value |
|--------------|----------------------------------------------------|-----------------------------------------------------------------|-------|
| Lines        |                                                    | See Lines Tab                                                   |       |
| Dialing Plan | Standard Mode / Length<br>Classic Mode / Dial Plan | See Dialing Plan Configuration                                  |       |
| Voice Mail   | All parameters                                     | See Voicemail tab descriptions for NuPoint Voice application    |       |
| Dial Strings | All parameters                                     | See Dial Strings tab descriptions for NuPoint Voice application |       |

### Outbound (Pager) Dialer Application Parameters

| Tab               | Parameter                                          | Description                                                       | Value |
|-------------------|----------------------------------------------------|-------------------------------------------------------------------|-------|
| Lines             |                                                    | See Lines Tab                                                     |       |
| Dialing Plan      | Standard Mode / Length<br>Classic Mode / Dial Plan | See Dialing Plan Configuration                                    |       |
| Dialers (Paggers) | <system generated list>                            | Select the dialers(pagers) that are supported by this line group. |       |
| Voice Mail        | All parameters                                     | See Voicemail tab descriptions for NuPoint Voice application      |       |
| Dial Strings      | All parameters                                     | See Dial Strings tab descriptions for NuPoint Voice application   |       |

**Centrex Application (Requires system with dual serial port. See Unified Integration for Centrex-like application that works with Precidia.)**

**Note:**

To program a serial port for Centrex, [create a line group](#) with an Application setting of "Centrex".

| Tab          | Parameter                        | Description                                                                                                                        | Value               |
|--------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Lines        |                                  | See Lines Tab                                                                                                                      |                     |
| Dialing Plan | Standard Mode / Length           | See Dialing Plan Configuration                                                                                                     |                     |
|              | Classic Mode / Dial Plan         |                                                                                                                                    |                     |
| Centrex      | Serial Port                      |                                                                                                                                    |                     |
|              | Log Serial Port Data Error       | <p>Select this check box to log serial port data errors.</p> <p>Clear this check box to prevent logging of serial data errors.</p> | Default is cleared. |
|              | Message Notification             |                                                                                                                                    |                     |
|              | Centrex Message Notification     | <p>Select this check box to enable message notification.</p> <p>Clear this check box to disable message notification.</p>          | Default is cleared. |
|              | Centrex RS232 Link Duplex        | Select Full or Half duplex for Centrex communication via the RS232 link.                                                           | Default is Full.    |
|              | Message Waiting Request Interval | The amount of additional time (ms) that an ESMDI message-waiting task will sleep between sending message requests.                 | Default is 100 ms.  |
|              | Miscellaneous                    |                                                                                                                                    |                     |



| Tab            | Parameter                           | Description                                                                                                                                                                                                                                                     | Value                                                            |
|----------------|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|                | Use calling extension information   | <p>Select this check box to have the system use calling extension information.</p> <p>Clear this check box to ignore calling extension information.</p>                                                                                                         | Default is cleared.                                              |
|                | Must answer call to get data packet | <p>Select this check box if the switch protocol requires NP-UM to go off-hook on a ringing line before the switch will send the calling information.</p> <p>Clear this check box if the off-hook action is not required.</p>                                    | Default is cleared.                                              |
|                | Centrex data timeout                | Enter the time to wait for data when a call is received.                                                                                                                                                                                                        | <p>Default is 7 sec.</p> <p>Valid entries are 0-255 seconds.</p> |
|                | Centrex ring timeout                | Enter the time to wait for ringing before data is received.                                                                                                                                                                                                     | Default is 10. Valid entries are 0-255 seconds.                  |
|                | Baud Rate                           | Select the baud rate of the serial port.                                                                                                                                                                                                                        | Default is 1200.                                                 |
| Prefix Strings | Centrex Office Code Prefixes        |                                                                                                                                                                                                                                                                 |                                                                  |
|                | Extensions beginning with n         | Select an "extension beginning with" value and enter the digits of the prefix for extensions beginning with that value. For example, if the extension number is 2345, and the phone number is 687-2345, then the prefix for extensions beginning with 2 is 687. |                                                                  |

| Tab          | Parameter      | Description                                                     | Value |
|--------------|----------------|-----------------------------------------------------------------|-------|
| Voice Mail   | All parameters | See Voicemail tab descriptions for NuPoint Voice application    |       |
| Dial Strings | All parameters | See Dial Strings tab descriptions for NuPoint Voice application |       |

## Unified Integration

| Tab                 | Parameter                   | Description                                                                                                                        | Value               |
|---------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Lines               |                             | See Lines Tab                                                                                                                      |                     |
| Unified Integration | Log serial port data errors | <p>Select this check box to log serial port data errors.</p> <p>Clear this check box to prevent logging of serial data errors.</p> | Default is cleared. |

## Enhanced InBand

| Tab             | Parameter                         | Description                                                                                                            | Value               |
|-----------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------|
| Lines           |                                   | See Lines Tab                                                                                                          |                     |
| Enhanced InBand | Calling Extension Absorbed Digits | Enter the number of digits to strip from the calling extension.                                                        | (0-12)              |
|                 | Calling Extension Signed Offset   | Enter the signed offset to be added to the extension after stripping the leading digits to arrive at a mailbox number. | + or - (n)          |
|                 | Called Extension Absorbed Digits  | Enter the number of digits to strip from the called extension.                                                         | (0-12)              |
|                 | Called Extension Signed Offset    | Enter the signed offset to be added to the extension after stripping the leading digits to arrive at a mailbox number. | + or - (n)          |
|                 | MF Enabled                        | <p>Select this check box to enable use of MF tones.</p> <p>Clear this check box to disable use of MF tones.</p>        | Default is cleared. |

| Tab | Parameter         | Description                                                                                                                                                  | Value               |
|-----|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|     | Set to T1 Gateway | <p>Select this check box to enable this line group for a MiVoice Business T1 gateway.</p> <p>Clear this check box if there is no T1 gateway requirement.</p> | Default is cleared. |

### DTMF to PBX Dialer

| Tab                | Parameter                 | Description                                                                                                                                                                                                                                                                                                                                      | Value                                                |
|--------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| Lines              |                           | See Lines Tab                                                                                                                                                                                                                                                                                                                                    |                                                      |
| DTMF to PBX Dialer | DTMF to PBX Dialer        |                                                                                                                                                                                                                                                                                                                                                  |                                                      |
|                    | PBX Special Access Code   | Some PBXs require the server to dial a special access code before sending message indicators requests. The special access code indicates to the PBX that one of its special features is about to be invoked. For more information, see the Message Waiting Application topic in the NuPoint Unified Messaging System Administration Online Help. | Valid characters are 0-9, #, *, +, (,), A_H, L, N-U. |
|                    | Pre-DN On Dial String     | Enter the string to send before the directory number (extension number) to instruct the PBX to turn the message waiting indicator on or off at that station.                                                                                                                                                                                     |                                                      |
|                    | Pre-DN Off Dial String    |                                                                                                                                                                                                                                                                                                                                                  |                                                      |
|                    | Post-DN On Dial String    | Enter the string to send after the directory number (extension number) to instruct the PBX to turn the message waiting indicator on or off at that station.                                                                                                                                                                                      |                                                      |
|                    | Post-DN Off Dial String   |                                                                                                                                                                                                                                                                                                                                                  |                                                      |
|                    | Maximum PBX Message Count | Enter the maximum message count (two chars) of unplayed messages to be included after the mail-box number and before the post DN. If you leave this field blank or set it to 0, no message count is sent.                                                                                                                                        | Valid values are 0 - 99.                             |

| Tab | Parameter                         | Description                                                                                                                                                                                                                      | Value                |
|-----|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|     | Options                           |                                                                                                                                                                                                                                  |                      |
|     | Initial Dialtone Detect           | Select this check box to enable initial dialtone detection.<br><br>Clear this check box to disable initial dialtone detection.                                                                                                   | Default is selected. |
|     | Dial Tone Confirmation            | Select this check box only if (1) a PBX special access code is required and (2) if, after the special access code has been sent, the PBX expects the server to wait for a dial tone before the server outdials any other digits. | Default is cleared.  |
|     | Suppress Updates to MWI           | Select this check box to prevent the server from sending an indicator-on request when the message indicator is already activated.                                                                                                | Default is selected. |
|     | Wait for Dial Tone                | Select this check box if the PBX can return dial tone to the server to indicate that a message indicator has been turned on or off successfully.                                                                                 | Default is cleared.  |
|     | Enable Alternate Code             | Select this check box when the DN and mailbox number are different.                                                                                                                                                              | Default is cleared.  |
|     | Use Same Port to Turn On /Off MWI | Select this check box to use the same port to turn MWI on and off. (Some Non-Mitel PBXs require that the MWI of an extension be turned off by the same port that turned it on.)                                                  | Default is cleared.  |

### Speech Recognition Parameters

| Tab                | Parameter             | Description                                                                            | Value |
|--------------------|-----------------------|----------------------------------------------------------------------------------------|-------|
| Lines              |                       | See Lines Tab                                                                          |       |
| Speech Recognition | Attendant's Extension | Enter the extension number for the Attendant. (Note: this is an active configuration.) |       |

| Tab | Parameter                      | Description                                                                                                                                                                                                                   | Value |
|-----|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|     | Speech Recognition Application | <p>Select the speech recognition application to associate with this line group. Choices are:</p> <ul style="list-style-type: none"> <li>- NuPoint Speech Auto Attendant and</li> <li>- Other VoiceXML Application.</li> </ul> |       |
|     | VoiceXML Start URL             | Displays only when the Other VoiceXML application is selected from the Speech Recognition Application list.                                                                                                                   |       |

### 1.2.5.6.2 Configure a Dialing Plan

To configure a standard dialing plan:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. From the navigation tree, click **Line Groups** and then select the line group to which you want to apply a dialing plan. Click **Edit**.
4. Click the **Dialing Plan** tab and use the Standard or Classic fields to enter the [dialing plan](#).
5. Click **Save**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

### 1.2.5.6.3 Transfer to System Attendant

This procedure describes how to configure a server so a caller can press 0 to transfer to an attendant.

To configure transfer to system attendant:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups**, select the line group to modify, and then click **Edit**.
4. On the **Voicemail** tab, in the **System Attendant's Extension** field, enter the number dialed by the application to connect the caller to the PBX attendant.
5. Do one of the following:
  1. • To allow a caller to press 0 during, or after, a greeting, select the **Key\_0 for Attendant Transfer During Greeting** check box.
  - To allow callers to press 0 only during the login sequence, clear this check box .
1. On the **Dial String** tab, in the **Attendant's Transfer String** field, enter the dial string that will put the caller on hold so the application can dial the PBX attendant.
2. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

#### 1.2.5.6.4 Prevent Unaddressed Messages

Use this procedure when you want callers to be transferred to the system attendant instead of leaving a message in the attendant's mailbox (an unaddressed message). A system attendant's extension must be configured.

##### With Message of the Day Capability

1. Edit the Attendant's mailbox using the instructions under [Edit Mailboxes](#).
2. On the **Class of Service** tab, in the **Feature:** field, select **6**.
3. Click **Save**.

##### Without Message of the Day Capability

1. Edit the NP Receptionist Line Group using the instructions under [Edit a Line Group](#).
2. On the **Voicemail** tab, in the **Attendant's Mailbox Number** field, enter a period (.) which disables the attendant's mailbox. Callers who respond to the wait prompt by waiting will be transferred to the system attendant's extension instead of the attendant's mailbox.

**Note:**

- If you disable the attendant's mailbox and you do not define a system attendant's extension, be sure to disable the wait prompt. Otherwise, when a caller waits, the server thanks the caller and then hangs up!
- Since the attendant's mailbox is used for recording the message of the day, this capability will no longer be available.

## 1.2.5.6.5 Enable the Dial by Name Function

To enable Dial-by-Name:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups**, select the line group to edit, and then click **Edit**.
4. On the **Dialing Plan** tab, do one of the following:
  - In **Standard Mode**, select the digit (1-9) that you want to use to trigger the dial-by-name prompt. (For example, if you want the prompt to say "Please enter a mailbox number or press **8** to dial by name.", then select the **(A) Dial by Name** dialing plan from the drop-down list adjacent to position 8.)

OR

  - In **Classic Mode**, enter the dial plan and include the Dial by Name digit **(A)** in the digit position that will trigger the prompt. (For example, 3,3,3,3,3,3,3,**A**,3 triggers our example prompt, "Please enter a mailbox number or press **8** to dial by name.")
5. Click **Save**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

**Note:**

By default, callers must dial a user's last name first. For example, to reach, John Smith, callers would begin dialing S-M-I-T-H followed by J-O-H-N. If you want to switch this functionality and have callers dial a user's first name first (eg. J-O-H-N followed by S-M-I-T-H), you must update the **Last Name First Flag** in the Text Console.

## 1.2.5.6.6 Configure Media Service (Packet Rate)

To configure packet rate:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Media Service**.
4. In the **Packet Rate** list, select one of the following:
  - **Fixed Packet Rate**: select this option to maintain a fixed packet rate of 20 ms. If a call requiring a non-standard packet rate is made to the NuPoint UM system, it may result in audio distortion.
  - **Variable Packet Rate**: select this option for MCD Release 4.0 (3300 ICP Release 10.0) and later to allow successful streaming of calls that may require a non-standard packet rate.
5. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.5.6.7 Verify Configuration Parameters

You can display a list of configuration parameters for each line group, or for all line groups:

1. From the navigation tree, select **Active Configuration > View Active Configuration**.
2. From the **Line Group** list, select a line group to display, or select **all** to see the configuration listing for all groups.
3. Click **View** to display the list onscreen, or click **Download** to open or save the list as a text file for printing.

## 1.2.5.7 Procedures (Text Console)

### 1.2.5.7.1 Define a Line Group

1. From the Main menu, select **(S) System maintenance, (R) Reconfiguration, (R) Reconfigure system**, then **(G) Offline Menu**.
2. Select **(B) Duplicate Active Configuration**. The system copies the current (active) configuration. When copying is complete, the short form of the Offline menu appears.



**Note:**

All subsequent steps in this procedure – along with any other configuration entries – affect only the inactive configuration, and will take effect only after you activate the inactive configuration.

3. From the NuPoint Voice Configuration Offline menu, select **(G) Line Groups**.
4. Select **(G) Current Group** to specify the line group number.
5. Enter the **number** of the line group (1-24) to be used for the application.
6. Select **(N) Name of Current Group** and enter a descriptive name of the application line group (for example, "Incoming").
7. Add the desired lines:

Select **(A) Add Lines to Current Group**. Each line number is expressed as a *triplet*, where module, slot, and port number are separated by colons (:). If you have a one-module server, you can refer to just the slot and port number. If you have a multi-module server, you must specify the module number as well, or the server assumes you are configuring Module 1 only. See [Module/Slot/Host table](#).

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

All of these formats are valid:

| Example      | Specifies                                                       |
|--------------|-----------------------------------------------------------------|
| 1:*          | All lines                                                       |
| 1:0:0-1:0:59 | All lines from 0 to 59 on module 1                              |
| 1:0:*        | All lines on module 1                                           |
| 1:0:0-2:0:4  | All lines on module 1, slot 0, through module 2, slot 0, port 4 |
| 1:*,2:*      | All lines on modules 1 and 2                                    |

8. To enable G.729 audio compression (G.711 is enabled by default), select **(P) Enable G729**, and then enter **1** [Yes].
9. Exit to the NuPoint Voice Configuration Offline Menu.
10. Select **(A) Line Group Only applications**. A list of available applications is displayed.
11. Select **(G) Group Selected** and then select the application to configure from the list.

**Note:**

If this Line Group is going to be used for **Call Director**, select **(V) NuPoint Voice** and then select **(U) User Interface** and **(C) Call Director**.

12. When you have configured the new line group, exit to the main menu and select **(A) Activate Configuration**.
13. When the activation is complete, test the new line group.

**Note:**

If G.729 audio compression is enabled for the NuPoint UM line group:

- If you enable G.729, you cannot select a Fax Group Connection for the line group.
- For a Mitel 5000 CP integration, access the Speech Encoding Setting field on the 5000 CP (located in System\Devices and Feature Codes\Node IP Connection Groups\<Pxxxx>IP Call Configuration or System\IP-Related Information\Call Configurations) and select **G.729**.
- For a MiVoice Business ICP integration, create a network zone on the MiVoice Business ICP, enable Intra-zone Compression, and then assign all endpoints, including sets and IP extensions mapped to NuPoint ports, to the zone. In addition, make sure to equip the MiVoice Business ICP with Digital Signal Processors (DSPs) that support G.729.
- For a Dialogic Media Gateway integration, access the DMG Web Interface, select the network group for this implementation (located under Configuration > VoIP > Network Groups), and then select **Low Bit Rate Codec** as Audio Codec #1.

## 1.2.5.7.2 Configure a Dialing Plan

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. From the Voice Configuration Menu, select the line group to modify, select **(M) Modify Application** and then **(D) Dialing Plan Menu**.

4. For a standard dialing plan, select **(D) Dialing Plan**. Enter one of the following elements in each of the nine positions as indicated in your NuPoint Voice [worksheet](#), separated by commas:

| Element | Explanation                                                                                      |
|---------|--------------------------------------------------------------------------------------------------|
| 0-11    | Length of the mailbox. Zero means none may start with this number.                               |
| V       | Variable number (1 through 11) of digits; server uses timeout to determine end of mailbox number |
| M       | Analog networking (AMIS) mailboxes leading digit                                                 |
| A       | Dial-by-Name (ASCII) leading digit                                                               |
| T       | Call placement leading digit                                                                     |
| An      | Networked mailboxes, n = mailbox number length. NV (variable number length) is acceptable        |
| Pn      | Network mailbox prefix used, n = mailbox length including prefix digit                           |

[See Dialing Plan Examples](#)

### Using the Optional Star Prefix Dialing Plan

1. Access the Dialing Plan menu (see steps 1-3 above).
2. To use the Star Prefix dialing plan, select **(E) Optional Star Prefix Dplan**. For example:
  - If you need a star prefix for **Dial By Name**, specify the trigger digit:  
  
Select (E) Dial By Name Dplan Digit and enter the **digit** that will precede a star to trigger the Dial-by-Name prompt. (For example, to trigger the prompt, "Please enter a mailbox number or press 8 to dial by name." enter "8".)
  - If you need a star prefix for **call placement**, specify the signal digit: *Select* (F) Call Placement Msg Delivery Dplan Digit and enter the **digit** that will precede a star to signal the server that the telephone number following the star is for call placement.
3. Save your entries by exiting to the NuPoint Voice Online Menu. If you chose to modify the Inactive Configuration in step 2, you need to [activate the inactive configuration](#) before your changes appear.

### 1.2.5.7.3 Transfer to System Attendant

This procedure describes how to configure a server so a caller can press 0 to transfer to an attendant.

To configure transfer to system attendant:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(R) Reconfigure System**
2. Go to the NuPoint Voice Configuration Online Menu in the active or inactive configuration. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the **number** of the line group (1-24), or press **Enter** if the current number is correct.
4. In the application menu, select **(M) Modify Application** and then **(Z) Dial String and Mailbox menu**.
5. Select **(A) System Attendant's Extension** and then enter the system attendant's PBX extension number plus dial string codes (valid dial string codes are listed in the table below) OR enter a **period (.)** to disable the system attendant's extension function.
6. Select **(B) Attendant's Transfer String** and then specify a character from the table below to describe all the dialing steps that the PBX must take to dial the system or mailbox attendant's extension number. This code is represented by the "attendant extension pre-dial index" in the mailbox set-up.
7. Return to the NuPoint Voice Application Menu.
8. Select **(K) Key\_0 for Attendant Transfer During Greeting** and then select:
  - **Y** to allow a caller to press 0 during (as well as after) a greeting, **OR**
  - **N** to allow a caller to press 0 only after a greeting has played. This also allows the caller to log into the mailbox, by pressing 0 or star (\*).
9. Save the parameter settings by exiting to the Main Menu. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

| Dial String Characters |                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Character              | Explanation                                                                                                                          |
| 0-9, *, #              | Keys on a standard pushbutton telephone                                                                                              |
| (                      | The following digits should be dial pulsed (10 PPS)                                                                                  |
| )                      | Stop pulsing; resume sending DTMF tones                                                                                              |
| +                      | Pause for one second                                                                                                                 |
| A-D                    | Fourth column DTMF keys                                                                                                              |
| E                      | Go off-hook, wait for dial tone or other steady tone (pager go-ahead or confirmation tone, for example), then do next item in string |
| F                      | Switch hook flash and wait for dial tone                                                                                             |
| G                      | Greet - Wait for a voice or computer tone answer                                                                                     |
| H                      | Hang up (go on-hook)                                                                                                                 |

| Dial String Characters |                                                                                                                                                                                                                                                |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Character              | Explanation                                                                                                                                                                                                                                    |
| L                      | Wait for an answer supervision signal that indicates the receiving phone has gone off-hook, then dial remaining characters after receiving the signal. Valid only with four-wire connections, not with loop start or ground start phone lines. |
| N                      | Start a new activity; do not go off-hook                                                                                                                                                                                                       |
| O                      | Ring once                                                                                                                                                                                                                                      |
| P                      | Go off-hook, do not wait for dial tone                                                                                                                                                                                                         |
| S                      | Switch hook flash, no wait required                                                                                                                                                                                                            |
| T                      | Go off-hook, wait for dial tone                                                                                                                                                                                                                |
| V                      | Play three seconds of the message for voice pager                                                                                                                                                                                              |

### 1.2.5.7.4 Prevent Unaddressed Messages

This procedure describes how to prevent callers from leaving messages in the attendant's mailbox. Use this procedure when you want callers to be transferred to the system attendant instead of leaving a message in the attendant's mailbox (an unaddressed message). A system attendant's extension must be configured.

#### With Message of the Day Capability

1. From the Main Menu, select **(M) Mailbox Maintenance**, and then **(M) Modify Mailboxes**.
2. Enter the attendant's mailbox number and press **Enter** until you are prompted for New FCOS.
3. At the **New FCOS** prompt, type **6**.
4. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

#### Without Message of the Day Capability

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.

2. Go to the NuPoint Voice Configuration Online Menu in the active or inactive configuration. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it.
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the number of the line group (1-24) for NP Receptionist OR press **Enter** if the current number is correct.
4. In the NP Receptionist Application Menu, select **(Z) Dial String and Mailbox Menu**.
5. Select **(D) Attendant's Mailbox #** and enter a **period (.)**, which disables the attendant's mailbox. Callers who respond to the wait prompt by waiting will be transferred to the system attendant's extension instead of the attendant's mailbox.

**Note:**

- If you disable the attendant's mailbox and you do not define a system attendant's extension, be sure to disable the wait prompt. Otherwise, when a caller waits, the server thanks the caller and then hangs up!
- Since the attendant's mailbox is used for recording the message of the day, this capability will no longer be available.

6. Save the entry by exiting to the Main Menu. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.2.5.7.5 Enable Multiple Messages for Outside Callers

This procedure describes how to allow outside callers to leave multiple messages for multiple mailbox owners in a NuPoint Unified Messaging server with a single call-in. Callers cannot make multiple messages in these cases:

- from tree mailboxes
- when forwarded immediately to a mailbox via a PBX or via an integration that does not allow multiple messages.

To enable multiple messages:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.

2. Go to the NuPoint Voice Configuration Online Menu in the active or inactive configuration. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the **number** of the line group (1-24), or press **Enter** if the current number is correct.
4. Return to the NuPoint Voice Configuration Menu (A/E/F/G/H/X).
5. Select **(M) Modify Application**, and then **(R) NP Receptionist Menu**.
6. Select **(M) Allow Multiple Messages for Outside Caller** and enter **Y** to allow an outside caller to leave more than one message with a single call-in.
7. Save the entry by exiting to the Main Menu. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.2.5.7.6 Enable the Dial-by-Name Function

To enable Dial-by-Name:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Go to the NuPoint Voice Configuration Online Menu in the active or inactive configuration. Do **one** of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the **number** of the line group (1-24), or press **Enter** if the current number is correct.
4. Select **(M) Modify Application** and then **(D) Dialing Plan Menu**.
5. Select **(D) Dialing Plan** and code the dialing plan with an **A** in the digit position that triggers a prompt about spelling the name. For example, 3,3,3,3,3,3,A,3 would trigger the prompt, "Please enter a mailbox number or press 8 to dial by name." See [Configure a Dialing Plan](#).
6. Exit from the Dialing Plan menu.
7. In the application menu, select **(F) Dial by Name**.
8. Select **(L) Last Name First Flag** and enter **Y** to specify a last name-first name dialing sequence, or **N** to specify a first name-last name dialing sequence. By default, callers must dial a user's last name first when using the Dial-by-Name function. For example, to reach the user John Smith, they would begin entering the keys S-M-I-T-H. The NuPoint UM server search a database for entries that match the series. If it finds more

than one match, it plays the names and mailbox numbers of the partial matches. If it finds a unique match, it plays either the user's name or personal greeting.

9. Select **(N) Number of Names Threshold** and enter the **Number** of names (1-9) that the server plays when a multiple partial match occurs. A typical threshold is 3.
10. Select **(E) Exact Match Break** and enter **Y** to allow a mailbox owner's name and mailbox number (or greeting, for an outside caller) to play as soon as a caller enters enough letters to uniquely identify a mailbox owner, or **N** to have the server wait for a caller to either stop entering letters or to press the # key before it responds.
11. Select **(S) Single Digit Access** and enter **Y** to allow a caller to enter a single digit to reach a mailbox after matched names have been played, or **N** to require a caller to enter an entire mailbox number to reach a mailbox after matched names have been played.
12. Select **(M) Suppress Mailbox Number** and enter **Y** to have the server omit the mailbox numbers in the list of names played when there is a match with a dialed name, or **N** to have the server include the mailbox numbers in the list of names played when there is a match with a dialed name.
13. Include feature bit 92 (user will be in Dial-by-Name database) in the FCOS assigned to the mailbox. [Customize an FCOS](#) as necessary.
14. Ensure that each mailbox to be accessible through Dial-by-Name shares the same GCOS group (if a bit-mapped GCOS) or GCOS (if an affinity group GCOS).
15. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.2.5.7.7 Configure Media Service (Packet Rate)

To configure packet rate:

1. From the Main menu, select **(S) System maintenance, (R) Reconfiguration, (R) Reconfigure system**, then **(G) Offline Menu**.
2. Select **(B) Duplicate Active Configuration**. The system copies the current (active) configuration. When copying is complete, the short form of the Offline menu appears.

All subsequent steps in this procedure – along with any other configuration entries – affect only the inactive configuration, and will take effect only after you activate the inactive configuration.

1. Select **(V) Configure Media Service**.



2. In the Media Service menu, select one of the following:

- **(F) Fixed Packet Rate:** select this option to maintain a fixed packet rate of 20 ms. **NOTE:** If a call requiring a non-standard packet rate is made to the NuPoint UM system, it may result in audio distortion.
- **(V) Variable Packet Rate:** select this option for MCD Release 4.0 (3300 ICP Release 10.0) and later to allow successful streaming of calls that may require a non-standard packet rate.

**Note:**

These selections are mutually exclusive - when you select one option, the other is automatically disabled.

3. To save your changes, exit to the NuPoint Voice Main menu. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.5.7.8 Verify Configuration Parameters

### All Applications Except Paging and Message Delivery

1. From the Main Menu, select **(R) Reports**.
2. Select **(C) Configuration** and then select a report configuration type from the following list:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server, or
  - **X** to exit report output options (no report)
3. When prompted, enter the number of the line group to which the application is assigned. Examples of valid formats for this response are:
  - **1** to report the configuration of line group 1
  - **1-4** to report the configuration of line groups 1 through 4
  - **1,2,4-7** to report the configuration of line groups 1, 2, and 4 through 7
  - Press **Enter** to get the configuration of all line groups

The server shows the name of the application assigned to each group specified and displays the parameter settings for that application. To make corrections, go to the appropriate application menu and enter the correct values.

## Paging and Message Delivery Applications

1. If you are modifying the Pager or Message Delivery application, go to the Pagers Menu:

From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.

2. Do one of the following:

- Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
- Otherwise, select **(E) Modify Active Configuration**.

3. Select **(G) Group Selected** and enter the Pager Line Group number. Select **(M) Modify Application**.

4. Select **(S) Show Pagers**. The server displays the pager system number (index number), pager name, access code, and hold time for each pager.

5. Check the displayed configuration for each pager system against your Pager and Message Delivery Worksheet to verify that it is correct.

6. To make corrections, return to the **Pager Systems Supported** option, the **Define Pagers** option, or the **Other Features** option, and then enter the correct values.

7. When your entries are correct, save the parameter settings.

### 1.2.5.8 Add Caller ID to Voice Mail Headers

You can configure mailboxes to include Calling Line ID (CLI) in the headers of voice mail viewed using Web View, or accessed via telephone.

[Customize an FCOS](#) to include the following feature bits in the required mailboxes:

- 263 (Store Caller Line ID as a Phone or Mailbox Number)
- **264** (Play Outside Caller User Interface for CLI Capture)

## 1.2.6 Pager (Outdial) Application

### 1.2.6.1 Description

This topic provides an overview of the following Pager (Outdial) features:

- [Pager Overview](#)
- [Message Delivery Overview](#)
- [Call Placement Overview](#)
- [Pager and Message Delivery Allocation](#)

- [Cascade Paging](#)

The Pager application causes the NuPoint Unified Messaging server to initiate, rather than receive, a telephone call. Don't let the name "Pager" confuse you. It is used for sending messages to pagers, but also for a number of other functions that require outdials. An outdial is a call placed by the server. Two other uses of this application are message delivery and call placement.

- **Paging** is a function that allows the server to notify a mailbox owner when a message arrives in the mailbox by activating a radio pager. Parameters can be set to limit the hours that a page may be sent, or the types of messages that activate a page.
- **Message delivery** is a function that allows the server to notify a mailbox owner when a message has been received, by calling the mailbox owner at a predefined telephone number and allowing the owner to log into the mailbox. Parameters can be set to limit the hours that a message delivery may be made, or the types of messages that activate the message delivery. If the [Cascade Paging](#) feature is enabled and the user receives a new message while the server is in the process of message delivery, the server will not initiate a new notification. If it is disabled, a new message will restart the message delivery function.
- **Call placement** is similar to message delivery, in that it places a call to a telephone number. In this case, the message is made *by* (rather than *to*) the mailbox owner. The message is addressed to a telephone number rather than to a mailbox. The answering party does not have to log in to hear the message. Call placement was formerly known as "off-system messaging."

Some optional features, such as [Cut-through Paging](#), use the Pager application as well.


## Pager Overview

The NuPoint Unified Messaging server can access the following types of radio pagers:

- **Tone only:** beeps when activated
- **Tone and vibrate:** allows a user to set pager to vibrate when beeping is undesirable
- **Display:** shows the telephone number where the paging party can be reached
- **Voice:** allows a calling party to leave a brief message and can activate the display of a display pager or issue a message for a voice pager when the message is left in a mailbox.

The diagram below shows how one-way paging works in the server. When a message is left in a mailbox configured for paging, the server places a call to the paging company (through the PBX and the CO). The pager then indicates the call.

## Pager Call Processing

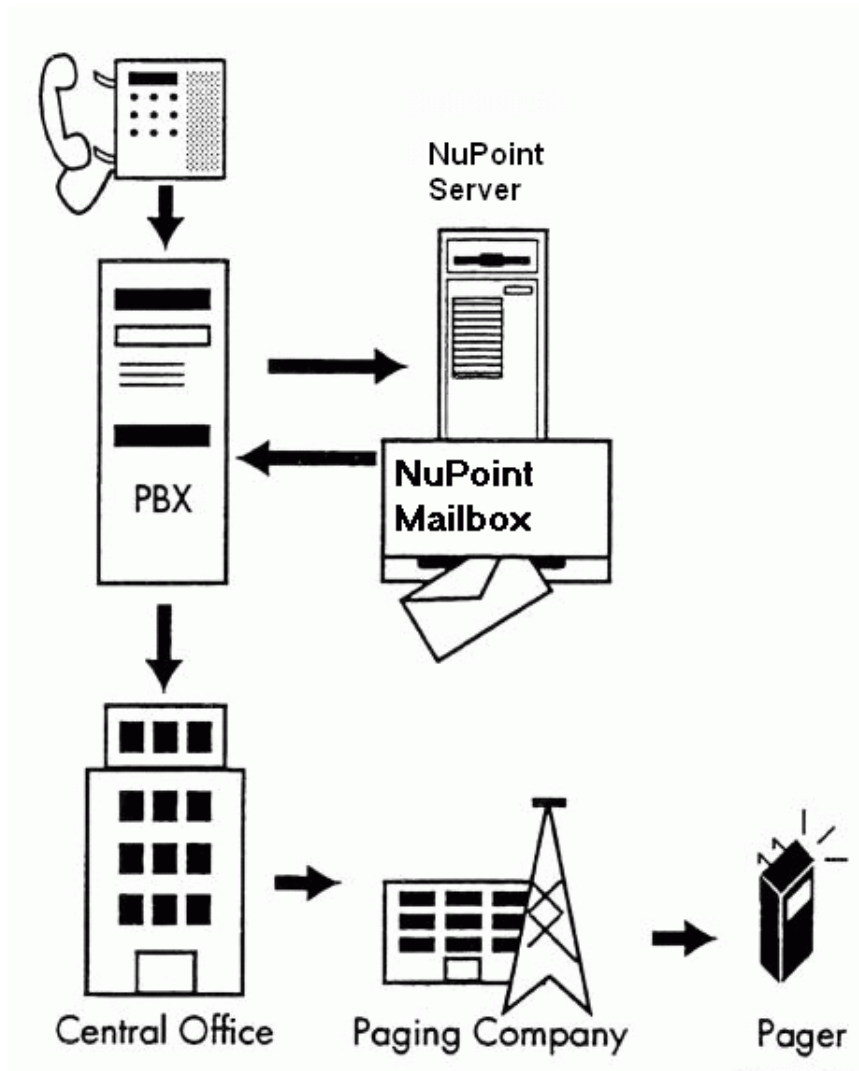

#### Features:

- Paging can be activated for specific types of messages.
- Users can specify the hours available for paging.
- Users can enter the number to be paged.
- Limits for paging can be set through the Limits Class of Service (LCOS).
- The server can track number of pages for billing purposes.
- Pages can be billed to a credit card or other billing account.

#### Message Delivery Overview

Message delivery provides message waiting indication by calling a mailbox owner at a pre-configured telephone number such as a cell phone number. When the phone is answered, the server prompts:

*"Hello <name recorded in the mailbox>. You have <number> unplayed message(s) in your mailbox. Please enter your passcode."*

When the mailbox owner enters a passcode, the server says:

*“You have [number] unplayed messages in your mailbox. Press P to play the first message.”*

The mailbox owner is now logged into the mailbox, and can use any of the features (Play, Make, Give, etc.) available to that mailbox.

The server prompts for the passcode once, then waits 30 seconds for a response. If someone other than the user answers, and does not know the passcode, the server responds:

*“Call back when you can remember your passcode. Good-bye.”*

and hangs up.

Message delivery is particularly valuable for users who do not work on-site, and so cannot use ordinary message waiting indicators. Without message delivery, they might have to call in many times a day to receive messages in a timely manner.

Features:

- Message delivery can be activated for specific types of messages.
- Users can specify the hours available for message delivery.
- Users can enter the number to be called.
- Limits for message delivery can be set through the LCOS.
- The server can track number of messages delivered for billing purposes.
- Message delivery calls can be billed to a mailbox owner’s credit card or other billing account.

## Call Placement Overview

Call placement (formerly known as “off-system messaging”) allows server users to send messages to the telephones of people who are not server users, that is, who do not have mailboxes. For example, users can send messages when their time at a phone is limited (at a pay phone, for example) and expect the other party to receive their information. A company can send a product announcement to many target customers at once, or a volunteer group can notify its members of a meeting time change. Any mailbox owner can have this feature if you configure the mailbox properly.

Call placement provides voice message delivery by dialing a telephone number entered by the caller. When the phone is answered, the server prompts:

*“Hello [recipient’s name]. You have a call from [user name].”*

The recipient can accept, reject, delay, or hold the call for 30 seconds. If the call is accepted, the message plays and the recipient can reply to the message.

Call placement is compatible with all applications and integrations.

Features:

- Users can send a single message to any number and combination of mailboxes and call placement numbers.
- The server retries delivery until successful.
- The server administrator can adjust re-dialing interval and frequency.
- A user can give an existing message to an outside number.
- Calls can be passcode protected, to ensure only the intended recipient can play the message.
- Limits for call placement can be set through the LCOS and RCOS (see Other Classes of Service).
- The server notifies users about calls that cannot be delivered.
- The server can track the number of calls for billing purposes.
- Message delivery calls can be billed to a mailbox owner's credit card or other billing account.

### Pager and Message Delivery Allocation

- *At least one port is required to outdial pages; it must be dedicated exclusively to outdialing.*

This means that fewer ports are available to accept incoming calls. If not enough ports are reserved to handle the paging traffic, paging requests will queue, and users will not receive message waiting notification in a timely manner.

Before assigning pagers or message delivery to mailboxes, it is important to analyze call-traffic flow and to decide how much of the system you want to devote to paging.

- Each call to a radio pager ties up an outdialing port for less than one minute. Queuing only becomes a problem in situations when several users have pagers.
- Message delivery requires more ports than paging because each port is tied up for the entire time that the user is logged in.
- If a user does more than simply play the unplayed message (or messages) that activated the message delivery, the outdialing port can be in use for a considerable length of time.
- The installation site (as the calling party) is responsible for any charges that accrue when paging or message delivery calls are made to numbers outside the PBX system.

### Cascade Paging

**Note:** You must use the **Text Console** to enable Cascade Paging.

The Cascade Paging function prevents the server from initiating a new page while a message is already being delivered. The function is disabled by default.

To understand the behavior of Cascade Paging, assume the pager settings for the mailbox are as shown:

| Pager Settings            |        |
|---------------------------|--------|
| Mailbox number            | 2001   |
| Primary Pager Number      | 2001   |
| Primary Pager Frequency   | 3      |
| Primary Pager interval    | 15 min |
| Alternate Pager Number    | 3001   |
| Alternate Pager Frequency | 3      |
| Alternate Pager Interval  | 15 min |

### When Cascade Paging is disabled:

1. A new message arrives in mailbox 2001, initiating a Pager cycle.
2. Extension 2001 rings.
3. If there is no reply from this extension (Ring-No-Answer), the pager system will try to call 2 more times (Frequency setting of 3) after a time interval of 15 minutes (Primary Pager interval) and, if still not answered, will move to the Alternate Pager number to repeat the process.

After there is no reply (RNA) for the first two attempts in the Primary Pager cycle, only one attempt of the Primary Pager remains and after this last attempt the system will call the Alternate Pager.

If, at this moment, a new message arrives in the user's mailbox, the system will behave as if this is first new message and it will restart the Primary Pager cycle.

This scenario continues any time a new message arrives in the user's mailbox.

### When Cascade Paging is enabled:

1. A new message arrives in mailbox 2001, initiating a Pager cycle.
2. Extension 2001 rings.
3. If there is no reply from this extension (Ring-No-Answer), the pager system will try to call 2 more times (Frequency setting of 3) after a time interval of 15 minutes (Primary Pager interval) and, if still not answered, will move to the Alternate Pager number to repeat the process.

After there is no reply (RNA) for the first two attempts in the Primary Pager cycle, only one attempt of the Primary Pager remains and after this last attempt the system will call the Alternate Pager.

If, at this moment, a new message arrives in the user's mailbox, the system does not initiate the Primary Pager cycle again. Thus the one attempt remaining for the Primary Pager will be executed and if this remaining attempt is RNA, the system will ring the Alternate Pager Number.

The above scenario continues until the Alternate Paging cycle is complete, even if more new messages arrive in the user's mailbox.

During the Pager call, the user is informed of the total number of unplayed messages in the mailbox.

## 1.2.6.2 Configuration Overview

### 1.2.6.2.1 Configuration Requirements

#### NuPoint Voice Configuration

Paging, message delivery, and call placement require the following information from the NuPoint Voice configuration:

- The **line group** that will be used for outdials
- **Pager system names**. These are unique names, also called “pager names,” to help you identify which pager system you are referring to. An example of a pager system name is “Outside Access.”
- **Hold time**. This is the number of seconds that the outdial port remains off-hook after all outdialing is performed. It should be long enough to allow a reorder or busy tone to be returned, which alerts the server that a page has failed. The default value is 20 seconds. The maximum hold time allowed is 90 seconds. Set a value of 3 seconds to clear the port more quickly.
- **Pager systems**. These are outdial indexes that outdial a certain dial string when accessed. Each pager system is represented by a number. (You later enter this number as an internal outdial index, billed outdial index, or unbilled outdial index, and specify the access code index when adding a pager, message delivery, or call placement to a mailbox.)
- **Message delivery** requires enabling the Message Delivery parameter.
- **Call placement** requires:
  - Server features that make it possible for the user to send messages to outside telephone numbers
  - Modification of the NuPoint Voice line group's dialing plan
- Paging and message delivery use message waiting indicators; call placement does not.

#### Mailbox Configuration

The following information is required in the user's mailbox configuration:



| Information Required                                                                                                                                                                        | Paging | Message Delivery | Call Placement |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------|----------------|
| A properly modified FCOS . (See Class of Service Configuration for Pager or Message Delivery or Call Placement.)                                                                            | Y      | Y                | Y              |
| A properly modified LCOS . (See Class of Service Configuration for Pager or Message Delivery or Call Placement.)                                                                            | Y      | Y                | Y              |
| The outdial indexes (which point to a specific pager system)                                                                                                                                | Y      | Y                | Y              |
| The pager access type (which points to an internal outdial index, billed outdial index, or unbilled outdial index)                                                                          | Y      | Y                | Y              |
| The pager number (the telephone number that the server outdials to)                                                                                                                         | Y      | Y                |                |
| The pager frequency (the number of times that the server attempts to notify the user of an unplayed message)                                                                                | Y      | Y                |                |
| The pager interval (the number of minutes the server waits between repages)                                                                                                                 | Y      | Y                |                |
| The post-pager number (used with display pagers) . Once the server has reached the pager number and the call is answered, it then sends the post-pager number to be displayed on the pager. | Y      |                  |                |
| The busy pager attempts (the number of times that the server attempts to notify the user of an unplayed message when it receives a busy tone on the last page attempt)                      | Y      |                  |                |
| The busy pager interval (the number of minutes the server waits between repages when it receives a busy tone on the last page attempt)                                                      | Y      |                  |                |

## Pager Application Worksheets

Use these three worksheets to gather and organize the information you need to configure a Pager application:

- Outdial Line Group Worksheet
- NuPoint Voice Application Worksheet
- Mailbox Individual Worksheet

Sample worksheets are shown here. Blank worksheets are available [here](#).

### Outdial Line Group Worksheet

- The Outdial Line Group Worksheet organizes information you need to configure the line group that outdials paging and message delivery calls and identify the pager system. A sample Outdial Line Group Worksheet for paging is shown here:

## Outdial Line Group Worksheet

| Pager System | Pager Name     | Access Code | Hold Time |
|--------------|----------------|-------------|-----------|
| 0            | Outside Access | T9T         | 3         |
| 1            | 415 Area Code  | T9T1415     | 3         |
| 2            | 553 Exchange   | T9T553      | 3         |
| 3            |                |             |           |
| 4            |                |             |           |
| 5            |                |             |           |
| 6            |                |             |           |
| 7            |                |             |           |
| 8            |                |             |           |
| 9            |                |             |           |
| 10           |                |             |           |
| 11           |                |             |           |
| 12           |                |             |           |
| 13           |                |             |           |
| 14           |                |             |           |
| 15           |                |             |           |

| Offline Parameters           |                                                                                                                   |
|------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Define Line Groups           | Current group <input type="text" value="2"/> Add lines to current group <input type="text" value="1:1:3, 2:0:3"/> |
|                              | Name of current group <input type="text" value="Pager Dialer 1"/>                                                 |
| Line Group Only Applications | Group selected <input type="text" value="2"/> Select application <input type="text" value="P"/>                   |

| Online Parameters                   |                                                                                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------------|
| VoiceMemo Configuration Online Menu | Group selected <input type="text" value="2"/>                                                     |
| Pagers                              | Pager systems supported (from Pager Systems Index Plan, above) <input type="text" value="0,1,2"/> |

## NuPoint Voice Application Worksheet

- The NuPoint Voice Application Worksheet you completed for the NuPoint Voice application contains information applicable to message delivery and call placement.
- If you are including message delivery in this application, you set all parameters in the Other Pager Features Menu to the same settings as the primary application that is configured on your server. For example, if the NuPoint Voice application is used for processing most calls on your server, copy the entries from the NuPoint Voice Worksheet into the Other Pager Features Menu. (The primary application could be NuPoint Voice or Centrex.)
- If you are including call placement in this application, establish a dialing plan on this worksheet that tells the server that mailboxes starting with the specified digit are

actually telephone numbers. See the [NuPoint Voice Application](#) section for more information. A sample NuPoint Voice Application Worksheet for call placement is shown here:

| NuPoint Voice Worksheet             |                                               |                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                          |
|-------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Offline Parameters</b>           |                                               |                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                          |
| Define line groups                  | Current group                                 | <input type="text" value="1"/>                                                                                                                                                                                                                                                         | Add lines to current group                                                                                                                                                                                               |
|                                     | Name of current group                         | <input type="text" value="Call Place"/>                                                                                                                                                                                                                                                | Drop lines from current group                                                                                                                                                                                            |
| Line Group Only Applications        | Group selected                                | <input type="text" value="1"/>                                                                                                                                                                                                                                                         | Select application                                                                                                                                                                                                       |
| <b>Online Parameters</b>            |                                               |                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                          |
| VoiceMemo Configuration Online Menu | Group selected                                | <input type="text" value="1"/>                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                          |
| Day/Night                           | Start time of workday                         | <input type="text" value="8:30"/> <input type="text" value="AM"/> <input type="text" value="PM"/>                                                                                                                                                                                      | End time of workday                                                                                                                                                                                                      |
|                                     |                                               | <input type="text" value="5:30"/> <input type="text" value="AM"/> <input type="text" value="PM"/>                                                                                                                                                                                      | <input type="text" value="D"/> <input type="text" value="D"/> <input type="text" value="D"/> <input type="text" value="D"/> <input type="text" value="D"/> <input type="text" value="N"/> <input type="text" value="N"/> |
|                                     |                                               |                                                                                                                                                                                                                                                                                        | M T W Th F Sa Su<br>Weekend days                                                                                                                                                                                         |
| Dialing Plan Menu                   | Dialing plan                                  | <input type="text" value="A"/> <input type="text" value="0"/> <input type="text" value="3"/> <input type="text" value="7"/> <input type="text" value="3"/> <input type="text" value="3"/> <input type="text" value="3"/> <input type="text" value="7"/> <input type="text" value="4"/> |                                                                                                                                                                                                                          |
| Optional Star * Prefix Dialing Plan | *Networking with prefix dplan digit           | <input type="text"/>                                                                                                                                                                                                                                                                   | *Networking with prefix dplan length                                                                                                                                                                                     |
|                                     | *Networking without prefix dplan digit        | <input type="text"/>                                                                                                                                                                                                                                                                   | *Networking without prefix dplan length                                                                                                                                                                                  |
|                                     |                                               | *Dial by name dplan digit                                                                                                                                                                                                                                                              | <input type="text"/>                                                                                                                                                                                                     |
|                                     |                                               | *Call placement msg delivery dplan digit                                                                                                                                                                                                                                               | <input type="text" value="8"/>                                                                                                                                                                                           |
| Dial String and Mailbox Menu        | System attendant's extension                  | <input type="text" value="311"/>                                                                                                                                                                                                                                                       | Attendant's transfer string or PBX predirectory #                                                                                                                                                                        |
|                                     | Administrator's mailbox #                     | <input type="text" value="9614"/>                                                                                                                                                                                                                                                      | Attendant's mailbox #                                                                                                                                                                                                    |
|                                     | E-mail transfer string                        | <input type="text" value="3186422 5+"/>                                                                                                                                                                                                                                                | General greeting mailbox #                                                                                                                                                                                               |
|                                     | Pre-company name dial string                  | <input type="text"/>                                                                                                                                                                                                                                                                   | Pre-mailbox greeting dial string                                                                                                                                                                                         |
| VoiceMemo Configuration-Online Menu | Key 0 for attendant transfer during greeting? | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Prompts "Enter mailbox # or wait"?                                                                                                                                                                                       |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Allow multiple messages for outside caller?                                                                                                                                                                              |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Delay before answer (time in tenths/sec.)                                                                                                                                                                                |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Default language for prompts                                                                                                                                                                                             |
| Dial-by-Name Menu                   | Last name first flag?                         | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Exact match break?                                                                                                                                                                                                       |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Single digit access?                                                                                                                                                                                                     |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Suppress mailbox number?                                                                                                                                                                                                 |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    | Number of names threshold                                                                                                                                                                                                |
| Passcode Menu                       | Minimum passcode length                       | <input type="text" value="5"/>                                                                                                                                                                                                                                                         | Maximum passcode length                                                                                                                                                                                                  |
|                                     |                                               | <input type="text" value="10"/>                                                                                                                                                                                                                                                        | Passcode trip count                                                                                                                                                                                                      |
|                                     |                                               | <input type="text" value="3"/>                                                                                                                                                                                                                                                         | Passcode trip period                                                                                                                                                                                                     |
| Allow Dial an Extension Menu        | Allow dial an extension for callers?          | <input type="checkbox"/> yes <input checked="" type="checkbox"/> no                                                                                                                                                                                                                    | Allow dial an extension for users?                                                                                                                                                                                       |
|                                     |                                               | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                    |                                                                                                                                                                                                                          |
| Speech Quality Menu                 | All names and greetings                       | <input type="text" value="18"/>                                                                                                                                                                                                                                                        | All recorded messages                                                                                                                                                                                                    |
|                                     |                                               | <input type="text" value="18"/>                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                          |

NP0175

## Mailbox Worksheet

- The Mailbox Worksheet organizes information you need to configure individual mailboxes for paging, message delivery, or call placement, or any combination of these functions.

- If you are including call placement in this application, specify the appropriate outdial index and access type for call placement. Also specify the appropriate FCOS and LCOS for call placement. A sample Mailbox Worksheet for paging is shown here:

| Mailbox Individual Worksheet                                                                                                                                                                                              |                                                                     |                                      |                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------|
| <b>Mailbox Type</b><br>Standard <input checked="" type="checkbox"/> Tree <input type="checkbox"/> (also complete Tree Mailbox Worksheet) Rotational <input type="checkbox"/> (also complete Rotational Mailbox Worksheet) |                                                                     |                                      |                                                                     |
| <b>Create New Mailboxes</b>                                                                                                                                                                                               |                                                                     |                                      |                                                                     |
| Mailbox to create                                                                                                                                                                                                         | 0117                                                                | Name                                 | Smith, Bob                                                          |
| Department code                                                                                                                                                                                                           | Outside                                                             | Access code                          |                                                                     |
| Receptionist day treatment                                                                                                                                                                                                |                                                                     | Receptionist night treatment         |                                                                     |
| Mailbox's extension number                                                                                                                                                                                                |                                                                     | Mailbox's extension pre-dial code    |                                                                     |
| Attendant extension number                                                                                                                                                                                                | 511                                                                 | Attendant extension pre-dial code    |                                                                     |
| Features Class of Service                                                                                                                                                                                                 | 10                                                                  | Units Class of Service               | 1                                                                   |
| Transfer Class of Service                                                                                                                                                                                                 |                                                                     | Group Class of Service               | 4                                                                   |
| Restriction Class of Service                                                                                                                                                                                              |                                                                     | Temporary passcode                   | 5                                                                   |
| Message waiting type #1                                                                                                                                                                                                   | 5                                                                   | Message waiting type #2              |                                                                     |
| Call placement pager access type                                                                                                                                                                                          |                                                                     | Turn off pager/outcall notification? | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no |
| Time zone offset                                                                                                                                                                                                          |                                                                     |                                      |                                                                     |
| Lists with change rights                                                                                                                                                                                                  | 2, 3-6                                                              | Lists with review rights             | 2, 3-6                                                              |
| Message speech quality                                                                                                                                                                                                    | 1B                                                                  | Name/greeting speech quality         | 1B                                                                  |
| <b>For outdial billing only</b>                                                                                                                                                                                           |                                                                     |                                      |                                                                     |
| Internal outdial index                                                                                                                                                                                                    |                                                                     | Billed outdial index                 |                                                                     |
| Unbilled outdial index                                                                                                                                                                                                    | 0                                                                   |                                      |                                                                     |
| Billing number                                                                                                                                                                                                            |                                                                     | Billing dialing code                 | <input type="checkbox"/> HB <input type="checkbox"/> BN             |
| <b>For AC message lamp (message waiting type # 2 only)</b>                                                                                                                                                                |                                                                     |                                      |                                                                     |
| AC message waiting lamp address                                                                                                                                                                                           |                                                                     |                                      |                                                                     |
| <b>For message waiting type 5 only</b>                                                                                                                                                                                    |                                                                     |                                      |                                                                     |
| Pager access type                                                                                                                                                                                                         | U                                                                   | Pager number                         | 5557979                                                             |
| Post-pager number                                                                                                                                                                                                         |                                                                     |                                      | ++G9117#                                                            |
| Pager frequency                                                                                                                                                                                                           | 5                                                                   | Pager interval                       | 30                                                                  |
| Message delivery?                                                                                                                                                                                                         | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no | Suppress pager?                      | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no |
| Busy pager attempts                                                                                                                                                                                                       |                                                                     | Busy pager interval                  |                                                                     |
| Pager start time                                                                                                                                                                                                          |                                                                     | Pager stop time                      |                                                                     |
| Define additional pager number?                                                                                                                                                                                           | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no |                                      |                                                                     |

NP0176

## 1.2.6.2.2 Line Groups for Outdial Functions

Use the information in the following paragraphs for entries on the NuPoint Voice Worksheet and Outdial Line Group Worksheet.

### Guidelines for Port Allocation

The server requires at least one port to outdial calls for paging, message delivery, and call placement. Outdialing ports must be dedicated exclusively; this means that there will be fewer ports available to accept incoming calls. If enough ports are not reserved to handle the outdial traffic, however, the requests are queued, and users do not receive message waiting notification or messages in a timely manner. Before assigning pagers or message delivery to mailboxes, you should analyze call traffic flow and decide how much of the server you wish to devote to outdials.

Each call to a radio pager ties up an outdialing port for less than a minute; queuing becomes a problem only when there is a large number of users with pagers. Message delivery can require more ports than paging, since each port is tied up for the entire time that the user is logged in. For example, if a user does more than simply play the unplayed message that activated message delivery, the outdialing port can be in use for a considerable amount of time. Call placement is more like message delivery because ports are in use for more time than for paging.

**Note:**

The server installation site, as the calling party, is responsible for any charges that accrue when paging, message delivery or call placement calls are made to numbers outside of the PBX system.

**Line Group Information**

All server ports are assigned to line groups. Each line group, in turn, is assigned to a single application, and any configuring that is done for that application applies to every port in the line group. The number of ports in each line group depends on how heavy the phone traffic is expected to be for the particular application.

**Line Group Number**

Each line group is represented by a discrete number. Valid line group numbers are 1 through 24.

**Group Name**

The group name should identify the line group's purpose. For example, "Pager Outdialer."

**Lines in Group**

You identify each line (or port) in a group by a triplet, which represent the module, slot, and port. Module refers to a CPU, the server's main processor. Modules are numbered at 1. Slots are numbered at 0. Ports are also numbered from 0 and the upper limit depends on the port limit of your system licensing.

For more information about line groups, see [About Line Groups](#).

**Call Placement**

To use call placement, you must change the dialing plan. Use the letter T as a dialing plan entry. For example, if you entered T in position 8 of the plan, users would enter 8 from the keypad to activate the call placement function. You can use T in any position of the dialing plan, but only once. See [About Dialing Plans](#) for more information.

**Pager Systems Supported**

You can configure the server with up to 16 different outdial access codes, each identified by an index number (0-15). Each outdial line group does not need to support all access codes; for example, a line group dedicated to radio paging for the local area code does not need to support an access code designed for long distance call placement. Assigning only the required access codes to an outdial line group makes it easier to plan and control traffic and prevent abuse.

The mailbox configuration specifies these access codes for use in placing internal calls, unbilled external calls, and external calls charged to a billing number. You enter the appropriate pager system numbers as the internal outdial index, billed outdial index, and unbilled outdial index.

The Pager Systems supported parameter assigns specific pager systems to the line group that is currently selected. You should analyze your needs carefully before assigning pager systems. For example, if your server will have message delivery, call placement, and outdialing to radio pagers, you should take into account the fact that a single message delivery can take several minutes (while the user plays the message, answers it, etc.), while activating a radio pager takes a fraction of that time. Therefore, you might want to assign pager systems that outdial call placement or message delivery calls to a larger line group.

### 1.2.6.2.3 Dial Strings for Outdials

When you are configuring the server to outdial, you create a dial string to duplicate the manual steps that you would perform to dial a pager or place a phone call.

#### **Define the Operations Required to Page or Place a Call**

##### Paging (Calling the Pager)

Many PBXs require that you dial an access code to get an outside line. To call the pager, you usually dial the pager company telephone number, listen for a pager tone, then dial the code number of the pager. Before you dial the pager company telephone number, however, you pick up the receiver on the telephone, and listen for a dial tone to be sure that the telephone system is ready to accept the number that you dial. The steps for successfully activating this pager, therefore, are to:

1. Go off-hook and listen for the dial tone
2. Dial any access code necessary to get an outside line
3. Dial the pager company telephone number
4. Listen for the pager tone
5. Dial the pager number

All of these steps must be configured.

##### Message Delivery and Call Placement

Many telephone switches require that you dial an access code to get an outside line. The sequence of events that you perform (other than dialing the actual number), such as waiting for tones, must be configured in the dial string.

## Translate the Required Operations to a Dial String

This table lists the characters that the server recognizes as the steps required to page or to place a call. You use these characters to make up your dial string:

### Dial String Characters

| Character | Explanation                                                                                                                                                                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0-9, *, # | Keys on a standard push button telephone                                                                                                                                                                                                                          |
| (         | The following digits should be dial pulsed (10 PPS)                                                                                                                                                                                                               |
| )         | Stop pulsing; resume sending DTMF tones                                                                                                                                                                                                                           |
| +         | Pause for one second                                                                                                                                                                                                                                              |
| A-D       | Fourth column DTMF keys                                                                                                                                                                                                                                           |
| E         | Go off-hook, wait for dial tone or other steady tone (pager go-ahead or confirmation tone, for example), then do next item in string                                                                                                                              |
| F         | Switch hook flash followed immediately by dialing                                                                                                                                                                                                                 |
| G         | Greet - Wait for a voice or computer tone answer                                                                                                                                                                                                                  |
| H         | Hang up (go on-hook)                                                                                                                                                                                                                                              |
| L         | Answer Supervision-Wait for an answer supervision signal that indicates the receiving phone has gone off-hook, then dial remaining characters after receiving the signal. Valid only with four-wire connections, not with loop start or ground start phone lines. |
| N         | Start a new activity; do not go off-hook                                                                                                                                                                                                                          |
| O         | Ring once                                                                                                                                                                                                                                                         |
| P         | Go off-hook, do not wait for dial tone                                                                                                                                                                                                                            |
| S         | Switch hook flash, no wait required                                                                                                                                                                                                                               |
| T         | Go off-hook, wait for dial tone                                                                                                                                                                                                                                   |
| V         | Voice pager: play first unplayed message (and update mailbox to count it as played).                                                                                                                                                                              |

#### Note:

The server always assumes a G (wait for greeting) as the last character in a message delivery dial string.

The dial string that you formulate is divided into three parts:

- **Pager system access code:** identified by the pager system index number, contains the first part of the dial string necessary to reach the user's pager. It is usually the part of the dial string that is common to some group of users. A pager system index number from 0 to 15 that assigns a pager system to a mailbox. If you do not select an outdial index for a pager schedule, the server cannot issue a page when a message is left in that mailbox.



- Pager number: is the balance of the dial string necessary to reach the user's pager.
- Post-pager number: used as the data to display on a display pager.

**Note:**

If there is no pager or post pager dial string entered, a page will not be sent.

**Design Rules**

When designing your dial strings, observe the following rules in assigning each of the three components:

- The first character in the dial string must make the server go off-hook and wait for a dial tone. A T is recommended.
- An F (switch hook flash) produces the switch hook flash followed immediately by dialing
- The access code is always outdialed before the pager number. The dial string used is dependent on the pager system selected.
- The pager system part of the dial string is limited to 30 characters.
- Only 16 pager systems can be stored in the NuPoint Voice configuration at any one time, regardless of the number of paging groups configured. However, each pager system can be shared by many users or line groups.
- The pager number is limited to 16 characters. The server administrator enters it in a mailbox's configuration.

**Programming Notes:**

1. After the last character is outdialed, the system goes on-hook ("hangs up") automatically, except when message delivery is specified.
2. When a mailbox is programmed for message delivery, the system automatically waits for a greeting. (If a G is erroneously programmed at the end of the dial string, the system ignores it.)
3. A "V" anywhere in the dial string causes the system to play the first unplayed message only. If there is more than one message in the mailbox, the user will probably be paged again. The next unplayed message will play because each unplayed message generates its own paging request.
4. When the system is programmed to outdial a telephone number to the outside network, and the number is followed by a G (wait for person or pager to answer), the "clicks" and "pops" of particularly noisy switching equipment may be misinterpreted as a greeting. To avoid any misunderstanding, dial the telephone number, then count the number of seconds it takes for the receiving telephone to ring or the pager to answer. If the call is made to a pager, insert the appropriate number of plus signs (+) between

the number and the G. For example, if the dial string is "T9T5551212G," and it took five seconds to answer, change the string to "T9T5551212+++++G."

5. Since Message Delivery always assumes a G at the end of the dial string, insert the appropriate number of plus signs (+) at the end of the pager number.
6. You can use the Answer Supervision (L) code if you have analog phone lines. This is a good alternative to the Greet (G) code, because answer supervision can increase reliability and lower connect time. **Answer supervision time out** controls how many seconds the system waits until issuing a time out. If the system does not detect answer supervision (a ringing on the line) by the number of seconds set in this exception, the page is considered a failure. This time out can be set between 0 and 255 seconds, where 0 means no time out period is enforced (wait forever).

## Examples:

### Example 1:

To page John Smith **manually**, you must lift the telephone receiver, wait for a dial tone; dial 9 to get an outside line; listen for another dial tone; dial (408) 555-9876; allow two seconds for the line to settle; listen for computer tone; then dial 1234. This makes John's pager beep or vibrate. The code for these actions is:

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| <b>T9</b>         | Wait for dial tone. Tell the PBX that you want an outside line |
| <b>4085559876</b> | Call the pager company's number                                |
| <b>++</b>         | Wait for the line to settle                                    |
| <b>G</b>          | Wait for computer tone                                         |
| <b>1234</b>       | Dial the number of the individual pager                        |

### Example 2:

Mary Jones has a DID display pager. To access this pager **manually**, you must lift the telephone receiver; wait for a dial tone; dial 9 to get an outside line; listen for a dial tone; dial (916) 325-9116; wait four seconds for the call to go through; wait for a computer tone; dial the display data, 237-6644; and press the # key (pound) to tell the pager that all the display data has been entered. This process activates the pager. The code for these actions is:

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| <b>T9</b>         | Wait for dial tone. Tell the PBX that you want an outside line |
| <b>9163259116</b> |                                                                |
| <b>++++</b>       | Dial (916)325-9116                                             |
| <b>G</b>          | Wait four seconds for the call to go through                   |
| 2376644           | Wait for computer tone                                         |
| <b>#</b>          | Dial the display data                                          |
|                   | Press the pound key to indicate all data has been entered      |

**Note:**

When designing your paging setup, choose your pager system dial strings carefully. You can only refer to 16 pager system access codes *per server*.

## Reporting Pager System Access Codes

You can create a report of pager systems, and their indexes and dial strings, by running the Pager Access Codes report from the Reports Menu in the **Text console**.

The server displays the available indexes, dial strings, and pager names (“paging system names”) as in the following example.

### Sample Report of Pager Systems Access Codes

| PAGER SYSTEMS ACCESS CODES |               |             |      |
|----------------------------|---------------|-------------|------|
| Mon Aug 10 10:59:33 20XX   |               |             |      |
| INDEX                      | PAGER NAME    | ACCESS CODE | HOLD |
| 0                          | INTERNAL      | T           | 10   |
| 1                          | EXTERNAL      | T9          | 10   |
| 2                          | 415 Area Code | T91415      | 20   |
| 3                          | PAGER 916-325 | T91916325   | 20   |
| 4                          | Empty         |             |      |
| 5                          | <no name>     |             |      |
| 6                          | <no name>     |             |      |
| 7                          | <no name>     |             |      |
| 8                          | <no name>     |             |      |

| PAGER SYSTEMS ACCESS CODES    |            |             |      |
|-------------------------------|------------|-------------|------|
| Mon Aug 10 10:59:33 20XX      |            |             |      |
| INDEX                         | PAGER NAME | ACCESS CODE | HOLD |
| 9                             | <no name>  |             |      |
| 10                            | <no name>  |             |      |
| 11                            | <no name>  |             |      |
| 12                            | <no name>  |             |      |
| 13                            | <no name>  |             |      |
| 14                            | <no name>  |             |      |
| 15                            | <no name>  |             |      |
| Press any key to continue.... |            |             |      |

Note that, in this sample, pager systems 5 through 15 have no name. These are pager systems that are not yet set up. Pager system 4 (Empty) is set up for use with pagers whose entire dial strings are contained in the pager number.

If you need to add a pager that requires the outdialing of more than 16 characters (i.e. the coding string is too long to fit into the pager number field) and no appropriate outdial index exists, you must configure a new pager system before you can add the pager.

## 1.2.6.2.4 Class of Service Configuration

### 1.2.6.2.4.1 Class of Service for Pager Mailboxes

You must [customize an FCOS](#) to give a mailbox its pager features and limits.

#### Features COS

The Feature bits listed in the following table control paging:

| Feature Bit | Function                                                                |
|-------------|-------------------------------------------------------------------------|
| 070         | User Options Menu                                                       |
| 077         | Enable paging from a telephone; allow schedule changes from a telephone |
| 079         | Set message wait # 1 for urgent messages only                           |
| 080         | Set message wait # 2 for urgent messages only                           |
| 124         | Change paging number                                                    |
| 168         | Message wait 1, pager requeue                                           |
| 169         | Message wait 2, pager requeue                                           |
| 181         | Paging over message delivery, message waiting 1 over message waiting 2  |
| 182         | Use pri/alt as week/weekend for MWI (message waiting type) 1            |

| Feature Bit | Function                                                     |
|-------------|--------------------------------------------------------------|
| 183         | Use pri/alt as week/weekend for MWI (message waiting type) 2 |
| 212         | Send page upon answer, greeting-only mailbox                 |

Two that deserve special mention affect changes to the weekday/weekend schedule and pager re-queuing.

### Change Weekday/Weekend Schedule/Paging Number

Users of the Pager application can be configured to perform the following tasks:

- set schedules for weekdays or weekends, showing when they can be reached
- change their paging number using their telephone.

To change a paging schedule, the corresponding mailbox must have an FCOS that includes feature bit 077 (Change pager schedule). To change a paging number, a mailbox owner's mailbox must have an FCOS that includes bit 124 (Change paging phone number). Both these bits require bit 070 (User Options Menu) to work. The mailbox owner's mailbox FCOS must contain bit 182 or 183 to change the schedule according to the weekday or weekend.

#### Note:

- Mailbox owners whose pager number contains non-numeric characters (G,T, or +) will not be able to change these numbers correctly using the telephone key pad. We suggest you use [Post-pager number field](#) to enter the non-numeric values.
- Scheduling is not available when TDD is enabled.

### Pager Re-Queue

The pager re-queue feature is activated by feature bit 168 for schedule one and bit 169 for schedule two. If you have paging scheduled from 9 a.m. to 5 p.m. and receive a call at midnight, the server does not automatically page you at 9 a.m., and does not page until another message arrives during the scheduled time period. By including these feature bits in the FCOS you assigned to the paging mailbox, you are called as soon as the scheduled start time begins, instead of having to wait for another message.

For more information about FCOS and feature bits, see [Features Class of Service](#).

### Limits COS

The limits listed in the following table affect paging mailboxes:

| Limit                                   | Unit    | Default | Valid Values |
|-----------------------------------------|---------|---------|--------------|
| Paging - phone, length                  | digits  | 7       | 3-11         |
| Message Waiting Indicator<br>Msg Length | seconds | 0       | 0-5          |
| Pages per billing period                | pages   | 0       | 0-999        |
| Receipt retention, regular              | hours   | 0       | 0-8760       |

### Paging - Phone Length

This limit controls user modification of paging. The paging phone length determines the maximum number of digits users can enter for a paging number. The default is 7, the allowable range is 3 to 11 digits. It is useful for preventing long-distance calls.

### MWI Message Length

This limit defines the minimum message length that activates paging or message delivery

### Pages per Billing Period

This limit can control the number of pages allowed for a billing period. This allows server administrators to control the number of paging functions allowed a user per billing period, and can be used where a paging service is sold for a flat fee per month. A setting of 0 means no limit is set.

### Receipt Retention, Regular

This limit is used in the Pager application to limit the amount of time regular receipts are kept. (The Receipt Retention, CTP limit is used with the Cut-through Paging optional feature.) The limit can be up to 8760 hours (1 year). Alternatively, you can specify unlimited receipt retention by entering 0.

For more information about LCOS and limits, see [Other Classes of Service](#).

## 1.2.6.2.4.2 COS for Message Delivery

This section covers specifics applicable only to message delivery. Remember that you must set the Message Delivery parameter to Yes in the mailbox owner's mailbox configuration to enable message delivery.

### Features COS

You must [customize an FCOS](#) to give a mailbox its message delivery features and limits.

The feature bits listed in the table below control message delivery:

| Feature Bit | Function                                                               |
|-------------|------------------------------------------------------------------------|
| 070         | User Options Menu                                                      |
| 079         | Set message wait # 1 for urgent messages only                          |
| 080         | Set message wait # 2 for urgent messages only                          |
| 094         | Enable message delivery; change message delivery options               |
| 143         | Change message delivery phone number                                   |
| 168         | Message wait 1, pager requeue                                          |
| 169         | Message wait 2, pager requeue                                          |
| 181         | Paging over message delivery, message waiting 1 over message waiting 2 |
| 182         | Use pri/alt as week/weekend for message waiting type 1                 |
| 183         | Use pri/alt as week/weekend for message waiting type 2                 |

## Change Weekday/Weekend Schedule

Message delivery users can set schedules for weekdays or weekends , showing when they can be reached.

To change a message delivery schedule, a user's mailbox must have an FCOS that includes feature bit 094 (Enable message delivery; change message delivery options). To change a message delivery number, a user's mailbox must have an FCOS that includes bit 143 (Change message delivery phone number). Both these feature bits require bit 070 (User Options Menu) to work.

## Pager Re-Queue

The pager re-queue functionality is activated by feature bit 168 for schedule one and bit 169 for schedule two. If you have message delivery scheduled from 9 a.m. to 5 p.m. and receive a call at midnight, the server does not automatically call you at 9 a.m., and does not call you until another message arrives during the scheduled time period. With this feature, the server calls you at the beginning of the next scheduled message delivery start time.

For more information about FCOS and feature bits, see the [Features Class of Service](#) section.

## Limits COS

Only one limit applies to message delivery, the Message Delivery-Phone Length limit. It controls user modification of message delivery. The message delivery phone lengths determine the maximum number of digits users can enter for a message delivery number. The default is 7, the allowable range is 3 to 11 digits. The limit is useful for preventing long-distance calls.

For more information about LCOS and limits, see the [Other Classes of Service](#) section.

### 1.2.6.2.4.3 COS for Call Placement

This section covers specifics applicable only to call placement. Remember that you must set the outdial indexes and the call placement pager access type parameters in the user's mailbox configuration to enable call placement.

#### Features COS

You must [customize an FCOS](#) to give a mailbox its call placement features and limits.

To use call placement, you must add feature bit 110 (Give/make to telephone number) to an existing FCOS or create a new one with this feature in it.

#### Limits COS

The limits listed in the table below control call placement. You might need to change the LCOS assigned to the call placement mailbox configuration accordingly.

| Limit                         | Unit              | Default | Valid Values |
|-------------------------------|-------------------|---------|--------------|
| Ring No Answer retry limit    | no. of retries    | 10      | 1-255        |
| Ring No Answer retry interval | minutes           | 60      | 1-255        |
| Busy retry limit              | no. of retries    | 10      | 1-255        |
| Busy retry interval           | minutes           | 10      | 1-255        |
| Phone length                  | digits            | 7       | 3-11         |
| Recipient Count               | no. of recipients | 190     | 1-190        |
| Max Msg Length                | minutes           | 5       | 0-60         |

#### Ring No Answer (RNA) Retry Limit

This limit determines the maximum number of times the server redials a call placement phone number when no one answers the phone on the first delivery attempt.

#### RNA Retry Interval

This limit determines how often the server redials a call placement phone number when no one answers the phone on the first delivery attempt.

#### Busy Retry Limit

This limit determines the maximum number of times the server redials a call placement phone number when the server detects a busy signal on the first delivery attempt.



## Busy Retry Interval

This limit determines how often the server redials a call placement phone number when the server detects a busy signal on the first delivery attempt

## Message Phone Length

This limit determines the maximum number of digits users can enter for a call placement phone number. Setting this limit higher accommodates long-distance calls.

## Recipient Count

This is the maximum number telephone numbers you can enter at any one time, for a single message. This includes both call placement, and AMIS messages.

## Maximum Message Length

The length determines the maximum size of a single message made for a call placement phone number.

If you send a message to both mailboxes and telephone numbers, this limit interacts with the limit on the size of messages sent to mailboxes; the shorter of the two limits overrides the longer. For instance, if you limit messages sent to mailboxes to a maximum of five minutes and limit call placement messages to two minutes, the server enforces the two-minute limit for both kinds of messages.

For more information about LCOS and limits, see [Other Classes of Service](#).

## 1.2.6.2.5 Mailboxes for Paging

To use the Pager application, you must configure mailbox parameters as well as offline and online parameters. You must set different mailbox parameters for each capability (paging, message delivery, call placement). This section provides a description of each parameter.

### Creating or Modifying Mailboxes for a Pager Application

After specifying the classes of service, you identify the outdial index for the pager system as an internal outdial, billed outdial, or unbilled outdial.

When you select message waiting Pager (or type 5) when creating or modifying a mailbox, you must set the following parameters:

- Pager access type
- Pager number
- Post-pager number
- Pager frequency

- Pager interval
- Message delivery enabled or disabled
- Suppressing of pages enabled or disabled
- Busy pager attempts
- Busy pager interval
- Pager start time
- Pager stop time
- Additional pager (alternate pager)

## Pager Access Type

The dial string that you formulated when configuring the Pager application is divided into three parts. The first part of the string is the pager system access code, which is represented in the mailbox by the outdial index. If you do not select an outdial index for a pager schedule, the server cannot issue a page when a message is left in that mailbox. See [Configure Dial Strings for Outdials](#) for more information.

## Pager Number

The pager number tells the server what numbers and/or characters to dial after the pager system dial string, and before the post-pager number. See [Configure Dial Strings for Outdials](#) and [Preparing for Mailbox Programming for Pagers](#).

Pager numbers are limited to 16 characters.

A mailbox FCOS with feature bit 124 (User can change paging phone number) or 143 (User can change message delivery number) allows the user to change the pager number without affecting the post-pager number. Refer to [Features Class of Service](#) for more information about FCOS and feature bits.

## Post Pager Number

The post-pager number is used in two cases. With display pagers, the post-pager number (typically the NuPoint Voice telephone number or the mailbox owner's mailbox number) is displayed on the pager screen. A second use is when the mailbox owner can change the pager number, and non-numeric pager dial string characters must be transmitted after the pager number to ensure a successful page. If the mailbox owner changes the pager number, then these non-numeric characters cannot be entered on the telephone set. In this case the post-pager number tells the server what numbers and/or characters to dial after the paging or message delivery number a user enters from the keypad. Such characters include G, +, and T. Mailbox owners cannot alter this post-pager number from the keypad.

Post-pager numbers are limited to 24 digits.

## Pager Frequency

The pager frequency is the maximum number of times that the server attempts to notify the user of an unplayed message, if each page is successful. The default pager frequency is 3.

A page is considered successful if the server places the call and it is answered. In other words, the server does not encounter a busy signal, reorder tone, or Ring No Answer after the pager/message delivery call is made. After a successful page is made, the server waits the number of minutes that are specified for the pager interval (below) and then, if there is still an unplayed message in the mailbox, repeats the page.

If the page is unsuccessful, the server retries the number until a successful page is made. For this reason, it is very important that you make a test call to verify that pager configuration is correct.

## Pager Interval

This is the length of time (0-255 minutes) the server waits between pages. The default is 30 (wait 30 minutes between pages).

## Message Delivery Enabled or Disabled

This parameter activates the message delivery option of paging. When enabled (set to Y), a new message causes the server to call the telephone number defined for message delivery, and ask whomever answers to log into the user's mailbox. Then the user can hear the message and perform other NuPoint Voice operations.

If message delivery is enabled, paging is not available for that message waiting type. However, you can set one message waiting type for paging and another one for message delivery. Or, on the same message waiting type, you can set the primary pager for paging and the alternate pager for message delivery. The default is N, no message delivery.

## Suppress Pages

This parameter turns off the paging feature without removing all the settings. Use this option to temporarily remove the paging option from a mailbox. The default is N, do not suppress pages. Set this field to N to resume the paging option after turning it off.

## Busy Pager Attempts

This is the number of times (0-255) the server retries the page until it completes the specified number of pages or completes a successful page. Set the number of attempts to a high number if the server will be encountering busy pager systems.

The default is 0 (unlimited retries).

## Busy Pager Interval

This is the length of time (0-255 minutes) the server waits between pages when a busy signal has been received. Set the Busy Pager Interval lower than the Pager Interval setting. The idea is that if a busy signal has been received, the page should be retried sooner than if speech or silence was received.

The default is 0 (retry every minute).

## Pager Start Time

This is the time that the server starts sending pages for this mailbox. To have paging available 24 hours per day, set both start and stop time to 12:00 a.m.

Enter the time in the form **hh:mm xm**, where **hh** is hours, **mm** is minutes, and **xm** is either a.m. or p.m. The default is 12:00 a.m.

## Pager stop time

This works with Pager start time, above, and is the time the server stops sending pages for this mailbox. The default is 12:00 a.m.

## Define an Additional Pager?

Each mailbox can be configured with up to three message waiting types, and all are activated simultaneously. For example, Message Waiting type #1 could be a pager, and Message waiting type #2 could be a message waiting light.

### Note:

- Call placement does not require a message waiting type
- You cannot use the third message waiting type for the Pager application, because it can only be used for the Centrex message waiting type.

You can set up two message waiting types as pagers, each with a primary and an alternate number. So Message waiting type 1 and message waiting type 2 would both have a primary pager number and an alternate pager number. Your mailbox can then be configured to contact up to four pagers or four message delivery numbers, or any pager/delivery number combination. When you designate two message waiting types as pagers, both are activated. The alternate pager numbers, however, are only activated when the primary pager numbers do not receive a successful response.

If you want to use one pager number as a primary and one as a backup, and no other message waiting function, then set up one primary and one alternate pager number using only the message waiting type #1 parameter).

The alternate pager numbers can also be used to assign a second frequency and/or interval to the same pager number.

**Note:**

The pager numbers are sometimes called “pager 1,” “pager 2,” “pager 3,” and “pager 4.” Pager 2 is an alternate for pager 1, using the first message waiting type parameter, and pager 4 is an alternate for pager 3, using the second message waiting type parameter. See the following table. (These numbers are allocated by how many pager numbers are set up, however.)

| Designation | Message Waiting Type Parameter 1 | Message Waiting Type Parameter 2 |
|-------------|----------------------------------|----------------------------------|
| Primary     | Pager 1                          | Pager 3                          |
| Alternate   | Pager 2                          | Pager 4                          |

**EXAMPLE:** If a user has message delivery, and you want to page twice, five minutes apart, then—if the message has not played—page three times, 30 minutes apart; assign pagers as follows:

Pager 1: frequency of 2, interval of 5

Pager 2: (same Pager number) frequency of 3, interval of 30

### 1.2.6.2.6 Preparing for Mailbox Programming for Pagers

Whether you are programming the system to outdial to a pager or to call a user to provide message delivery, the principle is the same; you want the system to duplicate the steps to activate the pager or to place the phone call. These steps must be programmed into the pager outdial index (access code index) and pager number (“Step 3: Choose Pager System Outdial Index and Pager Number”).

When you select Message Waiting Type 5 (Pager) while creating a mailbox, the system prompts you for an outdial index, a pager number, a pager frequency, and a pager interval. You can program up to three pagers (pagers 1, 2, and 3) per mailbox. Use the following procedure to answer prompts.

#### Step 1: Determine the Activation Protocol

Manually activate the pager, or call the user who wants message delivery; as you do, carefully note exactly what steps were necessary.

**Example:**

Many pagers require that you dial the telephone number of the pager company, listen for a computer tone, then dial the code number of the pager. However, before dialling the pager company telephone number, pick up the telephone receiver and listen for a dial-tone to be sure that the telephone system is ready to accept the number.

The steps for successfully activating this type of pager are as follows:

1. Go offhook and listen for the dial tone.
2. Dial the pager company number.
3. Listen for the computer tone.
4. Dial the pager number.

**Step 2: Formulate the Coding String**

Translate the activation protocol into a coding string that the system understands. Use the following codes to describe your actions:

| Code    | Description                                                                            |
|---------|----------------------------------------------------------------------------------------|
| 0-9,#,* | Send out these DTMF tones (as if they are dialed from a standard touch-tone telephone) |
| A-D     | Outdial these fourth column DTMF tones (keys on special phones)                        |
| T       | Go offhook and wait for a dial tone                                                    |
| ( )     | Digits enclosed should be dial pulsed (all other tones are DTMF)                       |
| +       | Pause for one second                                                                   |
| G       | Greet - wait for a person or pager to answer                                           |
| F       | Switch hook flash and wait for dial tone                                               |
| S       | Switch hook flash (no wait required)                                                   |
| V       | Play the first unplayed message (and update the mailbox to count it as played)         |

**Special Programming Notes**

1. After the last character is outdialed, the system goes on-hook ("hangs up") automatically, except when message delivery is specified.
2. When a mailbox is programmed for message delivery, the system automatically waits for a greeting. (If a G is erroneously programmed at the end of the dial string, the system ignores it.)
3. A "V" anywhere in the dial string causes the system to play the first unplayed message only. If there is more than one message in the mailbox, the user will probably be

paged again. The next unplayed message will play because each unplayed message generates its own paging request.

4. When the system is programmed to outdial a telephone number to the outside network, and the number is followed by a G (wait for person or pager to answer), the "clicks" and "pops" of particularly noisy switching equipment may be misinterpreted as a greeting. To avoid any misunderstanding, dial the telephone number, then count the number of seconds it takes for the receiving telephone to ring or the pager to answer.
5. If the call is made to a pager, insert the appropriate number of plus signs (+) between the number and the G. For example, if the dial string is "T95551212G," and it took five seconds to answer, change the string to "T95551212+++++G."
6. Since Message Delivery always assumes a G at the end of the dial string, insert the appropriate number of plus signs (+) at the end of the pager number.

### Step 3: Choose Pager System Outdial Index and Pager Number

The coding string you must formulate is divided into two parts:

- Pager system access code, represented by the outdial index (access code index)
- Pager Number

The choice of outdial index and pager number is flexible. For example, if the coding string you formulate is T94085551212++G1234, you can choose:

- Outdial Index 0 and Pager Number 4085551212++G1234; OR
- Outdial Index 2 and Pager Number 5551212++G1234; OR
- Outdial Index 5 (without a dial string), and put the entire coding string into the Pager Number (where outdial indexes match those shown in the table below).

Limitations:

- Pager numbers are limited to 24 characters.
- Access codes are limited to 30 characters.

The outdial index serves two purposes.

- It tells the system what characters to outdial before dialing the Pager Number.
- It assigns a pager system to the mailbox.

If you want to enter the entire outdial string into the Pager Number field, you must choose an outdial index to assign a pager system. If you do not select an outdial index for a mailbox, the system cannot issue a page when a message is left in that mailbox.

You can obtain a report of pager systems, outdial indexes, and dial strings by running the [Pager Access Codes Report](#) (Text console only). The system displays the available indexes, access codes (dial strings), and pager system names.

## Sample Report:

| INDEX | PAGER NAME    | ACCESS      |
|-------|---------------|-------------|
| CODE  | HOLD          |             |
| TIME  |               |             |
| 0     | Internal      | 20          |
| 1     | Long Distance | T 20        |
| 2     | Local         | T9 20       |
| 3     | 415 Area Code | T9415<br>20 |
| 4     | Pager 916-325 | T991635 20  |
| 5     | Empty         |             |

Up to 16 different page systems are allowed; only 4 were necessary for this installation. Pager System 5 (Empty) is set to use with Pagers that have entire dial strings in the Pager Number.

To add a pager that must outdial more than 24 characters (that is, when the coding string is too long to fit into the Pager Number field) when an appropriate outdial index does not exist, the system technician must configure a new pager system before the pager can be added.

#### Step 4: Choose the Pager Frequency

The pager frequency is the maximum number of times that the system attempts to notify the user of an unplayed message if each page is successful. The default pager frequency is three.

A page is considered successful if the system does not encounter a busy signal or a reorder tone after the pager/message delivery call is made. After a successful page, the system waits the number of minutes specified for the pager interval (see "Step 5: Choose the Pager Interval"); then (if the message in the mailbox remains unplayed), the system repeats the page. For a review see Successful versus Unsuccessful Pages.



If the page was unsuccessful, the system continuously retries the number until the party is successfully paged. For this reason, it is important that you make a test call to verify the pager programming (see "Step 7: Test the Pager").

### Step 5: Choose the Pager Interval

The pager interval is the number of minutes that the system waits before re-paging when the previous page was successful. The default pager interval is 30 minutes.

### Step 6: Message Delivery

When messages are left in a user's mailbox, message delivery calls the user at a specified telephone number, indicates the number of messages, and asks whether the user wants to check them.

### Step 7: Test the Pager

It is important to test a pager immediately after it is added to a mailbox. An error in programming can cause every page to fail. To test a pager or message delivery, leave a message in the mailbox and contact the user to be sure the page was successful.

- Radio pager - ensure that the pager is activated
- Display pager - the user must check the display digits to ensure that they are accurate
- Voice pager - the user must ensure that the first (unplayed) message plays at the appropriate time
- Message delivery - the system must call the appropriate telephone number
  - When the call is answered, the system should prompt:
  - "Hello, <name>. You have <number> unplayed messages in your mailbox. Please enter your passcode."
  - If the first part of the greeting is cut off, add more plus signs (+) at the end of the pager number.
  - If the user answers, and there is a long silence before the system plays the greeting, decrease the number of plus signs (+) at the end of the pager number.

See [Special Programming Note # 4](#) above.

## 1.2.6.2.7 Allow Mailbox Owners to Control Paging/Message Delivery

This procedure describes the feature bits required to allow mailbox owners to:

- Turn paging/message delivery on or off
- Change their paging or message delivery phone number
- Schedule paging/message delivery

To allow mailbox owners to control paging:

1. Customize an FCOS to include the following bits:
  - **070** (User Options Menu) (Mandatory)
  - **077** (change pager schedule) (Optional)
  - **094** (change message delivery options) (Optional)
  - **143** (change message delivery phone number) (Optional)
2. Assign the FCOS containing these bits to each mailbox that needs paging/message delivery control.

### 1.2.6.2.8 Allow Receipt of Urgent Messages Only

This procedure describes how to restrict paging or message delivery to urgent messages only. With this restriction, a page or message delivery call is activated only if the caller marks a message as "urgent".

1. Include the following feature bits in the FCOS for the mailbox that uses the pagers or message delivery:
  - **40** (receive messages from other users) AND/OR **41** (receive messages from outside callers)
2. • **79** (set msg wait #1 for urgent msgs only) OR **80** (set msg wait #2 for urgent msgs only)
  - **88** (receive urgent messages)
3. Assign the FCOS containing these bits to each mailbox you want for each of these features.

### 1.2.6.2.9 Configure a Tone or Voice Pager

This procedure summarizes the steps necessary to configure the server for tone or voice pagers.

Before You Begin

- Ensure that appropriate server hardware and software have been installed
- Ensure that you have completed the [Outdial Line Group Worksheet](#)
- Ensure that you have defined a line group for the Pager application

To configure a Tone Pager:

1. Follow the instructions in [Define a Pager System](#) to set up the paging system. A typical access code for tone paging is T9 where:

- T = Wait for dial tone
- 9 = Request an outside line

2. [Customize an FCOS](#) to include the following feature bits:

| Bit          | Description                                            |
|--------------|--------------------------------------------------------|
| 70           | User Options Menu                                      |
| 77           | Change pager schedule                                  |
| 79 (or 80)   | Set Message waiting #1(or #2) for urgent messages only |
| 124          | Change paging phone number                             |
| 168 (or 169) | Message waiting # 1 (or #2), pager requeue             |
| 181          | Paging over msg del, mwi 1 over mwi 2                  |
| 182 (or 183) | Use pri/alt as week/weekend for MWI #1 (or MWI #2)     |

3. If required, customize an LCOS using the information supplied in [COS for Pager Mailboxes](#).

4. Configure a mailbox for paging to set up a pager mailbox. A typical pager number for tone paging is 9163259116+G where:

- 9163259116 = Call the pager company's number
- + = Pause one second
- G = Wait for a computer tone or an answer (energy on the line)

The post-pager number can be blank; however, if mailbox owners have the option to change their paging phone numbers, it is recommended to add any non-numeric digits (G, T, or +) to the post-pager number.

5. If required, set billing rates for paging. See [Set Billing Rates for Pager Calls](#).

6. Test the configuration and pager operation using the procedures in the [Testing the Pager Application](#) section.

## 1.2.6.2.10 Configure a Display Pager

This procedure summarizes the steps necessary to configure the server for display pagers.

### Before You Begin

- Ensure that appropriate server hardware and software have been installed
- Ensure that you have completed the [Outdial Line Group Worksheet](#)
- Ensure that you have defined a line group for the Pager application

**Note:**

Defining pager systems should be done on a duplicate of the active configuration.

To configure a Display Pager:

1. *Follow the instructions to define a pager system to set up the paging system. A typical access code in a PBX environment for display paging is T9 where:*

- *T = Wait for dial tone*
- *9 = Request an outside line*

2. *Customize an FCOS to include these feature bits:*

| Bit          | Description                                            |
|--------------|--------------------------------------------------------|
| 40           | receive messages from other users                      |
| 41           | receive messages from outside callers                  |
| 70           | User Options Menu                                      |
| 77           | change pager schedule                                  |
| 79 (or 80)   | set Message waiting #1(or #2) for urgent messages only |
| 88           | receive urgent messages                                |
| 124          | change paging phone number                             |
| 168 (or 169) | Message waiting # 1 (or #2), pager requeue             |
| 181          | paging over msg del, mwi 1 over mwi 2                  |
| 182 (or 183) | use pri/alt as week/weekend for MWI #1 (or MWI #2)     |

3. If required, customize an LCOS using the information supplied in [COS for Pager Mailboxes](#).

4. Configure a mailbox for paging:

- A typical pager number for display paging contains the account number or the DID number of the user's pager, followed by a one- or two-second pause (++).
- A typical post-pager number for display paging contains only the display digits to be shown on the pager.
- Choose no message delivery.

5. If required, set billing rates for paging using the instructions under [Set Billing Rates for Pager Calls](#).

6. Test the configuration and pager operation using the procedures in the [Testing the Pager Application](#) section.

## 1.2.6.2.11 Paging Instructions for Users

This section discusses procedures that your users will need to interact with the paging or message delivery system. Give these instructions to users when you assign a paging mailbox.

### The User Telephone Interface

Users control their schedules and phone numbers by beginning at the Call Schedule Options Menu, an option on the User Options Menu. From there, they go to the Paging/Message Delivery Schedule Menu, where they can alter the start and stop times and phone numbers.

**Note:**

When NP TDD is enabled, call scheduling is not available.

When users make a choice from the Paging/Message Delivery Schedule, the server gives them a series of prompts to guide them through each change they make. Whether users hear the prompts for paging or message delivery depends on the FCOS, and whether the Message Delivery parameter is enabled in the mailbox configuration.

### Call Placement Telephone Interface

To use this feature, users begin with these steps:

1. Press **M** to start making a message.
2. Press the key that activates call placement (this key is set in the dialing plan).
3. Dial the destination phone number.

The server automatically prompts users to record the name of a recipient, and then to record a message. After recording, users can send their messages immediately (with “normal” delivery), or use message addressing options, including passcode protection (see below). When users send their messages, the system dials the specified phone number.

When someone answers the phone at the destination number, the system announces, **??** This is a message for [recipient’s name] from [sender’s name].” Recipients then have the following options from their telephone keypad:

- Accept this message.
- Delay the message for 30 seconds.
- Reject this message.

- Tell the server to retry delivery in an hour.

If recipients accept the message, they can replay it and/or answer the sender. If recipients reject the message or the server cannot deliver it, the server notifies the sender with a non-delivery receipt—even if the sender did not request a receipt. Of course, users can still request the standard receipt.

**Note:** By default, the system delivers paging prompts in the language programmed for the LCOS assigned to the mailbox. Otherwise, it delivers prompts in the language programmed for the pager line group. For example, if the mailbox has an LCOS with French specified as the alternate language, the user will receive paging prompts in French. However, if the mailbox has an LCOS with the default language (English), and is employing a line group programmed to use German and a pager line group programmed to use Swedish, the user will receive paging prompts in Swedish (and login prompts in German).

### Passcode Protection

As a message addressing option, users can attach a 4 to 10-digit passcode to their messages, which recipients must enter before they can play the messages. Of course, a sender and recipient must agree on this passcode beforehand.

To use this feature, a user presses M for message addressing options when making the message for a call placement number. The user then presses O for off-site passcode, and is prompted for a 4- to 10-digit passcode. The user then exits message addressing options and sends the message.

The called person is prompted for the passcode before the message can be played.

### To Disable and Enable Paging

Users can turn off paging or message delivery when they do not want to be "on call" so that the pager port is not tied up by issuing unwanted pages. For any mailbox with Pager/Message Delivery as a message waiting indicator, assign an FCOS that includes the feature bits:

- 070 User Options Menu
- 077 Enable/Disable Pager

(Unlimited, Full Guest and VIP default FCOS have these two feature bits).

To disable paging:

1. Log in to the mailbox, press **U** (the **8** key) for User Options. The system prompts, "Press C to change call schedule options, P to schedule paging, E or D to enable or disable paging."

2. Press **D** (the **3** key) to disable paging. The system confirms the choice: "Paging disabled."

When paging is disabled, and the user accesses the User Options menu, the system prompts: "Press E to enable paging."

1. Press **E** (the **3** key) to enable paging. The system confirms the choice: "Paging enabled."

## 1.2.6.2.12 Billing Considerations for Paging

The billing function is capable of billing both paging and message delivery on a per-call basis. Remember, however, that the server site is the calling party and thereby responsible for any charges that accrue when paging or message delivery calls are made to the outside telephone network. As stated earlier, pager calls are usually of very short duration, but message delivery calls can be quite long. Since the cost of each call depends on the time of day that it is made, the duration of the call, the distance between the server and the user, and the rates of the local telephone company, the server makes no provisions for this aspect of the billing.

### Outdial Billing

Outdials such as paging calls can, however, be billed back to a mailbox owner's account. This form of outdial billing can be implemented through individual mailboxes' configuration and is explained more fully in the [Mailboxes](#) section.

### Example:

Henry Huggins has a pager and has his pager calls billed to his calling card number. To perform this manually, you lift the telephone receiver; wait for a dial tone; dial 9 to get an outside line; dial 0-612-555-4534 (0 indicates you will charge the call); wait for a computer tone; dial the calling card number; wait for another tone; dial his mailbox number, 6446; then dial # to tell the pager that all the display data has been entered. (This activates the pager). The dial string for these actions is:

| Caller Action                         | Dial String     |
|---------------------------------------|-----------------|
| Wait for dial tone.                   | T               |
| Dial 9 to get outside access.         | 9               |
| Dial individual pager number is.      | 06125554534     |
| Wait four seconds for line to settle. | ++++            |
| Wait for computer tone.               | G               |
| Dial calling card number              | 503102533346666 |
| Wait four seconds for line to settle. | ++++            |
| Wait for computer (dial) tone.        | G               |

| Caller Action                                                                            | Dial String |
|------------------------------------------------------------------------------------------|-------------|
| Dial display data (mailbox).                                                             | 6446        |
| Enter # to indicate that all the data has been entered and make paging terminal hang up. | #           |

In this case, such as in [Example 2](#) (DID Display pager), configuration is complex, since there is not enough room in the mailbox parameter (Pager Number) to specify the individual pager number, the calling card number, *and* the display data, all of which are unique to this pager. In most installations, however, DID display pagers share a common area code and prefix (0-612-555, in this case), and configuring the area code and prefix into the outdial index allows more than one pager to use that pager system.

The organization of the dial string is as follows:

|                          |                          |
|--------------------------|--------------------------|
| Pager system dial string | T90612555                |
| Pager Number             | 4534++++G503102533346666 |
| Post-Pager Number        | ++++G6446#               |

The paging Mailbox Worksheet entries are:

|                   |                          |
|-------------------|--------------------------|
| Pager access type | B (billed outdial index) |
| Billing order     | nb                       |
| Message delivery  | No                       |

## Individual Rates

The server's billing rates structure does allow you to specify an individual rate for each pager system. This rate is multiplied by the number of pages that are issued for the mailbox. If you put message delivery accounts and radio pager accounts on separate pager systems, you can increase the charges on the pager systems that serve message delivery subscribers to compensate for any toll charges that the telephone company levies.

### 1.2.6.3 Procedures (Web Console)

#### 1.2.6.3.1 Add, Edit or Delete a Pager System

##### Add a New Dialer (Pager)

To add a new dialer (pager):

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. From the navigation tree, click **Dialers (Pagers)** and then click **Add**.



4. In the **Number** field, enter the index number (0-15) of the dialer (pager) system or click **Next Available** to use the next unused number.
5. In the **Name** field, enter a descriptive name that identifies this pager system. (For example, "553 exchange".)
6. In the **Access Code** field, enter the code (1-24 characters) that is common to mailbox owners using this pager system.
7. In the **Hold Time** field, Enter the number of seconds (0-90) the server holds a call before hanging up after a successful send attempt. (2 to 5 seconds is recommended.)
8. Click **Add**.
9. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).
10. **Note:** If, after the setup is complete, the pager fails to outdial, a system reboot may be required to enable the pager systems.

### Edit a Dialer (Pager)

To edit an existing dialer (pager):

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **Dialers (Pagers)** and then select the pager you want to edit by selecting its check box and then clicking **Edit**.
4. Edit the Name, Access Code, and Hold Time fields as required and then click **Save**.
5. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

### Delete a Dialer (Pager)

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **Dialers (Pagers)** and then select the pager you want to delete by selecting its check box and then clicking **Delete**. A confirmation message is displayed.
4. Click **Yes** to delete the selected pager.
5. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.6.3.2 Configure a Mailbox for Paging

To configure a mailbox for paging:

1. Follow the instructions to [add a mailbox](#) or [edit a mailbox](#)
2. Enter the required parameters on the **Message Waiting** tab and the **Outdial Parameters** tab.

These two tabs provide configuration for the following parameters:

- Mailbox configuration for paging
- Access type
- Frequency
- Interval
- Paging Start/Stop Times
- Alternate Pager
- Call placement

## 1.2.6.3.3 Add an Alternate Pager to an Existing Mailbox

You can add an alternate pager to an existing pager mailbox. If your pager mailbox is unsuccessful at contacting your primary pager after the frequency or "busy attempts" parameters have expired, the server attempts to contact any programmed alternate pager.

To add an alternate pager to an existing mailbox:

1. From the navigation tree, click **Mailbox Maintenance > Mailboxes**.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select a mailbox in the list, and then click Edit > Selected. The mailbox data is displayed.
4. On the **Message Waiting** tab, under the Pager message waiting Type, click the Details link.
5. Select **Enable Alternate Pager/Telephone Number** and configure as required using [Message Waiting Tab parameters](#) for reference.
6. Click **Save**.

## 1.2.6.3.4 Set Pager Start and Stop Times

To set pager start/stop times:

1. In the navigation tree, click **Mailboxes > Mailbox Maintenance**.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select a mailbox in the list, and then click Edit > Selected. The Mailbox data view is displayed.
4. On the **Message Waiting** tab, click the Details link associated with the Pager MWI type.
5. Select a **Start Time** and **Stop Time** for the primary and/or alternate pager.
6. Click **Save**.

### 1.2.6.3.5 Turn Pagers/Message Delivery Off for a Mailbox

You can suppress message delivery or paging for a mailbox temporarily without removing pager programming.

To suppress pager/message delivery for a mailbox:

1. From the navigation tree, click **Mailbox Maintenance > Mailboxes**.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select the mailbox to modify, and then click Edit > Selected. The mailbox data is displayed.
4. On the **Message Waiting** tab, under the Pager message waiting Type, click the Details link.
5. Scroll to the Primary or Alternate pager, as required, and select **Suppress pages/ Message Delivery**.

To turn pagers and message delivery back on, repeat the steps 1 to 4, and then clear the **Suppress pages/ Message Delivery** check box.

### 1.2.6.3.6 Call Placement

#### 1.2.6.3.6.1 Enable Call Placement

To allow mailbox owners to send messages to any telephone:

1. From the navigation tree, click **Mailbox Maintenance > Mailboxes**.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select a mailbox in the list, and then click Edit > Selected. The mailbox data is displayed.
4. Click Advanced.
5. On the **Outdial Apps** tab, scroll down to the **Call Placement** section.

6. In the **Call Placement Access Type** list, select one of the following:

- **Use Internal Access type** if call placement outdials from this mailbox are to use the internal outdial index (specified earlier in the mailbox configuration) for internal calls.

OR

- **Use Billed Access Type** if call placement outdials from this mailbox are to be charged to a billing account. Outcalls will use the billed outdial index specified earlier in the mailbox configuration.

OR

- **Use Internal Access type** if call placement outdials from this mailbox are to use the internal outdial index (specified earlier in the mailbox configuration) for internal calls.

OR

- **Use Non-billed Access Type** if call placement outdials from this mailbox are not to be charged to a billing account. Outcalls will use the Unbilled Outdial Index specified earlier in the mailbox configuration.

OR

- **0-15** to select the index **number** of the pager system (0-15) this mailbox uses. This is the same as the pager system number specified in the Define Pagers Menu.

## 1.2.6.4 Procedures (Text Console)

### 1.2.6.4.1 Pagers and Message Delivery

#### 1.2.6.4.1.1 Define a Pager System

This procedure describes how to assign an identification (index) number to each supported pager system, how to name each supported pager system, and how to specify an access code and hold time for each supported pager system.

#### Before You Begin

Ensure that you are familiar with [access code \(dial string\) configuration](#) and that you have completed the [Outdial Line Group Worksheet](#).

To define a pager system:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.

2. Do one of the following:

- Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
- Otherwise, select **(E) Modify Active Configuration**.

3. Select **(G) Group Selected** and then enter the **number** of the line group (1-24) to which the Pager application is assigned, or press **Enter** if the current number is the Pager application line group.
4. Select **(M) Modify Application**, and then **(P) Pager System Support**.
5. Using your Outdial Line Group Worksheet as reference, enter the information requested as shown in the following steps.
6. Select **(P) Pager Systems Supported** and then enter the pager system index **numbers** (0-15), separated by commas, of the pager systems that will be supported by this pager. (For example, to add two pager systems (one for internal and one for external), enter **0,1**.)
7. In the Pagers menu, select **(D) Define Pagers**.
8. Select **(P) Current Pager System** and then enter the index **number** of the first supported pager system. (For example, **0**.)
9. Select **(N) Pager Name** and then enter a name for this pager system. (For example, "Internal". Up to 30 characters are allowed.)
10. Select **(D) Access Code** and enter the **code** (1-24 characters) that is common to mailbox owners using this pager system. This code indicates what the server should dial before the unique number. It comprises the first part of the dial string.

OR

Press **Enter** if the current access code is correct.

OR

Enter a **period** (.) to delete an existing access code.

11. Select **(H) Hold Time** and enter the number of **seconds** (0-90) the server holds a call before hanging up after a successful send attempt. We recommend 2-5 seconds.
12. Save the parameter settings by exiting to the NuPoint Voice Configuration Main Menu.

If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

## 1.2.6.4.1.2 Configure a Mailbox for Paging/Message Delivery

Whether you are modifying existing mailboxes or creating new ones for paging, the following procedure outlines the required parameters. For detailed information about any parameter listed here, see the overview topic [Mailboxes for Paging](#).

Before you begin, ensure that you have completed the [Mailbox Worksheet](#).

To configure a mailbox for paging:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** and enter the **number** of the new mailbox you want to configure for paging

OR

Select **(M) Modify Mailboxes** and enter the **number** of the existing mailbox you want to re-configure for paging,

**Note:** The prompts are almost the same for creating a new mailbox and modifying an existing one, except that "New" precedes each prompt when you select Modify Mailboxes.

3. Press **Enter** until the **Features Class of Service** prompt appears. Enter the **number** of the FCOS (1-640) that includes the appropriate feature bits. See [Configure COS for Pager Mailboxes](#) for more information.
4. At the **Limits class of service:** prompt, enter the **number** of the LCOS (1-640) that includes the applicable limits. See [Configure COS for Pager Mailboxes](#) for more information.
5. Press Enter until the **Message waiting type #1:** prompt appears and then enter **5** for paging.
6. At the **Pager Access Type** prompt, enter the index **number** of the pager system (0-15) this mailbox uses. This is the same as the pager system number specified in the Define Pagers Menu,
7. **OR** enter one of the following parameters:
  - **I** if pages from this mailbox are to use the internal outdial index (specified earlier in the mailbox configuration) for internal calls.
  - **B** if pages from this mailbox are to be charged to a billing account. Pages will use the billed outdial index specified earlier in the mailbox configuration.
  - **U** if pages from this mailbox are not to be charged to a billing account. Pages will use the Unbilled Outdial Index specified earlier in the mailbox configuration.
8. At the **Pager number** prompt, enter the unique **number** (1-16 characters) of the pager. The pager number must contain at least one character. (This number is dialed

immediately following the access code specified in the Define Pagers Menu and can contain any additional characters from the [Dial String Characters table](#).)

9. At the **Post-pager number** prompt, enter one of the following:

- For display pagers, the display **digits** (0-24) to be shown on the pager.
- For tone or voice pagers, leave blank; however, if mailbox owners have the option to change their paging phone numbers, coding a greet-and-wait (G) character in the post-pager number is recommended. Also enter any overflow from the tone or voice pager number (up to 24 characters) that did not fit in the pager number field. Table 1 at the end of this procedure shows valid post-pager number characters. **Note:** If a post-pager number is entered, it comprises the last part of a paging dial string.

10. At the **Pager frequency** prompt, enter the number of **times** (0-255) this mailbox will be notified with a page every time there is an unplayed message in the mailbox. Either 0 or 1 indicates one notification only.
11. At the **Pager interval** prompt, enter the number of **minutes** (0-255) between pages for this mailbox. Either 0 or 1 indicates a one-minute interval.
12. At the **Message delivery** prompt, enter **Y** to enable Message Delivery or **N** to disable.
13. At the **Suppress pages** prompt, enter **N** to leave paging enabled OR enter **Y** to turn off the paging feature.
14. At the **Busy pager attempts** prompt, enter the number of **times** (0-255) this mailbox will retry a page when a busy condition is encountered. Either 0 or 1 indicates one retry. Setting both the busy pager attempts and busy pager interval to 0 specifies unlimited retries upon reaching a busy signal.
15. At the **Busy pager interval** prompt enter the number of **minutes** (0-255) between pager attempts. Either 0 or 1 indicates a one-minute interval. Setting both the busy pager attempts and busy pager interval to 0 specifies unlimited retries upon reaching a busy signal.
16. At the **Pager start time** prompt, enter the **time** at which paging is to start. Enter the time in hours and minutes followed by "am" or "pm"; for example: 6:00pm. If 12:00am is entered for start time and stop time, paging is enabled at all times.
17. At the **Pager stop time** prompt, enter the **time** at which paging is to stop. Enter the time in hours and minutes followed by "am" or "pm"; for example: 8:30am. If 12:00am is entered for stop time and start time, paging is enabled at all times.
18. At the **Define an additional pager number?** prompt, you can add an alternate pager to be used when the primary pager does not respond. Set the applicable parameters (step 7-17) for the additional pager as described for the primary.

**Note:**

If you use one of the billing outdial indexes, you cannot use Pager 4 (Message Waiting 2 alternate pager) because they use the same post-pager field.

19. Press **Enter** until the **Turn Off Pager/Outcall Notification** prompt appears. Enter **Y** to suppress all notifications (pages or message delivery) or **N** to leave pages and message delivery notification on.
20. If you require the Call Placement option, press **Enter** until the **C all placement pager access type** prompt appears and then enter one of the following:
  - **I** if call placement outdials from this mailbox are to use the internal outdial index (specified earlier in the mailbox configuration) for internal calls.
  - **B** if call placement outdials from this mailbox are to be charged to a billing account. Outcalls will use the billed outdial index specified earlier in the mailbox configuration.
  - **U** if call placement outdials from this mailbox are not to be charged to a billing account. Outcalls will use the Unbilled Outdial Index specified earlier in the mailbox configuration.
21. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.2.6.4.1.3 Setting Start and Stop Times

To set pager start/stop times:

1. From the Mailbox Maintenance Menu, select **(M) Modify Mailboxes**.
2. Enter the number of the mailbox to modify.
3. Press **Enter** until the **Pager Start Time** parameter appears.

**Note:**

If both the start time and the stop time remain unspecified, paging or message delivery is enabled at all times.

4. Enter the **Pager Start Time**: The time at which paging or message delivery is to start. Enter the time in hours and minutes followed by "am" or "pm"; for example: 6:00pm.
5. Enter the **Pager Stop Time**: The time at which paging or message delivery is to stop. Enter the time in hours and minutes followed by "am" or "pm"; for example: 8:30am.
6. Press **Enter** until the prompts stop. After the last prompt, the server displays the new mailbox configuration.



## 1.2.6.4.1.4 Change Paging Schedules or Intervals

This procedure describes how to:

- Schedule [weekday and weekend](#) paging or message delivery
- [Receive queued pages](#) or message delivery calls at the pager start time
- Change selection of pagers or message delivery when [schedules overlap](#).

### Setting a Weekday-Weekend Schedule

1. [Customize an FCOS](#) to include one of these feature bits in the FCOS for the mailbox that uses the pagers or message delivery:
  - **182** Use Pri/Alt as Week/Weekend for MWI 1: if the pagers or message delivery were configured as the first message waiting type.
  - **183** Use Pri/Alt as Week/Weekend for MWI 2: if the pagers or message delivery were configured as the second message waiting type.
2. Configure an [alternate pager](#). This will be the weekend pager.
3. Make sure the weekday pager number or message delivery number is specified for the primary and the weekend pager number or message delivery number is specified for the alternate.

### Receiving Queued Pages or Message Delivery Calls at the Start Time

[Customize an FCOS](#) to include one of these feature bits in the FCOS for the mailbox that uses the pager or message delivery:

- **168** Message Wait 1, Pager Requeue: if the pager was configured through the first message waiting type prompt.
- **169** Message Wait 2, Pager Requeue: if the pager was configured through the second message waiting type prompt.

### Prioritizing Paging When Schedules Overlap

[Customize an FCOS](#) to include these feature bits in the FCOS for the mailbox that uses the pager or message delivery:

- **70** User Options Menu
- **77** Change Pager Schedule
- **181** Paging over msg del, Message waiting #1 over Message waiting #2: if the schedules for pagers in both message waiting types overlap, the server selects the pager in the first message waiting type. If message delivery is in the first message waiting type and paging only is in the second message waiting type and their schedules overlap, the server selects paging only.

### 1.2.6.4.1.5 Enable Cascade Paging

The **Cascade Paging** feature is disabled by default and can only be enabled using the Text Console.

To enable Cascade Paging:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu, and (S) Auto Task Menu.**
2. Select **(P) Cascade Paging Feature .**
3. Select **(E) Cascade Paging Enable (Y/N).**
4. Enter **Y** to enable Cascade Paging.
5. Enter **X** to exit the menu and save changes.

### 1.2.6.4.1.6 Turn Pagers/Message Delivery Off for a Mailbox

You can suppress message delivery or paging for a mailbox temporarily without removing pager programming.

To suppress pager/message delivery for a mailbox:

1. From the Main Menu, select **(M) Mailbox Maintenance.**
2. Select **(M) Modify Mailboxes** and enter the mailbox number to modify.
3. Press **Enter** until the **Turn off pager/outcall notification** prompt appears and enter **Y** to turn off.
4. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

To turn paging/message delivery back on, follow the above procedure and select **N** at the **Turn off pager/outcall notification** prompt.

### 1.2.6.4.1.7 View Pager Configuration

You can view pager configuration from two different sources: the Reports menu or the Pagers menu.

To view pager information through the Reports menu:

1. From the Main Menu, select **(R) Reports Menu**.
2. Select **(R) Pager Access Codes**.
3. When prompted for output routing, select (C) Console screen or (P) Console with Pause. The server displays information about each supported pager:

| PAGER SYSTEMS ACCESS CODES    |               |             |           |
|-------------------------------|---------------|-------------|-----------|
| Wed Aug 12 14:36:11 2009      |               |             |           |
| INDEX                         | PAGER NAME    | ACCESS CODE | HOLD TIME |
| 0                             | Internal      |             | 20        |
| 1                             | Long Distance | T           | 20        |
| 2                             | Local         | T9          | 20        |
| Press any key to continue.... |               |             |           |

To view pager information through the Pagers menu:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(R) Reconfigure System**.
2. Select **(E) Modify Active Configuration**.
3. From the Voice Configuration Online Menu, select **(G)Group Selected** and enter the Pager Line Group number.
4. Select **(M) Modify Application**.
5. Select **(S) Show Pagers**. The server displays information about each supported server:

Pager Systems:

Pager System [0], Pager Name = "Internal"

Access code = [], Hold time = [20]

Pager System [1], Pager Name = "Long Distance"

Access code = [T], Hold time = [20]

Pager System [2], Pager Name = "Local"

Access code = [T9], Hold time = [20]

You can also see Pager application parameters in the [System Configuration report](#).

## 1.2.6.4.2 Call Placement

### 1.2.6.4.2.1 Enable Call Placement

To allow mailbox owners to send messages to any telephone:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and then enter the **number** of the line group (1-24) to which the Pager application is assigned, or press **Enter** if the current number is the Pager application line group.
4. Select **(M) Modify Application, (F) Other Features, (D) Dialing Plan Menu**.
5. Select **(D) Dialing Plan**.
6. At the **NuPoint Voice dialing plan=** prompt, enter **T** in the digit position that activates call placement, then the desired **code** in each of the other digit positions. Valid codes are:

|      |                                                                                                                                                                                                               |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | No mailbox numbers start with the digit marked by 0                                                                                                                                                           |
| 1-11 | Number of digits allowed in a valid mailbox number                                                                                                                                                            |
| A    | The digit marked by A enables Dial-by-Name. When this digit is pressed, it triggers a prompt that instructs the caller to begin spelling the name. You may use this element in any position of the dial plan. |
| V    | Mailbox numbers starting with the digit marked by V are variable length, up to 11 digits.                                                                                                                     |

7. Save the dialing plan by exiting to the Main Menu.
8. [Customize an FCOS](#) to include feature bit 110 (make/give to telephone number) and assign to the mailboxes.
9. If required, [modify the LCOS limits](#) that control call placement. You can modify any of the following limits:
  - a. RNA retry limit
  - b. RNA retry interval
  - c. Busy retry limit
  - d. Busy retry interval
  - e. Message phone length
  - f. Message count
  - g. Maximum message length
10. [Define a pager system](#) with message delivery to provide an outdialing port.

11. For each mailbox that uses the call placement function, modify the mailbox to:
    - a. **Assign** the FCOS containing feature bit 110.
    - b. **Assign** the LCOS modified to support call placement.
  12. Specify the pager system, defined in step 10, as the Call Placement index number. This is also set in the mailbox configuration. After setting FCOS and LCOS, press **Enter** until the Call Placement Pager Access Type prompt appears.
  13. At the **Call placement pager access type:** prompt, enter one of the following:
    - a. index **number** of the pager system (0-15) this mailbox uses. This is the same as the pager system number specified in the Define Pagers Menu.

OR

  - b. **I** if call placement outdials from this mailbox are to use the internal outdial index (specified earlier in the mailbox configuration) for internal calls.
- OR
- c. **B** if call placement outdials from this mailbox are to be charged to a billing account. Outcalls will use the billed outdial index specified earlier in the mailbox configuration.
- OR
- d. **U** if call placement outdials from this mailbox are not to be charged to a billing account. Outcalls will use the Unbilled Outdial Index specified earlier in the mailbox configuration.
14. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the system displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

## 1.2.6.5 Testing the Pager Application

### 1.2.6.5.1 Testing Overview

After telephone lines have been installed, and after you create and configure mailboxes for a Pager application, test pager operation using the procedures in this section.

**Note:**

It is very important to test a pager immediately after it is added to a mailbox, since a seemingly minor error in configuration can cause every page to fail. Furthermore, the server can tie up pager ports for a long time dialing invalid paging codes.

**Successful vs Unsuccessful Outdialing**

The server applies specific criteria to call processing and treats an outdial as successful or unsuccessful accordingly.

**Successful Outdialing**

If the server encounters speech, other than a lengthy greeting, after outdialing, it considers the call successful.

Successful pages are retried a specified number of minutes apart (the pager interval), for a maximum number of times (the pager frequency). Paging is discontinued when any of the following occurs:

- The frequency number is reached
- The user listens to all unplayed messages in the mailbox and logs out
- The user disables paging

**Unsuccessful Outdialing**

If the server encounters a Busy or Reorder tone, or a Ring No Answer condition after outdialing, the call is considered unsuccessful. Other examples of unsuccessful calls are if no dial tone is detected, or no tone or voice “greet” the server after the page is made. The server retries the page according to the busy frequency and busy interval.

When the server detects that an “illegal” dial string (that is, a string that does not conform to configuration rules) has been outdialed, it considers the page successful. This prevents the server from continually retrying the page. However, if a dial string is configured incorrectly (that is, it cannot activate the pager), but conforms to pager configuration rules, the server continually retries the page. This is why it is critical to test every pager immediately after configuring is completed.

**Note:**

If you are using answer supervision (the L code) in any of your outdial strings, your outdial is considered a failure unless the server detects a ringing on the line.

## 1.2.6.5.2 Test Pager Configuration

This procedure describes how to test a tone pager, display pager, or voice pager after it has been configured. Prerequisites for this procedure are:

- All appropriate hardware has been installed.
- Telephone lines have been installed and tested for dial tone.
- Test mailboxes have been configured for pagers.
- Pager systems have been configured.

### Testing a Pager

1. If you have not already done so, obtain a System Configuration Report. Refer to the report as needed for such information as the access code.
2. When the user has a radio pager, check to see if the pager is activated.
3. When the user has display pager, ask the user to check the display digits to be certain that they are accurate.
4. When the user has a voice pager, be sure that the first unplayed message is played at the appropriate time.

### Testing Primary Pager Configuration (Text Console only)

You can use the *Testing Primary Pager* instructions in the Text Console .

### Testing Alternate Pager Configuration

1. Set a very short frequency and interval in the test mailbox.
2. Test the primary pager as described above, but allow the frequency and interval of the primary pager to expire without responding to the test page.
3. Verify that the page is then received by the alternate pager.
4. If not successful, check the Event Log file to determine if the correct digits are being dialed. Review Event Recorder data reported at the server maintenance console to determine if any errors were encountered during the page.

**Note:** If you use one of the billing outdial indexes, you cannot use Pager 4 (Message Waiting #2 alternate pager) because they use the same post-pager field.

| Message Waiting Types |                      |
|-----------------------|----------------------|
| Number                | Message Waiting Type |
| 0                     | None                 |
| 1                     | Not available        |
| 2                     | Not available        |

| Message Waiting Types |                               |
|-----------------------|-------------------------------|
| 3                     | DTMF to PBX                   |
| 4                     | Not available                 |
| 5                     | Pager                         |
| 6                     | Not available                 |
| 7                     | Not available                 |
| 8                     | Not available                 |
| 9                     | Not available                 |
| 10                    | Not available                 |
| 11                    | Centrex                       |
| 12                    | Not available                 |
| 13                    | Not available                 |
| 14                    | Not available                 |
| 15                    | Not available                 |
| 16                    | HIS PMS                       |
| 17                    | Unified Integration (for 9.0) |
| 18                    | Not available                 |
| 19                    | Not available                 |
| 20                    | Not available                 |
| 21                    | Hitachi PMS                   |
| 22                    | Not available                 |
| 23                    | Not available                 |
| 24                    | Not available                 |

### 1.2.6.5.3 Test Call Placement

This procedure describes how to test the call placement function after it has been configured. Prerequisites for this procedure are:

- All appropriate hardware has been installed.
- Telephone lines have been installed.

To test call placement:

1. If you have not already done so, obtain a System Configuration Report. Refer to the report as needed for configuration parameter settings.
2. *Create a test mailbox for originating Call Placement messages. You will need another telephone (not the one associated with the originating mailbox) to simulate an off-server telephone number. The originating mailbox should include feature bit 110 in its FCOS so it can make messages to a telephone number, as well as the standard feature bits in, for example, FCOS 1.*



3. Log into the sending mailbox and place a call to the simulated off-server telephone number (the receiving telephone), then hang up.
4. Verify that the call was placed. Check the Event Log file to determine if the correct digits are being dialed. (For more information about Event Recorder, see the Troubleshooting section of the *NuPoint UM Technician's Handbook*.)
5. Accept and answer the call placement message from the simulated off-server telephone.
6. Log into the sending mailbox and verify that there is one unplayed message. This unplayed message should be the answer you made in the preceding step to the call placement message.
7. Play the message, then delete it.

### 1.2.6.5.4 Test Message Delivery

This procedure describes how to test the message delivery function after it has been configured.

Prerequisites for this procedure are:

- All appropriate hardware has been installed.
- Telephone lines have been installed.
- Test mailboxes have been configured for message delivery.
- Associated pager systems have been configured.

If you have not already done so, obtain a System Configuration Report. Refer to the report as needed for such information as message delivery parameter settings.

#### Using the Lights Test

You can test message delivery calls using the [Lights Test](#) as described for pager message waiting lights; however, if you make an actual message delivery test call, you can check server prompts and the mailbox user interface at the same time.

#### Using a Test Call

1. Log into the test mailbox, ensure that there are no unplayed messages, then log out of the test mailbox.

**Note:**

To streamline the test, you should set the number of retries to 0; otherwise, the server keeps trying to complete the call until the maximum number of retries has been reached.

2. Set event Recorder (CDR) for "3: Pager/Prog.RS232" and run event recorder.
3. Call the test mailbox and leave a message.
4. You can check the Event Log file to determine if the correct digits are being dialed. You want to see a result code of "0" in the log file, which indicates that it was dialed as programmed and completed the action.
5. When the telephone that you have called rings, answer it at the first ring (or have an assistant do so if necessary). The server should say, "Hello [mailbox name]. You have one unplayed message in your mailbox. One message total. Please enter your passcode."
6. Enter the passcode and play the message. If problems occur while attempting to play the message:
  - Check the dialing plan in the active configuration.
  - Check the mailbox FCOS.
  - Check the mailbox Pager Index number, Pager number, and Post pager number data.
  - Check the "Other Features" parameter settings for the pager line group, to ensure that they match the corresponding parameter settings for the NuPoint Voice application.
7. Verify that there is no further paging.

## Troubleshooting

For message delivery, the server should call the appropriate telephone number and, when the call is answered, should prompt,

"Hello, [user's name]. You have unplayed message(s) in your mailbox. Please enter your passcode."

If the first part of the greeting has been cut off, add more plus signs to the end of the pager number or post-pager number. Conversely, if the user answers and there is a long silence before the server plays the greeting, decrease the number of plus signs at the end of the pager number or post-pager number.

Message delivery calls can be tested using the Lights Test option mentioned earlier; however, if an actual test call is made, you can check server prompts and the mailbox user interface at the same time.

The server can outdial very quickly—too quickly for some PBXs. One result can be that the server fails to get an outside line. To prevent this situation, try slowing down the server's outdialing speed. You do this by inserting pluses (++) in dial strings. Each plus tells the server to pause for one second.

For example, suppose you have the following outdial string:

T94155551212++

You can slow the pacing of the sequence by inserting two pluses after each major step in the string. The result would be then be:

T9++4155551212++++

If this result works, you can experiment by removing one pause at a time to achieve the fastest speed that your PBX can handle.

### 1.2.6.5.5 Testing Primary Pager Configuration

Use this procedure and an extension that is part of the Pager line group and that has a mailbox configured for paging to test pager operation.

1. From the Main Menu, select **(S) System Maintenance**, and then **(O) Additional Options**.
2. Select **(L) Lights Test** to start the Lights Test and then enter the number of the test extension that has a mailbox configured for a pager. **Note:** You can also select a range of mailbox numbers separated by a hyphen, but be aware that the Lights Test may queue up a long list of message waiting requests and could take a long time to process.
3. At the **Light off/on/existing value (0/1/2):** prompt, enter **0** to turn the light off (to clear any existing indicator on the test extension).
4. At the **Message waiting type** prompt, enter **5** for paging. When prompted for mailbox number, enter the number of the test mailbox you used in step 3.
5. At the **Light off/on/existing value (0/1/2):** prompt, enter **1** to turn the light on. Check the indicator on the test extension.
6. Do one of the following:
  - If the light test is successful, you can either press Enter to stop the Lights Test menu, or you can test another extension.
  - If the light is not successful, check the Event Log file to determine if the correct digits are being dialed. Review Event Recorder data reported at the server maintenance console to determine if any errors were encountered during the page. (For more information about Event Recorder, see the Troubleshooting section of the *NuPoint UM Technician's Handbook*.)

## 1.2.7 External Applications (including RS-232)

### 1.2.7.1 Configure External Applications

External applications allow servers to use serial or IP ports to control an external device by sending signals over data links. The data links can be direct serial connections to the PBX, they can connect to modems that are connected to analog ports on the PBX

(the modem is used to "forward" DTMF signals to the PBX), or they can be direct IP connections.

External applications are programmed using the External Applications menu of the **Web Console**. Click the following links for application-specific instructions:

- [Message Waiting Indicator Applications](#) (including RS-232 MWI)
- [Property Management Services \(PMS\)](#)
- [SMS Notification \(UK Only\)](#)
- [Other External Applications](#) (parameters reference)

## 1.2.7.2 External Application (RS232) Programmable Application Parameters

| Parameter               | Description                                                                                                                                                                                                                                                                                                                                                                                                          | Value           |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Programmable Parameters |                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |
| Initialization String   | Enter the ASCII string required by the PBX. To create the string, consult the PBX operating manual or the PBX vendor for the correct code.                                                                                                                                                                                                                                                                           | 0-30 characters |
| Reply String            | Enter the ASCII string sent by the PBX.                                                                                                                                                                                                                                                                                                                                                                              | 0-30 characters |
| Delay between requests  | Enter the time to wait between requests.                                                                                                                                                                                                                                                                                                                                                                             | 0 - 255 seconds |
| Pre-DN ON string        | <p>If the PBX requires the string <b>before</b> the directory number (sometimes called extension number), create an ASCII string .</p> <p>If the PBX sends the string <b>after</b> the directory number:</p> <ul style="list-style-type: none"> <li>- enter a period (.) to delete an existing string, if necessary.</li> <li>- enter values for the Post-DN ON String and Post-DN OFF String parameters.</li> </ul> | 0-30 characters |
| Pre-DN OFF string       |                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |

| Parameter                               | Description                                                                                                                                                                                                                                                                                                                                                                                                          | Value           |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Post-DN ON string<br>Post-DN OFF string | <p>If the PBX requires the string <b>before</b> the directory number (sometimes called extension number), create an ASCII string .</p> <p>If the PBX sends the string <b>after</b> the directory number:</p> <ul style="list-style-type: none"> <li>- enter a period (.) to delete an existing string, if necessary.</li> <li>- enter values for the Post-DN ON String and Post-DN OFF String parameters.</li> </ul> | 0-30 characters |
| Department Code as DN                   | Select this check box to use the department code instead of the mailbox extension as the DN to turn lights on/off.                                                                                                                                                                                                                                                                                                   |                 |
| Unplayed Number Sent                    | Select this check box to send the number of unplayed messages currently in a mailbox to be included after the mail-box number.                                                                                                                                                                                                                                                                                       |                 |
| Delay after Post-DN String              | Enter the time to wait between Post-DN and Trailing String.                                                                                                                                                                                                                                                                                                                                                          | 0 - 255 seconds |
| Ending Trailing String                  | <p>If the PBX requires this string, create an ASCII string</p> <p>If the PBX does not require this string, enter a period (.) to delete an existing string.</p>                                                                                                                                                                                                                                                      | 0-30 characters |
| Suppress Updates to MWL                 | Select this check box to suppress updates of MWL after a user accesses the mailbox without changing status.                                                                                                                                                                                                                                                                                                          |                 |

| Parameter           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Value                                    |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Modem Result Code   | <p>This modem result code will be used to compare against the actual result code returned from the modem after it has finished outdialing the MWI string. If they are not matched, NuPoint Voice will retry the MWI request again later on.</p> <p><b>Recommendation:</b> For *better display* of CDR events, please turn OFF the Local Echo mode of the modem, ie. if the modem has dialed a MWI string like "ATDT*13658", it should not echo back this same string prior to returning the result code. If event messages for modem dial result are desired, enable "Pager" CDR in the Event Recorder menu.</p> | See Valid String Characters table below. |
| Connection Settings |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                          |
| IP Address          | Enter the IP address of the remote system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | (Used for PMS configuration)             |
| Server Port Number  | Enter the port that the remote device/system is listening on.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                          |

### Valid String Characters

| Character | Explanation     |
|-----------|-----------------|
| \b        | Backspace       |
| \f        | Form Feed       |
| \n        | New Line        |
| \r        | Carriage Return |
| \t        | Tab             |
| \\        | Backslash       |
| \"        | Double Quotes   |
| \?        | Question Mark   |

## 1.2.8 Message Waiting Application

### 1.2.8.1 Overview

#### 1.2.8.1.1 Descriptions

Some integrations do not handle message waiting indicators (MWI) so NuPoint Unified Messaging provides MWI applications that allow the server to activate message waiting indicators on the PBX. These applications are:

- DTMF-to-PBX
- MiTAI
- RS-232 (modem-based, legacy application)

#### **DTMF to PBX Message Waiting Application**

The DTMF-to-PBX MWI application allows the server to turn PBX message waiting indicators on and off by sending DTMF signals over the telephone lines. Some PBXs allow telephone users to turn message waiting indicators on and off by dialing in a code. If your PBX has this capability, and if the code is not sent using proprietary signaling, you may be able to configure the server to behave as if it were a station user.

When a message is left in a mailbox that uses this type of message waiting, the server takes a line-card port off-hook, dials a string of DTMF digits, then goes on-hook. The PBX translates these digits and turns the appropriate indicator on. When all unplayed messages have been played, the server follows the same procedure (dialing a different string of digits) to turn the indicator off.

#### **MiTAI Message Waiting**

MiTAI MWI has similar behavior to the DTMF dialer but does not generate a dialing sequence and does not require a port. MiTAI MWI uses the proprietary MiTAI Messaging API to communicate directly with the MiVoice Business ICP to activate message waiting indicators on designated phones. Because the MWI does not actually dial out, outbound calls with the MiVoice Business ICP are reduced.

#### **RS-232 MWI (Legacy)**

The RS-232 MWI application allows servers to turn PBX message waiting indicators on and off by sending signals to the PBX over RS-232 data links. The data links can be either direct serial connections to the PBX, or they can connect to modems that are connected to analog ports on the PBX.

When a message is left in a mailbox, the server sends an ASCII message that tells the PBX to turn on the message waiting indicator at the appropriate station. Conversely, when all unplayed messages are played, the server sends an ASCII string that directs the PBX to turn off the message waiting indicator.

### 1.2.8.1.2 Assign Message Waiting Type to a Mailbox

#### Web Console:

To assign message waiting indicators to a mailbox:

1. Edit the selected mailbox using the instructions under [Edit Mailboxes](#).
2. On the **Message Waiting** tab, in the **Message Waiting #1** field (or Message Waiting # 2 if #1 is used for another MWI application), assign the applicable Message waiting type from the table below:

| Number | Message Waiting Type          |
|--------|-------------------------------|
| 0      | None                          |
| 3      | DTMF to PBX                   |
| 5      | Pager (See Pager Application) |
| 7      | Program RS232                 |
| 9      | Centrex RS232                 |
| 11     | Centrex                       |
| 16     | HIS PMS                       |
| 17     | Unified Integration           |
| 21     | Hitachi PMS                   |
| 28     | MiTAI Messaging               |

1. Click **Save**.

#### Text Console

To assign message waiting indicators to a mailbox:

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** or **(M) Modify Mailboxes** and enter the number of the mailbox to which you want to assign a message waiting indicator.
3. Press **Enter** until **Message waiting type #1:** or, if #1 is used for another MW application, until **Message Waiting Type #2:** appears and then assign the applicable Message waiting type from the table above.



4. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

## 1.2.8.2 DTMF to PBX MWI

### 1.2.8.2.1 Configuration

#### 1.2.8.2.1.1 DTMF-to-PBX Configuration Requirements

The DTMF-to-PBX application allows the server to turn PBX message waiting indicators on and off by sending DTMF signals over the telephone lines. Some PBXs allow telephone users to turn message waiting indicators on and off by dialing in a code. If your PBX has this capability, and if the code is not sent using proprietary signaling, you may be able to configure the server to behave as if it were a station user.

When a message is left in a mailbox that uses this type of message waiting, the server takes a port off-hook, dials a string of DTMF digits, then goes on-hook. The PBX translates these digits and turns the appropriate indicator on. When all unplayed messages have been played, the server follows the same procedure (dialing a different string of digits) to turn the indicator off.

You need to set up a line group of at least one line, which is dedicated to outdialing DTMF-to-PBX message waiting signals.

#### DTMF-to-PBX Message Lights Worksheet

Configuring these message indicators involves two steps:

- setting up a line group of at least one line to serve as an outdialer of message indicators requests, and
- configuring the dial strings that constitute these requests.

Complete the worksheet (sample below) before configuring the server. Blank worksheet is [here](#).

#### Configuring the PBX

Assign, to each server line that is dedicated to this application, a PBX class of service that permits the server to turn message waiting indicators on and off.

**Note:**

- Message waiting indicators are affected by timer settings in the MiVoice Business system. To avoid premature extinguishing of MWI, ensure that the **SUPERSET Callback Message Cancel Timer** parameter in the **System Options Assignment** form is **BLANK**. (An entry in this field sets a time limit for MWI to be displayed, after which the indicator is extinguished.)
- In an environment with resilient MiVoice Business ICPs, an open communication path is required between the ICPs whenever a MWI messaging event occurs. Without a communication path, events will not be synchronized and the user's message waiting lamp will fail to turn on/off correctly.

**Configuring the Application**

There are three steps to configuring DTMF-to-PBX message indicators:

1. Determine what DTMF strings the PBX uses to turn message waiting indicators on and off, and use this information to complete the DTMF-to-PBX Message Lights Worksheet.
2. Create a line group with one or more lines to be used as an outdialer port. If your PBX only allows a message waiting indicator to be turned off by the same extension that turned it on, you can still configure a multi-line group if needed for heavy traffic volumes. The NuPoint Unified Messaging server uses the correct port to turn off message waiting indicators for specific extensions.
3. Enter the information at the server maintenance console.

All configuring of the DTMF-to-PBX message waiting indicators is PBX-dependent. If your PBX allows users to turn the message indicators of other users on and off, then the proper coding can usually be found in the PBX users' guide. Otherwise, consult the PBX operating manual or your PBX vendor for the necessary codes.

The DTMF-to-PBX Message Lights application menu prompts for specific sections of the dial strings. The dial strings are dialed out in the following order:

1. PBX special access code
2. Pre-DN on or off string (after dial tone confirmation)
3. Directory number
4. Post-DN on or off string (followed by a wait for dial tone)

Sample DTMF-to-PBX Message Lights Worksheet

## Line Group Information

All server ports are assigned to line groups. Each line group is then assigned to a single application, and any configuring that is done for that application applies to every port in the line group. The number of ports in each line group depends on how heavy the phone traffic is expected to be for that particular application.

### Line Group #

Each line group is represented by a distinct number. Valid line group numbers are 1 through 24.

### Group Name

The group name is optional. It serves to easily identify the line group's purpose; for example, the line group for this application can be called "DTMF-to-PBX Outdialer."

### Line(s) in Group

You identify each line (or port) in a group by a triplet, which represent the module, slot (line card), and port. Module refers to a CPU, the server's main processor. Modules are numbered at 1. Slots are numbered at 0. Ports are also numbered from 0 and the upper limit depends on the port limit of your system licensing (maximum is 60, so the range is 0-59). In a sense, you connect one telephone line to each port.

For more information on triplets and line group numbering, see [NuPoint Voice Application](#).

## Initial Dial Tone Detection

When building outdial strings, the Initial Dialtone Detect parameter gives you precise control. This parameter allows you to include a T code (Go Off-Hook, Wait for Dial Tone) if you are integrating with most PBXs, or delete a T code in the dial string if you are integrating with cellular or other non-PBX equipment that cannot produce a dial tone.

The outdial string consists of the following parts:

- Initial T code produced by this parameter, if enabled
- PBX special access code parameter, if any
- Appropriate on or off dial string parameter (the pre-DN on dial string, pre-DN off dial string, post-DN on dial string, or post-DN off dial string).

**Note:**

If you enable this parameter ("enabled" is the default), do not enter a T code as the first part of the special access code. If you do, the server waits for two separate dial tones. But two separate dial tones cannot occur in this context, so every message indicator request fails.

If you disable this parameter, you typically begin the special access code with the S (Go Off-Hook, Do Not Wait for Dial Tone) code.

**PBX Special Access Code**

Some PBXs require the server to dial a special access code before sending message indicators requests. The special access code indicates to the PBX that one of its special features is about to be invoked. Table 4-1 lists the characters allowed in this code.

**Note:**

The NuPoint Unified Messaging server automatically configures a T (Go Off-Hook, Wait for Dial Tone) as the first part of the outdial string. DO NOT enter a T as the first part of the special access code because then the server waits for two separate dial tones.

There is no default PBX special access code.

**Dial Tone Confirmation**

Answer Yes to this parameter only if (1) a PBX special access code is required and (2) if, after the special access code has been sent, the PBX expects the server to wait for a dial tone before the server outdials any other digits. The default is No (no wait).

**Pre-DN On or Off String**

This string is sent before the directory number (extension number) to instruct the PBX to turn the message waiting indicator on or off at that station. There is no default Pre-DN on or off string.

**Note:**

Never enter a T as the first part of the Pre-DN on string because then the server waits for two separate dial tones.

Enter the coding, if any, that must be sent before the directory number to turn message waiting indicators on or off.

### Suppress Updates to MWL

Each time a mailbox receives a new message, the server sends a request to the PBX to turn on the message indicator. However, if the user logs into the server, listens to all the new messages, and logs out, a single indicator-off request is sent to the PBX. Some PBXs stack the indicator-on requests. Then, when the single indicator-off request is sent, it cancels only one of the indicator-on requests, and the message indicator stays on. To prevent the server from sending an indicator-on request when the message indicator is already activated, leave this feature at the default setting of Yes. This feature also cuts down on overall message waiting indicators traffic.

### PBX Special Access Code Characters

| Character | Explanation                                                                                                                          |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------|
| 0-9, *, # | Keys on a standard pushbutton telephone                                                                                              |
| (         | The following digits should be dial pulsed (10 PPS)                                                                                  |
| )         | Stop pulsing; resume sending DTMF tones                                                                                              |
| +         | Pause for one second                                                                                                                 |
| A-D       | Fourth column DTMF keys                                                                                                              |
| E         | Go off-hook, wait for dial tone or other steady tone (pager go-ahead or confirmation tone, for example), then do next item in string |
| F         | Switch hook flash and wait for dial tone                                                                                             |
| G         | Greet - Wait for a voice or computer tone answer                                                                                     |
| H         | Hang up (go on-hook)                                                                                                                 |
| L         | Answer Supervision - Wait for telephony signal from destination. Use only with trunk (four-wire) connections.                        |
| N         | Start a new activity; do not go off-hook                                                                                             |
| O         | Ring once                                                                                                                            |
| P         | Go off-hook, do not wait for dial tone                                                                                               |
| S         | Switch hook flash, no wait required                                                                                                  |
| T         | Go off-hook, wait for dial tone                                                                                                      |
| V         | A voice pager system is being used                                                                                                   |

### Post-DN ON or OFF String

This string is sent after the directory number (extension number) to instruct the PBX to turn the message waiting indicator on or off at that station. There is no default post-DN on or off string.

Enter the coding, if any, that must be sent after the directory number to turn message waiting indicators on or off.

## Wait for Dial Tone

The default value is N. If the PBX can return dial tone to the server to indicate that a message indicator has been turned on or off successfully, answer Yes. The server registers an error condition if dial tone is not returned, and redials the appropriate dial string.

## Enable Alternate Code

The alternate code is the DTMF string that the server transmits after the pre-DN on string. Typically, the directory number (DN) and the mailbox number are the same. The server expects this to be the case, because it includes the mailbox number as the DN when it sends a message indicators request to the PBX. Sometimes, though, the DN and mailbox number are different. In those cases, do the following to make sure users get message waiting indication:

- Enable this parameter.
- Put the DN in the Department Code parameter of the mailbox's configuration. (The software supports up to 2000 department codes.)

After you complete these steps, the server uses the value of the Department Code parameter in the mailbox's configuration as the DN when it sends the request to the PBX.

## Testing

Testing is done using the Text Console.

### 1.2.8.2.1.2 DTMF to PBX MWI Configuration

This procedure summarizes the steps for configuring DTMF-to-PBX message waiting indicators.

To configure DTMF TO PBX MWI, for each node:

1. Complete a DTMF-to-PBX Message Lights [Worksheet](#). For detailed parameter information, see [Configuration Requirements](#).
2. Define a line group to be used for the DTMF-to-PBX Message Lights application. You must define at least one line to serve as an outdialer of message indicator requests.
  1. Set *DTMF-to-PBX protocols*.
  2. If user mailbox numbers are different from extension numbers, configure the server to use alternate codes.
  3. Verify the configuration.
  4. Assign message waiting type 3 as the first or second message waiting type in mailboxes that are to send message waiting indicator requests.

5. Test the DTMF-to-PBX Message Lights application (Text console only).

### 1.2.8.2.1.3 *Configure Message Cancel Timer*



If you have a MiVoice Business ICP, on the System Options form you must change the SUPERSET Callback Message Cancel Timer setting from 24 (hours) to blank to ensure the Message Waiting Indicator continues to flash until you have listened to your messages.

### 1.2.8.2.1.4 *Turn off MWI for Skipped Messages*

FCOS bit 302 allows users to skip a new message, have it remain in the unplayed queue and then, if no other unplayed messages exist, have the MWI lamp turn off when they log out. Users are still able to log in at any time and listen to the skipped messages that are marked as unplayed and are announced as such.

This alternate MWI behavior is controlled by FCOS bit **302** (Enable Alternate MWI for Skipped Messages) and can be assigned on a per mailbox basis.

#### Conditions

Must have the following feature bits enabled:

- **204** - Message Skip, Forward and Backward
- **145** - Message Stays in Original Queue on Hangup

To enable this feature, [customize an FCOS](#) as necessary and apply to the required mailboxes.

## 1.2.8.2.2 Programming (Web Console)

### 1.2.8.2.2.1 *Set DTMF-to-PBX Protocols*

This procedure describes how to set the following parameters for DTMF-to-PBX message waiting indicators:

- Dial strings (feature access codes) that the server must send to the PBX before or after the mailbox number in order to set message waiting indicators
- Places in the dial string at which the server must wait for dial tone from the switch while setting message waiting indicators
- Whether the server should send a message wait "on" request to the switch for every new message, or only when a mailbox with no new messages receives a message

To set DTMF-to-PBX protocols:

1. From the navigation tree, select **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups** and then click **Add**.
4. In the Application list, select **DTMF to PBX Dialer**.
5. Configure the parameters on the **Lines** and **DTMF to PBX Dialer** tabs as described in the [DTMF-to-PBX application parameters](#) listing. Use the parameters on this tab to set the following optional settings:
  - Initial Dialtone Detect
  - Dial Tone Confirmation
  - Suppress MWI Updates
  - Wait for Dial Tone
  - Enable Alternate Code (to compensate for different directory and mailbox numbers)
6. Click **Save**.
7. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.2.8.2.3 Programming (Text Console)

### 1.2.8.2.3.1 Set DTMF-to-PBX Protocols

This procedure describes how to set these parameters for DTMF-to-PBX message waiting indicators:

- Dial strings (feature access codes) that the server must send to the PBX before or after the mailbox number in order to set message waiting indicators
- Places in the dial string at which the server must wait for dial tone from the switch while setting message waiting indicators
- Whether the server should send a message wait "on" request to the switch for every new message, or only when a mailbox with no new messages receives a message

To set DTMF-to-PBX protocols:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(G) Offline Menu**.



**CAUTION:**

You should make all offline configuration entries on a duplicate of the active configuration so that you can easily check them, and easily correct them if necessary, before activating the configuration.

2. Select **(B) Duplicate Active Configuration**. The server copies the current (active) configuration.

**Note:**

All subsequent steps in this procedure – along with any other configuration entries – affect only the duplicate (inactive) configuration, and will take effect only after you activate the inactive configuration.

3. Select **(T) DTMF to PBX Message Lights**.
4. Select **(G) Group Selected** and enter the **number** of the line group (1-24) or press **Enter** if the current number is correct.
5. Select **(D) DTMF to PBX Message Lights**.

### Set Pre- and Post-DN Dial Strings

1. If the PBX requires a special access code to be dialed first, select **(A) PBX Special Access Code** and enter the required dial **string** (0-24 characters) or type a **period** (.) to delete an existing dial string. Consult the PBX operating manual or the PBX vendor for the correct code or use the table below to configure a string.

- 2.

**Note:**

If you are planning to enable a "wait for an initial dial tone", do not enter a T (wait for dial tone) as the first part of the special access code.

3. If the PBX requires a dial string BEFORE the directory number to turn the message waiting indicator ON, select **(D) Pre-DN ON Dial String** and enter the required dial **string** (0-24 characters), or enter a **period** (.) to delete an existing dial string.
4. If the PBX requires a dial string BEFORE the directory number to turn the message waiting indicator OFF, select **(F) Pre-DN OFF Dial String** and enter the required dial **string** (0-24 characters), or enter a **period** (.) to delete an existing dial string.
5. If the PBX requires a dial string AFTER the directory number to turn the message waiting indicator ON, select **(P) Post-DN ON Dial String** and enter the required dial **string** (0-24 characters), or enter a **period** (.) to delete an existing dial string.

6. If the PBX requires a dial string AFTER the directory number to turn the message waiting indicator OFF, select **(Q) Post-DN OFF Dial String** and enter the required dial string (0-24 characters), or enter a **period (.)** to delete an existing dial string.

### Set Dial Tone Call Progress Verification

1. To enable/disable a "wait for initial dial tone", select **(I) Initial Dialtone Detect**. Select **Y** if integrating with PBX equipment that produces an initial dial tone, or **N** if integrating with cellular or other non-PBX equipment that cannot produce a dial tone.
2. To enable/disable dial tone confirmation, select **(C) Dial Tone Confirmation**. Select **Y** if a PBX special access code is required and the PBX expects the server to wait for a dial tone before outdialing any other digits, or **N** in all other cases.
3. To enable/disable a "wait for a dial tone after a message indicators" request, select **(W) Wait for Dial Tone** and then select **Y** if the PBX returns a dial tone to indicate that a message indicator request was successful, or **N** in all other cases.

### Set Successive Indicator "On" Requests

1. To enable/disable successive indicator-on requests, select **(S) Suppress Updates to MWL** and then select **Y** to suppress updates of Message Waiting Lights after users access their mailbox without a change in status, or **N** to enable successive indicator-on requests.
2. Save the changes to the inactive configuration by exiting to the NuPoint Voice Configuration Main Menu.

| Dial String Characters |                                                                                  |
|------------------------|----------------------------------------------------------------------------------|
| Character              | Explanation                                                                      |
| 0-9, *, #              | Keys on a standard push button telephone                                         |
| A-D                    | Fourth column DTMF keys                                                          |
| ( )                    | Dial Pulse (10PPS) the characters between the parent heses                       |
| +                      | Pause for one second                                                             |
| T                      | Go off-hook, wait for dial tone                                                  |
| P                      | Go off-hook, do not wait for dial tone                                           |
| E                      | Go off-hook, wait for dial tone or other steady tone then do next item in string |
| G                      | Greet - Wait for a voice or computer tone answer                                 |
| H                      | Hang up (go on-hook)                                                             |
| F                      | Switch hook flash and wait for dial tone                                         |
| S                      | Switch hook flash, no wait required                                              |
| N                      | Start a new activity; do not go off-hook                                         |

| Dial String Characters |                                                                                                                                                                                                                                                |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Character              | Explanation                                                                                                                                                                                                                                    |
| L                      | Wait for an answer supervision signal that indicates the receiving phone has gone off-hook, then dial remaining characters after receiving the signal. Valid only with four-wire connections, not with loop start or ground start phone lines. |

### 1.2.8.2.3.2 Compensate for Different Directory and Mailbox Numbers

This procedure describes how to configure the server when the directory number differs from the mailbox number in the following applications:

- DTMF-to-PBX Message Lights
- RS-232 Message Waiting Indicators

To allow your MWI application to compensate for different directory and mailbox numbers:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(G) Offline Menu**.
2. Duplicate the configuration by selecting **(B) Duplicate Active Configuration**. The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears. All subsequent steps in this procedure – along with any other configuration entries – affect just the copy, and take effect only after you activate the configuration.

For configuration procedures for the RS-232 MWI interface, go to step 11.

To configure the server for different directory and mailbox numbers for the DTMF-to-PBX MWIs:

1. Specify the line group to which the DTMF-to-PBX Message Lights application is assigned by selecting **(G) Group Selected**. At the **Enter a group number** prompt, enter the **number** of the line group (1-24) to which the DTMF-to-PBX Message Lights application is assigned.
2. Select **(T) DTMF to PBX Message Lights**.
3. Enable an alternate code by selecting **(T) Enable Alternate Code**. At the **Enable alternate code (y/n)** prompt, enter **Y** for yes.
4. Save the setting by exiting to the NuPoint Voice Configuration Main Menu.
5. Exit to the Mailbox Maintenance Menu, and select **(C) Create New Mailboxes** or **(M) Modify Mailboxes**.
6. Enter the number of the mailbox to create/modify.

7. Press **Enter** until the **Department Code** prompt appears.
8. Enter the DN (directory number) by entering the DTMF **string**, which is the alternate code the server transmits after the pre-DN ON string.
9. Press Enter to skip through the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.
10. At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

To configure the RS-232 MWIs Interface:

1. From the Offline Menu, select **(M) RS232 Only Applications** and then select **(R) Programmable**.
2. Enable an alternate code by selecting **(D) Dept Code as DN?**. At the **E nter "N" for mailbox #, "Y" for dept code**, enter Y for department code.
3. Save the setting by exiting to the NuPoint Voice Configuration Main Menu.
4. Exit to the Mailbox Maintenance Menu, and select **(C) Create New Mailboxes** or **(M) Modify Mailboxes**.
5. Enter the number of the mailbox to create/modify.
6. Press **Enter** until the **Department Code** prompt appears.
7. Enter the DN (directory number) by entering the DTMF **string** that is the alternate code the server transmits after the pre-DN ON string. Any ASCII character is valid in this string.
8. Press Enter to skip through the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number.
9. At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.2.8.2.3.3 Refresh or Suppress MWI

You may want to refresh or suppress message waiting indicators. Reach the Suppress/Refresh MWI menu from the Main Menu by selecting **(S) System Maintenance**, **(R) Reconfiguration**, then **(C) Suppress/Refresh MWI**.

At the Suppress/Refresh MWI menu, you can set parameters to refresh some or all message waiting indicators, suppress message waiting indicators for specific MWI types, and view the current MWI types and settings. When you set the first and last mailboxes, be sure that the range is no more than the maximum of 2400 mailboxes.

### 1.2.8.2.3.4 Test DTMF-to-PBX MWI Configuration

LEAVE VISIBLE TO THE WEB CONSOLE

Create at least one mailbox with the DTMF-to-PBX message waiting type that is appropriate for your server. To test the message waiting indicators, choose the Lights Test option from the server maintenance console, and select the proper message waiting type.

The following procedure describes how to test the MWI configuration:

1. From the Main Menu, select **(S) System Maintenance**, and then **(O) Additional Options**.
2. Select **(L) Lights Test** to start the Lights Test and then enter the number of the test extension that has a mailbox configured for DTMF-to-PBX MWI (MWI type 3).
3. At the **Light off/on/existing value (0/1/2):** prompt, enter **0** to turn the light off (to clear any existing indicator on the test extension).
4. At the **Message waiting type** prompt, enter **3** for DTMF-to-PBX. When prompted for mailbox number, enter the number of the test mailbox you used in step 3.
5. At the **Light off/on/existing value (0/1/2):** prompt, enter **1** to turn the light on. The system dials the message waiting code to light the MWI lamp on the test extension. Check the indicator on the test extension.

**Note:**

The light off/on/existing value field is interpreted as 0 for off, 1 for on and 2 to send the existing value for the mailbox (useful if you want to refresh the message waiting lamps).

## 1.2.8.3 MiTAI MWI

### 1.2.8.3.1 MiVoice Business ICP Programming for MiTAI MWI

**Note:**

- The MiTAI Messaging MWI does not support the configuration of MiVoice Business ICP as a gateway.
- In an environment with resilient MiVoice Business ICPs, an open communication path is required between the ICPs whenever a MWI messaging event occurs. Without a communication path, events will not be synchronized and the user's message waiting lamp will fail to turn on/off correctly.

MiTAI MWI must be configured on both the MiVoice Business ICP and the NuPoint Unified Messaging systems.

### Creating an HCI Reroute Hunt Group on the MiVoice Business ICP

For programming the MiVoice Business ICP to support HCI Reroute Hunt Group, the following steps need to be performed on the MiVoice Business ICP side:

1. Open the MiVoice Business ICP System Administration Tool and in the Selection: drop-down menu, click **System Administration**.
2. Navigate to the **Hunt Groups** form (click Users and Devices > Group Programming > Hunt Groups).
3. Click **Add**.
4. In the **Hunt Group** field, type the hunt group **number**.
5. In the **Hunt Group Type** field, select **HCI Reroute**.
6. Click **Save**.
7. Navigate to the **Call Rerouting Always Alternatives** form (Call Routing > Call Handling > Call Rerouting Always Alternatives). Choose an unused **Always Alternative Number**, then click **Change**. Do not use Call Reroute number 1.

**Note:**

Remember the Always Alternative Number, because you need it in the final step of this procedure.

8. In the **Call Rerouting Always Alternatives** form, change all four **Always Originating Device** values to **Reroute**, and change **Directory Number to Reroute to** to the NP-UM messaging hunt group pilot number.
9. Click **Save**.
10. Navigate to the **Call Rerouting** form (Call Routing > Call Handling > Call Rerouting).
11. In the Call Routing folder, navigate to the pilot number of the HCI Reroute hunt group.
12. Click **Change**.

13. In the **Call Rerouting** window, change the **Call Rerouting Day**, **Call Rerouting Night1**, and **Call Rerouting Night2** numbers to the **Call Rerouting Always Alternative** number created in Step 7.

**Note:**

Message waiting indicators are affected by timer settings in the MiVoice Business system. To avoid premature extinguishing of MWI, ensure that the **SUPERSET Callback Message Cancel Timer** parameter in the **System Options** form is **BLANK**. (An entry in this field sets a time limit for MWI to be displayed, after which the indicator is extinguished.)

For detailed programming information, refer to *the MiVoice Business System Administration Tool Online Help*.

Web Console:

- [Configure NuPoint UM for MiTAI MWI](#)

Text Console:

- [Configure NuPoint UM for MiTAI MWI](#)

## 1.2.8.3.2 Programming (Web Console)

### 1.2.8.3.2.1 Configure NuPoint UM for MiTAI MWI

MiTAI MWI support requires configuration in the Network Elements and Mailbox Maintenance.

**Note:**

For MiCollab deployments, this configuration is done in the Users and Services application.

To configure the HCI Reroute Hunt Group number:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Network Elements**, select the ICP/ MiVoice Business to modify, and then click **Edit**.

4. In the **HCI Reroute Hunt Group Number for Mitai MWI** field, enter the HCI hunt group number.
5. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

To create or modify a mailbox for MiTAI MWI:

- Follow the instructions to [create or edit](#) a mailbox. On the **Message Waiting** tab, select the **MiTAI Messaging** option.

## 1.2.8.3.3 Programming (Text Console)

### 1.2.8.3.3.1 Configure NuPoint UM for MiTAI MWI

MiTAI MWI support requires configuration in the server and in Mailbox maintenance.

#### Server Configuration

The NuPoint Unified Messaging server needs to know the HCI Reroute Hunt Group number to generate the proper MWI messages. Set this up in the MiVoice Business ICP Integration menu:

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu, (I) Server Options and Configuration**, and then **(C) Configure Mitel MCD integration**.
2. Select **(H) HCI Reroute Hunt Group Number for Mitai MWI** and enter the HCI Reroute Hunt Group number.

## 1.2.8.4 RS-232 MWI

### 1.2.8.4.1 Introduction

This section includes an overview of RS-232 message waiting indicator interfaces, provides hardware requirements, worksheets and planning information, and includes the following configuration procedures:

- Configuring a Programmable MWI application
- Testing RS-232 MWI Configuration

The RS-232 MWI application allows servers to turn PBX message waiting indicators on and off by sending signals to the PBX over RS-232 data links. The data links can be either direct serial connections to the PBX, or they can connect to modems that are connected to analog ports on the PBX.



When a message is left in a mailbox, the server sends an ASCII message that tells the PBX to turn on the message waiting indicator at the appropriate station. Conversely, when all unplayed messages are played, the server sends an ASCII string that directs the PBX to turn off the message waiting indicator.

### **RS-232 Serial Port or Modem Requirements**

To use any of the RS-232 message waiting indicator interfaces, an RS-232 cable must be run from a server serial port to the PBX (or, in the case of CentrexRS-232 MWI interface, to a modem that communicates with the Central Office).

The physical setup uses RS-232 pins 2, 3, and 4, with communications parameters of 1200 baud, 8 data bits, 1 stop bit, no parity, full duplex, and no flow control.

If you have an expansion serial port card installed in your server, you can use as many serial ports as necessary for the programmable RS-232 message waiting application. You must first assign and configure a single serial port using index 1, which enables any additional ports assigned to the application to adopt the configuration of the first port.

## **1.2.8.4.2 Defining an RS-232 Serial Port**

### **Introduction**

The RS-232 MWI application allows servers to turn PBX message waiting indicators on and off by sending signals to the PBX over RS-232 data links. The data links can be either direct serial connections to the PBX, or they can connect to modems that are connected to analog ports on the PBX.

When a message is left in a mailbox, the server sends an ASCII message that tells the PBX to turn on the message waiting indicator at the appropriate station. Conversely, when all unplayed messages are played, the server sends an ASCII string that directs the PBX to turn off the message waiting indicator.

### **Requirements**

To use any of the RS-232 message waiting indicator interfaces, an RS-232 cable must be run from a server serial port to the PBX (or, in the case of Centrex RS-232 MWI interface, to a modem that communicates with the Central Office).

The physical setup uses RS-232 pins 2, 3, and 4, with communications parameters of 1200 baud, 8 data bits, 1 stop bit, no parity, full duplex, and no flow control.

If you have an expansion serial port card installed in your server, you can use as many serial ports as necessary for the programmable RS-232 message waiting application. You must first assign and configure a single serial port using index 1, which enables any additional ports assigned to the application to adopt the configuration of the first port.

## 1.2.8.4.3 Programmable RS-232 MWI Interface

### Planning

The programmable option allows you to customize the RS-232 message indicator software interface between the server and the PBX. All codes are sent in ASCII. Numbers, letters, and certain special characters (see table below) are understood by the software.

### RS-232 Message Waiting Indicators Interface Codes

| Code | Explanation      |
|------|------------------|
| \r   | carriage return  |
| \n   | new line         |
| \t   | tab              |
| \b   | backspace        |
| \f   | form feed        |
| \\   | backslash        |
| \"   | double quotes    |
| \?   | question mark    |
| .    | no string needed |

The [RS-232 Message Waiting Lights Worksheet](#) organizes the information that is necessary for configuring the programmable interface. You can use ASCII codes in any of strings listed below.

### Sample RS-232 Message Waiting Lights Worksheet

The following list provides definitions for the RS-2323 Message Waiting Lights Worksheet:

#### Initialization String

This string is sent to the PBX to notify it that the server is ready to send message waiting indicator requests.

#### Reply String

After the initialization string is sent, the server waits for the PBX to return this reply string, before sending message indicators requests.

#### Pre-DN On String

This string is sent before the directory number (extension number) to instruct the PBX to turn the message waiting indicator on at that station.

**Pre-DN Off String**

This string is sent before the directory number (extension number) to instruct the PBX to turn the message waiting indicator off at that station.

**Post-DN On String**

Enter the coding, if any, that must be sent after the directory number to turn message waiting indicators on. There is no default post-DN on string.

**Post-DN Off String**

Enter the coding, if any, that must be sent after the directory number to turn message waiting indicators off. There is no default post-DN off string.

**Department Code as DN?**

Enter Yes if you want the server to send the department code as the DN when issuing a request to turn indicators on or off. When this feature is set at the default value, No, the server sends the mailbox number as the DN.

**Unplayed Number Sent?**

Enter Yes if you want the server to send the number of unplayed messages after the DN, when issuing a request to turn indicators on. The default value is No.

**Delay After Post-DN String**

This parameter is the period of time, in seconds, between the post-DN off string and the ending trailer string. This delay gives the PBX time to process each request correctly. If requests come too quickly, the PBX could drop or corrupt them. From 0 to 255 seconds can be specified. There is no default delay.

**Ending Trailer String**

If the PBX requires this string, the server sends it after the delay just described. Use the characters in Table 5-3 to create this string, up to 30 characters long. There is no default ending trailer string.

**Suppress Updates to MWL?**

A server administrator can configure whether message waiting indicator on or off requests are sent out for every new unplayed message, or only when the message waiting indicator state changes from off to on or from on to off. Using the latter functionality (only when the message waiting indicator state changes) makes better use of server resources.

The server does not suppress message waiting indicator updates by default. To suppress them, you must enter the message waiting type number of your RS-232 system, then enter Yes. (The default is No for all types.) Message waiting types are listed in the following table.

### Message Waiting Types

| Number | Message Waiting Type |
|--------|----------------------|
| 0      | None                 |
| 3      | DTMF-to-PBX          |
| 5      | Pager                |
| 11     | Centrex              |
| 16     | HIS PMS              |
| 17     | Unified Integrations |
| 21     | Hitachi PMS          |
| 28     | MiTAI Messaging      |

### Modem Result Code

The modem result code parameter allows the server to determine if a message waiting request was accepted by the switch, and to retry a failed request if necessary. The modem result code tells the server to look for a certain message from the modem to indicate that the message waiting request was accepted by the switch. You must know the message that the modem returns, for example, "NO CARRIER." The server looks for the exact message set in the Modem Result Code field, and, if it does not see it, retries the message waiting request up to 18 times.

You can find out what result code the modem returns by setting this field to some value (it doesn't matter what), and then turning on the Pager/Programmable RS232 interface in Event Recorder. Use the Lights Test to send an MWI request to a mailbox that has its MWI type set to Programmable RS232. The Event Recorder message will show you the actual result string that is returned from the modem. You can then set the Modem Result Code field to that value, assuming that the request was completed successfully.

Leave this field blank to have the server ignore any result code returned by the modem and assume that all message waiting requests are successful. To remove a previously configured value, enter a period.

## 1.2.8.4.4 Programming (Web Console)

### 1.2.8.4.4.1 Configure Programmable RS-232 MWI

The programmable RS-232 MWI interface is configured entirely offline, through the External Applications menu. This procedure assumes that the appropriate server hardware and software have been installed.

Perform the following steps to configure the programmable RS-232 message waiting indicators interface in a server:

1. Complete an [RS-232 Message Waiting Indicators Interface Worksheet](#).
2. Create the interface string. See [Creating a Programmable RS-232 Interface String](#). This procedure includes instructions for:
  - setting delay times
  - enabling indicator-on requests for successive messages
  - sending the number of unplayed messages
  - compensating for different directory and mailbox numbers
3. Assign message waiting type **7** (programmable interface) through the first or second message waiting type prompt in mailboxes that are to receive message waiting indicator requests. See [Assigning Message Waiting Indicators to a Mailbox](#).
4. Use the [Lights Test](#) (Text console) described in the DTMF-to-PBX section to test RS-232 configuration. The modem will go off hook and dial the message waiting code to light the MWI lamp on the telephone set.

#### 1.2.8.4.4.2 *Creating a Programmable RS-232 Interface String*

The RS-232 programmable interface string consists of the following parts:

- Initialization string, if required by the PBX.
- Reply string, if required by the PBX.
- Any of the applicable indicator-on or indicator-off request strings (pre-DN ON, pre-DN OFF, post-DN ON, post-DN OFF, ending trailer string).

To create a string of ASCII codes for the RS-232 programmable interface:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **External Applications**.
4. Select the **Serial port** (1-2) or **IP port** (1-4) to program.
5. In the Application list, select **Programmable**.
6. In the **Initialization String** field, enter the ASCII **string** (0-30 characters ) required by the PBX, or a period (.) to delete an existing string. To create the **string**, consult the PBX operating manual or the PBX vendor for the correct code, and use the ASCII Characters table at the end of this procedure.
7. In the **Reply String** field, enter the ASCII **string** (0-30 characters ) sent by the PBX, or a period (.) to delete an existing string. To create the **string**, consult the PBX operating

manual or the PBX vendor for the correct code, and use Table 1 at the end of this procedure.

8. In the **Delay Between Requests** field, set the delay time between successive message waiting indicators requests in **seconds** (0-255).
9. In the **Pre-DN ON String** field, perform the action that corresponds to the following PBX behavior:
  - If the PBX requires the string before the directory number (sometimes called extension number), create an **ASCII string** (0-30 characters) using the characters in the table at the end of this procedure.
  - If the PBX sends the string after the directory number:
    - enter a **period** (.) to delete an existing string, if necessary.
    - enter values for the Post-DN ON String and Post-DN OFF String parameters.
10. In the **Pre-DN OFF String** field, perform the action that corresponds to the following PBX behavior:
  - If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
  - If the PBX sends the string after the directory number:
    - enter a **period** (.) to delete an existing string, if necessary.
    - enter values for the Post-DN ON String and Post-DN OFF String parameters.
11. In the **Post-DN ON String** field, perform the action that corresponds to the following PBX behavior:
  - If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
  - If the PBX sends the string after the directory number:
    - enter a **period** (.) to delete an existing string, if necessary.
    - enter values for the Post-DN ON String and Post-DN OFF String parameters.
12. In the **Post-DN OFF String** field, perform the action that corresponds to the following PBX behavior:
  - If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
  - If the PBX sends the string after the directory number:
    - enter a **period** (.) to delete an existing string, if necessary.
    - enter values for the Post-DN ON String and Post-DN OFF String parameters.
13. To use the Department Code as the DN for MWI (i.e. when the directory number differs from the mailbox number ) select the **Department Code as DN** check box. (Note: If Department Code is not configured, MWI lights on the mailbox number.)

14. To send the number of unplayed messages through the RS-232 interface after the directory number in a message light-on request, select the **Unplayed Number Sent** check box.
15. To set the time for delays between the post-DN OFF string and ending trailer string, enter the number of **seconds** (0-255) in the **Delay After Post-DN String** field.
16. In the **Ending Trailing String** field, perform the action that corresponds to the following PBX behavior:
  - If the PBX requires this string, create an **ASCII string** (0-30 characters) using the characters in the table below.
  - If the PBX does not require this string, enter a **period** (.) to delete an existing string.
17. Click **Save**.
18. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

#### ASCII Characters

| Character | Explanation     |
|-----------|-----------------|
| \b        | Backspace       |
| \f        | Form feed       |
| \n        | New line        |
| \r        | Carriage return |
| \t        | Tab             |
| \\        | Backslash       |
| \"        | Double quotes   |
| \?        | Question mark   |

### 1.2.8.4.4.3 Programming RS-232 MWI Using a Modem

The NuPoint Unified Messaging system offers a programmable RS-232 message waiting application that allows you to set up either the built-in COM port 2 or a single port of an optional add-in serial card to provide the necessary AT commands to be sent to an external modem.

The modem line port is in turn connected to an ONS port on the PABX which allows NuPoint UM to turn on and off message waiting lamps in a similar way as that done by the DTMF-to-PBX message waiting application.

Mitel recommends that external US Robotics modems be used for this application. Other modems will work, however, Mitel cannot provide support in troubleshooting other vendor modems.

**Note:**

This procedure uses the NuPoint Unified Messaging RS-232 COM2 port in conjunction with a US Robotics modem. A straight-through cable should be used from the modem to the COM2 port.

The following switch settings need to be set on the US Robotics Sportster modem:

## US Robotics Switch Settings

|      |    |      |      |    |    |      |      |
|------|----|------|------|----|----|------|------|
| 1    | 2  | 3    | 4    | 5  | 6  | 7    | 8    |
| down | up | down | down | up | up | down | down |

**Note:** The NuPoint Unified Messaging system expects to see the string 'NO CARRIER' returned by the modem after each message waiting activation. If the modem does not send this string, the NuPoint Unified Messaging system treats it as a failure and queues the message waiting task again and again (up to 18 times). The US Robotics modem with the switches set as above will meet this requirement and will work. If you do not have a modem that returns the 'NO CARRIER' result code, the message waiting application will not work.

Perform the following steps to configure the programmable RS-232 MWI using a modem:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **External Applications**.
4. Select a free **Serial Port** and then select **Programmable** from the Applications list.  
Set up the parameters as shown below.

**Note:**

The Pre-DN ON and Pre-DN OFF strings will contain the feature access code for the SX200D/L that has been chosen as the send message. In the example below, we are using 76 as the feature access code for send message, and therefore we need to send 761 to the PABX to turn the lamp on and 762 to turn the lamp off. This number will change from system to system, depending on the feature access code chosen.



### External Application - Serial Port 2

Save Cancel

Application

Application: Programmable ▼

Programmable Parameters

Initialization String: ATE0V1X4 \r

Reply String:

Delay Between Requests: 3

Pre-DN ON String: ATDT761

Pre-DN OFF String: ATDT762

Post-DN ON String: \r

Post-DN OFF String: \r

☐ Department Code as DN

☐ Unplayed Number Sent

Delay After Post-DN String: 6

Ending Trailing String:

☐ Suppress Updates to MWI

Modem Result Code:

NP0178

**Note:**

The initialization string is a back up to the switch settings mentioned above and sets the modem to no echo and verbose result codes. The \r code is a carriage return character that is sent to the modem.

1. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).
2. To complete the RS-232 message waiting application, you must now [assign the correct message waiting type](#) to the mailboxes that will be using it.

## 1.2.8.4.5 Programming (Text Console)

### 1.2.8.4.5.1 Define a Serial Port

Perform the following steps to define a serial port that enables the RS-232 Message Waiting Indicators Interface application and allows for RS-232 cabling:

**1. Reach the NuPoint Voice Configuration Offline Menu:**

From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(G) Offline Menu**.

**2. If desired, duplicate the configuration by selecting (B) Duplicate Active Configuration.**

The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.

All subsequent steps in this procedure – along with any other configuration entries – affect just the copy, and take effect only after you activate the configuration.

**3. Select (M) RS232 Application Only.**

**4. Specify the serial port index by selecting (P) Serial Port Selected.**

At the prompt **Enter a serial port index (0-2) =**, enter one of the following:

- **1** to indicate index 1
- **2** to indicate index 2
- **0** to disable the port and the RS-232 Message Waiting Indicators Interface application.

**5. At the prompt Enter the serial port type, 1 for cpu, 2 for smart card:, enter one of the following to specify the serial port type:**

- **1** to indicate that you will send signals through a CPU-based serial port (serial port 1 or serial port 2)
- **2** to indicate a smartcard-based serial port, which allows up to 32 ports.

**6. At the prompt Enter the serial port number, 1-2:, enter one of the following to specify the serial port type:**

- **1** to indicate CPU-based serial port 1
- **2** to indicate CPU-based serial port 2
- **1-32** to indicate a smartcard-based serial port.
- a smartcard-based serial port, which allows up to 32 ports.

**Note:**

Do not select serial port 1 if you are using this port for your console.

**7. Save the parameter settings by exiting to the Main Menu.**

## 1.2.8.4.5.2 Configure Programmable RS-232 MWI

The programmable RS-232 message waiting indicators interface is configured entirely offline, through the RS-232 Only Application Menu. This procedure assumes that the appropriate server hardware and software have been installed.

### Note:

Perform the following steps to configure the programmable RS-232 message waiting indicators interface in a server:

1. Complete an [RS-232 Message Waiting Indicators Interface Worksheet](#).
2. To enable the RS-232 Message Waiting Indicators Interface application and allow for RS-232 cabling, define an RS-232 serial port. See [Defining an RS-232 Serial Port](#).
3. Create the interface string. See [Creating a Programmable RS-232 Interface String](#).
4. Set delay times to allow for PBX processing of RS-232 message waiting indicators requests. See [Setting Delay Times for RS-232 Message Waiting Requests](#).
5. Enable or disable indicator-on requests for successive messages. See [Enabling/Disabling Light-on Requests for Successive Messages](#).
6. If desired, have the number of unplayed messages sent after the directory number when the server issues a request to turn indicators on. See [Sending the Number of Unplayed Messages through the Programmable RS-232 Interface](#).
7. Compensate for different directory number and mailbox numbers, if necessary. See [Compensate for Different Directory and Mailbox Numbers](#).
  - Set the **Dept Code As DN** parameter in the RS-232 Programmable Menu to **Yes**.
  - Enter the directory number in the Department Code parameter of the mailbox.
8. Verify that the configuration is correct.
9. [Activate the configuration](#).
10. Assign message waiting type 7 (programmable interface) through the first or second message waiting type prompt in mailboxes that are to receive message waiting indicator requests. See [Assigning Message Waiting Indicators to a Mailbox](#).
11. [Test](#) the RS-232 Message Waiting Indicators Interface application.

## 1.2.8.4.5.3 Creating a Programmable RS-232 Interface String

The RS-232 programmable interface string consists of the following parts:

- Initialization string, if required by the PBX.

- Reply string, if required by the PBX.
- Any of the applicable indicator-on or indicator-off request strings (pre-DN ON, pre-DN OFF, post-DN ON, post-DN OFF, ending trailer string).

To create a string of ASCII codes for the RS-232 programmable interface:

1. *From the Main Menu, select (S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, and then (G) Offline Menu.*
2. If desired, duplicate the configuration by selecting **(B) Duplicate Active Configuration**.

The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.

All subsequent steps in this procedure – along with any other configuration entries – affect just the copy, and take effect only after you activate the configuration.

3. *Select (M) RS232 Application Only.*
4. Select **(P) Serial Port Selected** or **(I) IP Serial Port Selected** and enter the serial port index number (1-4).
5. Select **(R) Programmable**.
6. Select **(I) Initialization String**.
7. At the **RS232 initialize string (0 - 30 chars) =** prompt, enter the ASCII **string** (0-30 characters ) required by the PBX, or a period (.) to delete an existing string. To create the **string**, consult the PBX operating manual or the PBX vendor for the correct code, and use Table 1 at the end of this procedure.
8. Select **(R) Reply String**.
9. At the **RS232 reply string (0 - 30 chars) =** prompt, enter the ASCII **string** (0-30 characters ) sent by the PBX, or a period (.) to delete an existing string.

To create the **string**, consult the PBX operating manual or the PBX vendor for the correct code, and use Table 1 at the end of this procedure.

10. Select **(O) Pre-DN ON String**.
11. At the **RS232 pre-DN ON string (0 - 30 chars) =** prompt, perform the action that corresponds to the following PBX behavior:
12. If the PBX requires the string before the directory number (sometimes called extension number), create an ASCII string (0-30 characters) using the characters in Table 1.
13. If the PBX sends the string after the directory number:
  - enter a **period** (.) to delete an existing string, if necessary.
  - enter values for the Post-DN ON String and Post-DN OFF String parameters.
14. Select **(F) Pre-DN OFF String**.
15. At the **RS232 pre-DN OFF string (0 - 30 chars) =** prompt , perform the action that corresponds to the following PBX behavior:

16. If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
17. If the PBX sends the string after the directory number:
  - enter a **period** (.) to delete an existing string, if necessary.
  - enter values for the Post-DN ON String and Post-DN OFF String parameters.
18. Select **(P) Post-DN ON String**.
19. At the **RS232 post-DN ON string (0 - 30 chars)** = prompt , perform the action that corresponds to the following PBX behavior:
20. If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
21. If the PBX sends the string after the directory number:
  - enter a **period** (.) to delete an existing string, if necessary.
  - enter values for the Post-DN ON String and Post-DN OFF String parameters.
22. Select **(Q) Post-DN OFF String**.
23. At the **RS232 post-DN OFF string (0 - 30 chars)** = prompt , perform the action that corresponds to the following PBX behavior:
24. If the PBX requires the string before the directory number, create an ASCII string (0-30 characters) using the characters in Table 1.
25. If the PBX sends the string after the directory number:
  - enter a **period** (.) to delete an existing string, if necessary.
  - enter values for the Post-DN ON String and Post-DN OFF String parameters.
26. Select **(M) Ending Trailer String**.
27. At the **RS232 trailer string (0 - 30 chars)** = prompt , perform the action that corresponds to the following PBX behavior:
28. If the PBX requires this string, create an ASCII string (0-30 characters) using the characters in the table below.
29. If the PBX does not require this string, enter a **period** (.) to delete an existing string.
30. Save the parameter settings by exiting to the Main Menu.

#### ASCII Characters

| Character | Explanation     |
|-----------|-----------------|
| \b        | Backspace       |
| \f        | Form feed       |
| \n        | New line        |
| \r        | Carriage return |
| \t        | Tab             |
| \\        | Backslash       |
| \"        | Double quotes   |

| Character | Explanation   |
|-----------|---------------|
| \?        | Question mark |

#### 1.2.8.4.5.4 Setting Delay Times for Programmable RS-232 MWI

Perform the following steps to set the delay time between successive message waiting indicators requests, and to set the delay time between the post-DN OFF string and the ending trailer string:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(G) Offline Menu**.
2. If necessary, duplicate the configuration by selecting **(B) Duplicate Active Configuration**.

The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.

All subsequent steps in this procedure – along with any other configuration entries – will affect just the copy, and take effect only after you activate the configuration.

3. Select **(M) RS232 Application Only**.
4. Select **(K) Delay Between Request** and set the time for delays between requests. When the prompt Delay in secs (0 - 255) = appears, enter the **seconds** (0-255) that the server should delay between successive message waiting indicators requests.
5. Select **(L) Delay After Post-DN String** and set the time for delays between the post-DN OFF string and ending trailer string. When the prompt Post-DN delay in secs (0 - 255) = appears, enter the **seconds** (0-255) that the server should delay after sending the post-DN OFF string and before sending the ending trailer string.
6. Save the parameter settings by exiting to the Main Menu.
7. You must [activate the inactive configuration](#) for the changes to take effect.

#### 1.2.8.4.5.5 Enabling/Disabling Light-on Requests for Successive Messages

Perform the following steps to turn on or turn off message waiting light-on requests for successive messages:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(G) Offline Menu**.

2. If desired, duplicate the configuration by selecting **(B) Duplicate Active Configuration**.

The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.

All subsequent steps in this procedure – along with any other configuration entries – affect just the copy, and take effect only after you activate the configuration.

3. Select **(M) RS232 Application Only**.

4. Enable or disable updates to message waiting lights by selecting (S) Suppress Updates to MWL.

When the prompt Suppress updates of MWL (y/n) = [] ? appears, enter

- **Y** to suppress updates of Message Waiting Lights
- **N** to permit updates as normal.

Enabling this feature stops updates after a user accesses the mailbox without a message waiting lights status change.

1. Save the parameter settings by exiting to the Main Menu.
2. You must [activate the inactive configuration](#) for the changes to take effect.

### *1.2.8.4.5.6 Sending the Number of Unplayed Messages*

1. Perform the following steps to configure the server to send the number of unplayed messages through the RS-232 interface after the directory number in a message light-on request:
2. Reach the NuPoint Voice Configuration Offline Menu:

From the Main Menu, select (S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, and then (G) Offline Menu.

3. If desired, duplicate the configuration by selecting (B) Duplicate Active Configuration.

The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.

All subsequent steps in this procedure – along with any other configuration entries – affect just the copy, and take effect only after you activate the configuration.

4. Go to the RS-232 Programmable Menu.

From the Main Menu, select (S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu, and then (M) RS232 Application Only.

5. Request that the number of unplayed messages be sent by selecting (U) Unplayed Number Sent?

When the prompt Enter "Y" to send # of unplayed messages after DN = appears, enter

- **Y** to send the number of unplayed messages
- **N** to not send this information

6. Save the parameter settings by exiting to the Main Menu.

### 1.2.8.4.5.7 Assigning Additional Serial Ports for Programmable RS-232 Interface

This procedure describes how to assign additional serial ports for the RS-232 Message Waiting Indicators Application. This procedure assumes:

- You have defined one serial port for the application, and it is using index 1 (see [Defining a RS-232 Serial Port](#)).
- You have configured the programmable RS-232 interface (see [Configure Programmable RS-232 Interface](#)).
- You have a serial interface card installed in your server.

The additional serial ports automatically copy their settings from the serial port assigned to index 1. Changes made to that serial port will also be applied to these serial ports.

Perform the following steps to assign additional serial ports:

1. Reach the NuPoint Voice Configuration Main Menu, then go to the NuPoint Voice Configuration Offline Menu: *From the Main Menu, select (S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, and then (G) Offline Menu.*
2. If desired, duplicate the configuration by selecting **(B) Duplicate Active Configuration**. The server copies the current (active) configuration. When copying is completed, the short form of the Offline Menu appears.
3. Select **(M) RS232 Application Only**.
4. Verify that the Serial Port Selected (at the top of the menu) is the one you want to use for the RS-232 Programmable Interface Application. Select a different port if it is not correct.
5. Navigate to the RS-232 Programmable \$CTI Serial Port Menu by selecting **(M) Multiple Programmable**.



**6. Assign additional serial ports for RS-232 message waiting by selecting (A) Add Serial Port .**

When the prompt **Serial ports to add =** appears, enter the **number** (1-32) of the serial port on the card that you want to assign to the RS-232 Programmable interface.

You can enter multiple port numbers by separating them with commas (1,3,5).

**7. If necessary, delete serial ports from this function by selecting (D) Delete Serial Port.**

When the prompt **Serial ports to delete =** appears, enter the **number** (1-32) of the serial port on the card that you want to remove from the RS-232 Programmable interface.

You can enter multiple port numbers by separating them with commas (1,3,5)..

**8. View the assigned serial ports by selecting (S) Show Serial Port Table.**

When the prompt **\$CTI PORTS = [1,2,3]** appears, enter the **number** (1-32) of the serial port you want to view.

**9. Save the parameter settings by exiting to the Main Menu.**

**10. You must [activate the inactive configuration](#) for the changes to take effect.**

### 1.2.8.4.5.8 Testing the RS-232 MWI Configuration

Use the [Lights Test](#) described in the DTMF-to-PBX section to test RS-232 configuration. The modem will go off hook and dial the message waiting code to light the MWI lamp on the telephone set.

### 1.2.8.5 Test Message Waiting Indication (Text Console only)

This procedure describes how to test message waiting lights after they have been configured for mailboxes in your server.

Prerequisites for this procedure are:

- All appropriate hardware has been installed.
- Telephone lines have been installed and tested for dial tone.
- Test mailboxes have been configured for message waiting lights.

To test MWI:

1. If you have not already done so, obtain a [System Configuration Report](#). Refer to the report as needed for the configuration parameters that you have set.

2. Use Event Recorder to monitor server activity during test pages and report the resulting data:
  - Specify the line on which the pager being tested is defined.
  - Specify the message level to be saved.
  - Enable Event Recorder.
  - Run Event Recorder.
  - Display the data at the server maintenance console.
3. From the Main Menu, select **(S) System Maintenance**, and then **(O) Additional Options**.
4. Select **(L) Lights Test** and enter the **number** of the mailbox to light or a range of mailbox numbers separated by a hyphen.

**Note:**

If you select a large range of mailboxes, the Lights Test could queue up a long list of message waiting requests and could take a long time to process.

5. At the **Light off/on/existing value (0/1/2):** prompt, enter **0** to turn the message waiting lights off.
6. At the **Message waiting type:** prompt, enter the **number** of the message waiting type assigned to the mailboxes you selected or press **Enter** for all message waiting types.

| Number | Message Waiting Type          |
|--------|-------------------------------|
| 0      | None                          |
| 3      | DTMF to PBX                   |
| 5      | Pager (See Pager Application) |
| 7      | Program RS232                 |
| 9      | Centrex RS232                 |
| 11     | Centrex                       |
| 16     | HIS PMS                       |
| 17     | Unified Integration           |
| 21     | Hitachi PMS                   |
| 28     | MiTAI Messaging               |

7. At the **Mailbox to light (1-9999999999):** prompt, enter the same mailbox **number**, or range of numbers that you entered in step 4.
8. At the **Light off/on/existing value (0/1/2):** prompt, enter 1 to turn the message waiting lights on.
9. At the **Message waiting type:** prompt, enter the **number** of the message waiting type assigned to the mailboxes you selected or press **Enter** for all message waiting types.
10. The server prompts for another mailbox to light. To repeat the test, perform steps 4 through 9 again.

11. Review Event Recorder data reported at the server maintenance console to determine if any errors were encountered.
12. At the **Mailbox to light (1-9999999999)**: prompt, enter another mailbox number to test OR press **Enter** to stop the Lights Test, then Exit to the Main Menu.

## 1.2.9 Worksheets

### 1.2.9.1 Worksheets Index

- [NuPoint Voice Worksheet](#)
- [Mailbox Individual Worksheet](#)
- [Mailbox Group Worksheet](#)
- [FCOS Worksheet](#)
- [GCOS Worksheet](#)
- [LCOS Worksheet](#)
- [RCOS Worksheet](#)
- [Billing Worksheet \(1 of 2\)](#)
- [Billing Worksheet \(2 of 2\)](#)
- [Outdial Line Group Worksheet](#)
- [Rotational Mailbox Worksheet](#)
- [Tree Mailbox Worksheet](#)
- [DTMF-to-PBX MWI Worksheet](#)
- [RS-232 MWI Worksheet](#)
- [Sample Worksheets](#)

## 1.2.9.2 NuPoint Voice Worksheet

| VoiceMemo Worksheet                 |                                               |                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Offline Parameters</b>           |                                               |                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                  |
| Define Line Groups                  | Current group                                 | <input type="text"/>                                                                                                                                                                                              | Add lines to current group                                                                                                                                                                                                                                                                                                       |
|                                     | Name of current group                         | <input type="text"/>                                                                                                                                                                                              | Drop lines from current group                                                                                                                                                                                                                                                                                                    |
| Line Group Only Applications        | Group selected                                | <input type="text"/>                                                                                                                                                                                              | Select application <input type="text"/>                                                                                                                                                                                                                                                                                          |
| <b>Online Parameters</b>            |                                               |                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                  |
| VoiceMemo Configuration Online Menu | Group selected                                | <input type="text"/>                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                  |
| Day/Night                           | Start time of workday                         | <input type="text"/> AM<br><input type="text"/> PM                                                                                                                                                                | End time of workday <input type="text"/> AM<br><input type="text"/> PM<br><input type="checkbox"/> M <input type="checkbox"/> T <input type="checkbox"/> W <input type="checkbox"/> Th <input type="checkbox"/> F <input type="checkbox"/> Sa <input type="checkbox"/> Su<br>Weekend days                                        |
| Dialing Plan Menu                   | Dialing plan                                  | <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/><br>1 2 3 4 5 6 7 8 9 |                                                                                                                                                                                                                                                                                                                                  |
| Optional Star * Prefix Dialing Plan | *Networking with prefix dplan digit           | <input type="text"/>                                                                                                                                                                                              | *Networking with prefix dplan length <input type="text"/>                                                                                                                                                                                                                                                                        |
|                                     | *Networking without prefix dplan digit        | <input type="text"/>                                                                                                                                                                                              | *Networking without prefix dplan length <input type="text"/>                                                                                                                                                                                                                                                                     |
| Dial String and Mailbox Menu        | System attendant's extension                  | <input type="text"/>                                                                                                                                                                                              | Attendant's transfer string or PBX predirectory # <input type="text"/>                                                                                                                                                                                                                                                           |
|                                     | Administrator's mailbox #                     | <input type="text"/>                                                                                                                                                                                              | Attendant's mailbox # <input type="text"/>                                                                                                                                                                                                                                                                                       |
|                                     | E-mail transfer string                        | <input type="text"/>                                                                                                                                                                                              | General greeting mailbox # <input type="text"/>                                                                                                                                                                                                                                                                                  |
|                                     | Pre-company name dial string                  | <input type="text"/>                                                                                                                                                                                              | Pre-mailbox greeting dial string <input type="text"/>                                                                                                                                                                                                                                                                            |
| VoiceMemo Configuration-Online Menu | Key 0 for attendant transfer during greeting? | <input type="checkbox"/> yes<br><input type="checkbox"/> no                                                                                                                                                       | Prompts "Enter mailbox # or wait"? <input type="checkbox"/> yes<br><input type="checkbox"/> no<br>Allow multiple messages for outside caller? <input type="checkbox"/> yes<br><input type="checkbox"/> no<br>Delay before answer (time in tenths/sec.) <input type="text"/><br>Default language for prompts <input type="text"/> |
| Dial-by-Name Menu                   | Last name first flag?                         | <input type="checkbox"/> yes<br><input type="checkbox"/> no                                                                                                                                                       | Exact match break? <input type="checkbox"/> yes<br><input type="checkbox"/> no<br>Single digit access? <input type="checkbox"/> yes<br><input type="checkbox"/> no<br>Suppress mailbox number? <input type="checkbox"/> yes<br><input type="checkbox"/> no<br>Number of names threshold <input type="text"/>                     |
| Passcode Menu                       | Minimum passcode length                       | <input type="text"/>                                                                                                                                                                                              | Maximum passcode length <input type="text"/><br>Passcode trip count <input type="text"/><br>Passcode trip period <input type="text"/>                                                                                                                                                                                            |
| Allow Dial an Extension Menu        | Allow dial an extension for callers?          | <input type="checkbox"/> yes<br><input type="checkbox"/> no                                                                                                                                                       | Allow dial an extension for users? <input type="checkbox"/> yes <input type="checkbox"/> no                                                                                                                                                                                                                                      |
| Speech Quality Menu                 | All names and greetings                       | <input type="text"/>                                                                                                                                                                                              | All recorded messages <input type="text"/>                                                                                                                                                                                                                                                                                       |

NP0043

## 1.2.9.3 Mailbox Worksheets

Before configuring a standard mailbox, complete the Mailbox Individual Worksheet. Each worksheet entry is explained in the following sections. If you want to use a default value, indicate that fact on the worksheet. Then you will not need to select or enter any information for that parameter during re-configuration. [See a sample Mailbox Individual Worksheet.](#)

To configure a mailbox for paging, message delivery, or call placement, see also the [Mailbox topics](#) in the Pager Application section.

Department codes are required for some message waiting applications. In addition, the billing report includes the department code to allow billing by department. If the mailbox uses a department code, the software supports up to 2000 department codes.

When you need to organize information for large groups of mailboxes, you can use a mailbox group worksheet. This worksheet allows you to enter configuration values for several mailboxes on a single sheet. Use it in conjunction with the Mailbox Individual Worksheet when appropriate. A blank Mailbox Group Worksheet is located in this manual.

## 1.2.9.4 Mailbox Individual Worksheet

### Mailbox Individual Worksheet

| Mailbox Type                                               | Standard <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Tree <input type="checkbox"/><br>(also complete Tree Mailbox Worksheet) | Rotational <input type="checkbox"/><br>(also complete Rotational Mailbox Worksheet) |
|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Create New Mailboxes</b>                                | <div>Mailbox to create <input type="text"/></div> <div>Name <input type="text"/></div> <div>Department code <input type="text"/></div> <div>Access code <input type="text"/></div> <div>Receptionist day treatment <input type="text"/></div> <div>Receptionist night treatment <input type="text"/></div> <div>Mailbox's extension number <input type="text"/></div> <div>Mailbox's extension pre-dial index <input type="text"/></div> <div>Attendant extension number <input type="text"/></div> <div>Attendant extension pre-dial index <input type="text"/></div> <div> <div>Features Class of Service <input type="checkbox"/></div> <div>Limits Class of Service <input type="checkbox"/></div> <div>Group Class of Service <input type="checkbox"/></div> <div>Network Class of Service <input type="checkbox"/></div> </div> <div> <div>Tenant Class of Service <input type="checkbox"/></div> <div>Restriction Class of Service <input type="checkbox"/></div> <div>Temporary passcode <input type="text"/></div> </div> <div> <div>Message waiting type #1 <input type="checkbox"/></div> <div>Message waiting type #2 <input type="checkbox"/></div> <div>Message waiting type #3 <input type="checkbox"/></div> </div> <div> <div>Call placement pager access type <input type="checkbox"/></div> <div>Turn off pager/outcall notification? <input type="checkbox"/> yes <input type="checkbox"/> no</div> <div>Time zone offset <input type="text"/></div> </div> <div> <div>Lists with change rights <input type="text"/></div> <div>Lists with review rights <input type="text"/></div> </div> <div> <div>Message speech quality <input type="text"/></div> <div>Name/greeting speech quality <input type="text"/></div> </div> |                                                                         |                                                                                     |
| <i>For outdial billing only</i>                            | <div>Internal outdial index <input type="text"/></div> <div>Billed outdial index <input type="text"/></div> <div>Unbilled outdial index <input type="text"/></div> <div>Billing number <input type="text"/></div> <div>Billing dialing order <input type="checkbox"/> NB <input type="checkbox"/> BN</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                         |                                                                                     |
| <i>For AC message lamp (message waiting type # 2 only)</i> | <div>AC message waiting lamp address <input type="text"/></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                         |                                                                                     |
| <i>For message waiting type 5 only</i>                     | <div> <div>Pager access type <input type="checkbox"/></div> <div>Pager number <input type="text"/></div> <div>Post-pager number <input type="text"/></div> </div> <div> <div>Pager frequency <input type="text"/></div> <div>Pager interval <input type="text"/></div> <div>Message delivery? <input type="checkbox"/> yes <input type="checkbox"/> no</div> <div>Suppress pages? <input type="checkbox"/> yes <input type="checkbox"/> no</div> </div> <div> <div>Busy pager attempts <input type="text"/></div> <div>Busy pager interval <input type="text"/></div> <div>Pager start time <input type="text"/> AM <input type="text"/> PM</div> <div>Pager stop time <input type="text"/> AM <input type="text"/> PM</div> </div> <div>Define additional pager number? <input type="checkbox"/> yes <input type="checkbox"/> no</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                         |                                                                                     |

NP0044

## 1.2.9.5 Mailbox Group Worksheet

|              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Customer     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Page      of |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

**Mailbox Group Worksheet**

|                 |                    |            |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
|-----------------|--------------------|------------|---------------|--------------------|-------------|----------|-------------|------------|---------------|---------------|------------|-----------|------------|---------------|---------------|-----------------|-----------|------------------|------------|--------------|--|--|--|--|
| Mailbox #       |                    | Name       |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
| Dep't           | Access code        | Day        | Night         | MB ext             | Pdial index | Attn ext | F COS       | L COS      | G COS         | N COS         | T COS      | Passcode  | Wake up    | MW1 1         | MW1 2         | MW1 3           | AC MWL    | Call P TZ offset | Chng lists | Review lists |  |  |  |  |
| Msg. spch qual. | Name/rgt spch qual | Pager type | Outdial index | Post outdial index | Freq        | Interval | Msg. delay? | Spres pge? | Busy attempts | Busy interval | Start time | Stop time | Add pager? | Intrnl od idx | Billed od idx | Unbilled od idx | Billing # | Bill dial order  |            |              |  |  |  |  |

|                 |                    |            |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
|-----------------|--------------------|------------|---------------|--------------------|-------------|----------|-------------|------------|---------------|---------------|------------|-----------|------------|---------------|---------------|-----------------|-----------|------------------|------------|--------------|--|--|--|--|
| Mailbox #       |                    | Name       |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
| Dep't           | Access code        | Day        | Night         | MB ext             | Pdial index | Attn ext | F COS       | L COS      | G COS         | N COS         | T COS      | Passcode  | Wake up    | MW1 1         | MW1 2         | MW1 3           | AC MWL    | Call P TZ offset | Chng lists | Review lists |  |  |  |  |
| Msg. spch qual. | Name/rgt spch qual | Pager type | Outdial index | Post outdial index | Freq        | Interval | Msg. delay? | Spres pge? | Busy attempts | Busy interval | Start time | Stop time | Add pager? | Intrnl od idx | Billed od idx | Unbilled od idx | Billing # | Bill dial order  |            |              |  |  |  |  |

|                 |                    |            |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
|-----------------|--------------------|------------|---------------|--------------------|-------------|----------|-------------|------------|---------------|---------------|------------|-----------|------------|---------------|---------------|-----------------|-----------|------------------|------------|--------------|--|--|--|--|
| Mailbox #       |                    | Name       |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
| Dep't           | Access code        | Day        | Night         | MB ext             | Pdial index | Attn ext | F COS       | L COS      | G COS         | N COS         | T COS      | Passcode  | Wake up    | MW1 1         | MW1 2         | MW1 3           | AC MWL    | Call P TZ offset | Chng lists | Review lists |  |  |  |  |
| Msg. spch qual. | Name/rgt spch qual | Pager type | Outdial index | Post outdial index | Freq        | Interval | Msg. delay? | Spres pge? | Busy attempts | Busy interval | Start time | Stop time | Add pager? | Intrnl od idx | Billed od idx | Unbilled od idx | Billing # | Bill dial order  |            |              |  |  |  |  |

|                 |                    |            |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
|-----------------|--------------------|------------|---------------|--------------------|-------------|----------|-------------|------------|---------------|---------------|------------|-----------|------------|---------------|---------------|-----------------|-----------|------------------|------------|--------------|--|--|--|--|
| Mailbox #       |                    | Name       |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
| Dep't           | Access code        | Day        | Night         | MB ext             | Pdial index | Attn ext | F COS       | L COS      | G COS         | N COS         | T COS      | Passcode  | Wake up    | MW1 1         | MW1 2         | MW1 3           | AC MWL    | Call P TZ offset | Chng lists | Review lists |  |  |  |  |
| Msg. spch qual. | Name/rgt spch qual | Pager type | Outdial index | Post outdial index | Freq        | Interval | Msg. delay? | Spres pge? | Busy attempts | Busy interval | Start time | Stop time | Add pager? | Intrnl od idx | Billed od idx | Unbilled od idx | Billing # | Bill dial order  |            |              |  |  |  |  |

|                 |                    |            |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
|-----------------|--------------------|------------|---------------|--------------------|-------------|----------|-------------|------------|---------------|---------------|------------|-----------|------------|---------------|---------------|-----------------|-----------|------------------|------------|--------------|--|--|--|--|
| Mailbox #       |                    | Name       |               |                    |             |          |             |            |               |               |            |           |            |               |               |                 |           |                  |            |              |  |  |  |  |
| Dep't           | Access code        | Day        | Night         | MB ext             | Pdial index | Attn ext | F COS       | L COS      | G COS         | N COS         | T COS      | Passcode  | Wake up    | MW1 1         | MW1 2         | MW1 3           | AC MWL    | Call P TZ offset | Chng lists | Review lists |  |  |  |  |
| Msg. spch qual. | Name/rgt spch qual | Pager type | Outdial index | Post outdial index | Freq        | Interval | Msg. delay? | Spres pge? | Busy attempts | Busy interval | Start time | Stop time | Add pager? | Intrnl od idx | Billed od idx | Unbilled od idx | Billing # | Bill dial order  |            |              |  |  |  |  |

NP0045

## 1.2.9.6 FCOS Worksheet

**FCOS Worksheet**

Features Class of Service Menu | **FCOS** |

FCOS to modify  FCOS name  FCOS to copy

**FCOS Features**

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| 1 Greeting          | 060 062 063 064 065 161 162 224                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |
| 2 Login             | 001 016 066 069 081 101 102 103 104 105 106 107 108 109 132 151 152 155 160<br>165 218 219 225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                 |
| 3 Logout            | 003 009 170 220                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4 Attendant Call 002 098 159                    |
| 5 Outside Caller    | 004 002 005 017 041 051 092 098 111 112 113 114 115 116 117 118 119 137 160<br>175 203 221                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                 |
| 6 Prompts           | 051 082 083 097 098 098 131 133 136 138 140 146 157 159 176 202 208<br>Language (1) 010 011 012 013 014 099 150 233 Interface (1) 209 210 211                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                 |
| 7 Receive Msgs      | 039 040 041 042 043 044 045 046 047 088 111 112 113 114 115 116 117 118 119<br>127 173 175 179 185 190 198 199 223                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                 |
| 8 Play Msgs         | 060 006 007 039 046 047 048 049 C52 057 058 059 075 076 089 144 145 147 153<br>204 215 216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                 |
| 9 Answer Msgs       | 029 019 030 031 038 147 158                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10 Network/Display Msgs 053 054 055 056 146 227 |
| 11 Make Msgs        | 080 081 082 083 084 085 086 087 088 089 090 091 092 093 094 095 096 097 098 099 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 |                                                 |
| 12 Give Msgs        | 084 085 018 025 026 027 028 033 035 061 084 085 110 126 157 158 192                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                 |
| 13 Msg Address.     | 018 019 021 023 025 027 030 031 087 095                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                 |
| 14 User Options     | 070 015 071 072 073 074 077 078 093 094 095 124 125 127 130 142 143 148<br>180 195 196 201                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                 |
| 15 User Dist. Lists | 032 033 036 044 074 134 222                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 16 Master Dist. Lists 034 035 045               |
| 17 Check In/Out     | 008 090 091                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                 |
| 18 Super User       | 121 122 058 120 123 141 147 152 174 178 186 187 189 229 234                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                 |
| 19 Msg Wait Ind.    | 079 080 134 182 183 205 228 234                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |
| 20 NuPoint Fax      | 190 191 192 193 194 195 196 197 198 199 200 203 206 207 230                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                 |
| 21 Paging           | 077 124 168 169 171 172 173 181 188 208 209 210 211 212 213 219                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                 |
| 22 E-mail           | 154 170 184 205 217 220 221 224 225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 23 Network/ NP Forms 135 139 149 166            |

FOCUS/SE/AV





## 1.2.9.7 LCOS Worksheet

| LCOS Worksheet                         |                                               |                      |                                         |                      |                                                  |                      |
|----------------------------------------|-----------------------------------------------|----------------------|-----------------------------------------|----------------------|--------------------------------------------------|----------------------|
| Limits Class of Service Menu           | Limits COS                                    | Name selected LCOS   |                                         |                      |                                                  |                      |
| <b>Limits Parameter Menu</b>           | Greeting length                               | <input type="text"/> | User message length                     | <input type="text"/> | Maximum attachments per message                  | <input type="text"/> |
|                                        | User name length                              | <input type="text"/> | Caller message length                   | <input type="text"/> | Maximum attachments per network message          | <input type="text"/> |
|                                        | Message count                                 | <input type="text"/> | Maximum login time                      | <input type="text"/> |                                                  |                      |
|                                        | Messages per billing                          | <input type="text"/> | Network queue message count             | <input type="text"/> |                                                  |                      |
| <b>More Limits Parameters Menu</b>     | Auto wakeup - phone length                    | <input type="text"/> | Maximum days -future delivery           | <input type="text"/> | Maximum pages per billing cycle                  | <input type="text"/> |
|                                        | Paging - phone length                         | <input type="text"/> | Maximum family member or guest          | <input type="text"/> | Maximum wakeups per billing                      | <input type="text"/> |
|                                        | Message delivery - phone length               | <input type="text"/> | Message waiting indicator - msg. length | <input type="text"/> |                                                  |                      |
|                                        | Future delivery - message count               | <input type="text"/> | Minimum message length                  | <input type="text"/> |                                                  |                      |
| <b>Even More Limits Parameter Menu</b> | Maximum days - auto wakeup                    | <input type="text"/> | Maximum destinations per reminder call  | <input type="text"/> | Maximum number of distribution lists             | <input type="text"/> |
|                                        | Maximum days - reminder call                  | <input type="text"/> | Maximum members per distribution list   | <input type="text"/> | Minimum number of recipients for receipt summary | <input type="text"/> |
|                                        | Maximum reminder calls per billing            | <input type="text"/> | Maximum recipients count                | <input type="text"/> | Minimum billed number length                     | <input type="text"/> |
| <b>Call Placement Menu</b>             | RNA retry limit                               | <input type="text"/> | Busy retry interval                     | <input type="text"/> | Maximum message length                           | <input type="text"/> |
|                                        | RNA retry interval                            | <input type="text"/> | Message phone length                    | <input type="text"/> |                                                  |                      |
|                                        | Busy retry limit                              | <input type="text"/> | Message count                           | <input type="text"/> |                                                  |                      |
| <b>FaxMemo Limits Menu</b>             | Maximum number of digits for telephone number | <input type="text"/> | CNG tone detection length               | <input type="text"/> | Fax delivery retry interval                      | <input type="text"/> |
|                                        | FaxMemo message count                         | <input type="text"/> | Fax delivery retry frequency            | <input type="text"/> |                                                  |                      |
| <b>Message Retention Limit Menu</b>    | Cut-through paging receipt retention          | <input type="text"/> | Urgent message retention                | <input type="text"/> | Fax receipt retention                            | <input type="text"/> |
|                                        | Played message retention                      | <input type="text"/> | Played fax message retention            | <input type="text"/> | Absolute message retention                       | <input type="text"/> |
|                                        | Receipt retention                             | <input type="text"/> | Unplayed fax message retention          | <input type="text"/> |                                                  |                      |
|                                        | Unplayed message retention                    | <input type="text"/> | Urgent fax message retention            | <input type="text"/> |                                                  |                      |
| <b>Set Language Menu</b>               | Prompts Language                              | <input type="text"/> |                                         |                      |                                                  |                      |

## 1.2.9.8 GCOS Worksheet

### GCOS Worksheet

|                                                                        |                                                                        |
|------------------------------------------------------------------------|------------------------------------------------------------------------|
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |
| GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> | GCOS to modify <input type="checkbox"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                     | Group numbers <input type="text"/>                                     |

NP0047

## 1.2.9.9 RCOS Worksheet

### RCOS Worksheet

|                                          |                                                                                       |                                                                                                         |
|------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Select RCOS: Modify Selected RCOS</b> | RCOS to modify <input type="text"/>                                                   | RCOS Name <input type="text"/>                                                                          |
| <b>RCOS System Wide Parameters Menu</b>  | Starting digit position of NPA <input type="text"/>                                   | Ending digit position of NPA <input type="text"/>                                                       |
|                                          | Starting digit position of NXX <input type="text"/>                                   | Ending position of NXX <input type="text"/>                                                             |
| <b>RCOS Specific Parameters</b>          | Home NPA <input type="text"/>                                                         | Check numbers which do not have absorb digits? <input type="checkbox"/> yes <input type="checkbox"/> no |
|                                          | Digits to be absorbed (16 patterns, 10 digits each)                                   | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | Exact Match Numbers: <input type="checkbox"/> Allow <input type="checkbox"/> Disallow |                                                                                                         |
|                                          | Exact Match Numbers (100 patterns, 25 digits each)                                    | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | <input type="text"/>                                                                  | <input type="text"/>                                                                                    |
|                                          | NPA: <input type="checkbox"/> Allow <input type="checkbox"/> Disallow                 |                                                                                                         |
|                                          | NPA                                                                                   | NXX                                                                                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |
|                                          | <input type="text"/>                                                                  | <input type="checkbox"/> Allow<br><input type="checkbox"/> Disallow                                     |

NP0049

## 1.2.9.10 Billing Worksheet (1 of 2)

**Billing Worksheet, Page 1 of 2**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | R A T E   |          |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Low Usage | Boundary | High Usage |
| <b>Messages Received</b><br>Messages received from users<br>Messages received from callers<br>Messages future deliveries<br>Call placement per minute rate (Connect Time)<br>Call placement per call rate<br>Urgent messages received from callers<br>Auto wakeups or TAS messages<br>Receipt requests<br>Disk usage (Disk Usage)                                                                                                                                                                                                                                                                                                                          |           |          |            |
| <b>Network Billing</b><br>Network messages sent<br>Network urgent messages sent<br>Network messages received<br>Network urgent messages received<br>Number of network nodes sent to<br>Number of network nodes sent urgent<br>Number of remote network recipients<br>Number of remote network recipients urgent<br>Message length network sent<br>Message length urgent network sent<br>Message length network received<br>Message length urgent network received<br>Message length, number of nodes sent<br>Msg. length, number of nodes sent urgent<br>Message length, number of remote recipients<br>Message length, number of remote recipients urgent |           |          |            |
| <b>Messages Received (fax)</b><br>Number of fax messages received<br>Number of fax messages sent<br>Number of fax retrieval<br>Faxes retrieved to billing number<br>Number of undelivered fax<br>Number of fax pages received<br>Number of fax pages sent<br>Number of fax pages retrieval<br>Fax pages retrieved to billing number<br>Fax disk usage (Disk Usage)                                                                                                                                                                                                                                                                                         |           |          |            |

NP0050

## 1.2.9.11 Billing Worksheet (2 of 2)

**Billing Worksheet, Page 2 of 2**

| Mailbox Accesses |     |       |      |            |       |      | Connect Time      |       |      |                     |       |      |
|------------------|-----|-------|------|------------|-------|------|-------------------|-------|------|---------------------|-------|------|
| Greeting Rate    |     |       |      | Login Rate |       |      | User Connect Time |       |      | Caller Connect Time |       |      |
| Line Group       | Low | Bound | High | Low        | Bound | High | Low               | Bound | High | Low                 | Bound | High |
| 1                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 2                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 3                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 4                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 5                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 6                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 7                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 8                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 9                |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 10               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 11               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 12               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 13               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 14               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 15               |     |       |      |            |       |      |                   |       |      |                     |       |      |
| 16               |     |       |      |            |       |      |                   |       |      |                     |       |      |

**Pager Billing**

| Pager No. | Low | Bound | High | Pager No. | Low | Bound | High |
|-----------|-----|-------|------|-----------|-----|-------|------|
| 0         |     |       |      | 8         |     |       |      |
| 1         |     |       |      | 9         |     |       |      |
| 2         |     |       |      | 10        |     |       |      |
| 3         |     |       |      | 11        |     |       |      |
| 4         |     |       |      | 12        |     |       |      |
| 5         |     |       |      | 13        |     |       |      |
| 6         |     |       |      | 14        |     |       |      |
| 7         |     |       |      | 15        |     |       |      |

**Base Rates**

| FCOS | Rate | FCOS | Rate | FCOS | Rate | FCOS | Rate |
|------|------|------|------|------|------|------|------|
| 1    |      | 17   |      | 33   |      | 49   |      |
| 2    |      | 18   |      | 34   |      | 50   |      |
| 3    |      | 19   |      | 35   |      | 51   |      |
| 4    |      | 20   |      | 36   |      | 52   |      |
| 5    |      | 21   |      | 37   |      | 53   |      |
| 6    |      | 22   |      | 38   |      | 54   |      |
| 7    |      | 23   |      | 39   |      | 55   |      |
| 8    |      | 24   |      | 40   |      | 56   |      |
| 9    |      | 25   |      | 41   |      | 57   |      |
| 10   |      | 26   |      | 42   |      | 58   |      |
| 11   |      | 27   |      | 43   |      | 59   |      |
| 12   |      | 28   |      | 44   |      | 60   |      |
| 13   |      | 29   |      | 45   |      | 61   |      |
| 14   |      | 30   |      | 46   |      | 62   |      |
| 15   |      | 31   |      | 47   |      | 63   |      |
| 16   |      | 32   |      | 48   |      | 64+  |      |

NP0051



## 1.2.9.12 Outdial Line Group Worksheet

### Outdial Line Group Worksheet

#### Pager Systems Index Plan

| Pager System | Pager Name | Access Code | Hold Time |
|--------------|------------|-------------|-----------|
| 0            |            |             |           |
| 1            |            |             |           |
| 2            |            |             |           |
| 3            |            |             |           |
| 4            |            |             |           |
| 5            |            |             |           |
| 6            |            |             |           |
| 7            |            |             |           |
| 8            |            |             |           |
| 9            |            |             |           |
| 10           |            |             |           |
| 11           |            |             |           |
| 12           |            |             |           |
| 13           |            |             |           |
| 14           |            |             |           |
| 15           |            |             |           |

#### Offline Parameters

##### Define Line Groups

Current group

Add lines to  
current groupName of  
current group

##### Line Group Only Applications

Group selected

Select  
application

#### Online Parameters

##### VoiceMemo Configuration Online Menu

Group selected

##### Pagers

Pager systems  
supported  
(from Pager  
Systems Index  
Plan, above)

1.2.9.13

NP0052

## 1.2.9.14 Rotational Mailbox Worksheet

### Rotational Mailbox Worksheet

|                                                                                                                                                                                                |                                                                                                                                                                                                |                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Mailbox number _____<br>FCOS _____<br>Index _____ Period _____<br>Start date _____<br>Start time _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded |                                                                                                                                                                                                |                                                                                                                                                                                                |
| System Mailbox number _____<br>FCOS _____<br>Index _____ Period _____<br>Start date _____<br>Start time _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded | System Mailbox number _____<br>FCOS _____<br>Index _____ Period _____<br>Start date _____<br>Start time _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded | System Mailbox number _____<br>FCOS _____<br>Index _____ Period _____<br>Start date _____<br>Start time _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded |

NP0053

## 1.2.9.15 Tree Mailbox Worksheet

### Tree Mailbox Worksheet

|                                                                                                                     |                                                                                                                     |                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Mailbox number _____<br>FCOS _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded |                                                                                                                     |                                                                                                                     |
| Digit <input type="text"/>                                                                                          | Digit <input type="text"/>                                                                                          | Digit <input type="text"/>                                                                                          |
| Mailbox number _____<br>FCOS _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded | Mailbox number _____<br>FCOS _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded | Mailbox number _____<br>FCOS _____<br>List _____<br>Members _____<br><input type="checkbox"/> Greeting/msg recorded |

NP0054

## 1.2.9.16 DTMF-to-PBX Worksheet

### DTMF-to-PBX Message Lights Worksheet

|                           |                                                                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Offline Parameters</b> |                                                                                                                                                              |
| Define line groups        | Current group <input type="text"/> Add lines to current group <input type="text"/><br>Name of current group <input type="text"/>                             |
| DTMF Applications         | Group selected <input type="text"/> Select application <input type="checkbox"/>                                                                              |
| <b>Online Parameters</b>  |                                                                                                                                                              |
| DTMF to PBX               | <input type="checkbox"/> yes      PBX special access code <input type="text"/><br><input type="checkbox"/> no                                                |
| Dial tone confirmation?   | <input type="checkbox"/> yes      Pre-DN ON dial string <input type="text"/><br><input type="checkbox"/> no      Pre-DN OFF dial string <input type="text"/> |
| Suppress updates to MWL?  | <input type="checkbox"/> yes      Pre-DN ON dial string <input type="text"/><br><input type="checkbox"/> no      Pre-DN OFF dial string <input type="text"/> |
| Wait for dial tone?       | <input type="checkbox"/> yes<br><input type="checkbox"/> no                                                                                                  |
| Enable alternate code?    | <input type="checkbox"/> yes<br><input type="checkbox"/> no                                                                                                  |

NP0169



# 1.2.9.17 RS-232 Message Waiting Lights Worksheet

RS-232 Message Waiting Indicators Interface Worksheet

RS-232 Only Applications

Serial Port Selected

Serial port index

Serial port type

Serial port number

Select Application

☐ AC Message Waiting Lights (BSR)

☐ BBL Pager

☐ Centigram Standard Interface

☐ Hyatt Encore PMS Integration

☐ PMS Integration

☐ HIS PMS Integration

☐ Hitachi PMS Integration

☐ Hitachi DX

☐ Programmable

☐ SL-1 Background Terminal Facility

☐ SL-1 Multiple Message Waiting Set Ports

☐ Tip & Ring Message Waiting Lamps

☐ Video Dispatch

☐ Citywide SMDI

☐ Fujitsu 960

AC Message Waiting Lights

☐ AC Controller I

☐ AC Controller II

Programmable

Initialize string

Delay between requests

Pre-DN ON string

Post DN-ON string

Department code as DN?

☐ yes

☐ no

Delay after post-DN string

Suppress updates to MWL?

☐ yes

☐ no

RS-232 reply string

Pre-DN OFF string

Post-DN OFF string

Unplayed number sent?

☐ yes

☐ no

Ending trailer string

# 1.2.9.18 Sample Worksheets


## 1.2.9.18.1 Mailbox Worksheet Examples

### Sample Mailbox Individual Worksheet

537

NuPoint Unified Messaging Web Console

### Tree Mailbox Worksheet

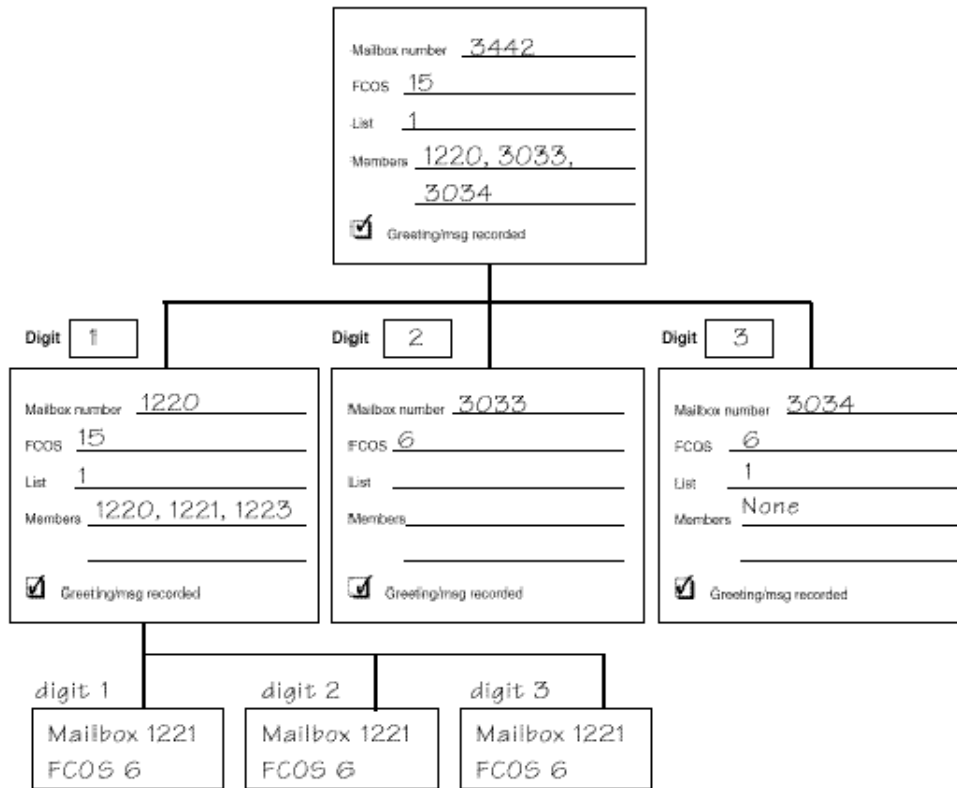

### Mailbox Group Worksheet

## 1.2.9.18.2 Sample LCOS Worksheet

| LCOS Worksheet                         |                                               |         |                                         |                  |                                                  |     |
|----------------------------------------|-----------------------------------------------|---------|-----------------------------------------|------------------|--------------------------------------------------|-----|
| <b>Limits Class of Service Menu</b>    | Limits COS                                    | 4       | Name selected LCOS                      | Contractors only |                                                  |     |
| <b>Limits Parameter Menu</b>           | Greeting length                               | 1       | User message length                     | ok               | Maximum attachments per message                  | 10  |
|                                        | User name length                              | ok      | Caller message length                   | ok               | Maximum attachments per network message          | 10  |
|                                        | Message count                                 | 50      | Maximum login time                      | 50               |                                                  |     |
|                                        | Messages per billing                          | 200     | Network queue message count             | ok               |                                                  |     |
| <b>More Limits Parameters Menu</b>     | Auto wakeup - phone length                    | ok      | Maximum days -future delivery           | ok               | Maximum pages per billing cycle                  | 100 |
|                                        | Paging - phone length                         | ok      | Maximum family member or guest          | 3                | Maximum wakeups per billing                      | ok  |
|                                        | Message delivery - phone length               | ok      | Message waiting indicator - msg. length | 0                |                                                  |     |
|                                        | Future delivery - message count               | 50      | Minimum message length                  | 0                |                                                  |     |
| <b>Even More Limits Parameter Menu</b> | Maximum days - auto wakeup                    | 365     | Maximum destinations per reminder call  | ok               | Maximum number of distribution lists             | ok  |
|                                        | Maximum days - reminder call                  | 365     | Maximum members per distribution list   | ok               | Minimum number of recipients for receipt summary | ok  |
|                                        | Maximum reminder calls per billing            | 100     | Maximum recipients count                | ok               | Minimum billed number length                     | 9   |
| <b>Call Placement Menu</b>             | RNA retry limit                               | ok      | Busy retry interval                     | ok               | Maximum message length                           | ok  |
|                                        | RNA retry interval                            | ok      | Message phone length                    | ok               |                                                  |     |
|                                        | Busy retry limit                              | ok      | Message count                           | 50               |                                                  |     |
| <b>FaxMemo Limits Menu</b>             | Maximum number of digits for telephone number | NA      | CNG tone detection length               | NA               | Fax delivery retry interval                      | NA  |
|                                        | FaxMemo message count                         | NA      | Fax delivery retry frequency            | NA               |                                                  |     |
| <b>Message Retention Limit Menu</b>    | Cut-through paging receipt retention          | 0       | Urgent message retention                | 178              | Fax receipt retention                            | NA  |
|                                        | Played message retention                      | 672     | Played fax message retention            | NA               | Absolute message retention                       | 0   |
|                                        | Receipt retention                             | 0       | Unplayed fax message retention          | NA               |                                                  |     |
|                                        | Unplayed message retention                    | 336     | Urgent fax message retention            | NA               |                                                  |     |
| <b>Set Language Menu</b>               | Prompts Language                              | English |                                         |                  |                                                  |     |

## 1.2.9.18.3 Sample GCOS Worksheet

### GCOS Worksheet

|                                                                                                     |                                                                    |
|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| GCOS to modify <input type="text" value="1"/> GCOS name <input type="text" value="Default - Full"/> | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text" value="1 - 128"/>                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text" value="2"/> GCOS name <input type="text" value="Empty"/>          | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text" value=""/>                                                         | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text" value="3"/> GCOS name <input type="text" value="Contractors"/>    | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text" value="1 - 64"/>                                                   | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |
| GCOS to modify <input type="text"/> GCOS name <input type="text"/>                                  | GCOS to modify <input type="text"/> GCOS name <input type="text"/> |
| Group numbers <input type="text"/>                                                                  | Group numbers <input type="text"/>                                 |

## 1.2.9.18.4 Sample RCOS Worksheet

| RCOS Worksheet                    |                                                                  |                                                                                                                             |                                                                                                                    |
|-----------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Select RCOS: Modify Selected RCOS | RCOS to modify                                                   | 2                                                                                                                           | RCOS Name<br>Westregion                                                                                            |
| RCOS System Wide Parameters Menu  | Starting digit position of NPA                                   | 10                                                                                                                          | Ending digit position of NPA                                                                                       |
|                                   | Starting digit position of NXX                                   | 7                                                                                                                           | Ending position of NXX                                                                                             |
| RCOS Specific Parameters          | Home NPA                                                         | 408                                                                                                                         | Check numbers which do not have absorb digits? <input checked="" type="checkbox"/> yes <input type="checkbox"/> no |
|                                   | Digits to be absorbed (16 patterns, 10 digits each)              | <input type="text" value="9"/><br><input type="text" value="1"/><br><input type="text" value="91"/><br><input type="text"/> |                                                                                                                    |
|                                   | Exact Match Numbers:                                             | <input type="checkbox"/> Allow <input checked="" type="checkbox"/> Disallow                                                 |                                                                                                                    |
|                                   | Exact Match Numbers (100 patterns, 25 digits each)               | <input type="text" value="5551212, 411, 0"/><br><input type="text"/><br><input type="text"/><br><input type="text"/>        |                                                                                                                    |
|                                   | NPA:                                                             | <input checked="" type="checkbox"/> Allow <input type="checkbox"/> Disallow                                                 |                                                                                                                    |
|                                   | NPA                                                              | NXX                                                                                                                         |                                                                                                                    |
|                                   | 408                                                              | <input type="checkbox"/> Allow <input checked="" type="checkbox"/> Disallow                                                 | 662, 684, 728                                                                                                      |
|                                   | 415                                                              | <input type="checkbox"/> Allow <input checked="" type="checkbox"/> Disallow                                                 | 493                                                                                                                |
|                                   | 510                                                              | <input type="checkbox"/> Allow <input checked="" type="checkbox"/> Disallow                                                 | 424                                                                                                                |
|                                   |                                                                  | <input type="checkbox"/> Allow <input type="checkbox"/> Disallow                                                            |                                                                                                                    |
|                                   | <input type="checkbox"/> Allow <input type="checkbox"/> Disallow |                                                                                                                             |                                                                                                                    |

## 1.3 System Administration

## 1.3.1 Overview

The system administrator creates and maintains software files for all mailboxes on the system (the server). You perform the following functions:

- Creating and modifying mailboxes
- Deleting and reassigning mailboxes
- Performing routine maintenance of software files
- Changing the system time and date
- Establishing system security

Additional administrative responsibilities may include the following activities:

- Billing clients
- Running reports
- Building classes of service
- Establishing programming for pagers
- Setting up system-wide distribution lists
- Creating messages, greetings, and tutorials

This online help system contains instructions for performing these functions.

Most administration is performed using either the Web console or the Text console, but some administration tasks can also be performed using the [telephone](#).

## 1.3.2 Maintenance

### 1.3.2.1 Description

#### 1.3.2.1.1 System Maintenance - Overview

System maintenance for NuPoint UM is performed automatically. This section describes utilities you can use to perform optional maintenance procedures:

- [Verify](#)
- [Passcode Maintenance](#)
- [Alarm Management](#)
- [Message Purge](#)
- [Backup](#)
- [System Shutdown](#)

- [Fax Download Settings](#)

### 1.3.2.1.2 Passcode Maintenance

You can perform the following passcode maintenance:

- Set up temporary mailbox passcodes for new mailbox owners so they can access their mailboxes.
- Enforce a passcode change so users are prompted to change the password at their first login.
- Configure an expiry period for mailbox passcodes so that users are prompted to change passcodes periodically.

### 1.3.2.1.3 Alarm Manager

The alarm management system monitors system devices and applications and provides alarm notification and management abilities. Administrators can configure alarm management to send alarm messages ("traps") to an SNMP agent, or to send alarms as email messages to one or more selected email accounts. You can choose to receive each individual alarm as one message, or to receive all alarms of one type as one message. The second choice is more effective when multiple alarms are caused by a single error.

Administrators of systems that do not have an SNMP management system can use the Web Console for alarm management. Alarms can be acknowledged and/or deleted. Acknowledged alarms do not appear in the active alarm list.

The log-in page of the Web Console displays alarm status and a link to the Alarm Management page.

#### Alarm Messages

The alarm management system supports the following NuPoint alarm messages:

| Alarm Type ID | Default Severity | Alarm Class | Type Name                 | Prescription                                | Cause of Alarm                                       |
|---------------|------------------|-------------|---------------------------|---------------------------------------------|------------------------------------------------------|
| 1001          | Minor            | PORT        | RNA                       |                                             | The port is experiencing a ring-no-answer condition. |
| 2001          | Warning          | LICENSE     | MBOX                      |                                             | Not in use.                                          |
| 2002          | Informational    | LICENSE     | No more Web View licenses | Upgrade the WebView license of your system. | Not in use.                                          |

| Alarm Type ID | Default Severity | Alarm Class | Type Name                                 | Prescription                                                                 | Cause of Alarm                                                                                                                                                                                      |
|---------------|------------------|-------------|-------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2003          | Minor            | LICENSE     | Speech AA corporate list license exceeded | Upgrade the Speech AA license of your system.                                | The maximum number of Speech Auto Attendant users has been exceeded.                                                                                                                                |
| 3001          | Warning          | ERROR       | Gather schedule                           | Re-activate NuPoint system to re-enable gathering.                           | The system is experiencing a problem gathering billing data, so the service has been suspended. To fix the problem, check that the gathering schedule is valid and make corrections if necessary. . |
| 3002          | Informational    | ERROR       | Speech AA rejected entries                | Make sure all entries have a first and last name, as well as a phone number. | Entries for the Speech Auto Attendant have been rejected due to invalid data.                                                                                                                       |
| 3003          | Major            | ERROR       | Speech AA data source error               | Make sure the Speech Auto-Attendant Data Source is configured properly.      | Entries for the Speech Auto Attendant have been rejected because the data source is improperly configured.                                                                                          |
| 4001          | Warning          | SECURITY    | Failed login                              | Track the source IP address to determine where the requests come from.       | The system has rejected a login attempt to the Web Console interface.                                                                                                                               |
| 4002          | Informational    | SECURITY    | Failed WebView login                      | Track the source IP address to determine where the requests come from.       | The system has rejected a login attempt to the Web View interface.                                                                                                                                  |
| 5001          | Major            | NODE        | Failover                                  |                                                                              | A failover has occurred from one NuPoint 640 server to another.                                                                                                                                     |
| 5002          | Critical         | NODE        | Critical process                          |                                                                              | A critical process has crashed.                                                                                                                                                                     |



| Alarm Type ID | Default Severity | Alarm Class | Type Name                                                               | Prescription                                                         | Cause of Alarm                                                                                                                                                          |
|---------------|------------------|-------------|-------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5003          | Warning          | NODE        | Restore warning or error                                                | Check log files for details.                                         | A warning or error has occurred during the restore process.                                                                                                             |
| 5008          | Informational    | NODE        | Socket for UMPro services either failed, disconnected, or is timed out. | Automatic retry by the system to reconnect.                          | The system has experienced a problem with the socket used for creating a session with the Mail servers; and reading and writing of data using these sockets.            |
| 6001          | Warning          | NETWORK     | Cannot connect to mail server                                           | Make sure that the mail server is reachable from the NuPoint system. | The system cannot access the mail server.                                                                                                                               |
| 6002          | Minor            | NETWORK     | Unable to access Superuser account                                      | Verify Superuser configuration.                                      | The system cannot access the superuser account for Advanced UM.                                                                                                         |
| 7001          | Major            | TRANSACTION | No More SpinVox transcription credits (Speech To Text)                  | Buy more credits and activate the SpeechToText Feature.              | The Speech to Text account credits are depleted. To fix the problem, purchase additional credits from your Authorized Mitel Reseller and then re-activated the feature. |
| 7002          | Warning          | TRANSACTION | Invalid credentials for SpinVox transcription (Speech To Text)          | Enter valid credentials.                                             | Incorrect Speech to Text credentials have been provided. To fix the problem, re-enter the credentials ( username , password, account ID, application ID).               |

| Alarm Type ID | Default Severity | Alarm Class | Type Name                                                      | Prescription                                                   | Cause of Alarm                                                                                                                                                                                                              |
|---------------|------------------|-------------|----------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7003          | Warning          | TRANSACTION | Near end of credits for SpinVox transcription (Speech To Text) | Please buy additional credits.                                 | The Speech to Text account credits are almost depleted. To fix the problem, purchase additional credits from your Authorized Mitel Reseller.                                                                                |
| 8001          | Major            | ERROR       | SAA misconfiguration or missing language                       | Make sure SAA language installed and configuration is correct. | <p>The Speech Auto Attendant has one of the following problems:</p> <ul style="list-style-type: none"> <li>• Incorrect configuration</li> <li>• Missing language</li> <li>• Mismatch of NuPoint database restore</li> </ul> |

**Note:**

Enterprise Manager does not support NuPoint UM and will not receive/display alarm messages.

### 1.3.2.1.4 Message Purge - Overview

A message purge clears the hard disk of unplayed, urgent, and played messages; it frees disk space for other tasks. Purging can be done in one of two ways: automatically or manually.

**Automatic** purges run daily at the default time of midnight. Deletion is controlled by the message retention settings in the LCOS of each mailbox.

**Manual** purges do not rely on LCOS settings but on parameters entered by the administrator at the time of the purge. Deletion can be limited by settings like mailbox

number, class of service, or age of message. Manual purges must be done using the **Text Console**.

### 1.3.2.1.5 Backup and Restore

The following backup options are supported:

- LAN Backup to:
- an FTP Server
- a network share using Microsoft Networking
- a USB Memory Device

Restore procedures for LAN- and USB-based backups are supported for the following configurations:

- Standard and Active/Passive
- Active/Active

#### Requirements

Backing up NuPoint UM data can take a few seconds or up to several hours and should be performed during off-peak periods when traffic is at a minimum. Factors that influence the duration include:

- The nature of the files to be backed up and the amount of information being transferred. Messages, names, and greetings are large files and significantly increase the backup duration.
- The network speed: the throughput of the network between the NuPoint UM system and the storage server.
- The processing speed of the storage server.

The backup process saves all of the data to a single, large compressed file and is therefore limited by the destination file system:

| File system                                               | Maximum File Size |
|-----------------------------------------------------------|-------------------|
| FAT32                                                     | 4 GB              |
| NTFS                                                      | 2 TB              |
| ext3                                                      | 16 GB to 16 TB*   |
| * Depends on the system block size but is typically 2 TB. |                   |

For example, if you are backing up data to a Windows client that uses the FAT32 file system (the default for many older versions of Windows), you are limited to a maximum file size of 4 GB; newer Windows operating systems that use the NTFS file system have a much larger capacity. If the backup file exceeds the maximum file size of the client operating system, it cannot be properly restored.

## Web Console or Text Console?

You can perform all of the backup and restore procedures using Text console and some of the backup and restore procedures using Web console, as illustrated in the following table.

| Procedure                                                                | Text console | Web console                   |
|--------------------------------------------------------------------------|--------------|-------------------------------|
| Configure login, network, and backup settings for the destination server | Y            | Y                             |
| Configure scheduled (automatic) LAN backups                              | Y            | Y                             |
| Perform manual backups                                                   | Y            | N                             |
| Back up data to USB memory devices                                       | Y            | During scheduled backups only |
| Restore data                                                             | Y            | N                             |

## LAN Backup

NuPoint Unified Messaging supports backups of all data from the NuPoint server(s) using Microsoft Networking or an FTP server on the customer's Local Area Network (LAN), and provides system restore capability from the LAN archive to the server. You can restore data using FTP / MS Networking interchangeably, provided that you use the same directory path for both. The format of backed up data is the same, regardless of whether you backed it up using FTP or MS Networking.

Microsoft Networking enables NuPoint Unified Messaging to mount a remote driver or folder on a Microsoft Windows PC. The supported Windows operating systems include:

- Windows 7
- Windows 8
- Windows 8.1
- Windows 10
- Windows Server 2008
- Windows Server 2012

A LAN backup and restore involves the following procedures:

- Configure the FTP server/MS Network Share for LAN backup and restore.
- Back up all configuration settings, mailbox names, messages, greetings, and billing information.
- [Schedule](#) automatic daily, weekly, monthly or delayed LAN system backups that occur once or repeatedly at specified times or dates.
- Activate inactive configurations after scheduling backups.
- Restore systems to retrieve backed-up content from the LAN archive.

## USB Backup

You can back up to USB memory devices. It is the responsibility of the administrator to ensure that the memory device can accommodate the size of the backup as backing up a large number of recordings to such a device may fail if there is inadequate storage.

Many memory sticks will work but the following two brands are officially supported:

- Sandisk Cruzer flash drive
- Lexar Jumpdrive flash drive

## Restore Data

Using Text console, you can perform the following data restore operations:

- LAN Restore using FTP
- LAN Restore using MS Networking
- USB Restore

### Note:

**FPSA** user information is not included in a NuPoint backup. If it is necessary to perform a restore procedure, FPSA user information will not be included.

## 1.3.2.1.6 Configuring the Microsoft Network Share for LAN Backups and Restores

Before you back up the LAN, you must configure the backup data store. Ensure the folder or drive to be used for LAN backups is shared with Read/Write permission to the "userid" configured in the NuPoint UM menu.

### Note:

To configure the network share for LAN backups and restores refer to in a Windows environment go to <http://support.microsoft.com/kb/304040>.

To configure the Microsoft Network Share

1. On the target drive, set up the root directory for the NuPoint UM backup (for example, NUPOINT\SiteA) and click **I Agree** to continue.
2. Right-click the root folder and select **Properties**.
3. On the **Sharing** tab, select **Share this folder**.

4. After **Share name**, type the name of the root directory for the NuPoint UM backup (in this example, type **NUPOINT\SiteA**) and click **OK**.
5. Click **Permissions**. The Share Permissions window appears.
6. Under **Group or user names**, add the user ID/group that will need to access the NP-Backup directory.
7. Under **Permissions for Everyone**, after **Allow**, select the **Full Control**, **Change**, and **Read** check boxes to grant everyone full control of the NUPOINT\SiteA directory and click **OK**.
8. On the **Security** tab, add the user ID/group (the same group you selected in Step 6) that will need to access the NUPOINT\SiteA directory.
9. Under **Permissions for Everyone**, after **Allow**, select the **Full Control**, **Modify**, **Read & Execute**, **List Folder Contents**, **Read**, and **Write** check boxes to grant everyone full control of the NP-Backup folder and click **OK**.

### 1.3.2.1.7 System Shutdown

**Note:**

This option is only available through the **Text console**.

System shutdown is an orderly shutdown procedure that warns callers when the system terminates call processing. You should run this program before turning off the power to a NuPoint UM node. We recommend that you perform this procedure during periods of low-call traffic.

#### What Happens When I Give the System Shutdown Order?

- The system asks for permission to shut down the node (module).
- The node's phone lines are displayed with their state indicated ("active", "idle", or "stopped")
- Phone lines that are carrying calls at the time you give the shutdown command are taken offhook when the caller who leaves a message, or the user who is logged into a mailbox, either presses a key or allows a silence timeout.
- The caller or user hears the shutdown warning and is disconnected:

"I'm sorry, the system is currently shut down for maintenance. Please call back later."

**EXAMPLE:** If the shutdown occurs while a user is making a message for another system user, he can continue to record the message. But when he presses a key to review the message, or stops recording for the silence timeout interval, the system

interrupts the call, plays the shutdown warning, sends the message, and logs out the user.

- Phone lines taken offhook by the system are listed as **idle** in the line states display (prevented from answering new incoming or outgoing calls).
- Phone lines with interrupted calls are listed as **stopped** in the line states display.
- All message-waiting indicator requests are canceled. Message lights are turned off even when there are unplayed messages in mailboxes.
- Pager/message delivery calls and re-pages are not made during shutdown or afterward.
- Message Indicator Request Queue Length shows how many message requests were lost on shutdown.
- The system displays the status of each line and the lengths of the message indicator and paging request queues.
- Lights are not turned on until new messages are received after shutdown.
- Callers who try to access the shutdown lines will hear a busy signal until the system is completely rebooted.

## 1.3.2.2 Procedures (Web Console)

### 1.3.2.2.1 Auto Purge

An automatic message purge can be run daily without input from the administrator. A time for the automatic purge can be configured using Offline Configuration.

#### Configure Auto Purge

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. Click **Auto Purge**. The Auto Purge configuration screen is displayed.
4. In the **Time to run purge** field, select the hour at which you want to run the daily purge. By default, this value is set a 00 (midnight).
5. In the **Delay after Message Waiting Off Request** field, enter the amount of time to delay after the "message waiting off" request is sent. By default this value is set to 0. Enter any valid value between 0 and 50 (increments are .1 seconds so a setting of 10 = 1 second). Use this value when slower MWI methods like DMTF-to-PBX are used.
6. Click **Save**.
7. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.3.2.2.2 Backup

### 1.3.2.2.2.1 Auto Backup

You can use the Auto Backup option to schedule automatic backups and to specify details for the backup file destination. For more information about backups, see [Backup and Restore](#).

**Note:** When you are finished making offline changes, you are instructed to save (commit) the changes to make them permanent in the offline (inactive) configuration. To make the revised configuration take effect in your system, you must then activate the offline configuration.

#### Configuring Auto Backup

To use Web console to schedule automatic LAN backups (for backups that use either FTP or MS Networking)

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Auto Backup**. The Auto Backup configuration screen is displayed.
4. Select **Turn on auto backup**.
5. In the **Frequency** list, select the frequency in which the system the system will perform backups.
  - If you selected **Daily**, select the **Hour of Day** to perform the backup. (The default is 0, midnight.)
  - If you selected **Weekly**, select the **Day of the Week** and the **Hour of Day** to perform the backup.
  - If you selected **Monthly**, select the **Day of Month** and the **Hour of Day** to perform the backup.
  - If you selected **Delayed**, enter a **Year**, and select a **Month**, **Day of Month** and **Hour of Day** to perform the backup.
6. In the Backup Details section, select a **backup type** and configure its parameters:
  - [FTP](#)
  - [USB](#)
  - [Hard Disk](#)
  - [MS Networking](#)
7. Click **Save**.
8. In the navigation tree, select **Commit Changes**, **X** (Exit), and **Y** (Yes).
9. [Activate the configuration](#).



## Turning Off Auto Backup

To turn off Auto backup

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. After **Duplicate Active Configuration**, select **Yes**.
3. In the navigation tree, click **Auto Backup**. The Auto Backup configuration screen is displayed.
4. Clear the **Turn on auto backup** check box.
5. In the navigation tree, select **Commit Changes**, **X (Exit)**, and **Y (Yes)**.
6. [Activate the configuration](#).

### 1.3.2.2.2 Backup Parameters

#### FTP Backup

| Parameter                      | Description                                                                          | Value                        |
|--------------------------------|--------------------------------------------------------------------------------------|------------------------------|
| FTP Server IP Address/hostname | Enter the IP address of the FTP server to which you are backing up the data.         | Valid IP address or hostname |
| FTP Server User ID             | Enter your FTP server user ID.                                                       | Max 15 characters            |
| FTP Server Password            | Enter your FTP server password.                                                      | Max 15 characters            |
| Backup Path                    | Enter the path to the location on the FTP server where you want to back up the data. |                              |
| Backup Messages                | Select this check box to back up the mailbox messages.                               |                              |
| Backup Names and Greetings     | Select this check box to back up names and greetings.                                |                              |
| Back up Fax Cover Pages        | Select this check box to back up fax cover pages.                                    |                              |

#### USB Backup

| Parameter                  | Description                                                              | Value |
|----------------------------|--------------------------------------------------------------------------|-------|
| USB Drive Path             | Select the USB path from the list of installed USB devices.              |       |
| Backup Path                | Enter the path to the location where the backed up data is to be stored. |       |
| Backup Messages            | Select this check box to back up the mailbox messages.                   |       |
| Backup Names and Greetings | Select this check box to back up names and greetings.                    |       |
| Back up Fax Cover Pages    | Select this check box to back up fax cover pages.                        |       |

## Hard Disk Backup

| Parameter                  | Description                                                                         | Value |
|----------------------------|-------------------------------------------------------------------------------------|-------|
| Backup Path                | Enter the path to the location on the hard disk where you want to back up the data. |       |
| Backup Messages            | Select this check box to back up the mailbox messages.                              |       |
| Backup Names and Greetings | Select this check box to back up names and greetings.                               |       |
| Back up Fax Cover Pages    | Select this check box to back up fax cover pages.                                   |       |

## MS Networking Backup

| Parameter                       | Description                                                                           | Value |
|---------------------------------|---------------------------------------------------------------------------------------|-------|
| MS Network Destination Hostname | Enter the IP address of the PC where the data will be backed up.                      |       |
| MS Network Domain               | Enter the name of the domain to connect to the MS Network-enabled server.             |       |
| MS Network Shared Path          | Enter the path to the shared directory on the PC where the data will be backed up.    |       |
| Backup Path                     | Enter the path to the directory where the backup data will be stored.                 |       |
| MS Network User ID              | Enter the user name for the local account on the PC where the data will be backed up. |       |
| MS Network Password             | Enter the password for the local account on the PC where the data will be backed up.  |       |
| Backup Messages                 | Select this check box to back up the mailbox messages.                                |       |
| Backup Names and Greetings      | Select this check box to back up names and greetings.                                 |       |
| Back up Fax Cover Pages         | Select this check box to back up fax cover pages.                                     |       |

### 1.3.2.2.3 Perform System Shutdown and Startup

You can shut down NuPoint in order to perform offline maintenance. Two shutdown options are available. The first automatically restores the NuPoint services when you reboot the machine. The second requires you to restore the services manually.

## System Shutdown

To perform a system shutdown:

**CAUTION:**

**CAUTION:** You should follow the policies of your site to warn users prior to the system shutdown, because this process removes the server from call processing.

1. From the navigation tree, click **Utilities > Stop NuPoint**.
2. Select a shutdown option:

- **Stop services and restart when machine reboots**

If you select this option, the NuPoint services will remain stopped until you reboot the machine, at which time they are restarted automatically. For instructions to reboot the machine, see [Shutdown or Reconfigure](#).

- **Stop services and do not restart when machine reboots**

If you select this option, the NuPoint services will remain stopped even after you reboot the machine. You must then restart the services manually. For instructions to restart the services, see [System Startup](#) (below).

3. Click **Stop NuPoint**, and then click **OK**. You will be redirected to the MSL Server Manager, where you may perform maintenance and then reboot the machine.

## System Startup

If you have selected the second shutdown option (Stop services and do not restart when the machine reboots), use the following procedure to restart the NuPoint services manually from the MSL Server Manager.

To perform a system startup:

1. From the MSL Server Manager, select **Applications > NuPoint Web Console**.
2. Select **Start NuPoint**, and then click **OK**.

### 1.3.2.2.4 Fax Download Settings

The NP Fax feature enables users to receive faxes in their mailboxes as electronic documents. Users can then send the faxes from their mailboxes to an actual fax machine, forward them to other mailboxes, send over the network or view them in the Web View interface.

Use this procedure to define the format you wish to receive, store and print faxes on the NuPoint UM system:

- **TIFF (Tagged Image File Format):** a computer file format for storing raster graphics images.

- PDF (Portable Document Format): a file format used to present documents in a manner independent of application software, hardware, and operating systems.

To configure the FAX download settings:

1. From the navigation tree, click **Utilities > Fax Download Settings**.
2. Choose one of the following:
  - For PDF format, select **Download Fax as PDF**.
  - For TIFF format (default), clear **Download Fax as PDF**.
3. Click **Save**.

### 1.3.2.2.5 Enable Alarm Management

You can configure the system to send alarm notifications (traps) to an SNMP agent or an email account. You can also specify whether a notification is generated for each alarm, for all alarms of a particular type (Information, Warning, etc.), or for all alarms together. The first option results in the most notifications; the last option results in the fewest notifications.

#### Configure Alarm Management on NuPoint

To configure alarm management:

1. From the navigation tree, click **Alarm Manager > Configuration**.
2. Select a notification method: **SNMP Notification** or **Email Notification**, or both.
3. For each method, select the frequency of notification:
  - **Every Alarm** to receive notification for each and every alarm
  - **Every Kind** to receive notification for each **type** of alarm
  - **Once** to receive one notification for any and all alarms.
4. Select the **Severity Level** that will trigger an alarm (Information, Warning, Minor, Major, Critical).
5. If you selected Email notification, enter the email addresses to which you want to send the alarm messages. Enter each email address and then click **Add**.
6. Click **Save**.

**Note:**

Alarm management emails received in the Outlook environment may not have the proper heading format because the "Auto Remove Line Breaks" feature in Outlook is enabled. To correct this problem, search for article # 287816 at <http://support.microsoft.com/>

**Configure SNMP on MSL**

If you selected SNMP Notification, you must configure the SNMP service on the Mitel Standard Linux (MSL) server.

To configure the SNMP settings:

1. Log in to the MSL Server Manager as "admin."
2. From the navigation tree, click **Configuration**, and then click **SNMP**.
3. For Service Status, select **Enabled**.
4. Enter the following settings:
  - **Community string:** Enter the address that SNMP clients use to monitor the server. The default string is "public". For security, chose a non-default string.
  - **System contact address:** Enter the administrator's email address. If this field is left blank, the local administrative account is used y default.
  - **System location:** Enter the name of the system (for example, New York admin server).
  - **Network access setting:** Select one of the four available settings to permit access to SNMP information for the localhost only, immediate local networks only, all configured local networks, or all local networks and remote networks.
  - **SNMP Trap host or address:** Type the IP address where trap messages will be sent.
  - For all other fields, accept the default values.
5. Click **Save**.

**Note:**

For detailed instructions on how to configure SNMP on the MSL server, refer to the *NuPoint UM Technician's Handbook* and the *Mitel Standard Linux Installation and Administration Guide*.

**Manage Alarms**

To manage alarms:

1. From the navigation tree, click **Alarm Manager** and then click **View**.
2. From the alarm display list, select the alarms to display (All Alarms, Active Alarms, or Acknowledged Alarms). Click **Refresh** at any time to update the list.
3. Do one or more of the following:
  - to acknowledge an alarm, select the alarm check box and then click **Acknowledge**.
  - to delete an alarm, select the alarm check box and then click **Delete**.
  - to export an alarm to a .csv file, select the alarm check box and then click **Export to CSV**.
4. To determine the alarm category, click **Description**.

**Note:**

You cannot acknowledge an alarm that has previously been deleted. If you attempt to do so, you will *not* receive a notification of any sort from the system.

## 1.3.2.3 Procedures (Text Console)

### 1.3.2.3.1 Message Purge

#### 1.3.2.3.1.1 Automatic Message Purge

You can purge message storage automatically by programming a daily time for the purge to run (the default setting is '0' or midnight). Message disposal parameters are dictated by the [LCOS settings](#) for each mailbox.

To configure automatic message purge:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, **(R) Reconfigure System**, **(G) Offline Menu**, and then **(B) Duplicate Active Configuration**.
2. Select **(S) Auto Task Menu** and then **(B) Auto Purge**.
3. Select **(A) Hour to Run Purge=** and enter the hour at which you want the purge to start. (**0** is midnight.)
4. Select **(B) Delay after Message Wait Off Request** and enter the amount of time to delay after the "message waiting off" request is sent. By default this value is set to **0**. Enter any valid value between 0 and 50 (increments are .1 seconds so a setting of 10 = 1 second). Use this value when slower MWI methods like DMTF-to-PBX are used.
5. Exit to the main menu to save the changes to the offline configuration. You will need to activate the inactive configuration before your changes take effect.

### 1.3.2.3.1.2 Manual Message Purge

The parameters that you enter in the Manual Purge menu control which messages will be deleted.

To perform a manual message purge:

1. Notify users about the purge beforehand by sending a Message of the Day, to inform users which types of messages will be purged. See [Recording Messages/Greetings/Tutorials](#), for instructions.
2. From the Main menu, select **(S) System Maintenance** and then **(M) Manual Message Purge**.
3. At the **Range of extensions to purge? (first-last)** prompt, enter the numbers of the first and last mailboxes in a range, separated by a hyphen (for example, 100-399) OR press <Enter> to check ALL mailboxes for old messages.
4. At the **Feature Classes to purge** prompt, enter one of the following:
  - **o** = odd numbered only
  - **e** = even numbered only
  - **u** = upper half only
  - **l** = lower half only
  - **x-y** to enter a range (x and y are numbers between 1 and 640)
  - **x, y, z** to enter individual classes
  - **x** to enter a single class of service
  - **Enter** = purge all mailboxes or purge all classes of service
5. At the **Group Classes to purge** prompt, enter o/e/u/l, the number(s), range, or press **Enter** for all (as in step 4).

6. The system now offers a series of age prompts. Select one of the following parameters or press **Enter** to move to the next prompt without selecting:

- **Age, in hours, of played messages to purge? [<CR> for no purge]:** The age of a played message indicates the number of hours it is stored on the hard disk after it was played and kept.
- **Age, in hours, of unplayed messages to purge?** This value indicates the number of hours an unplayed message is stored on the hard disk.
- **Age, in hours, of urgent messages to purge?** This value indicates the number of hours an urgent message is stored.
- **Age, in hours, of cut-through receipts to purge?**
- **Age, in hours, of receipts to purge?**
- **Age, in hours, of played fax messages to purge?**
- **Age, in hours, of unplayed fax messages to purge?**
- **Age, in hours, of urgent fax messages to purge?**
- **Age, in hours, of fax receipts to purge?**
- **Age, in absolute hours, of messages to purge?**
- **Purge Distribution Lists** (Enter 'Y' or <CR> for no purge]. Purge searches distribution lists for all mailboxes. If a mailbox is in a distribution list, but that mailbox does not exist, Purge removes it from the distribution list. (When this mailbox is the last one in a list, the list is deleted.)
- **Age, in hours, of NIB copy lists to be purged?** Enter a value between 1 and 999.

The system displays the conditions you specified for the messages to purge.

1. If the conditions are correct, type **purge** (lower-case) to activate the purge. If the conditions are NOT correct, press Enter and start the procedure again.

Purging is complete when the system displays the shortened version of the System Maintenance Menu.

### 1.3.2.3.2 Backup and Restore



### 1.3.2.3.2.1 Perform a USB Backup

You can back up to USB memory devices. It is the responsibility of the administrator to ensure that the memory device can accommodate the size of the backup as backing up a large number of recordings to such a device may fail if there is inadequate storage.

#### Before You Begin

- Ensure that the USB memory device can accommodate the size of the backup.
- Before the USB device can be used for backup it must be formatted with a file system. Any USB storage device that is formatted as FAT32 (DOS) or ext3 (Linux), or NTFS (Windows and Linux) is compatible.
- The file size limit for USB backups is set by the destination file system: 4 GB for a FAT32, 2 TB for NTFS, and 16 GB to 16 TB for ext3 (depending on file system block size). The current MSL ext3 block size is 4096 bytes which allows file sizes of 2TB.

To perform the backup

1. Insert the USB device (in the master node for systems with multiple nodes).
2. In Text Console, select **S (System maintenance)**, **L (NPM Backup)**, and **U (USB Backup)**.
3. Select **A (USB Drive Path)** and then select the USB device to use.
4. Configure the following USB backup settings:
  - **(D) Backup Path** = [enter the **path** to the location where the backed up data is to be stored]
  - **(M) Backup Messages (Y/N)** = [enter **Y** to backup mailbox messages or **N** to skip]
  - **(N) Backup Names and Greetings (Y/N)** = [enter **Y** to backup names and greeting or **N** to skip]
  - **(F) Backup Fax Coverpages (Y/N)** = [enter **Y** to backup Fax coverpages or **N** to skip]
  - Select **B (Perform Backup)**. The device configuration is always backed up.
5. Return to the **Main Menu** and quit Text console.

### 1.3.2.3.2.2 Configure the FTP Server for LAN Backups and Restores



Before you back up the LAN, you must configure the backup data store. You can use any properly configured FTP server for LAN backups. The configuration requirements vary across FTP server types. The following example details how to configure an open source Server on a Windows operating system.

**Note:**

The configuration requirements and procedures vary across FTP server types.

## Configuring the FTP Server for LAN Backup and Restore

To configure the backup data store on the FTP server

1. Set up the root folder for the NuPoint UM backup (for example, NUPOINT\SiteA) and click **I Agree** to continue.
2. Double-click the executable file to download the server software.
3. On the **Licence Agreement** window, click **I Agree** to proceed with the installation.
4. On the **Choose Components** window, click **Next** to install the default installation options:
  - a. Server (Service)
  - b. Administration Interface
  - c. Start Menu Shortcuts
  - d. Desktop Icon
5. On the **Choose Install Location** window, click **Next** to accept the default location to install the server software: **C:\Program Files\Backup Server**.
6. On the **Startup Settings** window
  - a. Click **Next** to accept the default startup settings for the Backup Server: **Install as service, started with Windows (default)**.
  - b. Click **Next** to accept additional default startup settings for the Backup Server: Start if user logs on, apply to all users (default).
7. On the **Installation Complete** window, click **Close**.
8. On the **Connect to Server** window, click **OK** to accept the default server IP address and port and click **OK**. The Backup server console opens.
9. In the **Backup Server Console**, on the **menu bar**, click the **Groups** (double headed) icon. The Groups window appears.
10. To create a group for backing up data, under **Groups**, type a name and click **Add**.

**11.** Set up shared folders for the group:

- a.** Under **Page**, click **Shared folders**.
- b.** In the center pane, click **Add** and add the NuPoint UM backup root folder (you created in Step 1) as the shared folder.
- c.** Under **Files and Directories**, select all of the check boxes to enable all of the file and directory options.
- d.** Click **Set as home directory** to make the directory the home directory for the group and click **OK**.

**12.** In the **BackupServer Console**, on the **menu bar**, click the **Users** (head) icon. The Users window appears.**13.** Set up a user account:

- a.** Under **Users**, enter a password and click **Add**.
- b.** Under **Account settings**, ensure **Enable account** and **Password** are enabled.
- c.** After **Group membership**, select the **group** you created in Step 10.
- d.** After **Maximum connection** count, enter **0**.
- e.** After **Connection limit per IP**, enter **0**.
- f.** Under **Page**, click **Shared folders** to continue.

**14.** Set up shared folders for the user account:

- a.** Under **Page**, click **Shared folders**.
- b.** In the center pane, click **Add** and add the NuPoint UM backup root folder (you created in Step 1) as the shared folder.
- c.** Under **Files and Directories**, select all of the check boxes to enable all of the file and directory options.
- d.** Click **Set as home directory** to make the directory the home directory for the user and click **OK**. The Backup server console opens.
- e.** Log on to the FTP server to test the network share.

### 1.3.2.3.2.3 *Back up the LAN using FTP*

NuPoint UM supports manual and scheduled backups of all application data from the NuPoint UM server(s) using Microsoft Networking or a FTP server on the customer's LAN. Each backup is a full and independent backup of NuPoint UM data, and does not include existing MSL configuration data. You perform backups over the LAN to an FTP server or a Microsoft network share.

NuPoint UM provides a system restore capability from the LAN archive to the server. You can restore data using FTP / MS Network interchangeably, provided that you use the same directory path for both. The format of the backed up data is the same, regardless of whether you backed it up using FTP or MS Networking.

Backing up NuPoint UM data can take a few seconds or up to several hours. Factors that influence the duration include

- The nature of the files to be backed up and the amount of information being transferred. Messages, names, and greetings are large files and significantly increase the backup duration.
- The network speed: the throughput of the network between the NuPoint UM system and the storage server.
- The processing speed of the storage server.

### Before You Begin

- For the LAN backup to function, you must enable write access on the customer's FTP server before you perform the backup. Failure to do so will result in errors.
- Ensure the Windows PC has sufficient disk space available for the backup.
- If you have added local host names for VPIM servers to the MSL server, the host names are not backed up by the LAN backup procedure. To back up local host names for VPIM servers on the MSL server, you must back up the MSL server settings before you perform the LAN backup procedure. For information on backing up the MSL server, refer to the Mitel Standard Linux Technician's Handbook on the [Mitel Customer Documentation](#) site.
- Ensure the network connection is functioning and is stable.
- For Active/Active and Active/Passive systems, ensure the backup is restored to the correct server (for example, the server1 backup must be restored to server1) in order to maintain cluster and ILO information.
- [Configure the FTP Server for LAN backups and restores.](#)

To specify network, login, and default backup settings for the FTP destination server

1. Access **Text console** and connect to the **NuPoint UM node**.
2. Log in as **root** and type the **root** password.
3. Access the FTP Backup menu: select **S (System Maintenance)**, **L (NPM Backup Menu)**, and **L (Lan Backup using FTP)**.
4. In the FTP Backup menu, configure the following settings:

1. • **(I) FTP Server IP Address/host name** = [enter the **IP address** of the FTP server to which you will back up the data (for example, 10.32.63.100)]
  - **(U) FTP Server User ID** = [enter the **FTP server user ID**]
  - **(P) FTP Server Password** = [enter the **FTP server password**]
  - **(D) Backup Path** = [enter the **path** to the location on the FTP server where the data will be backed up.] You specified the name of the root folder in Step 1 of [Configuring the FTP Server for LAN Backups and Restores](#).
  - **(M) Backup Messages (Y/N)?** = [enter **Y** (yes) or **N** (no) to indicate if mailbox messages will be backed up]
  - **(N) Backup Names and Greetings (Y/N)?** = [enter **Y** (yes) or **N** (no) to indicate whether mailbox names and greetings will be backed up]
  - **(F) Backup Fax Coverpages (Y/N)** = [enter **Y** (yes) or **N** (no) to indicate whether Fax cover pages will be backed up] The system configuration is automatically backed up the FTP server.
1. Type **B** (Perform Backup) to begin the backup process.
2. When the backup is complete, under **General information** the **Status** line confirms if the backup was completed successfully.
3. Return to the **Main Menu** and quit Text console.

### 1.3.2.3.2.4 Perform a LAN Backup using MS Networking

NuPoint UM supports manual and scheduled backups of all application data from the NuPoint UM server(s) using Microsoft Networking or a FTP server on the customer's LAN. Each backup is a full and independent backup of NuPoint UM data, and does not include existing MSL configuration data. You perform backups over the LAN to an FTP server or a Microsoft network share.

NuPoint UM provides a system restore capability from the LAN archive to the server. You can restore data using FTP / MS Network interchangeably, provided that you use the same directory path for both. The format of the backed up data is the same, regardless of whether you backed it up using FTP or MS Networking.

Backing up NuPoint UM data can take a few seconds or up to several hours. Factors that influence the duration include

- The nature of the files to be backed up and the amount of information being transferred. Messages, names, and greetings are large files and significantly increase the backup duration.
- The network speed: the throughput of the network between the NuPoint UM system and the storage server.
- The processing speed of the storage server.

## Before You Begin

- Ensure the folder or drive to be used for LAN backups is shared with Read/Write permission for the userid configured in the NuPoint Unified Messaging menu. Failure to do so will result in errors.
- Ensure the Windows PC has sufficient disk space available for the backup.
- If you have added local hostnames for VPIM servers to the Mitel Standard Linux server, the hostnames are not backed up by the LAN backup procedure. To back up local hostnames for VPIM servers on the Mitel Standard Linux server, you must back up the Mitel Standard Linux server settings before you perform the LAN backup procedure. For information about backing up the Mitel Standard Linux server, refer to the *Mitel Standard Linux Installation and Maintenance Guide* available at Mitel OnLine.
- Ensure the network connection is functioning and is stable.
- The file size limit for LAN backups is set by the destination file system: 4 GB for a FAT32, 2 TB for NTFS, and 16 GB to 16 TB for ext3 (depending on file system block size). The current MSL ext3 block size is 4096 bytes which allows file sizes of 2TB.
- For Active/Active and Active/Passive systems, ensure the backup is restored to the correct server (for example, the server1 backup must be restored to server1) in order to maintain cluster and ILO information.
- [Configure the MS Network Share for backups and restores.](#)

To specify network, login, and default backup settings for the Microsoft Network destination server

1. Access Text console and connect to the NuPoint UM node.
2. Log in as "root" and type the admin password.
3. To access the MS Networking Backup menu, select **S (System Maintenance)**, **L (NPM Backup Menu)**, and **M (Lan Backup using MS Networking)**.

#### 4. In the MS Networking Backup Menu, configure the following settings:

- **(I)** MS Network Destination Hostname = [enter the **IP address** of the server to which you will back up the data (for example, 10.33.63.111).]
- **(A)** MS Network Shared Path = [enter the **path** to the shared folder on the PC where the data will be backed up]
- **(U)** MS Network User Id = [enter the **user name** for the local account on the PC where the data will be backed up.]
- **(P)** MS Network Password = [enter the **password** for the local account on the PC where the data will be packed up.]
- **(D)** Backup Path = [enter the **path** to the folder where the data will be backed up.] You specified the name of the root folder in Step 1 of [Configuring the MS Network Share for backups and restores](#).
- **(M)** Backup Messages (Y/N)? = [enter **Y** (yes) or **N** (no) to indicate whether you want to restore the mailbox messages.]
- **(N)** Backup Names and Greetings (Y/N)? = [enter **Y** (yes) or **N** (no) to indicate whether you want to restore the mailbox names and greetings.]
- **(F)** Backup Fax Coverpages (Y/N) = [enter **Y** (yes) or **N** (no) to indicate whether you want to restore the Fax cover pages.]

#### Note:

The system configuration is automatically backed up to the MS Networking server.

5. Select **B (Perform Backup)** to begin the backup process. When the backup is complete, under **General information** the **Status** line confirms if the backup was completed successfully.
6. Exit to the **Main Menu** and quit Text console.

### Troubleshooting a LAN Backup (MS Networking)

- If the backup fails (times out, broken connection), you are given a choice to either start it again from beginning or to resume the last backup. The time-out value in case of a broken LAN connection is 1 minute.
- The following scenarios are possible during a LAN Backup/Restore:
- LAN connection failure - The backup stops after a time-out of 1 minute. In this case, you must restart the backup manually. The system prompts you to either resume the backup or restart it from the beginning. The log file will specify the error encountered.
- Windows server share not available - This scenario is same as LAN connection failure. See above.
- Remote disk full - The backup process can not find out if the disk space is full or not. The processes will simply log the error that it could not copy the file(s). Attempts to

resume the backup may continue failing. Ensure that enough disk space is available on the remote server.

- Login failure - Backup will stop immediately, indicating the appropriate error in the log file.

### 1.3.2.3.2.5 Configure Scheduled LAN Backups

You can schedule automatic daily, weekly, monthly or delayed LAN system backups that occur once or repeatedly at specified times or dates.

#### Before You Begin

Manually back up the LAN to confirm it is configured properly before you schedule automatic backups.

#### Note:

- If Auto Backup is interrupted, it will not resume from where it was interrupted—it will always start at the beginning.
- After you schedule the automatic LAN backup, you *must* activate the configuration.

To schedule automatic LAN backups (for backups that use either FTP or MS Networking)

1. Access Text console and connect to the NuPoint UM node.
2. Log in as **root** and type the **root** password.
3. Select **S (System Maintenance)**, **R (Reconfiguration)**, **R (Reconfigure System)**, and **G (Offline Menu)**.
4. In the Offline menu, select **B** to duplicate the active configuration and then select **S (Auto Task Menu)**.
5. In the Auto Task menu, select **D (Backup Menu)**. The NPM Backup menu appears.
6. Select **T (Backup Type)** and then select **F (FTP)** or **M (Microsoft Networking)**.
7. Select **E (Enable Regular Backup)** and then select **D (Daily)**, **W (Weekly)**, **M (Monthly)**, or **O (Delayed)**.
8. Configure a daily, weekly, monthly, or delayed LAN backup (Refer to the procedures below.)
9. Select **B (Backup Messages)** and then select **Y**.
10. Select **N (Backup Names and Greetings)** and then select **Y**.
11. Select **F (Fax Cover Pages)** and then select **Y**.
12. Exit to the **Main Menu**.
13. Activate the inactive configuration.



### Schedule a Daily LAN Backup:

1. From the NPM Backup Menu, select **D (Daily Backup Menu)**.
2. Select **H (Hour to do Backup)** and enter the number (from zero (midnight) to 23 hours) that corresponds to the hour at which the backup will begin.
3. Exit to the **Main Menu**.

### Schedule a Weekly LAN Backup:

1. From the NPM Backup Menu, select **W (Weekly Backup Menu)**.
2. Select **D (Day to do Backup)** and enter the letter that corresponds to the day of the week on which the backup will occur: (M - Monday, T - Tuesday, W - Wednesday, TH - Thursday, F - Friday, S - Saturday, SU - Sunday).
3. Select **H (Hour to do Backup)** and enter the number (from zero (midnight) to 23 hours) that corresponds to the hour at which the backup will begin.
4. Exit to the **Main Menu**.

### Schedule a Monthly LAN Backup:

1. From the NPM Backup Menu, select **M (Monthly Backup Menu)**.
2. Select **M (day of Month to Do Backup)** the enter the number (from 1 to 28) that corresponds to the date/day of the month on which the backup will occur.
3. Select **H (Hour to do Backup)** and enter the number (from zero (midnight) to 23 hours) that corresponds to the hour at which the backup will begin.
4. Exit to the **Main Menu**.

### Schedule a Delayed LAN Backup:

1. From the NPM Backup Menu, select **O (Delayed Backup Menu)**.
2. Select **Y (Year to do Backup)** and specify the year during which the scheduled backup will occur, (for example, type 2005).
3. Select **M (Month to do backup)** enter type the number (from 1 to 12) that corresponds to the month in which the backup will occur.
4. Select **D (Day to do backup)** and enter the number (from 1 to 28) that corresponds to the date/day of the month on which the backup will occur.
5. Select **H (Hour to do Backup)** and enter the number (from zero (midnight) to 23 hours) that corresponds to the hour at which the backup will begin.
6. Exit to the **Main Menu**.

### 1.3.2.3.2.6 Restore Data

#### CAUTION:

Partial restore is not supported. Ensure that all data you want to keep is backed up before restoring.

Use this procedure to perform any of the following data restore operations:

- LAN Restore using FTP
- LAN Restore using MS Networking
- USB Restore

Message waiting indicators will automatically refresh following a restore. Time required for MWI restore is dependent upon the number of mailboxes in the system.

This procedure requires you to shut down the system and disable the module(s). All modules of a system must be both stopped and disabled before restoring the database.

#### Note:

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

### Standard and Active/Passive Systems

To restore previously backed-up data:

1. Shut down the system and disable all the modules. See [Shutting Down the System](#). The module will reboot automatically as part of the system shutdown.
2. At the # prompt, enter **startnpm**. A list of commands is displayed.
3. At the **Enter one of the names:** command, type **system.restore**, and then press **Enter**. The Restore Menu is displayed.
4. Select one of the following restore options from the menu:
  - USB Restore
  - LAN Restore using FTP
  - LAN Restore using MS Networking

**5.** Modify the parameters in the restore menu as follows:

In the USB Restore Menu:

- (D) Backup Path = [enter the path to the backup folder]
- (R) Restore From = [enter the number that corresponds to the date of the backup you want to restore]
- (C) Restore System Configuration (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the system configuration.]
- (M) Restore Messages (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox messages.]
- (N) Restore Names and Greetings (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox names and greetings.]
- (F) Restore Fax Coverpages (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the Fax coverpages.]

In the FTP Restore Menu:

- (A) FTP Server IP Address = [enter the IP address of the FTP server from which you are restoring the data, for example, 192.168.1.101]
- (U) FTP Server User Id = [enter your FTP server user ID, for example, anonymous]
- (P) FTP Server Password = [enter your FTP server password, for example, ftp1001]
- (D) Backup Path = [enter the LAN Backup path from which you are restoring the data, for example, NUPOINT\SiteA]
- (R) Restore From = [enter the number that corresponds to the date from which you would like to restore the archived system backup]

**Note:**

A maximum of 20 of the most recent backup dates are listed.

- (C) Restore System Configuration (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the system configuration.]
- (M) Restore Messages (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox messages.]
- (N) Restore Names and Greetings (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox names and greetings.]
- (F) Restore Fax Coverpages (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the Fax coverpages.]

In the MS Networking Restore Menu:

- (I) MS Network Destination Hostname = [enter the IP address of the PC to restore the data to.]
  - (A) MS Network Shared Path = [enter the path to the shared folder on the PC where the data will be restored]
  - (U) MS Network User Id = [enter the user name for the local account on the PC.]
  - (P) MS Network Password = [enter the password for the local account on the PC.]
  - (D) Backup Path = [enter the path to the folder that contains the backup data you want to restore.]
  - (R) Restore From = [enter the number that corresponds to the date from which you would like to restore the archived system backup]
  - (C) Restore System Configuration (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the system configuration.]
  - (M) Restore Messages (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox messages.]
  - (N) Restore Names and Greetings (Y/N)? = [enter Y (yes) or N (no) to indicate whether you want to restore the mailbox names and greetings.]
  - (F) Restore Fax Coverpages (Y/N) = [enter Y (yes) or N (no) to indicate whether you want to restore the Fax coverpages.]
6. Select **(S) Perform Restore** to begin the restore process. If you are restoring messages and/or names, the following message may appear: "Speech Allocation Manager (SAM) Initialization is in progress. This can take maximum 15 minutes. Do you want to continue [yes/no]"
  7. Select **yes** to continue with the system restore. (If you select no, the system restore process is aborted.) The restore process begins.
  8. When the system restore process has completed, the LAN Restore Menu will reappear. Exit from this menu by selecting **(X) Exit**. The system updates the configuration records.

9. At the prompt, type `host.status`, and then press Enter. The Module Maintenance Menu is displayed.
10. Select **(E)** to enable a module, or type **all** to enable all the modules.
11. If you are enabling a specific module, type the number of the module at the Which Module? prompt.
12. At the # prompt, type **console** to return to the Main Menu.
13. Reboot the system to restore FPSA functionality. For more information see [FPSA](#).
14. Log into each of the other modules and start up NuPoint Unified Messaging manually.

The data restore is now complete.

### Active/Active Systems

To restore data on an Active/Active system

1. Log into the master node using the cluster IP address.
2. Shut down the NuPoint Unified Messaging system by accessing the System Maintenance Menu and selecting the **(S) System Shutdown** option.
3. Answer **N** to the **Transfer mastership to another node?** prompt that appears if you are on a master node.
4. Answer **All** to the **Modules to shutdown** prompt, and then type **Y** to confirm.
5. Type **shutdown** to reconfirm and start the shutdown process.
6. Answer the questions to the **MWI** and **Paging** prompts.
7. Answer **Y** to the **Enable or disable modules?** prompt.
8. From the Module Maintenance Menu that appears, select **D** to disable a module (you then need to enter the specific module to disable), or type **all** to disable all the modules.
9. NuPoint Unified Messaging is now completely stopped.
10. Type **startnpm** to start NuPoint Unified Messaging.
11. When the NuPoint Unified Messaging system has started, type **system.restore** to start the data restore process.
12. The data restore process for the Active/Active system is the same as for the Standard platform, steps 4 through 13, above.
13. NuPoint Unified Messaging will start on a local node, and you then need to access the second active node to invoke the **startnpm** command manually.

The data restore is now complete.

### 1.3.2.3.3 Hard Disk Utilities

Information about the hard drives in your system can be obtained from the Hard Disk Utilities menu.

## Information for All Disks

1. From the Main menu, select **(S) System Maintenance** and then **(H) Hard Disk Utilities**.
2. Select **(I) Information for all Disks**.
3. The system displays disk size, type and status information:

```
=====
* * * MODULE # 1 DISK INFORMATION * * *

Disk Size Rev. Disk Type Redund Status Errors
-----
0:0 139GB PRIMARY 0:0 ENABLED
1:1 139GB REDUNDANT* 0:0 ENABLED
=====

** : Probably not working.

Press any key to continue...
```

## Physical Table Display

To display physical information about the disks in your system:

1. From the Main menu, select **(S) System Maintenance** and then **(H) Hard Disk Utilities**.
2. Select **(P) Physical Table Display**.
3. The system displays the physical characteristics of the system disk:

```
>>> Physical Characteristics Table <<<
```

```
1 Disk
```

```
DISK ID CAPACITY SERIAL NUMBER DISK TYPE REDN ID STATUS
```

```
-----
```

```
0, 0 78156225 1234 PRIMARY 0, 0 ENA
```

```
(END)
```

### Virtual Table Display

To display information about the virtual disks in your system:

1. From the Main menu, select **(S) System Maintenance** and then **(H) Hard Disk Utilities**.
2. Select **(V) Virtual Table Display**.
3. The system displays the characteristics of all virtual drives:

```
>>> Virtual Drive Characteristics Table <<<
```

```
VID DISK ID TYPE OFFSET SIZE FLAGS
```

```
-----
```

```
000 0,0 QNX 00080325(0x000139c5) 02040255(0x001f21bf)
001 0,0 PROMPT 00000154(0x0000009a) 00530048(0x00081680) P
002 0,0 PROMPT 00530202(0x0008171a) 00530048(0x00081680) P
003 0,0 PROMPT 01060250(0x00102d9a) 00530048(0x00081680) P
004 0,0 PROMPT 01590298(0x0018441a) 00530048(0x00081680) P
005 0,0 PROMPT 02120346(0x00205a9a) 00530048(0x00081680) P
006 0,0 PROMPT 02650394(0x0028711a) 00530048(0x00081680) P
007 0,0 PROMPT 03180442(0x0030879a) 00530048(0x00081680) P
008 0,0 PROMPT 03710490(0x00389e1a) 00530048(0x00081680) P
009 0,0 ACCOUNT 04240538(0x0040b49a) 00032834(0x00008042)
010 0,0 ACCOUNT 04273372(0x004134dc) 00032834(0x00008042)
011 0,0 ACCOUNT 04306206(0x0041b51e) 00032834(0x00008042)
012 0,0 ACCOUNT 04339040(0x00423560) 00032834(0x00008042)
013 0,0 ACCOUNT 04371874(0x0042b5a2) 00032834(0x00008042)
```

### 1.3.2.3.4 Change Text Console Password

The password for the 'admin' and 'root' users is the same password, and is set when the MSL operating system is installed and configured. We recommend that you do not change the root password, as it will not make a corresponding change to the 'admin' password and they will be out of synch.

If it is your intention to have different passwords for the 'admin' and 'root' users, then you can use the following procedure to do so.

To change the console password:



1. From the Main menu, select **(S) System Maintenance** and then **(P) Passwords/Security**.
2. Select **(C) Change Password** and enter the new 'root' password. The console passcode may be 6 to 30 alphanumeric characters. The letters may be upper or lower-case.
3. When prompted, re-enter the new password. The system confirms the password change.

**Note:**

Administration by phone requires a different phone passcode. Instructions for setting a passcode for phone administration are provided in [Administration by Phone](#). When FPSA is activated, additional restrictions apply to console passcodes. See [Functionally Partitioned System Administration \(FPSA\)](#).

### 1.3.2.3.5 Set System Time and Date

This option allows you to reset the system time and date. You can also review the time and date without changing it by pressing **Enter** in response to the prompts.

1. From the Main menu, select **(S) System Maintenance**, **(O) Additional Options**, and then **(T) Time and Date**.
2. When prompted, enter the new date in the format mm-dd-yy where:
  - **mm** = two-digit month code
  - **dd** = two-digit day code
  - **yy** = two-digit year code (for example, enter **12-27-09**)
  - OR press **Enter** to skip this prompt
3. When prompted, enter the new time in the format hh:mm [am/pm] where:
  - hh = two digit hour code (1-12)
  - mm = two digit minute code
  - [am/pm] = AM or PM setting (For example, enter **03:29 pm**)
  - OR press **Enter** to skip this prompt

### 1.3.2.3.6 Lights Test

The lights test is used to test the function of message-waiting indicators (usually lights). Depending on the programming of the mailbox being tested, the lights test can also activate pagers and provide stutter dial tone.

## To Perform a Lights Test

1. From the Main menu, select **(S) System Maintenance**, **(O) Additional Options**, and then **(L) Lights Test**.
2. At the Mailbox to light (1 - 9999999999) prompt, enter the *number* of the mailbox associated with the light to be tested OR enter a range of mailboxes to test; separate the first and last mailbox numbers in the series with a hyphen (for example, 100-399).
3. At the **Light off/on/existing value (0/1/2)** prompt, enter one of the following:
  - Enter **0** (zero) to turn the message waiting indicator(s) OFF
  - Enter **1** to turn the indicator(s) ON
  - Enter **2** to update the indicator(s) to the current correct state(s).

### Note:

The "correct state" is ON if there is at least one unplayed message in the mailbox, and OFF if no unplayed messages reside in the mailbox.

4. At the **Message waiting type (0 or <CR> for all)** prompt, press Enter to test any message waiting type(s) associated with the test mailbox(es) OR enter a number (from 2 through 28) to test a specific [message waiting indicator](#).
5. Check the state of the indicator(s) for proper functioning. To return the indicators to their correct states, repeat Steps 2 through 4 using the same mailbox number(s) and enter **2** at Step 3.

### Note:

Pagers must be set to OFF before they can be reactivated a second time.

6. At the **Mailbox to Light (1 - 9999999999)** prompt, press **Enter** to return to the Additional Options Menu.

## 1.3.2.3.7 Enable Alarm Management

You can configure the system to send alarm notifications (traps) to an SNMP agent or an email account. You can also specify whether a notification is generated for each alarm, for all alarms of a particular type (Information, Warning, etc.), or for all alarms together. The first option results in the most notifications; the last option results in the fewest notifications.

### Configure Alarm Management

To enable alarm management:

1. From the Main Menu, select **(S) System Maintenance**, and then **(T) Alarm Setting and Management**.
2. Select **(A) Alarm Setting**.
3. Select a notification method:
  - For SNMP notification, select **(A) SNMP Settings**.
  - For Email notification, select **(B) Email Settings**. **Note:** You can configure both methods.
4. In the Alarm SNMP Setting or Alarm Email Setting menu, select option **(A)** to enable notification and enter:
  - **1** to enable OR
  - **0** to disable
5. Select option **(B)** to set the **Sending Option** and enter one of the following:
  - **0** to report every alarm type
  - **1** to report only once (if an alarm is raised when there is no existing active alarm)
  - **2** to report every alarm individually
6. Select option **(C)** to set **Sending Severity** and enter one of the following:
  - a. **1** for Informational alarms
  - b. **2** for Warning alarms
  - c. **3** for Minor alarms
  - d. **4** for Major alarms
  - e. **5** for Critical alarms
7. For Email notification, select option **(D)** to set **Email Addresses** for alarm messages. Enter one or more email addresses separated by commas.
8. Exit to save your changes.

**Note:**

- Alarm management emails received in the Outlook environment may not have the proper heading format because the "Auto Remove Line Breaks" feature in Outlook is enabled. To correct this problem, search for article # 287816 at <http://support.microsoft.com/>.
- If you enable SNMP Notification, you must configure the SNMP service on the Mitel Standard Linux (MSL) server. For instructions, see [Configure SNMP on MSL](#). For additional information, refer to the *Mitel Standard Linux Installation and Administration Guide*.

## Report and Manage Alarms:

You can manage alarms and produce reports for active alarms, cleared alarms, or all alarms.

To manage alarms:

1. From the Main Menu, select **(S) System Maintenance**, and then **(T) Alarm Management**.
2. Select **(B) Alarm Report and Management**.
3. Select one of the following options:
  - Option **(A)** to Report and Manage **Active** Alarms
  - Option **(B)** to Report and Manage **Acknowledged** Alarms
  - Option **(C)** to Report and Manage **All** Alarms
  - Option **(D)** to report Alarm status
4. Do one or more of the following:
  - Select Option **(A)** to display a report of each alarm category
  - Select option **(B)** to acknowledge a selected alarm or option **(C)** to acknowledge all alarms, as required
  - Select option **(D)** to delete a selected alarm or option **(E)** to delete all alarms, as required

### 1.3.2.3.8 Perform System Shutdown and Startup

To perform a system shutdown:

#### CAUTION:

You should follow the policies of your site to warn users prior to the system shutdown, because this process removes the server from call processing.

1. From the Main menu, select **(S) System Maintenance** and then **(S) System Shutdown**.
2. Type **shutdown** (lowercase).
3. At the **Modules to shutdown?** prompt, enter **1**.
4. The system displays a warning about call processing being terminated. Enter **Y** to continue. The system displays the status of each line of the module as "idle," "active" or "stopped," and updates the status every minute until all lines are stopped. The system stops any calls still in progress after five minutes.

5. At the **Wait for message waiting queues to clear?** prompt, enter **Y** to wait or **N** to proceed without waiting.
6. At the **Wait for paging queues to clear?** prompt, enter **Y** to wait or **N** to proceed without waiting.
7. At the **Do you want to enter the menu to enable or disable modules?** prompt, enter **Y** if you want to leave a server disabled after the shutdown/reboot (possibly for some offline maintenance) OR enter **N** to continue with shutdown (skip to step 10).
8. If you entered **Y** in step 7, module status is displayed. Enter **(D) to disable** a module or **(E) to enable** a previously-disabled module.
9. When prompted to **select a module ID**, enter **1**. The module state is changed to your selected state.
10. Press **Enter** to return to the root # prompt.
11. Type **startnpm**.
  - If you have disabled the module, the system warns you and offers a menu of offline maintenance choices (for example, system.restore, console). Select a maintenance procedure as required. To re-enable the module, type **host.status** and select **(E)** to enable.
  - If you have just changed the module state to "enabled", the node reboots.
12. The screen displays startup messages and then returns to the root prompt. Type **console** to return to the Main menu.

### 1.3.2.3.9 Adjust Audio Stream

Automatic Gain Control (AGC) is a MiVoice Business ICP, MiVoice Business feature that adjusts the volume of audio streams of individual calls so they are neither too loud nor too faint. You enable or disable AGC on a system wide basis. The default setting is Disabled. AGC settings are maintained during system reboots and are backed up.

To enable automatic gain control functionality:

1. Access Text console and connect to the NuPoint UM node.
2. Log in as "root" and type the admin password.
3. Exit to the Linux prompt and enter **touch /usr/vm/config/AGCon**
4. Restart the server.

To disable automatic gain control functionality:

1. Access Text console and connect to the NuPoint UM node.
2. Log in as "root" and type the admin password.
3. Exit to the Linux prompt and enter **rm -f -r /usr/vm/config/AGCon**

## 1.3.3 Security

### 1.3.3.1 Description

#### 1.3.3.1.1 Security - Overview

Server security refers to protecting your NuPoint Unified Messaging server from abuse, both from outside callers and from mailbox owners. Outside callers can attempt to “take over” mailboxes that can be reached through the public switched telephone network and use them for their own applications. Mailbox owners can make inappropriate use of server resources by placing long distance calls through the server, overusing available storage, or sending messages to mailboxes that should be “off limits.”

The server has many features that are designed to provide security at the server level and at the mailbox level. These features address server administration, mailbox usage, and access to facilities, applications, and information.

This section describes the following features:

- Protecting your server from outside abuse
- Protecting your server from abuse by mailbox owners and users
- Protecting the server maintenance and administration functions
- Security reports and audit trails
- Functionally Partitioned System Administration (FPSA)

#### 1.3.3.1.2 Protection From Outside Abuse

Mailboxes that can be reached through the telephone network are seen as the primary entry point for “hostile invasion” of a communications server such as the NuPoint Unified Messaging server. Service providers and corporate telecommunications managers alike are concerned about hackers taking over mailboxes for their own applications, or using mailboxes for toll fraud by calling through long-distance facilities accessible from the server.

You can configure your server to require access codes or passcodes before callers can reach various functions, and you can configure mailboxes to automatically perform certain functions, such as hanging up after playing a greeting.

#### Existing Mailboxes

The first level of security is protection of the mailboxes by **passcodes**. By default, the server requires passcodes on all mailboxes. You can turn this feature off using feature bit 218 for direct calls, but you should do so with caution. Mailbox owner passcodes can be

up to 10 digits in length, and users can change their passcodes at any time (feature bit 073).

The server administrator typically sets a temporary passcode for new mailboxes, but the user is forced to enter a permanent passcode during the interactive tutorial. Using FCOS settings, you can prevent users from setting a passcode that is the same as the mailbox number (feature bit 130), or from using trivial passcodes, such as 1234 or 8888 (feature bit 201).

If a caller enters the wrong passcode when trying to get into a mailbox, the server requires the caller to enter the correct passcode twice, or the server hangs up. Callers are not told whether the mailbox number or the passcode was incorrect; hackers do not know if they have even half of a valid combination. (You can use feature bit 081 to set the server to only require a single correct passcode after an incorrect attempt, but this reduces the effectiveness of the security feature.)

The server tracks bad passcode attempts for each mailbox and compares the number to the parameters set for the line group. If the bad passcode attempts for a mailbox exceeds the number allowed in the passcode trip period, the server plays a bad passcode warning at the next login so that the mailbox owner knows that someone may have tried to gain unauthorized entry.

Feature bit 132 allows you to enable a bad passcode lockout, in which a mailbox is locked when the threshold of bad passcode attempts is reached. Only the server administrator can unlock the mailbox, set a new temporary passcode, reset the tutorial, and require re-initialization from the integrated telephone number (feature bit 142).

## New Mailboxes

When you create a new mailbox, you can designate a temporary passcode for that mailbox, either by making up a passcode, or using the server's random passcode generation program.

### Note:

When you choose the random passcode generation program, you must make note of the number generated and provide that number to the mailbox user so that they can log in to their new mailbox.

If you have created mailboxes but have not yet assigned them to users, you can use an FCOS to deny login (feature bit 001).

To ensure that a new mailbox, once assigned, is not used until the owner accesses it, you can require initialization from the integrated telephone number (feature bit 142). You can also set the FCOS to prevent messages from being received until the mailbox has been initialized (feature bit 127).

**Note:**

Feature bit 142 (Must run tutorial from own phone) is not supported for all integrations.

## Line Groups

By dividing the total number of ports in your server into line groups, you can increase the security for specific applications. You can configure each application to be on a different line group, and enable an appropriate level of security for each application.

Separating the applications by line group can help prevent certain types of abuse, such as connecting from one application to another. Incoming and outgoing calls occur on separate line groups in a server. This keeps hackers from reaching the server and then dialing out through the NP Receptionist or another application.

You can restrict access to certain line groups, like a toll-free dial-in line group, by setting the FCOS to require callers to enter an access code before hearing the regular line group greeting (feature bit 160). If a caller exits one mailbox, the server requires reentry of the access code before allowing further progress through the server. You can also use FCOS to completely deny login on specific line groups (feature bits 101-109), or ensure that mailboxes cannot receive messages when the call is received on a specific line group (feature bits 111-119).

## Telephone Answering

Outside callers can abuse access to a server during a telephone answering call by trying to break into the dialed mailbox or access other features. By correctly setting the line groups and FCOS in your server, you can control the feature set available during an answering session.

You can force the termination of telephone answering sessions after callers leave a single message by setting the line group to not allow multiple messages for outside callers. For Greeting-Only mailboxes, you can have the server hang up immediately after playing the greeting (feature bit 062), call the mailbox attendant after the greeting (bit 063), or call the mailbox user after the greeting (bit 064).

By customizing an FCOS to contain feature bit 004 (Outside caller functions) but not feature bit 005 (Play outside caller menu prompts), you can allow knowledgeable users to access server functions, while not letting other callers know that the functions are available.

Feature bit 137 (Caller must enter access code) can restrict outside callers from leaving messages in high security mailboxes. You set the access codes when configuring each individual mailbox.



You can further ensure the privacy of mailbox users by not putting them in the Dial-by-Name database (feature bit 092), or by not allowing the mailbox name or extension number to be played (bit 202). This latter feature can be especially important in hotel or dormitory situations.

### **Audiotext (Tree Mailboxes)**

You can protect audiotext applications by requiring callers to enter an access code (feature bit 137) before hearing the information. Because you can design audiotext applications as a series of mailboxes, each with individual information, you can set a unique access code for each piece of information to ensure corporate security.

You can configure audiotext applications to hang up after playing the greeting (feature bit 062), or transfer to the mailbox attendant (bit 063) or mailbox extension (bit 064). You can also deny login from within the tree (bit 152).

### **1.3.3.1.3 Protection From Mailbox Owner Abuse**

The corporate telecommunications manager must control use and potential abuse of corporate resources to provide the best service while controlling costs and maintaining security. Likewise, the revenue of a service bureau is dependent on being able to bill mailbox owners for use of the server. The NuPoint UM server allows you to place controls and limits in the server to ensure that mailbox owners use the server appropriately.

### **Line Groups**

Service bureaus can provide mailbox owners with certain line groups for receiving messages, while having them pick up their messages on other line groups, either to control costs or to control call flow. To enforce this type of usage, you can use feature bits 101-109 to deny login on specific line groups; callers can leave messages, but are not able to log into a mailbox. In this way, you can also restrict access to certain information to internal ports only, or to “800” number ports where the server owner must pay for connect time.

### **Mailbox Usage**

Depending on the number of phone lines or the storage hours available on your server, or on the levels of service that mailbox owners pay for, you can set LCOS parameters to control certain aspects of mailbox usage, such as connect time, number of messages stored, or storage duration.

If the number of phone lines to your server is limited, you can limit call duration by setting the Maximum login time parameter in each LCOS to a few minutes. On the other hand, if disk storage is a limiting factor, you can lower both the Caller message length and User message length, and set the Message count limit to a number that is equitable to all users assigned to each LCOS.

The amount of storage used on your server is the result of the number of messages stored and the length of storage time. You can control the storage times for played and unplayed messages by setting the two LCOS parameters: Played message retention and Unplayed message retention.

Besides setting limits on server usage, you must ensure that your mailbox listings are current—remove mailboxes that are no longer being used. Once you have removed a mailbox, the server automatically removes it from the Dial-by-Name database and from all distribution lists.

## Messaging

Messaging between mailbox owners is the primary purpose of many voice mail systems, but you must use GCOS and FCOS settings to enforce restrictions on which mailboxes can exchange messages.

The primary tool for controlling messaging between mailboxes is the GCOS. Correct GCOS settings can effectively partition a server so that separate user groups are not aware of one another, or so that certain mailboxes can only receive or send messages to other specific mailboxes, such as in dispatcher situations.

GCOS structures also create partitioned Dial-by-Name. A mailbox owner cannot use Dial-by-Name to address a message to a mailbox that is not accessible due to GCOS restrictions; the server does not match or play inaccessible mailbox names.

You can also use FCOS settings to control the sources and destinations for messages. Feature bits 040 through 045 control a mailbox's ability to receive messages from various sources, such as other users, outside callers, or distribution lists. Feature bits 020 through 035 control the ability to make or give messages to users and distribution lists.

## Outdials

Depending on the optional features purchased with your server, mailbox owners can send a variety of outdial calls, including call placement, message delivery, auto wakeup, and paging. To prevent abuse and to provide better call traffic, you can restrict different outgoing call types to specific line groups and set appropriate restrictions and limits on each line group. This prevents users from accessing other services on dedicated line groups and allows you to monitor resource usage.

Mailbox owners can use the message delivery feature for message waiting, in which the server calls a specified number when the mailbox owner receives a new message. The person who answers the phone must enter the correct passcode to access the mailbox, thus ensuring that only the mailbox owner can listen to the message.

Mailbox owners can use call placement to record a message and send it to a telephone number (as opposed to a mailbox). The message sender can record the name of the intended recipient and can optionally require a passcode before the message is played.

The FCOS and LCOS settings provide a tool for the administrator to control access to outdial services. Various feature bits enable use of the different features, and LCOS limits control the number of digits that a mailbox owner can enter for a target telephone number. You can set the message delivery, paging, and message phone lengths to seven digits to limit calls to the local service area, or 10 (or 11) digits to allow for long distance calls.

### 1.3.3.1.4 Security for System Administration

In the hands of a trained and responsible administrator or technician, server administration functions can be used to provide convenient and full-featured service to mailbox owners and callers, and to keep the server functioning smoothly. In the wrong hands, the same functions can be used to take over mailboxes, disrupt service, and even shut down the server. Security for the administration function is extremely important. However, when [Functionally Partitioned System Administration](#) (FPSA) is employed, server security is assured because access can be restricted to authorized persons only.

#### System Maintenance Console (Text and Web Consoles)

The system maintenance console—the main point of entry for configuration and administration—is one of the most critical factors in security. Console access is protected by a login sequence of **User ID** and **Passcode** to verify a user before allowing access to menus.

#### FPSA User ID

The FPSA user ID is a unique representation of a person's identity within the system, consisting of up to 14 alphanumeric characters. Each user ID is associated with one real name, although a single real name can be assigned multiple user IDs.

During the login sequence, you are identified by your user ID, the terminal device, and the module where you log in. Each subsequent activity you perform during a session at a server maintenance console can be recorded in the audit trail.

An FPSA user can perform the following tasks:

- Log in/out of [Web](#) or [Text](#) Console
- Change password in [Web](#) or [Text](#) Console
- Display privileges in [Web](#) Console

#### System Superuser

The system superuser (a system administrator who logs in as "root" or "admin") can display, on a system maintenance console, all current user IDs, along with the names, passcodes, permission categories, and other statistics associated with the IDs.

The system superuser can perform following user-maintenance tasks:

- Configure FPSA parameters in [Web](#) or [Text](#) Console
- Add, delete and unlock FPSA users in [Web](#) or [Text](#) Console
- Modify FPSA user permission categories in [Web](#) or [Text](#) Console
- Reset FPSA user passwords in [Web](#) or [Text](#) Console
- Display a list of FPSA users in [Web](#) or [Text](#) Console
- Start an audit trail in [Web](#) or [Text](#) Console
- Generate an audit trail report in [Web](#) or [Text](#) Console

**Note:**

The system superuser's login user IDs ("root" and "admin") cannot be changed.

**Console Passcode**

A user ID can be verified by entering an optional passcode consisting of a mix of alphabetic, numeric and punctuation characters. The same passcode can be used with different user IDs. The system superuser and FPSA users each have their own passcode.

**FPSA Passcode Restrictions**

FPSA passwords:

- must contain at least one alphabetic, one numeric and one punctuation character (3! CALDA@) in the first eight characters.
- must be between six and 64 characters long for Web Console access, and between six and 30 characters long for Text Console access.
- cannot be reused.
- cannot contain accented characters.
- cannot contain a substring (four or more characters) of the user ID. For example, the user ID "mark61" cannot have the console passcode "**mar**key4!" or "n=**ark**60" because each contains a substring that is part of the user ID (indicated in bold characters).

Each time you log in the system displays the date and time of your last login and the number of unsuccessful attempts, if any, since your last login.

**Modem**

A modem on a serial port of the system can be used by you, or anyone else, to gain access to all system maintenance and configuration capabilities. You must protect this access point from abuse. The same login sequence described in the previous section applies to any remote access that uses the modem.

## Administrator's Mailbox

The [administrator's mailbox](#) can be used to perform several administration functions, including the creation and deletion of mailboxes.

To protect the administrator's mailbox:

- **Change the mailbox number** to any number up to 11 digits (you do not have to keep the default setting). If you do change the administrator's mailbox to a number with several digits, be sure the Dial Plan allows it (or change the plan).
- Make a passcode a condition for successful login.
- 

### Note:

The administrator's mailbox **must** have a passcode; it cannot be the same as the mailbox number, and it cannot be a trivial passcode (such as, 1234 or 8888).

- Set the FCOS to **require an access code** before callers can leave a message. If the administrator's mailbox number is not an integrated extension number, you must access the mailbox by calling the system: press the \* key (star) at the first greeting, enter the administrator's mailbox number, press the \* key (star), and enter the passcode.
- If the FCOS requires an access code, you must enter it before you can press the second \* (star), thus adding a second level of passcode-type protection.
- Use FCOS settings to further **restrict mailbox access to certain ports**, or to deny login to the mailbox (FCOS Category 2).
- 

### Note:

If you deny login to the mailbox, you must use the system console to allow login prior to performing any administration by phone.

## 1.3.3.1.5 Security Reports and Audit Trails

Several reports available from the **Text Console** can indicate breaches in system security or potential security abuse or concerns.

### Mailbox Reports

Use the following reports and options to review security issues. For details on specific reports see [Reports Overview](#).

- The **Mailbox Dump Report** can be run for specific mailboxes to obtain information about mailbox activity, including login status and usage statistics.

- The **Idle Mailboxes Report** lists mailboxes with no activity. This listing contains any unassigned or non-initialized mailboxes in the server.
- The **Mailbox Totals Report** gives the same type of information as the Idle Mailboxes Report, except that it covers all mailboxes in the system.
- The **Mailbox Data Inquiry Report** provides summary statistics for a single mailbox or a range of mailboxes.
- The **Mailbox Data Report** contains information on the number of recent failed login attempts and on the date of the last mailbox owner login. Because this report covers all mailboxes and contains extensive information, it is the last report used to examine potential abuse problems.
- **Mailbox searches** can locate mailboxes that meet certain criteria (such as those with a specific FCOS or GCOS, or those without a passcode, or with the tutorial enabled). If you suspect system abuse, you can identify the mailboxes involved by performing a search with the right criteria.

## Audit Trail

If you are the system administrator, you can obtain an Audit Trail Report of all users logged in during a specified period. After logging in, each subsequent activity performed during a session at a maintenance console is recorded in the audit trail.

Recorded information includes:

- User ID
- Time and date of activity
- Menus reached
- Actions taken
- Additional details you specify

Only the system administrator can configure and manage an audit trail. Audit trail options include:

- Start and stop the audit trail
- Review the audit trail report; each activity is recorded as a separate numbered entry
- Specify the maximum entries (up to 999,999) in an audit trail
- Specify the type of information that comprises an entry (entry details)
- Specify a range of entries to report

The audit trail resembles the system Logfile, but it does not need to be cleared. When the specified maximum number of entries is reached, the server continues to record new information, overwriting the oldest information and beginning again at entry 1. The system issues a warning, in the error log, when the number of entries reaches 85%, 90% and 95% of the maximum.

### 1.3.3.1.6 Configure Mailbox Passcode Parameters by FCOS

You can modify FCOS settings to control how mailbox owners can set their passcodes, including:

- Allow mailbox owners to change their passcodes
- Prevent the use of trivial passcodes
- Lock the owner out of the mailbox when there are too many invalid passcode entries.

To configure passcode parameters:

1. [Customize an FCOS](#) to include feature bit **70** (User Options Menu) and the following bits as applicable:
  - **73** (enter and change mailbox passcode)
  - **81** (only require one correct passcode for login)
  - **93** (deny change of passcode in first tutorial)
  - **130** (passcode cannot be same as mailbox)
  - **132** (bad passcode lockout if over limit)
  - **201** (deny trivial passcode)
  - **218** (passcode not needed on direct calls)
2. Assign the FCOS containing these bits to each mailbox that requires these passcode settings.

### 1.3.3.1.7 Restrict Line Group Access

This procedure describes how to restrict line group access in a variety of ways. Select those methods that are appropriate for your server and users.

#### Require Callers to Enter a Line Group Access Code

1. [Customize an FCOS](#) to include feature bit **160** (Caller must enter line group access code).
2. Set the Access Code in the Administrator's Mailbox for each line group that requires an access code. The Department Code is the line group access code. Callers do not have to enter an access code on line groups with no department code in the Administrator's Mailbox.

## Deny Login on Specific Line Groups

- [Customize each FCOS](#) to include feature bit **101-109** (Deny login on line groups 1-9, respectively).

## Force the Termination or Transfer of Calls to Greeting-only Mailboxes

- [Customize an FCOS](#) to include one of the following feature bits:
  - **62** (Hang up immediately after greeting)
  - **63** (Call mailbox attendant after greeting)
  - **64** (Call mailbox user extension after greeting)
- Assign the FCOS containing these bits to each greeting-only mailbox that requires these passcode settings.

## 1.3.3.2 Procedures (Web Console)

### 1.3.3.2.1 List of Current Users

You can view a list of FPSA users who are currently logged into the Web Console.

#### Note:

- Only the system superuser can perform this procedure.
- The list includes FPSA users who have been added in both the Text Console and the Web Console.

To display a list of current users:

1. In the navigation tree, click FPSA Management >Who is online.

The Administrators Online page displays the list of FPSA users who are currently logged in to the Web Console. The User ID, Name, and Login Time is provided for each user.

2. To update the page, click **Refresh**.

### 1.3.3.2.2 Start an Audit Trail



This procedure describes how to start the NuPoint Unified Messaging audit trail that creates a record of users logged in at a Web Console.



**Note:**

Only the system superuser (root) can perform this procedure.

To start an audit trail:

1. In the navigation tree, click Report Generation > **Start Audit Trail**.

The Start Audit Trail page displays.

2. Enter a number from 1 to 999999 as the **Maximum Audit Trail Entries** to record. If you leave the current number of trail entries set to 0, the audit trail will remain empty even after being started.

**Note:**

The system issues a warning in the error log when the number of entries reaches 85%, 90% and 95% of the maximum. To ensure that this process functions properly, enter values in multiples of 100 (in other words, enter 200 or 2000, but do not enter 201 or 2222).

3. To start the audit trail, click **Start**.

The audit trail starts and continues running until it has recorded the number of events you specified or the system capacity is exceeded. If there is a capacity problem, a series of alarms are issued until the capacity limit is reached, at which time older audit trail entries will be overwritten.

**Note:**

Once you have started an audit trail, you cannot stop it. However, when you [Export an Audit Trail](#) all data is deleted, enabling you to start a new audit trail.

### 1.3.3.2.3 Export an Audit Trail

Use this procedure to download the audit trail and delete all existing entries. It is important to clear the data in this manner if your system has limited storage capacity.

**Note:**

Only the system superuser (root) can perform this procedure.

To export an audit trail:

1. In the navigation tree, click Report Generation >**Export**.

The Export Audit Trail page displays.

2. Click **Export**.
3. Depending on which type of browser you are using, the download may begin automatically or the File Download dialog may display. If the File Download displays, navigate to the place where you wish to store the audit trail and click **Save**.

The report is exported in CSV format and data for the current audit trail is deleted. To resume the audit trail, you must [Start an Audit Trail](#).

### 1.3.3.2.4 Generate an Audit Trail Report

Use this procedure to generate the current NuPoint Unified Messaging audit trail report and display it in the Web Console.

**Note:**

Only the system superuser (root) can perform this procedure.

To generate a report of the audit trail:

1. In the navigation tree, click Report Generation >**Report**.

The Generate Audit Trail Report page displays.

2. Use the screen tools to select the **Time Range** (start and end date/time).
3. Use the **Include Data** check boxes to select which data columns and records numbers to include in the report.
4. Select the report format:
5. **Printer Friendly Version:** The report is opened in a web page which you can print.
6. **Export to CSV File:** The report is downloaded to your system in CSV format. Depending on which type of browser you are using, the download may begin automatically or the File Download dialog may display. If the dialog displays, navigate to the place where you wish to store the audit trail and click **Save**. No data is deleted when you perform this function.

**Note:**  
Generating an audit trail report in printer friendly or CSV format *does not* delete any data, unlike when you [Export an Audit Trail](#).

### 1.3.3.3 Procedures (Text Console)

#### 1.3.3.3.1 List of Authorized Users

You can view a list of FPSA users who have access to the server.

- Note:**
- Only the system superuser can perform this procedure.
  - The list includes FPSA users who have been added in both the Text Console and the Web Console.

To display a list of authorized users:

- From the Main menu, select **(S) System Maintenance, (P) Passwords and Security,** and then **(L) List Users**.

**Sample List of Authorized Users**

| User ID----- | UID----- | Real Name-----  | Last Login----- | Has Password--- |
|--------------|----------|-----------------|-----------------|-----------------|
| Locked---    | Perm---  |                 |                 |                 |
| cmartin      | 5001     | christal martin | <none>          | Yes No .23456   |
| jsmith       | 5003     | Jeff smith      | <none>          | Yes No .2....   |
| mjones       | 5002     | melanie jones   | Aug 25 2011     | Yes No ...45.   |

#### 1.3.3.3.2 Configure Mailbox Passcode Parameters by Line Group

This procedure describes how to:

- Set a minimum and maximum passcode length
- Set the number of incorrect passcode attempts that will trigger a warning

- Set the period for counting incorrect passcode attempts

To configure mailbox passcode parameters by line group:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(R) Reconfigure System**.
2. Do one of the following:
3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
4. Otherwise, select **(E) Modify Active Configuration**.
5. Select **(G) Group Selected** and enter the **number** of the line group (1-24) that you want to modify.
6. Select **(M) Modify Application** and then **(P) Passcode Menu**.
7. Select **(M) Minimum Passcode Length** and enter a **number** (4-10). This is the minimum number of digits that constitute a valid passcode for all users in the current line group.
8. Select **(N) Maximum Passcode Length** and enter a **number** (4-10). This is the maximum number of digits that constitute a valid passcode for all users in the current line group.
9. Select **(C) Passcode Trip Count** and enter the **number** of times (1-255) someone can attempt to use an incorrect passcode during a passcode trip period before a warning is issued, or enter **0** (zero) to disable the passcode trip count function.
10. Select **(P) Passcode Trip Period** and enter the **number** of hours (1-240) for the time limit for a passcode trip count, or **enter 0** (zero) to disable the passcode trip period function.
11. Save the parameter settings by exiting to the NuPoint Voice Configuration Main Menu.
12. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.3.3.3.3 Prevent Multiple Message In an Answering Session

#### Prevent Multiple Message In an Answering Session

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, **(R) Reconfigure System**.
2. Do one of the following:
3. Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
4. Otherwise, select **(E) Modify Active Configuration**.
5. Select **(G) Group Selected** and enter the **number** of the line group (1-24) to modify.

6. Select **(M) Allow Multiple Messages for Outside Caller** and enter **N** to prevent outside callers from leaving more than one message with a single call-in.
7. Save the entry by exiting to the Main Menu. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.3.3.3.4 Set Site Name, Site Banner, or Site Code

To set the site name, site banner, and the site code:

#### Changing Site Name and Code

1. From the Main Menu, select **(S) System Maintenance**, and then **(N) Site Name, Code, Banner**. The server displays the current site name, code and banner.
2. Select **(N) Change Site Name** and then enter **Y** to change the site name, or **N** to keep the current site name.
3. If you entered Y, enter a descriptive site **name**, up to 60 characters.
4. Select **(C) Change Site Code** and enter a site code, up to 10 characters.
5. Exit the site name menu.

#### Changing the Site Banner

1. From the Main Menu, select **(S) System Maintenance**, and then **(N) Site Name, Code, Banner**. The server displays the current site name, code and banner.
2. Select **(B) Change Site Banner** and enter **Y** to change the site banner, or **N** to keep the current site banner.
3. If you entered Y, enter a **banner**, up to 240 characters, 65 characters or fewer per line. Terminate text by entering a **period (.)** on a new line and press **Enter**.
4. Exit the site name menu.

#### Reverting to the Previous or Default Site Banner

1. From the Main Menu, select **(S) System Maintenance**, and then **(N) Site Name, Code, Banner**. The server displays the current site name, code and banner.
2. Select **(P) Revert to Previous Site Banner** and enter **Y** to reset the site banner to the previous text, or **N** to keep the current site banner.
3. To change the banner back to the default setting, select **(D) Revert to Previous Site Banner** and then **Y** to reset the site banner to the default text, or **N** to keep the current site banner.
4. Exit the site menu.

## 1.3.3.3.5 Audit Trails

### 1.3.3.3.5.1 Start or Stop an Audit Trail

This procedure describes how to start or stop the audit trail that creates a record of users logged in at a server text console.

Note: Only the system superuser (root) can perform this procedure.

#### Starting the Audit Trail

To start an audit trail:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(T) Audit Trail Menu**.
3. Select **(A) Max. Number of Audit Trail Entries** and enter a **number** from 1 to 999999 for the maximum number of entries to record in the audit trail. If you leave the current number of trail entries set to 0, the audit trail will remain empty even though you start it.

#### Note:

The system issues a warning in the error log when the number of entries reaches 85%, 90% and 95% of the maximum. To ensure that this process functions properly, enter values in multiples of 100 (in other words, enter 200 or 2000, but do not enter 201 or 2222).

4. Select **(B) Start Audit Trail**. The audit trail begins.

#### Stopping the Audit Trail

To stop an audit trail:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(T) Audit Trail Menu** and then select **(C) Stop Audit Trail**.

### 1.3.3.3.5.2 Format an Audit Trail Report

To format a report of the audit trail at the server console:

**Note:**

Only the system superuser (root) can perform this procedure.

To format an audit trail:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(T) Audit Trail Menu** and then **(D) Audit Trail Report Menu**.
3. Select **(A) Details** and enter one of the following:

- **A** for all details
- A single field **number** for a single detail, for example, 5
- A range of field **numbers** for a continuous range of details, for example, 5-10
- A comma-separated list of field **numbers**, for example, 4,5,8. This list can also include a range, for example 4-8,9.
- Enter a question mark (?) to see a list of the details available:

| Field Number | Abbrev. | Description                                        |
|--------------|---------|----------------------------------------------------|
| 1            | TEN     | Trail entry number                                 |
| 2            | DATE    | Date of the entry                                  |
| 3            | TIME    | Time of the entry                                  |
| 4            | PORT    | TTY Port number                                    |
| 5            | SVID    | Server identifier                                  |
| 6            | USER    | ID of user logged in                               |
| 7            | PROG    | Application or menu invoked                        |
| 8            | ACT     | Action taken (start, stop, delete, configure, etc. |
| 9            | SMBX    | Starting mailbox number                            |
| 10           | EMBX    | Ending mailbox number                              |

4. Select **(B) Field Delimiter** and enter **0** to make the field delimiter a space, **1** to make the field delimiter a tab, or enter any printable character.
5. Select **(C) Starting Trail Entry Number** (to specify the first entry to be reported) and enter a trail entry **number** from 1 to 999999.
6. Select **(D) Ending Trail Entry Number** and enter an ending trail entry **number** from 1 to 999999.
7. Select **(E) Report's Width** and enter the **number** of characters, from 40 to 160, in a displayed line of the report

### 1.3.3.3.5.3 *Generate an Audit Trail Report*

**Note:** Only the system superuser (root) can perform this procedure.

To generate a report of the audit trail at a server text console:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(T) Audit Trail Menu** and then **(D) Audit Trail Report Menu**.
3. Ensure that you have completed the [Format an Audit Trail Report](#) procedure before proceeding.
4. Select **(F) Generate Report**.

The server displays the report, formatted as specified, at the server console. When the end of the report is displayed, you can continue in the Audit Trail Menu or exit.

## 1.3.3.4 Functionally Partitioned System Administration (FPSA)

### 1.3.3.4.1 Functionally Partitioned System Administration

Functionally Partitioned System Administration (FPSA) is a standard software feature that requires you to enter your user identifier (user ID) and password for verification before you can reach any of the system maintenance console menus. Access to the menus is based on the authorization level of your user ID and password.

FPSA allows access to menus only to persons who are authorized through permission categories. In addition, FPSA requires passwords for all users logging in.

#### **FPSA Permission Categories**

Six permission categories are available. The first is applicable only to the system superuser. The remaining five can be applied to FPSA users to establish their privileges. The categories are described in the following table.



| Category # | Category Name           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | System Superuser        | <p><b>Unlimited access to all Text and Web Console features and server resources. Can perform FPSA management activities such as adding users, unlocking users, changing permission categories, resetting passwords and starting audit trails.</b></p> <p><b>Two superusers ("admin" and "root") are created when the system is originally installed. You can reset their password, but you cannot change or delete them. If you forget the superuser password, you can contact Mitel assistance for assistance or reset it yourself using a <a href="#">Unix Shell</a> command.</b></p> |
| 2          | NuPoint Voice Superuser | Access to all Text and Web Console features and server resources with the exception of FPSA management.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 3          | System Configuration    | <p><b>Access only to system configuration and network features in the Text and Web Console .</b></p> <p><b>For example, see <a href="#">Features Class of Service</a>.</b></p>                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4          | Mailbox Maintenance     | Access only to mailbox maintenance features in the Text and Web Console .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5          | Inquiry/Report Only     | Access only to inquiry features such as Reports, Statistics, and Dump in the Text and Web Console .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Category # | Category Name         | Description                                                                       |
|------------|-----------------------|-----------------------------------------------------------------------------------|
| 6          | Network Configuration | Access only to network and network-related features in the Text and Web Console . |

After logging in as an FPSA user, you can perform menu-based procedures described in this section **ONLY** if you have the appropriate permission category or categories.

FPSA limits access to menus based on a permission category or categories assigned to each user ID. If you attempt to reach an unauthorized menu, the server responds with a "Permission denied" message. Each server menu also has one or more permission categories associated with it.

When you assign permission categories to each user, make sure that the combination is sensible. For example, category 1 gives access to the entire server, so there is no need to assign any other permission categories in addition. Categories 3 and 6 together give permission for all system configuration menus.

## Using FPSA

FPSA is activated by default on the NuPoint UM system. Prior to using it, the administrator needs to configure the FPSA parameters and add up to 500 new users in the Text or Web Console. When these steps are complete, the users can reach console menus only if they have the proper permission category (or categories). Every console menu is associated with one or more permission categories.

## Password Restrictions

The following restrictions apply to FPSA passwords:

- Passwords must contain at least one letter, one digit, and one punctuation mark. For example, **o;ster1**.
- Users must change their passwords periodically (default is 30 days). The new password must be different from the old one. The server issues a reminder notice at login warning that the password must be changed; the default reminder period is seven days. If the password is not changed before the expiration date, the server forces the user to change passwords after logging in. The system superuser can set the period between password changes and the period for displaying warnings.

The above-noted restrictions do not apply to the system superuser ("admin" and "root").

## Login and Usage Errors

If a user enters an invalid or incorrect ID or password, the server displays "login incorrect" and the login sequence halts. If a user attempts to reach a menu outside the user's permission category or categories, the server displays "permission denied" and prohibits access.

After three unsuccessful login attempts, the user will be locked out and must contact the system superuser to have his or her [password reset](#). If you are the system superuser and forget your password or become locked out, contact Technical Support for assistance or reset the password using a [Unix Shell](#) command.

### Login Restrictions (Web Console only)

An FPSA user can only have one login session. If a user opens a second session on the same or another PC, the first session will be terminated.

A client can support only one login session. If an FPSA user opens a second session, the first session will be terminated.

FPSA users are automatically logged out after five minutes of inactivity.

Up to five users of any type (FPSA, "admin," or "root") can be logged in to Web Console simultaneously. If a sixth user attempts to log in, access will be denied.

### Configuration

Configuration involves the following steps:

- Configure password parameters
- Add FPSA users to the Web or Text Console
- Set up an audit trail if desired

#### Note:

FPSA user information is not included in a NuPoint backup. If it is necessary to perform a restore procedure, FPSA user information will not be included.

### NuPoint Feature Examples

The following table provides examples of how NuPoint features can be accessed with FPSA permission categories.

| Feature                               | Permission Category |   |   |   |   |
|---------------------------------------|---------------------|---|---|---|---|
| 1                                     | 2                   | 3 | 4 | 5 | 6 |
| Change Password and Security Settings | *                   |   |   |   |   |
| Configure NP-UM Wake Up               | *                   | * |   |   |   |
| Configure Remote Modem Connection     | *                   | * |   |   |   |
| Resynchronize HIS PMS                 | *                   | * |   |   |   |

| Feature                                  | Permission Category |   |   |  |  |
|------------------------------------------|---------------------|---|---|--|--|
| Manually Purge Messages                  | *                   | * |   |  |  |
| Perform System Shutdown                  | *                   | * |   |  |  |
| Set Site Name, Site Code, or Site Banner | *                   | * |   |  |  |
| Perform Backup/Restore                   | *                   | * |   |  |  |
| Manage Class of Service                  | *                   | * | * |  |  |
| Edit/Activate Offline Configuration      | *                   | * | * |  |  |
| Configure Speech Auto Attendant          | *                   | * | * |  |  |
| Configure Unified Messaging              | *                   | * | * |  |  |
| Configure Call Director                  | *                   | * | * |  |  |
| Enable Alarm Management                  | *                   | * | * |  |  |

## 1.3.3.4.2 Procedures (Web Console)

### 1.3.3.4.2.1 FPSA Management

#### 1.3.3.4.2.1.1 Configure FPSA Password Parameters



This procedure describes how the system superuser can configure password parameters.

#### Note:

Only the system superuser can perform this procedure.

To configure FPSA password parameters:

1. In the navigation tree, click FPSA Management > Password Parameters.

The Password Parameters page is displayed.

2. In the **Password Expiration Period** field, enter the number of days, from 1 to 365, preceding the expiration of a password that the server issues a warning to change the password. The default is 30 days.
3. Click **Save**. The setting change takes effect immediately.

## 1.3.3.4.2.1.2 Add, Delete, Lock, or Unlock a User ID



These procedures describes how to manage user IDs with the Web Console.

### Note:

Only the system superuser can perform the following procedures.

### Adding a User ID

To add an FPSA user:

1. In the navigation tree, click FPSA Management > Administrators.

The Administrators page is displayed.

2. Click **Add**.
3. Enter a unique **User ID** of up to 14 alpha-numeric characters.
4. Enter the user's actual **First Name** and **Last Name**. Each field can contain up to 50 alphabetic characters.
5. Select the password **Type**:
6. **User Specified**: If you select this option, you must manually configure the password by entering it twice. It must contain at least one alphabetic, one numeric and one punctuation character in the first eight characters, and be between six and 64 characters long. It cannot contain accented characters.
7. **System Generated**: If you select this option, the system will automatically generate the password.
8. Select the permission categories; for example: 4, 5, 6. At least one permission category is required. Refer to the table below for descriptions.

| Category | Description                                                                                                                                                                                                                                                                                                                                   |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | System Superuser. Unlimited access to all features and server resources. Can perform FPSA management activities such as adding users, unlocking users, changing permission categories, resetting passwords and starting audit trails. This category is created when the system is installed; therefore, it cannot be set through the console. |
| 2        | NuPoint Voice Superuser. Access to all features and server resources with the exception of FPSA management.                                                                                                                                                                                                                                   |
| 3        | System Configuration. Access only to system configuration and network features.                                                                                                                                                                                                                                                               |

| Category | Description                                                                                 |
|----------|---------------------------------------------------------------------------------------------|
| 4        | Mailbox Maintenance. Access only to mailbox maintenance features.                           |
| 5        | Inquiry/Report Only. Access only to inquiry features such as Reports, Statistics, and Dump. |
| 6        | Network Configuration. Access only to network and network-related features.                 |

9. Click **Save**. The settings take effect when you see the confirmation "<user ID> added."
10. Record the password and give it to the user.

## Locking a User ID

While users are "locked," they cannot log in to the system. The system administrator can lock a user using the procedure outlined below, or a user may become locked by entering incorrect login credentials three times in a row.

To manually lock an FPSA user:

1. In the navigation tree, click FPSA Management > Administrators.

The Administrators page is displayed.

2. Specify the users you wish to lock by selecting the check boxes next to their User IDs.
3. Click **Lock**.

A lock icon displays next the name of each user who is locked.

## Unlocking a User ID

The system administrator can unlock users who have a "lock" icon next to their names on the Administrators page.

To unlock an FPSA user:

1. In the navigation tree, click FPSA Management > Administrators.

The Administrators page is displayed.

2. Specify the users you wish to unlock by selecting the check boxes next to their User IDs.
3. Click **Unlock**.

**Note:**

You can also unlock a user by clicking the lock icon next to the user's name.

**Deleting a User ID**

To delete an FPSA user:

1. In the navigation tree, click FPSA Management >Administrators.

The Administrators page is displayed.

2. Select the check boxes to the left of the ID column to choose one or more users, or all users.
3. Click **Delete**, and then confirm that you wish to proceed.

The deletion takes effect and future login attempts will be prevented.

### 1.3.3.4.2.1.3 Modify Permission Categories for Current User IDs

This procedure describes how to add or delete permission categories for a current user ID. Assigning permission categories to a **new** user is covered in [Add, Delete, or Unlock a User ID](#).

**Note:**

Only the system superuser can perform this procedure.

To modify permission categories for an FPSA user ID:

1. In the navigation tree, click FPSA Management >Administrators.

The Administrators page is displayed.

2. Specify the user you wish to modify by selecting the check box next to the User ID.
3. Click **Edit**.

4. Enter up to five **categories**, numbers 2 - 6, each separated by a comma. You must enter all the categories desired, not just the category that you are adding or deleting. For example, to add category 6 to categories 4 and 5, enter 4,5,6.

| Category | Description                                                                                                                                                                                                                                                                                                                                   |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | System Superuser. Unlimited access to all features and server resources. Can perform FPSA management activities such as adding users, unlocking users, changing permission categories, resetting passwords and starting audit trails. This category is created when the system is installed; therefore, it cannot be set through the console. |
| 2        | NuPoint Voice Superuser. Access to all features and server resources with the exception of FPSA management.                                                                                                                                                                                                                                   |
| 3        | System Configuration. Access only to system configuration and network features.                                                                                                                                                                                                                                                               |
| 4        | Mailbox Maintenance. Access only to mailbox maintenance features.                                                                                                                                                                                                                                                                             |
| 5        | Inquiry/Report Only. Access only to inquiry features such as Reports, Statistics, and Dump.                                                                                                                                                                                                                                                   |
| 6        | Network Configuration. Access only to network and network-related features.                                                                                                                                                                                                                                                                   |

5. Click **Save**. The category modification takes effect when you see the message "<User ID> modified."

### 1.3.3.4.2.1.4 Reset a Password

This procedure describes how the system superuser can reset an FPSA user password.

**Note:**

Only the system superuser can reset a user's password.

To reset an FPSA password:

1. In the navigation tree, click FPSA Management > Administrators.

The Administrators page is displayed.

2. Specify the user you wish to reset by selecting the check box next to the User ID.
3. Click **Reset**.
4. Select the password **Type**:
5. User Specified: If you select this option, you must manually configure the password by entering it twice. It must contain at least one alphabetic, one numeric and one



punctuation character in the first eight characters, and be between six and 64 characters long. It cannot contain accented characters.

6. **System Generated:** If you select this option, the system will automatically generate the password.
7. Click **Save**. The password change takes effect when you see "Password reset for user ID <user ID>. Password expiration date reset."

### 1.3.3.4.2.2 FPSA Use

#### 1.3.3.4.2.2.1 Log In or Log Out of the Web Console

This procedure describes how to log in to or log out of a server through the NuPoint Unified Messaging Web Console. The login steps described below become the first steps in every procedure that requires access to a menu, even though they are not described in every procedure.

##### Logging In

1. Activate the NuPoint Unified Messaging Web Console.
2. At the Login prompt, enter your **user ID**.
3. **When prompted, enter your password.** It does not display.

After you have successfully logged in, the server displays your User ID.

##### Login Incorrect

If "login incorrect" displays, one of the following may have occurred:

- You typed your User ID incorrectly
- You typed your password incorrectly
- Your User ID has been locked

Try again, being careful to enter your user ID and password correctly.

After three unsuccessful login attempts, you will be locked out. To regain access to the system, contact your system administrator to have your [password reset](#). If you are the system superuser ("root" or "admin"), contact Technical Support for assistance.

##### Password Expiration

By default, FPSA user passwords expire after 30 days. The expiry interval can be changed by the system administrator to anything from one to 365 days.

One day before your password is due to expire, you will receive a warning message instructing you to [change it](#). If you fail to do this and allow your password to expire, you will be prompted to configure a new password the next time you attempt to log in.

### **Permission Denied**

If you do not have the correct permission categories to access a menu option, the server prompts "Permission Denied." To change your permission categories, contact your system administrator.

### **Logging Out**

You can log out while you are viewing any Web Console screen.

- To log out, click **Logout** in the upper right corner of the Web Console interface.

When logout is completed, the server displays the login prompt.

## **1.3.3.4.2.2 Change a Password**

This procedure describes how users with any permission category can change their passwords.

**NOTE:** Change Password option is available for FPSA users only if the user is logged in through npm-admin.

### **Changing a Password**

To change an FPSA password:

- 1.** In the navigation tree, click **Utilities>Change Password**.

The Change Password page is displayed.

- 2.** Enter the following fields:

- Enter old password
- Enter new password
- Confirm new password

**Note:**

Your new password:

- must be different from the old password
- must contain at least one alphabetic, one numeric and one punctuation character (3!CALDA@) in the first eight characters.
- must be between six and 64 characters long.
- cannot contain accented characters.
- cannot contain a substring (four or more characters) of the user ID

3. Click **Save**. Your new password takes effect when you see the message "Password changed. Password expiration date reset."

### 1.3.3.4.2.2.3 Display Administrator Privileges



This procedure describes how users can check which features they may access in the Web Console.

**Note:**

Feature access is determined by the permission categories you have been assigned by the system superuser.

To display administrator privileges:

- In the navigation tree, click Utilities > My Admin Privileges.

The Administrator Privileges page displays a list of the features you may access on the Web Console:

- Mailbox Maintenance
- Report Generation
- Audit Trail
- Class of Service
- Active Configuration
- Offline Configuration
- Auto Attendant
- FPSA Management

- Utilities

### 1.3.3.4.3 Procedures (Text Console)

#### 1.3.3.4.3.1 FPSA Management

##### 1.3.3.4.3.1.1 Configure FPSA Password Parameters

This procedure describes how the superuser can configure password parameters.

**Note:**

Only the system superuser can perform this procedure.

To configure FPSA password parameters:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/ Security**.
2. Select **(P) Configure Password Parameters** and specify the **number** of days, from 1 to 365, before a password expires. The default is 30 days.
3. These settings take effect immediately.

##### 1.3.3.4.3.1.2 Add, Delete, or Unlock a User ID

This procedure describes how to add or delete a user ID, and how to unlock the ID of a user. Adding a user ID involves specifying a user ID, the actual (real) name, a password, and permission categories. Only the server superuser can perform this procedure.

#### Adding a User ID

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/ Security**.
2. Select **(A) Add User** and enter a unique **user ID** of up to 17 letters.
3. Enter the **real name**, up to 25 letters, of the person to be associated with this user ID.
4. Enter the permission categories; a **digit** from 2 through 6, or any combination of these digits, separated by commas. For example: 4,5,6. Refer to the table below for a description of permission categories.

| Category | Description                                                                                                                                                |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | Unlimited access to all console menus and all server resources (synonymous with server superuser access). This category cannot be set through the console. |

| Category | Description                                                                                                     |
|----------|-----------------------------------------------------------------------------------------------------------------|
| 2        | Unlimited access to all console menus and Linux shell, except security features limited to the server superuser |
| 3        | Access only to system configuration menus except network configuration (see Features Class of Service)          |
| 4        | Access only to mailbox maintenance menus                                                                        |
| 5        | Access only to inquiry menus (read-only menus such as Reports, Statistics, and Dump)                            |
| 6        | Access only to network and network-related menus                                                                |

- 

1. The system assigns a temporary password that is valid for 30 days. Write it down and give it to the user.
2. These settings take effect when you see the confirmation "<user ID> added."

### Unlocking a User ID

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(U) Unlock User** and enter the User ID of the locked user.
3. Unlocking takes effect when you see the confirmation "<user ID> unlocked."

### Deleting a User ID

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(D) Delete User** and enter the **user ID** to be deleted. Check the User ID and real name displayed to ensure it is the correct one to delete.
3. Enter Y to delete the user or **N** to keep the user.
4. The deletion takes effect when you see the confirmation "<user ID> deleted."

## 1.3.3.4.3.1.3 Modify Permission Categories for Current User IDs

This procedure describes how to add or delete permission categories for a current user ID. Assigning permission categories to a **new** user is covered in [Add, Delete, or Unlock a User ID](#).

**Note:**

Only the system superuser can perform this procedure.

To modify permission categories for an FPSA user ID:

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(M) Modify User Data** and enter the **user ID** to be modified.
3. Press **Enter** until you are prompted to **Enter the permission categories (separated by commas)**.
4. Enter up to five **categories**, numbers 2 - 6, each separated by a comma. You must enter all the categories desired, not just the category that you are adding or deleting. For example, to add category 6 to categories 4 and 5, enter 4,5,6.

| Category | Description                                                                                                                                                                                                                                                                                                                                   |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | System Superuser. Unlimited access to all features and server resources. Can perform FPSA management activities such as adding users, unlocking users, changing permission categories, resetting passwords and starting audit trails. This category is created when the system is installed; therefore, it cannot be set through the console. |
| 2        | NuPoint Voice Superuser. Access to all features and server resources with the exception of FPSA management.                                                                                                                                                                                                                                   |
| 3        | System Configuration. Access only to system configuration and network features.                                                                                                                                                                                                                                                               |
| 4        | Mailbox Maintenance. Access only to mailbox maintenance features.                                                                                                                                                                                                                                                                             |
| 5        | Inquiry/Report Only. Access only to inquiry features such as Reports, Statistics, and Dump.                                                                                                                                                                                                                                                   |
| 6        | Network Configuration. Access only to network and network-related features.                                                                                                                                                                                                                                                                   |

The category modification takes effect when you see the message "<User ID> modified. Press any key to continue."

### 1.3.3.4.3.1.4 Reset a Password

This procedure describes how the superuser can reset a password for users.

**Note:**

Only the server superuser can reset a password.

1. From the Main Menu, select **(S) System Maintenance**, and then **(P) Passwords/Security**.
2. Select **(R) Reset** user password and enter the **user ID** to be modified.
3. Note the new temporary password assigned by the server.
4. The password change takes effect when you see "Password reset for user ID <user ID>."
5. Password expiration date reset."

### 1.3.3.4.3.1.5 List of Authorized Users

You can view a list of FPSA users who have access to the server.

**Note:**

- Only the system superuser can perform this procedure.
- The list includes FPSA users who have been added in both the Text Console and the Web Console.

To display a list of authorized users:

- From the Main menu, select **(S) System Maintenance**, **(P) Passwords and Security**, and then **(L) List Users**.

**Sample List of Authorized Users**

| User ID----- | UID----- | Real Name-----  | Last Login----- | Has Password--- |
|--------------|----------|-----------------|-----------------|-----------------|
| Locked---    | Perm---  |                 |                 |                 |
| cmartin      | 5001     | christal martin | <none>          | Yes No .23456   |
| jsmith       | 5003     | Jeff smith      | <none>          | Yes No .2....   |
| mjones       | 5002     | melanie jones   | Aug 25 2011     | Yes No ...45.   |

### 1.3.3.4.3.2 FPSA Use

#### 1.3.3.4.3.2.1 Log In or Log Out of the Text Console



This procedure describes how to log in to or log out of a server through the NuPoint Unified Messaging Text Console. The login steps described below become the first steps in every procedure that requires access to a menu, even though they are not described in every procedure.

## Logging In

To log in as an FPSA user:

1. Activate the NuPoint Unified Messaging Text Console.
2. At the Login prompt, enter your **user ID**.
3. **When prompted**, enter your **password** or your temporary **password**. It does not display.
4. At your first login, you must change your temporary **password** to a personalized password. Your password:
  - must contain at least one alphabetic, one numeric and one punctuation character (3!CALDA@).
  - must be between six and 30 characters long.
  - cannot contain a substring (four or more characters) of your user ID.

When you have successfully logged in, the server displays a message such as the following:

\*\*\*\*Last successful login: 12/24/10 9:41 a.m.

## Login Incorrect

If "login incorrect" displays, one of the following may have occurred:

- You typed your user ID incorrectly
- You typed your password incorrectly
- Your user ID has been locked

Try again, being careful to enter the user ID and password correctly. If you are still unsuccessful, contact your system administrator to have your [password reset](#). If you are the system superuser ("root" or "admin" user), contact Technical Support for assistance.

## Warning About Password Expiration

If a warning about password expiration displays, you can continue logging in but you should [change your password](#) without delay, through the Passwords/Security Menu. If your password expires, you are forced to change it as soon as you log in.



## Permission Denied

If a user does not have the correct permission categories to access a menu option, the server prompts "Permission Denied." To change your permission categories, contact your system administrator.

## Logging Out

You can perform a routine logout from the Main Menu, or you can take a shortcut from any related menu.

- To log out routinely, return to the Main Menu, then press **(X)** to exit.
- To take a shortcut, press **Ctrl-C**.

In either method, when logout is completed, the server displays the login prompt on the main console only.

### 1.3.3.4.3.2.2 Change Text Console Password

The password for the 'admin' and 'root' users is the same password, and is set when the MSL operating system is installed and configured. We recommend that you do not change the root password, as it will not make a corresponding change to the 'admin' password and they will be out of synch.

If it is your intention to have different passwords for the 'admin' and 'root' users, then you can use the following procedure to do so.

To change the console password:

1. From the Main menu, select **(S) System Maintenance** and then **(P) Passwords/Security**.
2. Select **(C) Change Password** and enter the new 'root' password. The console passcode may be 6 to 30 alphanumeric characters. The letters may be upper or lower-case.
3. When prompted, re-enter the new password. The system confirms the password change.

#### Note:

Administration by phone requires a different phone passcode. Instructions for setting a passcode for phone administration are provided in [Administration by Phone](#). When FPSA is activated, additional restrictions apply to console passcodes. See [Functionally Partitioned System Administration \(FPSA\)](#).

## 1.3.4 Billing

### 1.3.4.1 Description

#### 1.3.4.1.1 Overview

This section describes the billing function and gives the requirements for configuring the billing function. Billing reports are summarized in this section, but the Reports section has more complete information about them. Information covered in this section includes:

- Setting rates
- Gathering billing data
- Billing reports
- Configuration requirements

#### About Billing

The billing function collects statistics about NuPoint Unified Messaging server usage and calculates charges for that usage. You can set a low-usage rate and a high-usage rate for each statistic. This rate-setting arrangement gives you the option to charge fixed rates, give volume discounts, or charge for heavy use. During day-to-day server operation, over 120 different statistics can be kept for each mailbox, grouped into these six categories:

- Mailbox access
- Base rates
- Connect time
- Disk usage
- Messages received
- Network rates
- Pager calls

You can configure the server to perform a gather of these statistics, then obtain billing reports generated by the server from the resulting information.

#### Billing Reports

After the server performs a gather, the statistics and charges that are calculated go into four types of billing reports that the server can generate. Each report gives a breakdown of charges for individual mailboxes by statistics, then calculates the total amount that is due. Each report has a different purpose. Samples of these reports and explanations of their contents are contained in the [Reports](#) section.

## 1.3.4.1.2 Configuration Requirements for Billing

Configuring for billing involves obtaining a report of current rates, using a Billing Worksheet, and adjusting rates, if necessary.

### Current Billing Rates

You can use Text console reports to see what the current rates are for various statistics, such as base rates and pager calls. In the Web console, you can view all current rates on the Billing Rates page.

Use these options to see what the low usage and high usage rates are and what the low/high boundary is for each statistic in the categories mentioned earlier. When configuring for billing, you should check these figures to help you determine which rates to set or adjust. If you are setting rates for many of the server usage activities, you should also use the report of current rates as an extension of the Billing Worksheet, marking it up to show the rates for all the various server usage activities desired.

### Billing Worksheet

Complete one Billing Worksheet for each line group. For all rates except Base Rates, specify the Low rate, the High rate, and the Boundary (the point at which the High rate applies).

The Billing Worksheet has two pages. Be sure you complete both pages when working on Billing Rates. Blank worksheets are located in [Worksheets](#) section. A sample Billing Worksheet is shown here:

## Billing Worksheet, Page 1 of 2

|                                                    | R A T E   |          |            |
|----------------------------------------------------|-----------|----------|------------|
|                                                    | Low Usage | Boundary | High Usage |
| <b>Messages Received</b>                           |           |          |            |
| Messages received from users                       | 0.500     | 20       | 1.000      |
| Messages received from callers                     | 0.700     | 10       | 1.500      |
| Messages future deliveries                         |           |          |            |
| Call placement per minute rate (Connect Time)      |           |          |            |
| Call placement per call rate                       |           |          |            |
| Urgent messages received from callers              |           |          |            |
| Auto wakeups or TAS messages                       |           |          |            |
| Receipt requests                                   |           |          |            |
| Disk usage, (Disk Usage)                           |           |          |            |
| <b>Network Billing</b>                             |           |          |            |
| Network messages sent                              | 0.000     | 0        | 0.000      |
| Network urgent messages sent                       | 1.000     | 5        | 2.500      |
| Network messages received                          |           |          |            |
| Network urgent messages received                   |           |          |            |
| Number of network nodes sent to                    |           |          |            |
| Number of network nodes sent urgent                |           |          |            |
| Number of remote network recipients                |           |          |            |
| Number of remote network recipients urgent         |           |          |            |
| Message length network sent                        |           |          |            |
| Message length urgent network sent                 |           |          |            |
| Message length network received                    |           |          |            |
| Message length urgent network received             |           |          |            |
| Message length, number of nodes sent               |           |          |            |
| Msg. length, number of nodes sent urgent           |           |          |            |
| Message length, number of remote recipients        |           |          |            |
| Message length, number of remote recipients urgent |           |          |            |
| <b>Messages Received (fax)</b>                     |           |          |            |
| Number of fax messages received                    | 0.050     | 30       | 0.100      |
| Number of fax messages sent                        |           |          |            |
| Number of fax retrieval                            |           |          |            |
| Faxes retrieved to billing number                  |           |          |            |
| Number of undelivered fax                          |           |          |            |
| Number of fax pages received                       |           |          |            |
| Number of fax pages sent                           |           |          |            |
| Number of fax pages retrieval                      |           |          |            |
| Fax pages retrieved to billing number              |           |          |            |
| Fax disk usage (Disk Usage)                        |           |          |            |

## Billing Worksheet, Page 2 of 2

| Mailbox Accesses |               |       |       |            |       |       | Connect Time      |       |       |                     |       |       |
|------------------|---------------|-------|-------|------------|-------|-------|-------------------|-------|-------|---------------------|-------|-------|
| Line Group       | Greeting Rate |       |       | Login Rate |       |       | User Connect Time |       |       | Caller Connect Time |       |       |
|                  | Low           | Bound | High  | Low        | Bound | High  | Low               | Bound | High  | Low                 | Bound | High  |
| 1                | 0.002         | 10    | 0.000 | 0.000      | 0     | 0.000 | 0.001             | 50    | 0.002 | 0.001               | 50    | 0.002 |
| 2                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 3                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 4                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 5                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 6                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 7                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 8                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 9                |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 10               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 11               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 12               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 13               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 14               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 15               |               |       |       |            |       |       |                   |       |       |                     |       |       |
| 16               |               |       |       |            |       |       |                   |       |       |                     |       |       |

## Pager Billing

| Pager No. | Low   | Bound | High  | Pager No. | Low | Bound | High |
|-----------|-------|-------|-------|-----------|-----|-------|------|
| 0         | 0.050 | 10    | 0.120 | 8         |     |       |      |
| 1         | 0.030 | 15    | 0.200 | 9         |     |       |      |
| 2         |       |       |       | 10        |     |       |      |
| 3         |       |       |       | 11        |     |       |      |
| 4         |       |       |       | 12        |     |       |      |
| 5         |       |       |       | 13        |     |       |      |
| 6         |       |       |       | 14        |     |       |      |
| 7         |       |       |       | 15        |     |       |      |

## Base Rates

| FCOS | Rate  | FCOS | Rate  | FCOS | Rate  | FCOS | Rate  |
|------|-------|------|-------|------|-------|------|-------|
| 1    | 0.200 | 17   | 0.050 | 33   | 0.100 | 49   | 0.250 |
| 2    | 0.200 | 18   |       | 34   |       | 50   |       |
| 3    | 0.400 | 19   |       | 35   |       | 51   |       |
| 4    |       | 20   |       | 36   |       | 52   |       |
| 5    |       | 21   |       | 37   |       | 53   |       |
| 6    |       | 22   |       | 38   |       | 54   |       |
| 7    |       | 23   |       | 39   |       | 55   |       |
| 8    |       | 24   |       | 40   |       | 56   |       |
| 9    |       | 25   |       | 41   |       | 57   |       |
| 10   |       | 26   |       | 42   |       | 58   |       |
| 11   |       | 27   |       | 43   |       | 59   |       |
| 12   |       | 28   |       | 44   |       | 60   |       |
| 13   |       | 29   |       | 45   |       | 61   |       |
| 14   |       | 30   |       | 46   |       | 62   |       |
| 15   |       | 31   |       | 47   |       | 63   |       |
| 16   |       | 32   |       | 48   |       | 64+  | 1.200 |

## Mailbox Accesses

There are two types of mailbox access for which you can bill: logins and greetings (number of times greeting was played), and you can set a low usage rate, high usage rate, and a low/high boundary for each type. The two types are shown on the worksheet and in the Billing Categories table at the bottom of this page.

The rates you set for mailbox access apply to all calls through the specified port (line) group.

## Base Rates

As mentioned earlier in this section, a base rate is a flat fee that is charged at every billing period. You must set a rate for each FCOS that you want to bill. You can only differentiate among the first 64 FCOS; any FCOS higher than 64 is billed at the rates for FCOS 64.

## Connect Time

There are three connect time statistics that you can bill for: user connect time, caller connect time, and call placement connect time. These statistics are accumulated in the same way, but you can have a different set of rates for each port (line) group in the server. These statistics measure off-hook to on-hook phone line usage.

- **User connect time** is the time used by the mailbox owner to pick up messages and/or to make messages for other mailbox owners. The rates you set for user connect time apply to all calls through the specified port (line) group.
- **Caller connect time** is the time charged when outside callers leave messages in a mailbox or listen to the greeting of a Greeting-Only mailbox. The rates you set for caller connect time apply to all calls through the specified port (line) group.
- **Call placement connect time** is the amount of time required to place an off-server call, including any greeting a caller hears. The low-usage rate and high-usage rate applies to all line groups. The rates you set for call placement connect time apply to the entire server.

## Measurement Method

Connect time other than call placement connect time is measured in tenths of minutes (6 seconds), rounded up if not exact. Call placement connect time is measured in one-minute units. This statistic can increment to about 109 hours before the accumulator restarts at zero. This is equivalent to about 3.5 hours per day for a month.

## Calculation of Charges

When charges are calculated, they are based on minutes of connect time, rather than tenths of a minute. This is to allow rates, which are precise to \$0.001, to be adjusted by small amounts.

## Disk Usage

The disk usage statistic is calculated as follows: the message size multiplied by the time on disk.

## Measurement Method

Message size is measured in tenths of a minute (6 seconds), rounded up if not exact. Time on disk is measured in hours, rounded up to the next hour, and is calculated when the message is deleted from the server.

The disk usage statistic resets to zero after 16,777,215 units of usage (one unit equals one-tenth of a minute multiplied by 1 hour of storage). This is equivalent to keeping three hours of speech for 1 year.

## Calculation of Charges

Users typically accumulate several thousand units of disk usage per month, unless they delete messages immediately after they are received. If the rate were applied to the usage as accumulated, a rate of \$.001 would be a significant charge, and the only way the rate could be changed would be to double it. Therefore, when charges are calculated, disk usage values are divided by one hundred, and the rate is specified to the nearest mil per minute of speech that has been kept for ten hours.

Other factors in the calculation of charges are:

- A user is not billed for messages that have not been deleted at the time that billing data are gathered. These messages are eventually deleted, however, and the charges are greater, since the time on disk has increased.
- No disk usage is accumulated for names or greetings. Charges for these can be included in the base rates.
- If a message is made with a distribution list, each mailbox that receives the message is charged for it.
- If a user gives a message, with comments, to another user, the sender is charged for the original message for as long as it remains on the server. The recipient is charged disk usage for both the original message, and for the comments, until each is deleted from the mailbox.

## Messages Received

Every time a message is left in a mailbox, one of 14 statistics is incremented for that mailbox. Each message statistic can accumulate up to 4095 messages before it resets to zero. This is equivalent to 132 messages per day, for a month.

User message count increments in two ways:

- When a caller phones his/her own mailbox and “makes a message” for another mailbox, the recipient’s mailbox counter increases.
- When a user “gives” a message, with comments, to another mailbox, the counter of the recipient mailbox increases by one. (The message, plus the comments, are counted as one message.)

Caller message count increments in several ways:

- When a caller phones into the server directly and leaves a message.
- When a greeting is delivered for a Greeting-Only mailbox. This includes times when the mailbox owner logs into his mailbox by pressing the star (\*) key while the greeting is playing.
- When a caller phones into the server directly and leaves an urgent message.
- When a caller phones into the server directly, leaves a message, and requests a receipt response.

## Network Rates

Network rates that can be set are grouped as message counts and message lengths.

Network message counts include messages sent, messages sent urgent, messages received, and messages received urgent. Network message lengths include messages sent, messages sent urgent, messages received, and messages received urgent. See the [table below](#) for a complete list of network rate statistics.

## Pager Calls

Pager call rates are set by pager system, not by individual pager. Pagers that have the same access code index are on the same pager system. In the Billing Report, charges for pager calls are listed by line group.

Each time a successful page is issued, a counter increments in the mailbox. This does not necessarily correspond to the number of messages received. If two messages are received at the same time, only one page is made. If a message is not picked up within a selected period (the pager interval, which was configured when the mailbox was created), the server re-pages, if the mailbox pager frequency (which also was configured when the mailbox was created) is greater than 1. Each re-page is counted as a separate page.

Unsuccessful re-pages are not counted in the mailbox statistics.

## Adjusting Pager Call Rates in Mid-Cycle

The rate at which a page is billed depends on the access code index (the Pager System number) that is in the mailbox setup at the time the gather is done, not the one that is present at the time the page is made. If the access code index or the billing rate is changed in the middle of the billing period, all pages that were accumulated during the billing period are billed at the new rate.

## Termination of Paging

When paging service is discontinued in the middle of the billing period, there is no access code index in the mailbox at the time of billing and, therefore, no pages are billed,



even if some have accumulated. To avoid this situation, generate a Termination Report (described earlier) before modifying the mailbox. This calculates the amount due without changing the statistics in the mailbox; the other charges are correct at the regular billing.

### Low Usage Rates, Low/High Boundary, High Usage Rate

The rates and boundary specified apply to all pagers in the specified pager system.

### Message Delivery Billing Considerations

The server is capable of billing both paging and message delivery on a per-page basis. However, keep in mind that the server installation site, as the calling party, is responsible for any charges that accrue when paging or message delivery calls are made to the outside telephone network. While pager calls are usually very short, message delivery calls can be quite long. Since the cost of each call depends on the time of day that it was made, the duration of the call, the distance to the user, and the rates of the local telephone company, the server makes no provisions for this aspect of the billing.

The billing rates structure does allow you to specify an individual rate for each pager system. This rate is multiplied by the number of pages that are issued for the mailbox. If you put message delivery accounts and radio pager accounts on separate pager systems, you can increase the charges on the pager systems that service message delivery subscribers to compensate for any toll charges that the telephone company levies.

### Adjusting Rates

You can set, adjust, or leave as is a low usage rate, low/high boundary rate, and high usage rate for each of the statistics in the billing categories on the worksheet. Billing categories are defined here:

| Category                     | Statistics Calculated and Reported                                                                                                        |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Mailbox accesses             | Logins Greets                                                                                                                             |
| Base rates                   | FCOS usage by FCOS number (1-64 only)                                                                                                     |
| Connect time (by line group) | User connect time Caller connect time Call placement connect time                                                                         |
| Disk usage                   | Disk usage units (length of messages x time on disk)                                                                                      |
| Messages received            | User messages Caller messages Call placement messages Future delivery messages Urgent messages Wakeup messages Receipt responses messages |

| Category                                                               | Statistics Calculated and Reported                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network rates (applicable if the NP Net optional feature is installed) | Network messages sent Network urgent messages sent Number of network nodes sent to Number of network nodes sent urgent to Number of remote network recipients sent to Number of remote network recipients sent urgent to Network messages received Network urgent messages received Message length for network messages sent Message length for network messages sent urgent Message length for network messages received Message length for urgent network received Message length for number of network nodes sent Message length for number of network nodes sent urgent Message length for number of remote recipients sent Message length for number of remote recipients sent urgent          |
| Network rates (applicable if the NP Net optional feature is installed) | Network messages sent Network urgent messages sent Number of network nodes sent to Number of network nodes sent urgent to Number of remote network recipients sent to Number of remote network recipients sent urgent to Network messages received Network urgent messages received Message length for network messages sent Message length for network messages sent urgent Message length for network messages received Message length for urgent network messages received Message length for number of network nodes sent Message length for number of network nodes sent urgent Message length for number of remote recipients sent Message length for number of remote recipients sent urgent |
| Pager Calls                                                            | Successful pages issued                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

### 1.3.4.1.3 Set Billing Rates

During day-to-day system operation, 120 different statistics are kept for each mailbox, including mailbox access counters, message counters, connect time accumulators, disk usage accumulation, and page counter. For each statistic, different rates can be set for high and low usage, and for a boundary. This tiered rate system gives you the option to charge set rates or to give volume discounts.

- **Low usage rate** is the rate charged, up to the boundary number. A 0 (zero) prevents this rate from appearing on the Billing Report.
- **High usage rate** is the rate charged after the boundary number is reached. If you want to use this rate, be sure to enter a boundary.
- **Boundary** is where the rate changes from the low usage rate to the high usage rate. A 0 (zero) means all usage is charged at the low rate.

If you need to enter new billing rates or adjust existing rates the system's various counters and accumulators determine the charges. A different billing rate can be set for each resource counter.

## Set Billing Rates for Each Counter

You can set billing rates for each counter. With the exception of Base rates, which are flat fees, you can enter a separate high and low usage rate, along with a boundary rate, for each resource (See [About Resource Counters](#)).

To give volume discounts, enter a lower amount for the high usage rate than for the low usage rate. To penalize heavy usage, enter a higher amount for the high usage rate. Boundary values are charged at the lower rate. Each boundary value is set in the same unit as the individual resource. To charge a standard rate, enter 0 (zero) in the boundary number field.

You can also generate reports of the current rates. See the [Reports](#) section for more information.

### 1.3.4.1.4 About Resource Counters

Each mailbox has resource counters. The billing system allows you to charge a base rate and set two-tiered separate rates for each counter, if required. Rates for the following resources are discussed here:

- |                      |                     |
|----------------------|---------------------|
| • Base Rates         | • Disk Usage        |
| • Mailbox Accesses   | • Messages Received |
| • Logins             | • Pager Calls       |
| • Greetings Accesses | • Network Rates     |
| • Connect Times      |                     |

#### Base Rates

A base rate is a flat fee charged at every billing period. The system prompts you to set a base rate for each FCOS. The rate set for any FCOS can be any value between \$0.00 and \$327.67, precise to \$0.01; it can be pro-rated for a portion of the billing cycle.

#### Mailbox Accesses

There are two different mailbox access counters: (a) login rates, and (b) greeting rates. Although each mailbox has mailbox access counters, these counters are designed specifically for billing Information-only mailboxes. Information-only mailboxes have an FCOS that **does not** allow them to receive messages (for example, chain and greeting-only mailboxes).

Other resource counters that may be increased for Information-only mailboxes are the "user connect" time and the "caller connect" time. A base rate can also be set.

## Login Rates Counters

Login rates counters track the number of times the user logs into the mailbox. A different rate may exist for each port or line group on the system.

## Greeting Rates Counters

Greeting rates counters track the number of times that the mailbox greeting plays (that is, the number of times that the mailbox is accessed by an outside caller). A different rate may exist for each port or line group on the system. **Note:** The caller does not have to listen to the entire greeting for this counter to be increased.

## Connect Times

Two connect time accumulators measure phone line usage (off-hook to on-hook).

## User Connect Rates

User connect rates measure the time used by the mailbox owner to pick up messages and make messages for other users. A different rate may exist for each port or line group on the system.

## Caller Connect Rates

Caller connect rates measure the time charged when outside callers leave messages in a mailbox, or listen to the greeting of an Information-only mailbox.

### Note:

- Counter is not increased when a message is left by a TAS (Telephone Answering Service) operator using the Message Attendant application. There is no way to associate TAS operator time with any particular mailbox—other than by the number of messages left by [TAS](#) operators.
- Different rates may exist for each port or line group on the system.

## Measurement Method and Limitations of the "Connect Time" Counter

Connect time is measured in tenths of minutes (6 seconds), rounded up if not exact. Each counter allows 109 hours—about 3.5 hours per day for a month—before the accumulator restarts at zero.

## Calculation of Charges

When charges are calculated, they are based on minutes of connect time (rather than tenths of a minute). This calculation allows rates (which are in mils) to be adjusted by small amounts.

## Disk Usage

Disk usage is the size of the message, multiplied by the length of time the message stays on the system.

## Measurement Method and Limitations of the "Disk Usage" Accumulator

Time on disk is measured in hours rounded up to the next hour, and is calculated when the message is deleted from the system. The disk usage accumulator resets to zero after 16,777,215 units of usage—equivalent to keeping three hours of speech for one year.

## Calculation of Charges

Users typically accumulate several thousand units of disk usage per month, unless they delete messages immediately after they are received. If the rate is applied to the usage as accumulated, a rate of \$.001 would be a significant charge, and the only way the rate could change would be to double it. Therefore, when charges are calculated, disk usage values are divided by one hundred, and the rate is specified to the nearest mil-per-minute of speech kept for 10 hours.

- Users are not billed for messages not deleted at the time billing data is gathered. These messages will eventually be deleted, however, and the charges will increase, because the time on the disk will have increased.
- Disk usage for names or greetings is not accumulated. Charges for these can be included in the base rates.
- If a message is made with a distribution list, each mailbox receiving the message is charged for it.
- If a user sends a message with comments to another user, the sender is charged for the original message for as long as it remains on the system. The recipient is charged disk usage for both the original message and for the comments until each is deleted from the mailboxes.

## Messages Received

Every time a message is left in a mailbox, a counter is increased for that mailbox for each of the following categories:

- |                             |                                           |
|-----------------------------|-------------------------------------------|
| • user messages             | • fax sent messages                       |
| • caller messages           | • fax retrieval non-billed messages       |
| • call placement messages   | • fax retrieval billed messages           |
| • future delivery messages  | • fax undelivered messages                |
| • urgent messages           | • fax pages received messages             |
| • wakeup/tas messages       | • fax pages sent messages                 |
| • receipt response messages | • fax pages retrieval non-billed messages |
| • fax received messages     | • fax pages retrieval billed messages     |

## User Messages Counters

User messages counters are increased in two ways:

- When a caller phones his or her own mailbox and "makes" a message for another mailbox, the recipient's mailbox counter increases.
- When a user "gives" a message with comments to another mailbox, the recipient's mailbox counter increases by one (message plus comments are counted as one message).

## Caller Messages Counters

Caller messages counters are increased in several ways:

- When a caller phones into the system directly and leaves a message.
- When a caller leaves a message in the attendant's mailbox and the attendant forwards the message.
- When a greeting is delivered for a Greeting-only mailbox. Including times when the mailbox owner logs into his mailbox by pressing the \* key (star) while the greeting is playing.
- When a caller phones into the system directly and leaves an urgent message.
- When a caller phones into the system directly and requests a receipt response.

## TAS Operator Messages Counters

TAS operator messages counters increase when a TAS operator leaves a message via one of the open ports set up by the Message Attendant application.

## Limits of the "Messages Received" counter

Each message counter can accumulate up to 4,095 messages—132 messages per day for a month—before it resets to zero.

## Pager Calls

Each time a successful page is issued, a counter is increased in the mailbox, however, this does not necessarily correspond to the number of messages received.

- If two messages are received at the same time, only one page is made.
- If a message is not picked up within the set pager **interval** (a selected amount of time programmed when the mailbox was created), the system re-pages.
- If the mailbox pager **frequency** (programmed when the mailbox was created) is greater than one, every re-page is counted as a separate page.

Pager call rates are set by the Pager System, not by an individual pager. Pagers with the same pager outdial index (also known as the access code index) belong to the same pager system. See [Pagers and Message Delivery](#) for more information.

## Adjusting Pager Call Rates in Mid-cycle

The rate at which a page is billed depends on the pager outdial index—representing the pager system access code—programmed into the mailbox at the time the "Gather" is performed, and **not** the rate present at the time the page is made. If the pager outdial index or the billing rate are changed in the middle of the billing period, all pages accumulated during the billing period are billed at the new rate.

## Termination of Paging

When paging service is discontinued in the middle of the billing period, an outdial index does not appear in the mailbox at the time of billing. Therefore, **no** pages are billed even if some have accumulated. To avoid this situation, run a Termination Report before modifying the mailbox. This report calculates the amount due without changing statistics in the mailbox. Other charges are corrected at the regular billing. See the Reports section for instructions to run the Termination Report.

## Network Rates

Billing rates can be set for network usage, including the following:

### Network Message Counters

- messages sent; urgent messages sent
- network nodes sent to; network nodes sent urgent to
- recipients sent to; recipients sent urgent to
- messages received; urgent messages received

### Network Message Length Counters

- messages sent; urgent messages sent
- messages received; urgent messages received

- network nodes sent; network nodes sent urgent
- remote recipients sent to; remote recipients sent urgent to

Network rates can be set for any/each of the following categories:

- |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Network messages sent</li> <li>• Network urgent messages sent</li> <li>• Number of network nodes sent to</li> <li>• Number of network nodes sent urgent to</li> <li>• Number of remote network recipients sent to</li> <li>• Number of remote network recipients sent urgent to</li> <li>• Network messages received</li> <li>• Network urgent messages received</li> </ul> | <ul style="list-style-type: none"> <li>• All message length rates are per .1 minutes of messages</li> <li>• Message length for network messages sent</li> <li>• Message length for network messages sent urgent</li> <li>• Message length for network messages received</li> <li>• Message length for urgent network received</li> <li>• Message length for number of network nodes sent</li> <li>• Message length for number of network nodes sent urgent</li> <li>• Message length for number of remote recipients sent</li> <li>• Message length for number of remote recipients sent urgent</li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 1.3.4.1.5 Gathering Data

Before the server can produce billing reports, data must be gathered from the statistics that have been specified. Gathering data is a three-step process:

1. The current billing data file, which was created during the last gather, becomes the new previous billing data file. The server issues a warning because this step overwrites (and thereby destroys) the previous billing data file, which was also created during the last gather.
2. The server scans the statistics in all the mailboxes. The data that is collected becomes the new current billing data file.
3. The data gathered in step 1 is subtracted from the mailbox statistics. This update zeros the statistics in all the mailboxes (unless there was mailbox activity between steps 2 and 3 to prepare them for the next billing cycle).

When you run a billing report, the value that is obtained during the gather for each statistic in a mailbox is multiplied by the billing rate that you assigned to that statistic. The



server then adds the charges for all statistics with billing rates greater than zero, plus any base rate that you may have specified, to give a total charge for each mailbox.

All billing data older than the previous billing data file is available using the regular backup procedures.

## 1.3.4.2 Procedures (Web Console)

### 1.3.4.2.1 Perform a Manual Gather

To perform a manual or single gather:

1. In the navigation tree, click Report Generation, then click Billing, and then click Billing Gather.

The Billing Gather form opens.

2. Click Gather Now!.

### 1.3.4.2.2 Configure an Automatic Gather

Once the Automatic Billing Gather is configured and saved, you can close the Web Console session. The Automatic Gather will be performed as long as the Web Console application and the NuPoint Unified Messaging server are running.

To configure an automatic gather:

1. In the navigation tree, click Report Generation, then click Billing, and then click Billing Gather. The Billing Gather form opens.
2. Configure the [Billing Gather form](#).
3. To save your Automatic Gather configuration, click Save.

### 1.3.4.2.3 Set Billing Rates

You must set Billing Rates before you can gather billing information and run a Billing Report.

You can configure billing for the following eight categories of billing rates:

- Mailbox Access
- Base Rates
- Connect Time
- Disk Usage
- Messages Received

- Fax Messages
- Network Rates
- Pager Calls

### To set Billing Rates:

1. In the navigation tree, click Report Generation, then click Billing, and then click Billing Rates.
2. Configure rates for one or more of the billing categories in the [Billing Rates form](#).
3. Click Save.

## 1.3.4.2.4 Billing Gather Form

You use the Billing Gather form to configure periodic, automatic billing gathers on the NuPoint Unified Messaging system.

### Billing Gather Form Field Descriptions

| Field            | Description                                                                                                 | Values/Notes                                                                                                                                                                                                                                                           |
|------------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Automatic Gather |                                                                                                             |                                                                                                                                                                                                                                                                        |
| Never            | Disables automatic gather.                                                                                  | N/A                                                                                                                                                                                                                                                                    |
| Weekly           | Enables automatic gather to occur once a week at the times specified in the When to Gather section below.   | The gather will occur once a week, at the selected Hour of Day, on the Day that is selected.                                                                                                                                                                           |
| Twice Monthly    | Enables automatic gather to occur twice a month at the times specified in the When to Gather section below. | The gather will occur twice a month, at the selected Hour of Day, on the days selected for the First Day and the Second Day. If you select a value for the first day, the GUI will automatically advance the Second Day setting by a day. You can then change the day. |
| Monthly          | Enables automatic gather to occur once a month at the times specified in the When to Gather section below.  | The gather will occur once a month, at the selected Hour of Day, on the Day selected.                                                                                                                                                                                  |
| When to Gather   |                                                                                                             |                                                                                                                                                                                                                                                                        |
| Hour of Day      |                                                                                                             | Hour of Day range is from 01:00 - 12:00, AM and PM.                                                                                                                                                                                                                    |
| Weekday          |                                                                                                             | For Weekly, select the day of the week from the drop-down list                                                                                                                                                                                                         |
| First Day        |                                                                                                             | For Monthly and Twice Monthly, Days are numbered 01-28.                                                                                                                                                                                                                |
| Second Day       |                                                                                                             | Same as First Day.                                                                                                                                                                                                                                                     |

**Billing Gather Form Button Actions**

| Button      | Action                                        |
|-------------|-----------------------------------------------|
| Save        | Saves the configuration.                      |
| Gather Now! | Immediately gathers the data for the mailbox. |

1.3.4.2.5 Billing Rates Form

You use the Billing Rates form to set mailbox billing rates.

There are eight tabs available on this form, one for each of the eight different billing categories:

- [Base Rates](#)
- [Mailbox Accesses](#)
- [Connect Time](#)
- [Disk Usage](#)
- [Messages Received](#)
- [Fax Messages](#)
- [Network](#)
- [Pager Calls](#)

Daily statistics are generated for each billing category. For each statistic, different rates can be set for high and low usage, and for a boundary. This tiered-rate system gives you the option to charge set rates or to give volume discounts.

- Low usage rate is the rate charged, up to the threshold number. A 0 (zero) prevents this rate from appearing on the Billing Report.
- High usage rate is the rate charged after the threshold number is reached. If you want to use this rate, be sure to enter a boundary.
- Threshold is where the rate changes from the low usage rate to the high usage rate. A 0 (zero) means all usage is charged at the low rate.

You can enter new billing rates or adjust existing rates, and the system determine the charges. A different billing rate can be set for each resource counter.

**Base Rates Fields Description**

The Base rates are flat fees that are charged at every billing period. The base rates are set for each [FCOS](#). All named, programmed FCOS are displayed in the form with their base rates. You can only differentiate among the first 64 FCOS; any FCOS higher than 64 is billed at the rates for FCOS 64.

| Fields | Values                                                                                                                                                                                                                |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCOS   | Max. 640 – only named FCOS are displayed (Note: You can create unnamed FCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed FCOS, use the Text console to name it.) |
| Rates  | Range (\$0.00 - \$654.99). Default value \$0.00                                                                                                                                                                       |

### Mailbox Accesses Fields Description

Although each mailbox has mailbox access counters, the login rates and greeting rates are designed specifically for billing information-only mailboxes. For each line group the Logins and Greets can be configured through this form. The rates you set for mailbox access apply to all calls through the specified port (line) group.

Login rates counters track the number of times the user logs into the mailbox. Greeting rates counters track the number of times that the mailbox greeting plays (that is, the number of times that the mailbox is accessed by an outside caller).

| Fields            | Values                                                                                                            |
|-------------------|-------------------------------------------------------------------------------------------------------------------|
| Line Group Number | Max.24 – Only the ones that are programmed will be shown.                                                         |
| Logins            | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Greets            |                                                                                                                   |
|                   |                                                                                                                   |

### Connect Time Fields Description

For each line group the User connect time, Caller connect time and Call placement connect time can be configured. There are three connect time statistics that you can bill for: user connect time, caller connect time, and call placement connect time. All these statistics are accumulated in the same way, but you can have a different set of rates for each port (line) group in the server. These statistics measure off-hook to on-hook phone line usage.

- User connect time is the time used by the mailbox owner to pick up messages and/or to make messages for other mailbox owners. The rates you set for user connect time apply to all calls through the specified port (line) group.
- Caller connect time is the time charged when outside callers leave messages in a mailbox or listen to the greeting of a Greeting-Only mailbox. The rates you set for caller connect time apply to all calls through the specified port (line) group.
- Call placement connect time is the amount of time required to place an off-server call, including any greeting a caller hears. The low-usage rate and high-usage rate applies

to **all** line groups. The rates you set for call placement connect time apply to the entire server.

### Measurement Method

Connect time other than call placement connect time is measured in tenths of minutes (6 seconds), rounded up if not exact. Call placement connect time is measured in one-minute units. This statistic can increment to about 109 hours before the accumulator restarts at zero. This is equivalent to about 3.5 hours per day for a month.

### Calculation of Charges

When charges are calculated, they are based on minutes of connect time, rather than tenths of a minute. This is to allow rates, which are precise to \$0.001, to be adjusted by small amounts.

| Fields                      | Values                                                                                                            |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------|
| Line Group Number           | Max.24 – Only the ones that are programmed will be shown.                                                         |
| User connect time           | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Caller connect time         |                                                                                                                   |
| Call placement connect time |                                                                                                                   |

### Disk Usage Fields Description

#### Measurement Method

The disk usage statistic is calculated as follows: the message size multiplied by the time on disk. Message size is measured in tenths of a minute (6 seconds), rounded up if not exact. Time on disk is measured in hours, rounded up to the next hour, and is calculated when the message is deleted from the server.

The disk usage statistic resets to zero after 16,777,215 units of usage (one unit equals one-tenth of a minute multiplied by 1 hour of storage). This is equivalent to keeping three hours of speech for 1 year.

#### Calculation of Charges

Users typically accumulate several thousand units of disk usage per month, unless they delete messages immediately after they are received. If the rate were applied to the usage as accumulated, a rate of \$.001 (one mil) would be a significant charge, and the only way the rate could be changed would be to double it. Therefore, when charges are calculated, disk usage values are divided by one hundred, and the rate is specified to the nearest mil per minute of speech that has been kept for ten hours.

Other factors in the calculation of charges are:

- A user is not billed for messages that have not been deleted at the time that billing data is gathered. These messages are eventually deleted, however, and the charges are greater, since the time on disk has increased.
- No disk usage is accumulated for names or greetings. Charges for these can be included in the base rates.
- If a message is made with a distribution list, each mailbox that receives the message is charged for it.
- If a user gives a message, with comments, to another user, the sender is charged for the original message for as long as it remains on the server. The recipient is charged disk usage for both the original message, and for the comments, until each is deleted from the mailbox.

| Fields                           | Values                                                                                                            |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Disk usage units (excluding Fax) | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Fax disk usage units             |                                                                                                                   |
|                                  |                                                                                                                   |

## Messages Received Fields Description

Every time a message is left in a mailbox, one of 14 statistics is incremented for that mailbox. Each message statistic can accumulate up to 4095 messages before it resets to zero. This is equivalent to 132 messages per day, for a month.

User messages are incremented in two ways:

- When a caller phones his/her own mailbox and “makes a message” for another mailbox, the recipient’s mailbox counter increases.
- When a user “gives” a message, with comments, to another mailbox, the counter of the recipient mailbox increases by one. (The message, plus the comments, are counted as one message.)

Caller messages are incremented in several ways:

- When a caller phones into the server directly and leaves a message.
- When a greeting is delivered for a Greeting-Only mailbox. This includes times when the mailbox owner logs into his mailbox by pressing the star (\*) key while the greeting is playing.
- When a caller phones into the server directly and leaves an urgent message.
- When a caller phones into the server directly, leaves a message, and requests a receipt response.

| Fields                    | Values                                                                                                            |
|---------------------------|-------------------------------------------------------------------------------------------------------------------|
| User messages             | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Caller messages           |                                                                                                                   |
| Call replacement messages |                                                                                                                   |
| Future delivery messages  |                                                                                                                   |
| Urgent messages           |                                                                                                                   |
| Wakeup messages           |                                                                                                                   |
| Receipt responses         |                                                                                                                   |

### Fax Messages Fields Description

| Fields                        | Values                                                                                                            |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Received messages             | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Sent messages                 |                                                                                                                   |
| Retrieval non-billed messages |                                                                                                                   |
| Retrieval billed messages     |                                                                                                                   |
| Undelivered messages          |                                                                                                                   |
| Pages received                |                                                                                                                   |
| Pages sent                    |                                                                                                                   |
| Pages retrieved non-billed    |                                                                                                                   |
| Pages retrieved billed        |                                                                                                                   |

### Network Fields Description

Network rates that can be set are grouped as message counts and message lengths.

Network message counts include messages sent, messages sent urgent, messages received, and messages received urgent. Network message lengths include messages sent, messages sent urgent, messages received, and messages received urgent.

| Fields                                   | Values                                                                                                            |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Messages sent                            | Low and High Usage:<br><br>Range (\$0.00 -\$64.99). Default is \$0.00.<br><br>Threshold: 0 – 65535. Default is 0. |
| Messages sent urgent                     |                                                                                                                   |
| Messages sent per node                   |                                                                                                                   |
| Messages sent urgent per node            |                                                                                                                   |
| Messages sent urgent to remote recipient |                                                                                                                   |
| Messages received                        |                                                                                                                   |
| Message Length/Sent                      |                                                                                                                   |
| Message Length/Sent Urgent               |                                                                                                                   |
| Message Length/Received Urgent           |                                                                                                                   |
| Message Length/Sent per node             |                                                                                                                   |
| Message Length/Sent urgent per node      |                                                                                                                   |
|                                          |                                                                                                                   |

| Fields                                  | Values |
|-----------------------------------------|--------|
| Message Length/Sent to remote recipient |        |

## Pager Calls Fields Description

Each time a successful page is issued, a counter is incremented in the mailbox.

Pager call rates are set by pager system, not by individual pager. Pagers that have the same access code index are on the same pager system. Once the Pager system number is selected it will show the related rates for successful pages for that Pager System. In the [Billing Report](#), charges for pager calls are listed by line group. For more information about Pager Systems, see the *System Administration Help*.

Each time a successful page is issued, a counter is incremented in the mailbox. This does not necessarily correspond to the number of messages received. If two messages are received at the same time, only one page is made. If a message is not picked up within a selected period (the pager interval, which was configured when the mailbox was created), the server re-pages, if the mailbox pager frequency (which also was configured when the mailbox was created) is greater than 1. Each re-page is counted as a separate page.

Unsuccessful re-pages are not counted in the mailbox statistics.

## Adjusting Pager Call Rates in Mid-Cycle

The rate at which a page is billed depends on the access code index (the Pager System number) that is in the mailbox setup at the time the gather is done, not the one that is present at the time the page is made. If the access code index or the billing rate is changed in the middle of the billing period, all pages that were accumulated during the billing period are billed at the new rate.

## Termination of Paging

When paging service is discontinued in the middle of the billing period, there is no access code index in the mailbox at the time of billing and, therefore, no pages are billed, even if some have accumulated. To avoid this situation, [run a Billing Report](#) and check the Termination Data before modifying the mailbox. This calculates the amount due without changing the statistics in the mailbox; the other charges are correct at the regular billing.

## Low Usage Rates, Low/High Threshold, High Usage Rate

The rates and boundary specified apply to all pagers in the specified pager system.

## Message Delivery Billing Considerations

The server is capable of billing both paging and message delivery on a per-page basis. However, keep in mind that the server installation site, as the calling party, is responsible



for any charges that accrue when paging or message delivery calls are made to the outside telephone network. While pager calls are usually very short, message delivery calls can be quite long. Since the cost of each call depends on the time of day that it was made, the duration of the call, the distance to the user, and the rates of the local telephone company, the server makes no provisions for this aspect of the billing.

The billing rates structure does allow you to specify an individual rate for each pager system. This rate is multiplied by the number of pages that are issued for the mailbox. If you put message delivery accounts and radio pager accounts on separate pager systems, you can increase the charges on the pager systems that service message delivery subscribers to compensate for any toll charges that the telephone company levies.

## Adjusting Rates

You can set, adjust, or leave as is a low usage rate, low/high threshold, and high usage rate for each of the statistics in the billing categories on the worksheet.

| Fields                   | Values                                      |
|--------------------------|---------------------------------------------|
| Pager System Number      | 16 - one selected at a time                 |
| Low Usage and High Usage | Range (\$0.00 -\$64.99). Default is \$0.00. |
| Threshold                | Range is 0 – 65535. Default is 0.           |

## 1.3.4.3 Procedures (Text Console)

### 1.3.4.3.1 Check Current Billing Rates

This procedure describes how to check the current rates for various statistics that the server uses to generate billing reports. These are:

|                                 |                                                         |
|---------------------------------|---------------------------------------------------------|
| • Base Rates                    | • Connect Time Rates                                    |
| • Mailbox Access Rates          | • Network Rates                                         |
| • User and Caller Message Rates | • Call Placement, Future Delivery, Urgent, Wakeup Rates |
| • Disk Usage Rates              | • Receipt Processing Rates                              |
| • Pager Call Rates              |                                                         |

To check current rates:

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, **(A) Adjust Rates**, and then **(R) Report Rates**.
2. Select the options for the statistics you want to check, as described in the following sections:

### To Check Base Rates (Keyed to FCOS)

- Select **(B) Base Rates**. The server displays a list of all FCOS in numerical order and the current rate for each.

#### Note:

FCOS from 65 to 640 are billed and reported at the rates for FCOS 64.

### To Check Connect Time Rates

1. To view rates for **caller connect** time, select **(C) Caller Connect Rates** and enter the port group number to report. The server displays the current low usage rate, low/high boundary, and high usage rate, by line (port) group.
2. To view rates for **user connect** time, select **(U) User Connect Rates**. No response is necessary. The server displays the current low usage rate, low/high boundary, and high usage rate, by line (port) group.
3. To view rates for **call placement connect** time, select **(O) Other Rates**. No response is necessary. The server displays the current low usage rate, low/high boundary, and high usage rate under "Connect Time."

### To Check Mailbox Access Rates

1. To view rates for **greetings**, select **(G) Greeting Rates**. The server displays the current low usage rate, low/high boundary, and high usage rate, by line (port) group.
2. To view rates for **logins**, select **(L) Logins Rates**.

### To Check Network Rates

- To check Network rates, select **(N) Network Rates**. The server displays the current low usage rate, low/high boundary, and high usage rate, by line (port) group, for Network message counts and Network message lengths.

### To Check Rates for Pager Calls

- To view rates for pager calls, select **(P) Pager Calls**. The server displays the current low usage rate, low/high boundary, and high usage rate for supported pager systems by access code.

## To Check Other Rates

To check any of the following rates, select **(O) Other Rates**:

- User and Caller Messages
- Call Placement, Future Delivery, Urgent, or Wakeup Messages
- Receipt Processing
- Disk Usage

### 1.3.4.3.2 Perform a Gather

Before the system can bill mailboxes, it must gather data from all mailbox counters. Gather is a three-step process that performs the following tasks:

1. The **current billing data file** (created during the last Gather), becomes the *new previous billing data file*. This step overwrites (and thus destroys) the *old* previous billing data file, also created during the last Gather; the system issues a warning.
2. The system scans the counters and accumulators in all mailboxes. The data collected becomes the *new current billing data file*.
3. The data gathered in Step 2 is subtracted from the mailbox counters. This update zeros the counters in all mailboxes to prepare them for the next billing cycle (unless mailbox activity occurs between Steps 2 and 3).

While the billing report is running,

- The value obtained during the Gather for each counter in a mailbox is multiplied by the billing resource rate you assigned to that counter.
- The system adds charges for all resources with billing rates greater than zero, plus any base rate you may have specified.
- A total charge for each mailbox is provided.

You can perform a Gather manually, or you can configure the system to [perform a Gather automatically](#).

## To Run a Single Gather (Manually)

1. From the Main menu, select **(R) Report Generation**, and then **(B) Billing**.
2. Select **(G) Gather Data**. The system displays the date of the last Gather, and responds: **Warning!!** This will destroy previous billing data. Type "gather" if you really want to do this.
3. Type **gather**; **OR** press **Enter** to cancel. The system displays status messages: Please wait...gathering data... gathering complete... starting update... <number> mailboxes updated.

When the system displays the number of mailboxes updated:

- Gather is complete
- Counts of all statistics are set to zero (0)
- Any billing report you obtain is current, as of this Gather

**Note:**

If you did not receive both **gathering complete** and **<number> mailboxes updated** prompts, see "If Gather Fails", below.

### If Gather Fails

It is possible for a Gather to be unsuccessful. The most likely cause is a power loss during the process because Gather can take several minutes to complete. If your Gather fails, use the following procedure to determine your billing:

1. Perform a backup. (See the NuPoint UM Technician's Handbook for instructions.)
2. Perform another Gather. The information needed for the current billing is now divided between the current and previous billing data files on the hard disk.
3. Run a [Previous Billing Report](#). This report shows what was billed during the last billing cycle and gives a starting point for determining current charges.
4. Run a [Billing Report](#) and a Previous Billing Report from the **hard disk**. Manually determine which report has the correct bill for each mailbox.

## 1.3.4.3.3 Auto Gather

Auto Gather allows the system to be configured to automatically perform weekly, monthly, or bimonthly gathers.

### To Configure Auto Gather

**Note:**

This procedure makes changes to the inactive configuration. You must activate the inactive configuration for the changes to take effect.

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu**.

2. Select **(B) Duplicate Active Configuration**. The system copies the current (active) configuration. Steps 3 through 7 and additional configuration entries affect only the copy; entries take effect **only after** you activate the configuration.
3. Select **(S) Auto Task Menu** and then **(A) Gather - System Billing**.
4. If you are enabling weekly gather, select **(W) weekly Gather menu** and configure **(D) Day to do Gather**, and **(H) Hour to do Gather** (0 = midnight, 12 = noon).
5. Select **(E) Enable Auto Gather (weekly/monthly/no) (W/M/N)** and enter
  - **W** to enable a weekly Gather
  - **M** to enable a monthly (or twice-monthly) Gather
  - **N** to disable Auto Gather
6. If you are enabling **monthly** (or bi-monthly) Gather, select **(M) Monthly Gather** menu and configure the following:
  - Day of month to do first gather (1-28)
  - Day of month to do second gather (1-28) (For bi-monthly gathers)
  - Hour to do gather (0-23)
  - Second auto gather enabled? Y/N (Enter **Y** to perform a bi-monthly gather)
7. Select **X** to exit. Select **X** again to save changes and return to the Main menu. For changes to take effect, you must [activate the inactive configuration](#).

### 1.3.4.3.4 Set Base Rates

To set base rates for billing purposes:

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, and then **(A) Adjust Rates**.
2. Select **(B) Base Rates** and enter one or more FCOS numbers. Valid entries are:
  - A = all (1-64)
  - E = even
  - O = odd
  - L = lower half (1-32)
  - U = upper half (33-64)
  - A range of first-last, for example, 1-5
3. Individual numbers separated by commas, for example, 1,3,4,6
4. A single FCOS number, for example, 1
5. At the **base rate (\$n.nn) ?** prompt, enter an **amount** from \$0.01 through \$654.99, **OR** enter **0.00** to clear the current rate (you must enter two digits after the decimal point)

when entering an amount or clearing the current rate), **OR** press **Enter** to keep the current setting.

6. Exit to the Main Menu to make your settings take effect.

**Note:**

FCOS from 65 to 640 are billed at the rates set for FCOS 64.

### 1.3.4.3.5 Set Billing Rates for Connect Time

This procedure describes how to set low usage rates, high usage rates, and a high/low boundary for user connect time, caller connect time, and call placement connect time. The server uses these rates to calculate charges when generating billing reports.

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, and then **(A) Adjust Rates**.
2. Select **(C) Connect Time** and enter the line group **number** (1-16) to which user and caller connect time rates will apply. Rates for call placement connect time apply to all line groups.
3. For each connect time category (user connect, caller connect, call placement), enter the following information as required, when prompted:
  - At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
  - At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes to a high rate (for example, 600 equals 1 hour), OR enter **0.00** to clear the current rate, OR press **Enter** to keep the current setting.
  - At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
4. Exit to the Main Menu to make your settings take effect.

### 1.3.4.3.6 Set Billing Rates for Messages Received

This procedure describes how to set low usage rates, high usage rates, and a high/low boundary for types of messages received. The server uses these rates to calculate charges when generating billing reports.

• User messages

• Wakeup messages

- |                                                                                                                                                                       |                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Caller messages</li> <li>• Call placement messages</li> <li>• Future delivery messages</li> <li>• Urgent messages</li> </ul> | <ul style="list-style-type: none"> <li>• Receipt response messages</li> <li>• Fax received, sent, retrieval, and undelivered messages</li> <li>• Fax pages received, sent, and retrieved messages</li> </ul> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, and then **(A) Adjust Rates**.
2. Select **(M) Messages Received**.
3. For one or more message types (listed above), enter the following information when prompted (you can press **Enter** until you reach the message type you want to set/change.):
  - At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
  - At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes to a high rate (for example, 600 equals 1 hour), OR enter **0.00** to clear the current rate, OR press **Enter** to keep the current setting.
  - At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
4. Exit to the Main Menu to make your settings take effect.

### 1.3.4.3.7 Set Billing Rates for Mailbox Accesses

This procedure describes how to set low usage rates, high usage rates, and a high/low boundary for the two types of mailbox access statistics: logins and greets. The server uses these rates to calculate charges when generating billing reports.

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, and then **(A) Adjust Rates**.
2. Select **(A) Mailbox Accesses** and enter the line group **number** to which these mailbox access rates will apply.
3. For each access category (logins and greets), enter the following information as required, when prompted:
  - At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
  - At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes

to a high rate (for example, 600 equals 1 hour), OR enter **0.00** to clear the current rate, OR press **Enter** to keep the current setting.

- At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.

4. Exit to the Main Menu to make your settings take effect.

### 1.3.4.3.8 Set Billing Rates for Pager Calls or Message Delivery

This procedure describes how to set rates which the server can use to produce a report for billing message delivery usage or pager usage.

1. From the Main Menu, select **(R) Reports, (B) Billing**, and then **(A) Adjust Rates**.
2. Select **(P) Pager Calls** and enter the index **number** (0-15) of the pager system (that includes message delivery), that you want to set rates for.
3. At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
4. At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes to a high rate (for example, 600 equals 1 hour), OR enter 0 to charge the same rate regardless of usage.
5. At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
6. Exit to the Main Menu to make your settings take effect, or enter the index number of the next pager system to continue.

### 1.3.4.3.9 Set Billing Rates for Disk Usage

This procedure describes how to set low usage rates, high usage rates, and a high/low boundary all disk usage. The server uses these rates to calculate charges when generating billing reports.

To set billing rates for disk usage:

1. From the Main Menu, select **(R) Reports, (B) Billing**, and then **(A) Adjust Rates**.
2. Select **(D) Disk Usage**.
3. At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.



4. At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes to a high rate (for example, 600 equals 1 hour), OR enter **0.00** to clear the current rate, OR press **Enter** to keep the current setting.
5. At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
6. Exit to the Main Menu to make your settings take effect.

### 1.3.4.3.10 Set Billing Rates for Network Usage

This procedure describes how to set low usage rates, high usage rates, and a high/low boundary for types of network usage. The NuPoint Unified Messaging server uses these rates to calculate charges when generating billing reports. Types of network usage are:

- Network messages sent
- Network urgent messages sent
- Number of network nodes sent to and sent urgent to
- Number of remote network recipients sent to and sent urgent to
- Network messages received and network urgent messages received
- Message length for network messages sent, sent urgent, received, and received urgent
- Message length for number of network nodes sent and sent urgent
- Message length for number of remote recipients sent and sent urgent

To set billing rates for network usage:

1. From the Main Menu, select **(R) Reports**, **(B) Billing**, and then **(A) Adjust Rates**.
2. Select **(N) Network Rates**.
3. For one or more network usage types (listed above), enter the following information when prompted (you can press **Enter** until you reach the usage type you want to set/change.):
  - At the **low usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.
  - At the **low/high boundary (n) ?** prompt, enter a **number** from 1 through 65535 that represents the number of units (tenths of a minute) at which the low rate changes to a high rate (for example, 600 equals 1 hour), OR enter **0.00** to clear the current rate, OR press **Enter** to keep the current setting.
  - At the **high usage rate (\$ n.nnn) ? \$** prompt, enter an amount for the new usage rate (\$0.01 through \$64.99) OR enter **0.00** to clear the current rate OR press **Enter** to keep the current setting.

4. Exit to the Main Menu to make your settings take effect.

### 1.3.4.3.11 Bill Outdials to an Account or Long Distance Carrier

This procedure describes the steps for having an outdial billed to an account or a long distance carrier specified for the originating mailbox.

#### Configure an Access Code

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the **number** of the Pagers line group (1-24).
4. Select **(M) Modify Application** and then **(D) Define Pagers**.
5. Select **(P) Current Pager System** and enter the pager system index **number** representing the access code for the outdials.
6. Select **(D) Access Code** and enter the **code** (1-24 characters) that is common to mailbox owners using this outdial index. This code indicates what the server should dial before the destination telephone number. It comprises the first part of the [dial string](#).
7. Save the parameter settings by exiting to the Main menu.
8. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear

#### Establish a Minimum Billed Number Length

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration**, and then **(L) Limits COS**.
2. Select **(C) Choose Limits COS to Modify** and enter the **number** of the LCOS you want to modify (1-640).
3. Select **(E) Set Even More Limits for Selected LCOS**.
4. Select **(I) Minimum Billed Number Length** and then enter the minimum **number** of characters in the outdial string required to activate call charges to an account or activate the specified carrier.
5. Select **(X)** to exit and save your changes.

## Configure the Mailbox

1. From the Main Menu, select **(M) Mailbox Maintenance**.
2. Select **(C) Create New Mailboxes** or **(M) Modify Mailboxes** and enter the number of the mailbox to add or modify for outdial billing or for a specific carrier. (When you select "Modify", the word "New" precedes all prompts.)
3. Press **Enter** until the **Limits Class of Service** prompt appears and then enter the number (1-640) of the LCOS.
4. Press **Enter** until the **Enter Internal Outdial Index** prompt appears and then enter the index **number** (0-15) representing the access code for internal calls.
5. At the **Billed Outcall Index** prompt, enter the index **number** (0-15) representing the access code for outdials to be charged to a billing account.
6. At the **Non-Billed Outcall Index** prompt, enter the index **number** (0-15) representing the access code for outdials not charged to a billing account.
7. At the **Billing Number** prompt, enter the **number** of the account, up to 24 digits, that outdials are billed to.
8. At the **Billing Dialing Order** prompt, enter one of the following:
  - **BN** to require the billing number to be processed before the destination telephone number, OR
  - **NB** to require the destination telephone number to be processed before the billing number
9. At the **Message Waiting Type** or **# 1 Message Waiting Type #2** prompt, enter **5** (pagers).
10. At the **Pager access type** prompt, enter **B** for billed.
11. Set the other paging parameters as desired. (See [Configure a Mailbox for Paging](#).)
12. Press **Enter** until the **Call Placement Pager Access Type** parameter displays and then enter **B** for billed.
13. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the server displays the mailbox configuration, then prompts for the next mailbox number. At this point, the parameter settings are saved and you can exit.

## 1.3.5 Reports

### 1.3.5.1 Overview

The system generates three types of reports.

- **System Information reports** provide specific information on how the system is configured or programmed. Information reports are discussed in System Information Reports.

- **Statistics reports** cover how system resources are used and are discussed in Statistics Reports.
- **Billing reports** provide a breakdown of charges for individual mailboxes by statistic and calculate the total amount due. These reports are discussed in Billing Reports.

The **Web Console** provides only a subset of these reports because much of the information is easily viewed in the Web Console interface. Web Console reports can be printed, or downloaded in text or .csv file format.

The **Text Console** provides numerous reports that can be viewed at the console or printed to a file.

### Viewing Reports on the Text Console

Reports can be directed to the console or to a serial port; they can be displayed, saved, or printed. When you run each report, the system prompts you to choose a report destination. Choose from the following options:

| REPORT OUTPUT ROUTING |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| C                     | to display the report on the console without pausing.               |
| P                     | to display the report on the console and pause as the screen fills. |
| 1                     | (no longer used)                                                    |
| 2                     | (no longer used)                                                    |
| F                     | to send the report to a file on the system.                         |
| A                     | to append the report to an existing file on the system.             |
| X                     | to exit report output options (no report).                          |

When displaying a report on the console, use the following commands to control scrolling:

- **CTRL-S** to stop scrolling.
- **CTRL-Q** to resume scrolling.
- **CTRL-C** to discontinue the report.

When viewing a report:

- **Press the space bar** to move ahead one page at a time.
- **Press <Enter>** to move ahead one line at a time.
- **Enter Q** when you reach the "END" of the report and want to exit the display.

## 1.3.5.2 System Information Reports

### 1.3.5.2.1 Procedures (Web Console)

### 1.3.5.2.1.1 View System Information

The System Information Report contains the serial numbers of all disks in the server, all optional features loaded, and the number of hours of speech storage. The hour, port, and link locks indicate the maximum number of hours, ports, and links that the current server can support. The UI (Unified Integration) lock lists the number of ports allowed.

To view system information:

1. In the navigation tree, click **Report Generation**, and then **System Information**. The system information report is displayed.
2. Click **Printer Friendly Version** to print the list, or click **Download** to save the list as a text file.

### 1.3.5.2.2 Procedures (Text Console)

#### 1.3.5.2.2.1 Configuration Report

##### Overview

The Configuration report provides a summary of all features programmed for the system. An excerpt from a Configuration report is shown here:

>>> Mitel Corporation <<<

## SYSTEM CONFIGURATION

Tue Nov 10 14:16:07 20XX

Group #1: "voice1"

Module 1: Lines 0:0 0:1 0:2 0:3

Fax Conn: Fax Group 1 (1 channel shared w/ other line groups)

Voice Recognition Conn: <none>

Application = [NP RECEPTIONIST]

Dial plan = [4,4,4,4,4,4,P8,3]

Administrator mbox # = [998]

General Greeting mbox # = []

Attendant mbox # = [999]

Wait Prompt = [Y]

Caller multiple messages enabled = [Y]

KEY\_0 for attendant transfer during greeting = [N]

Disconnect string = []

Pre-company name string = []

Pre-mailbox greeting string = []

Passcode Length Min = [4], Max = [10], Language = [English]

"6" Key Operator Transfer Dial String = []

Enter Group Number to Display (1-24) or <CR> for all: 01

"6" Key Operator Transfer pre-Dial String = []

Start of day = [08:00 AM], End of day = [05:00 PM], Days of Week = [DDDDDDNN]

Passcode trip count = [5], Passcode trip period = [24]

Dial-by-name: Last First = [Y], Match Threshold = [3], Exact = [Y]

Suppress Number = [N], Single Digit Access = [N]

## Run the Configuration Report

1. From the Main Menu, select **(R) Reports** and then **(C) Configuration**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server
3. Select a group number to display or press **Enter** for all groups.

### *1.3.5.2.2.2 Call Director Database Report*

The Call Director Database report provides a list of all mailboxes that are licensed to have personal call flows. An excerpt from a sample report is shown here:

\*\*\*\*\*CALL DIRECTOR DATABASE REPORT\*\*\*\*\*

\*\*\*Mailboxes Licensed to have personal call flows \*\*\*

Mailbox Number

1. 4095
2. 8888
3. 13215
4. 15152
5. 20105
6. 20225
7. 20228
8. 20239
9. 20240
10. 20242
11. 20293
12. 20311
13. 20364
14. 20418
15. 20469
16. 20592
17. 20704

### Run the Call Director Database Report

1. From the Main Menu, select **(R) Reports** and then **(N) Call Director Database Report**.



2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.

### *1.3.5.2.2.3 Feature Class of Service (FCOS) Report*

#### **Overview**

A Feature Class of Service (**FCOS**) is assigned to each mailbox when the mailbox is created. The FCOS feature bits grant privileges or impose restrictions on mailboxes.

The FCOS Report lists each FCOS and the numbers of the assigned feature bits. An excerpt from a sample FCOS Report is shown here:

>>> Mitel Corporation <<<

FEATURE CLASS OF SERVICE

Tue Nov 10 15:22:21 20xx

FCOS: UNLIMITED : 1

001 002 003 004 005 006 007 020 024 028 029 032 033 034 035 040 041 043 044  
045

050 053 055 058 059 066 070 071 072 073 074 077 092 098 125 126 161

FCOS: FULL GUEST : 2

001 002 003 004 005 006 008 020 024 028 029 032 033 034 035 040 041 043 044  
045

050 053 055 058 059 066 070 071 072 073 074 077 126

FCOS: RESTRICTED : 3

001 002 003 004 005 006 008 009 010 040 041 043 044 050 052 053 054 055 058  
059

066

FCOS: CHECK IN : 4

001 004 005 066 070 071 072 090

FCOS: CHECK OUT : 5

001 004 005 066 070 071 072 091

FCOS: GREETING ONLY : 6

001 002 003 060 062 066 070 071 072 073

FCOS: TUI EMULATION : 7

/usr/vm/log/tmp\_ShL.0A1 18%

## Run the FCOS Report

1. From the Main Menu, select **(R) Reports** and then **(F) FCOS**.

2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

3. Refer to [Feature Bit Descriptions](#) for details.

## 1.3.5.2.2.4 Group Class of Service (GCOS) Report

### Overview

The Group Class of Service ([GCOS](#)) provides a way to manage the mailboxes with which a particular set of system users can communicate. A GCOS must be included in every mailbox configuration for the mailbox owner to send and receive messages. The report lists the groups assigned to each GCOS. An excerpt from a sample GCOS Report is shown here:

>>> Mitel Corporation <<<

GROUP CLASS OF SERVICE

Tue Nov 10 15:30:25 20xx

GCOS: Default GCOS 1 : 1

001 002 003 004 005 006 007 008 009 010 011 012 013 014 015 016 017 018 019 020

021 022 023 024 025 026 027 028 029 030 031 032 033 034 035 036 037 038 039  
040

041 042 043 044 045 046 047 048 049 050 051 052 053 054 055 056 057 058 059  
060

061 062 063 064 065 066 067 068 069 070 071 072 073 074 075 076 077 078 079  
080

081 082 083 084 085 086 087 088 089 090 091 092 093 094 095 096 097 098 099  
100

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120

121 122 123 124 125 126 127 128

GCOS: Contractors : 2

001 007 009 013 041 056 099

GCOS: <No name> : 3

GCOS: <No name> : 4

GCOS: <No name> : 5

## Run the GCOS Report

1. From the Main Menu, select **(R) Reports** and then **(G) GCOS**.

2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.

### 1.3.5.2.2.5 Limits Class of Service (LCOS) Report

#### Overview

A Limits Class of Service (LCOS) is assigned to each mailbox when the mailbox is created. LCOS allow you to control system resources, such as speech and message storage. LCOS are detailed in Mailbox Reference Guide.

The LCOS Report lists each LCOS and the limits that are set for each parameter. A sample LCOS Report is shown here.

```
>>> Mitel Corporation <<<

LIMITS CLASS OF SERVICE

Tue Nov 10 14:28:19 20xx

Max Netq Max User Callr Name Greet Max Msg Net MsgDI 1View
# Name Msgs Msgs Bill Len Len Len Len Log Sib Sib Delay Tmout
-----
1 Default 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
2 NYNEX-Basic 200 99 0 2.0 2.0 2 2.0 0 199 199 5 59
3 NYNEX-Advanced 200 99 0 2.0 2.0 2 2.0 0 199 199 5 59
4 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
5 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
6 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
7 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
8 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
9 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
10 <No name> 200 99 0 5.0 5.0 2 2.0 0 199 199 5 59
```

## Run the LCOS Report

1. From the Main Menu, select **(R) Reports** and then **(E) LCOS**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server
3. Refer to [LCOS Parameter Descriptions](#) for details on report categories.

### 1.3.5.2.2.6 Log File Report

#### Overview

The log file is a record of any detected module or system errors and the date and time of any system resets. An excerpt from a sample Log File Report for a single-module system is shown here.

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

>>> Mitel Corporation <<<

## SYSTEM ERROR LOGFILE

Wed Nov 11 12:32:52 20xx

1 16365(ipPhone ) (ip\_phone\_han 409 ) 11/11 10:54:51: Ch 49 extension

147321224: Error receiving data, expected 176, received 0

1 16365(ipPhone ) (ip\_phone\_han 527 ) 11/11 10:54:51: Ch 49: [x.6250]

detected a closed socket

1 16314(ipPhone ) (ip\_phone\_han 409 ) 11/11 10:54:51: Ch 47 extension

164487560: Error receiving data, expected 176, received 0

1 16314(ipPhone ) (ip\_phone\_han 527 ) 11/11 10:54:51: Ch 47: [x.6248]

detected a closed socket

1 16301(ipPhone ) (ip\_phone\_han 409 ) 11/11 10:54:51: Ch 46 extension

161661320: Error receiving data, expected 176, received 0

1 16301(ipPhone ) (ip\_phone\_han 527 ) 11/11 10:54:51: Ch 46: [x.6247]

detected a closed socket

1 16258(ipPhone ) (ip\_phone\_han 409 ) 11/11 10:54:51: Ch 43 extension

138531208: Error receiving data, expected 176, received 0

1 16258(ipPhone ) (ip\_phone\_han 527 ) 11/11 10:54:51: Ch 43: [x.6244]

detected a closed socket

1 05766(recorder) (recorder.c 497 MINOR ) 11/11 10:54:51: Logfile size reached 800000. Previous log file has been moved to /usr/vm/log/logfile\_8.

1 16298(mitaiMon) (mtaimonitor. 363 ) 11/11 10:54:51: Ch 45, Resilient

/usr/vm/log/logfile

You are advised to view or print and clear this report on a weekly basis.

## Reading the Logfile Report

The logfile maintains the following format:

`<sitecode><m> <tid>(task_name>) <date> <time>: <error message> <code>`

|                                    |                                                                                         |
|------------------------------------|-----------------------------------------------------------------------------------------|
| <code>&lt;sitecode&gt;</code>      | Site code assigned to module (serial output only)                                       |
| <code>&lt;m&gt;</code>             | Module where failure occurred                                                           |
| <code>&lt;tid&gt;</code>           | Task ID of program reporting problem                                                    |
| <code>&lt;task_name&gt;</code>     | Name of system resource                                                                 |
| <code>&lt;date&gt;</code>          | Date of occurrence                                                                      |
| <code>&lt;time&gt;</code>          | Time of occurrence                                                                      |
| <code>&lt;error message&gt;</code> | Type of error that occurred<br><br>(may also indicate resets and other system activity) |
| <code>&lt;code&gt;</code>          | Failure code                                                                            |

If you are unsure of the meaning or importance of any logfile message, **do not clear the logfile** until you consult with the system technician or your distributor.

## Run the Logfile Report

The Logfile Report can be extensive and, therefore, time-consuming to scroll through. You are advised to review and clear all logfiles on a weekly basis. The Logfile Report can become extensive and, therefore, time-consuming to scroll through.

## View the Logfile

1. From the Main Menu, select **(R) Reports** and then **(L) Log File**.
2. Select **(V) View Log File Content**.
3. The log file is displayed. Press **Page Down** to scroll through the report.
4. Press **Q** to exit the report. The system returns to the Log File Menu.

**CAUTION:** If you are unsure of the meaning or importance of any logfile message, do not clear (delete) the logfile until you consult with the system technician or your distributor.

## Configure the Log File

1. From the Main Menu, select **(R) Reports** and then **(L) Log File**.
2. Select **(C) Configure Primary Log Output**.



3. To enable console output for this module, select **(E) Enable Console Output**. To disable logging to this module's console, select **(D) Disable Console Output**.
4. To change the name of the log file (default is "logfile"), select **(N) Specify Disk Log File Name** and then enter a new name for the log file.
5. Exit from the Log File menu to save your changes.

### To Delete the Log File Report

1. From the Main Menu, select **(R) Reports** and then **(L) Log File**.
2. Select **(D) Delete Log File**.
3. The system prompts you to confirm the deletion. If you are unsure of the meaning or importance of any log file message, **do not clear the log file** until you consult with the system technician or your administrator.
4. Enter **Y** to continue and delete the log file OR enter **N** to keep the log file.

### Access Log File help

1. From the Main Menu, select **(R) Reports** and then **(L) Log File**.
2. Select **(H) Help**.

## 1.3.5.2.2.7 Mailbox Data Report

### Overview

The Mailbox Data Report is available through the Reports Menu; it is keyed to the mailboxes themselves, and it provides statistics for **every mailbox** on the system. The example below shows an excerpt from a sample Mailbox Data Report.

INTERNAL INDEX: NONE BILLED INDEX: NONE NON-BILLED INDEX: NONE

FAX RETRIEVAL ACCESS TYPE: NONE

FAX DEFAULT TELEPHONE NUMBER: NONE

CALL PLACEMENT ACCESS TYPE: NONE TIME ZONE OFFSET: 0

DISTRIBUTION LISTS WITH CHANGE RIGHTS: all

DISTRIBUTION LISTS WITH REVIEW RIGHTS: all

MAILBOX: 4095 Created: 12/05/08 12:03 pm

MSGs: 0 UNPLAYED: 0 URGENT: 0 RECEIPT: 0

LCOS: Standard : 1 FCOS: CentrexCD 15.00 : 2

GCOS: Default GCOS 1 : 1 NCOS: Default : 1

TCOS: Admin : 1 RCOS: : 1

BAD LOGS: 0 LAST LOG: 11/04/09 4:17 pm MINS: 0.0

PASSWD: Y TUTOR: N DAY: M NIGHT: M

NAME: Dave Beach CODE:

EXTEN: 4095 INDEX: 0

ATTEN DN: INDEX: 0

ALT-EX#1: ALT-EX#2:

ALT-EX#3: ALT-EX#4:

ACCESS: NONE NOTIFICATION DISABLED: N

INTERNAL INDEX: NONE BILLED INDEX: NONE NON-BILLED INDEX: NONE

MWI #01: Mitai Messaging

FAX RETRIEVAL ACCESS TYPE: NONE

FAX DEFAULT TELEPHONE NUMBER: NONE

CALL PLACEMENT ACCESS TYPE: NONE TIME ZONE OFFSET: 0

DISTRIBUTION LISTS WITH CHANGE RIGHTS: all

DISTRIBUTION LISTS WITH REVIEW RIGHTS: all

MAILBOX: 5005 Created: 05/29/09 6:04 pm

MSGs: 2 UNPLAYED: 1 URGENT: 0 RECEIPT: 0

There are other mailbox reports available through the Mailbox Maintenance menu that are keyed to search criteria that you specify. They allow you to obtain statistics on **specific** mailboxes. Refer to [Find Mailbox Information](#) for procedures to run these reports: the [Mailbox Data Inquiry Report](#), the [Mailbox Block Inquiry Report](#), and the [Mailbox Dump Report](#).

## Run the Mailbox Data Report

1. From the Main Menu, select **(R) Reports** and then **(M) Mailbox Data**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.

### *1.3.5.2.2.8 Network Class of Service (NCOS) Report*

#### Overview

The Network Class of Service (**NCOS**) controls users' access to the network. NCOS settings control whether a mailbox owner can send, give, or answer messages over

the network. It is part of the NP Net Digital Network optional feature. An excerpt from a sample NCOS report is shown here:

```
>>>
Mitel Corporation <<<
```

#### NETWORK CLASS OF SERVICE

Tue Nov 10 15:35:50 2009

NCOS: Default : 1

002 003 004 005 006 007 010 011 012

NCOS: <No name> : 2

001 002 003 004 005 006 007 010 011 012

NCOS: <No name> : 3

NCOS: <No name> : 4

NCOS: <No name> : 5

### Run the NCOS Report

1. From the Main Menu, select **(R) Reports** and then **(H) NCOS**.

2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.

## 1.3.5.2.2.9 NP Receptionist Treatments Report

### Overview

NP Receptionist treatment types are discussed in the [Mailbox section](#) of this guide. NP Receptionist offers two reports to show NP Receptionist configuration:

- **Receptionist Day/Night Treatment Types Report:** Each mailbox configuration contains day and night treatment types that tell the system how mailbox owners want calls handled under different conditions. The Receptionist Day/Night Treatment Types Report displays the treatment types that you can choose when you create mailboxes. **Note:** Some treatment types will not be available when NP Receptionist is configured to perform a blind call transfer (put the called party on hold, dial the number, and hang up). See [Hidden \('Blind'\) Mailbox Extension Number Programming](#).
- **Pre-extension Dial Strings Report:** See [Pre-extension Dial Strings Report](#) for more information.

A sample Receptionist Day/Night Treatment Types Report is shown here:

```
>>> Mitel Corporation <<<

NP RECEPTIONIST DAY/NIGHT TREATMENT TYPES

Wed Nov 11 14:49:30 20xx

EXTENSION TYPES Auth Redial

Index Name Time Auth Code Dflt RNA BUSY REJ SCREEN
1 treatment 1 A D R R R Y
2 treatment 2 A D R R R N
3 treatment 3 A A R R R Y
4 treatment 4 A M R R R Y
5 treatment 5 A M M M R N
6 treatment 6 A M M M M Y
7 treatment 7 A R M R M Y
8 treatment 8 A R R R M Y
9 treatment 9 A R R R R N
10 MSU A M R R R N
12 Financial Aid A M M M R N

TRUNK TYPES Auth Redial

Index Name Time Auth Code Dflt Connect Fail
```

## Reading the Receptionist Day/Night Treatment Types Report

The sample report shows 10 Extension treatment types. Refer to the table below for a description of the fields.

| Extension Types | Treatment types                                                                                                                                                                                                                                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Index           | Index number that represents each treatment type                                                                                                                                                                                                                    |
| Name            | Descriptive name that identifies each treatment type                                                                                                                                                                                                                |
| Auth Time       | Authorized time period(s) when this number may be accessed<br><br>(A = all, D = day, N = night)                                                                                                                                                                     |
| Auth Code       | Authorization code (usually a number) that the caller must enter before NP Receptionist rings the extension. Special codes:<br><br>M = enter any valid mailbox number<br><br>P = enter a valid passcode<br><br>blank field = an authorization code is not necessary |
| Redial Dflt     | Redial menu that plays when Redial is selected for any extension failure condition                                                                                                                                                                                  |
| RNA             | Action taken when the extension rings but there is no answer:<br><br>R = play the default Redial menu (see "Redial Dflt" field above)<br><br>A = transfer to an assistance number<br><br>M = prompt the caller to leave a message in the mailbox                    |

| Extension Types | Treatment types                                                                                                                                                                                                                             |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Busy            | <p>Action taken when the extension is busy:</p> <p>R = play the default Redial menu</p> <p>A = transfer to an assistance number</p> <p>M = prompt the caller to leave a message in the mailbox</p>                                          |
| Rej             | <p>Action taken when call screening is in effect and the recipient rejects the call:</p> <p>R = play the default Redial menu</p> <p>A = transfer to an assistance number</p> <p>M = prompt the caller to leave a message in the mailbox</p> |
| Screen          | Shows whether the user wants NP Receptionist to screen all outside calls: Y = yes, N = no                                                                                                                                                   |
| Trunk Types     | Trunk treatment types                                                                                                                                                                                                                       |
| Connect         | <p>Connect criteria; the conditions under which the server should consider the trunk call to be successful:</p> <p>C = Cut through, R = Ring, T = Tone (dial or modem)</p>                                                                  |
| Failure         | Action taken when the connect criteria for the trunk call are not met: R = play the default Redial menu A = transfer to an assistance number M = prompt the caller to leave a message in the mailbox                                        |

## Run the Receptionist Day/Night Treatment Types Report

1. From the Main Menu, select **(R) Reports** and then **(T) NP Receptionist Treatments**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server

The system runs the report. Press **Q** to return to the Reports Menu.

### 1.3.5.2.2.10 Pager Access Codes Report

#### Overview

The Pager (Systems) Access Codes Report displays the index number, name, access code, and hold time of each supported pager system. To see all parameters configured for supported pager systems, run a system [Configuration Report](#).

An excerpt from a sample report is shown here:

```
>>> Mitel Corporation <<<

PAGER SYSTEMS ACCESS CODES

Wed Nov 11 14:33:49 20xx

INDEX PAGER NAME ACCESS CODE HOLD TIME

0 Inhouse T145++ 3
1 Local T8+ 3
2 On Campus T 3
3 Faxbill T8+10102880 3
```

#### Run the Pager Access Codes Report

1. From the Main Menu, select **(R) Reports** and then **(R) Pager Access Codes**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.



### 1.3.5.2.2.11 Phonebook Report

#### Overview

The Phonebook Report is an alphabetical listing of mailbox names. It shows the corresponding mailbox number and GCOS assigned to the mailbox. You can print the report or display it on the maintenance console.

When you choose the Phonebook Report option, the system uses the Dial-by-Name database to create a phonebook. The mailbox owner's name is included in the Dial-by-Name database only when:

- Dial-by-Name function is enabled
- Feature bit 092 (User will be in Dial-by-Name database) is assigned to the mailbox FCOS.

A sample phonebook report is shown here:

```
>>>Acme Management Systems<<<
```

```
PHONEBOOK
```

```
Tue Apr 31, 20xx 12:57 pm
```

```
NAME MAILBOX GCOS
```

```
-----
```

```
ATTEND. MB 3850 2
```

```
Allen, Debbi 3852 9
```

```
Allen, Richard 511 14
```

```
Bau, Lee 255 14
```

```
Barry, Randall 601 14
```

```
Borregas, Rita 3809 9
```

#### Run the Phonebook Report

1. From the Main Menu, select **(R) Reports** and then **(J) Phonebook Report**.

## 2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

The system displays, saves, or prints an alphabetical list of every mailbox owner's name, mailbox number, and the GCOS assigned to the mailbox.

### 1.3.5.2.2.12 *Pre-extension Dial Strings Report*

#### Description

NP Receptionist is a program that automatically answers calls and requests the extension number of the called party. When a caller enters an extension number, NP Receptionist converts it to a mailbox number. The system then checks the **mailbox extension number** field (of this mailbox) for the actual extension number to outdial.

A pre-extension dial string is a series of instructions and/or characters that the system must outdial before dialing that mailbox extension number.

**Example:** The dial string may consist of the dialing sequence and account code for a non-"Dial 1" long-distance carrier. If the string does not match one of the pre-extension dial strings configured by the system technician, you must enter this string in the extension number field of every mailbox that outdials to this carrier.

When an appropriate pre-extension dial string has been configured, users can select the string by simply entering an index number in the **pre-extension index** field.

The report displays the pre-extension dial strings associated with each index configured for mailboxes served by NP Receptionist.

The Pre-extension Dial Strings Report and the [Receptionist Day/Night Treatment Types Report](#) are the two reports that show NP Receptionist configuration.

#### Run the Pre-extension Dial Strings Report

## 1. From the Main Menu, select **(R) Reports** and then **(D) Pre-extension dial strings**.

## 2. Select an output routing for the report:

- **C** to send the report to the console without pausing
- **P** to send the report to the console, pausing as the screen fills
- **F** to send the report to a file on the server
- **A** to append the report to an existing file on the server

3. The system provides a list of predial strings, or it indicates that no Pre-extension dial strings configured; then it returns to the Reports Menu.

### 1.3.5.2.2.13 Show or Edit the History File

The History File is a record of modifications made to the server. Entries are made to this record by the system administrator, or by technical personnel. You should review this record before updating software on the server to verify that no custom changes have been made that might be overwritten by the new software.

You can view the current History File, and add entries to it (update it), using the Text console only.

To view the History File:

1. From the Main Menu, select **(S) System Maintenance, (O) Additional Options, (U) Utility Menu**, and then **(H) History**.
2. Select **(S) Show File** and enter a **record number** to view OR press **A** for all records. The server displays the file to the console. Press **Ctrl-S** to stop scrolling. Press **Ctrl-Q** to restart scrolling.

To enter information in the history file (update it):

1. From the Main Menu, select **(S) System Maintenance, (O) Additional Options, (U) Utility Menu**, and then **(H) History**.
2. Select **(U) Update File**.
3. At the **Contact person name:** prompt, enter the name of the person who made changes to the server, up to 15 characters.
4. At the **Reported problem:** prompt, enter the description of the problem you encountered, up to 79 characters.
5. At the **Fixed Problem:** prompt, enter the description of changes you made to the server to correct the reported problem, up to 159 characters.
6. At the **Other comments:** prompt, enter any other necessary information, up to 79 characters, or press **Enter** to leave blank.

### 1.3.5.2.2.14 System Information Report

The System Information Report provides the following details:

- Release and revision numbers of software currently installed
- Disk serial number
- Storage capacity of hard disk (in hours)

- Ports and links
- Optional features installed

An excerpt from a sample report is shown here:

```
>>>  
Mitel Corporation<<<
```

#### SYSTEM INFORMATION

Tue Nov 10 15:39:11 2009

Install Time: Fri Oct 16 10:43:39 EDT 2009

NuPoint Messenger Base Software Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

Install Time: Fri Oct 16 10:43:40 EDT 2009

NuPoint Messenger LanBackup Optional Feature Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

Install Time: Fri Oct 16 10:43:43 EDT 2009

NuPoint Messenger Caller Line Id user interface Optional Feature Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

Install Time: Fri Oct 16 10:43:45 EDT 2009

NuPoint Messenger FPSA Optional Feature Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

/usr/vm/log/tmp\_ShL.0A1

Install Time: Fri Oct 16 10:43:48 EDT 2009

NuPoint Messenger NP Admin Server Optional Feature Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

Install Time: Fri Oct 16 10:43:51 EDT 2009

NuPoint Messenger NP Call Director Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

Install Time: Fri Oct 16 10:44:04 EDT 2009

NuPoint Messenger NP Receptionist Optional Feature Release 12.5.5.16 Rev 01

Release Time: Thu Oct 1 15:38:30 EDT 2009

## Run the System Information Report

1. From the Main Menu, select **(R) Reports** and then **(I) System Information**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server

The system runs the report and returns to the Reports Menu.

### 1.3.5.3 Statistics Reports

#### 1.3.5.3.1 Overview - Statistics Reporting

Statistics reports display how system resources are used.

#### Statistics Reporting in the Web Console:

The Web Console enables you to run three types of Statistics reports:

- **Line Usage Report:** This report shows the number of seconds during which individual lines were busy and how many calls each line received over a specific reporting time. The data can be displayed for a selection of lines.
- **Line Group Usage Report:** This report shows the number of seconds during which line groups were busy and how many calls each group received over a specific reporting time. The data can be displayed for a selection of groups.
- **Speech Block Usage Report:** The speech storage units, called “storage blocks”, depend on the storage hour capacity of the hard disk. In addition to messages, mailbox names, greetings, prompts, and distribution list names all consume speech storage blocks. The Speech Usage form is similar to Line Usage form except it does not have any Line Selections.

Reports are displayed in dita format. You can print them and export them to a CSV file.

#### Statistics Reporting in the Text Console:

A summary of the available Text Console reports is provided here:

- **Line Group Usage—All Trunks Busy (ATB) Statistics:** Shows the number of times, in a specified period, that every port in a line group is busy and the total number of seconds that this condition occurs within that time period.
- **Line Group Usage—Line—Statistics:** Shows the number of seconds that an individual port in a line group is busy and the number of calls received by that port, within a

specified time period. (This report is similar to Line Usage Statistics except that it is at the line group level.)

- **Line Usage Statistics:** Shows the number of seconds that an individual port is busy, and the number of calls each line receives over a specified reporting period.
- **Mailbox Statistics:** Shows mailbox usage. Several reports are available through the Mailbox Maintenance Menu (Mailbox Data Inquiry Report, Mailbox Block Inquiry Report, Mailbox Dump Report) and the Mailbox Statistics Menu option of the Statistics Menu (Total Speech and Account Breakdown, Idle Mailboxes, Mailbox Totals Report).
- **Message Counts Usage Statistics:** Shows the number of messages received, the number available, and the percentage of message storage available for a specified time period.
- **Speech Blocks Usage Statistics:** Shows the amount of speech storage units in use and the amount available over a specified time period.
- **Complete Summary:** Shows a summary of all report statistics. Also called "Total Statistics Summary Report".
- **Total System Statistics:** Shows the amount of storage capacity consumed on the hard disk and the amount available.
- **Virtual Drive Statistics:** Shows the amount of storage capacity consumed on each of the drive partitions and the amount available.
- **Network Usage Statistics:** **Shows network messaging activity for a specified reporting period.**

### 1.3.5.3.2 Procedures (Web Console)

#### 1.3.5.3.2.1 Run a Line Usage Report

A Line Usage report shows the number of seconds during which individual lines were busy and how many calls each line received over a specific reporting time. The data can be displayed for a selection of lines.

To run a Line Usage Report:

1. In the navigation tree, click Report Generation, then click Statistics, and then click Line Usage. The Line Usage Report Options form is displayed.
2. Configure the following Line Usage Report options as required, and then click OK:

| Fields    | Values                                    |
|-----------|-------------------------------------------|
| Available | Only Programmed Groups will be displayed. |
| Selected  |                                           |

| Fields               | Values                                                                                                                                         |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Report resolution    | Select one of three: <ul style="list-style-type: none"> <li>• Summary Only</li> <li>• 1 hour intervals</li> <li>• 15 min intervals</li> </ul>  |
| Time Range from Date | Select from the drop-down lists or click the Calendar pop-up and select a date.                                                                |
| Time Range from Time | Enter in 12 Hr and 60 min format (00:00-12:59), and then select AM or PM from the drop-down list. Time range can be from and to the same time. |
| Time Range To Date   | Select from the drop-down lists or click the Calendar pop-up and select a date.                                                                |
| Time Range To Time   | Enter in 12 Hr and 60 min format (00:00-12:59), and then select AM or PM from the drop-down list. Time range can be from and to the same time. |

3. The Line Usage Report is displayed in dita format.

- To print the report, click on **Printer Friendly Version....**
- To save the report as a CSV tile, click on **Export to CSV File....**

## Reading the Line Usage Report

The report heading shows the NuPoint Unified Messaging system name in the title. This name is acquired from the Network Element and is configured through the [Network Element Configuration](#).

The report displays the following statistics:

| Columns        | Displayed Information     |
|----------------|---------------------------|
| Time           | mm/dd/yyyy hh:mm:ss AM/PM |
| Module         | 1-4                       |
| Slot           | 1-15                      |
| Line           | Starting from 0           |
| Busy Seconds   | Numeric value             |
| Calls Answered | Numeric value             |

### 1.3.5.3.2.2 Run a Line Group Usage Report

A Line Group Usage report shows the number of seconds during which line groups were busy and how many calls each line group received over a specific reporting time. The data can be displayed for a selection of line groups.

To run a Line Usage Report:



1. In the navigation tree, click Report Generation, then click Statistics, and then click Line Group Usage. The Line Group Usage Report Options form is displayed.
2. Configure the following Line Group Usage Report Options, and then click OK.

| Fields               | Values                                                                                                                                           |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Available            | Maximum 24. Only Programmed Groups will be displayed.                                                                                            |
| Selected             | Maximum 24.                                                                                                                                      |
| Report resolution    | Select one of three: <ul style="list-style-type: none"> <li>• Summary only</li> <li>• 1 hour intervals</li> <li>• 15 minute intervals</li> </ul> |
| Time Range from Date | Select from the drop-down lists or click the Calendar pop-up and select a start date.                                                            |
| Time Range To Date   | Select from the drop-down lists or click the Calendar pop-up and select an end date.                                                             |
| Time Range from Time | Enter in 12 Hr and 60 min format (00:00-12:59). Time range can be from and to the same time.                                                     |
| Time Range To Time   | Enter in 12 Hr and 60 min format (00:00-12:59). Time range can be from and to the same time.                                                     |

3. The Line Usage Report is displayed in dita format.

- To print the report, click on **Printer Friendly Version....**
- To save the report as a CSV file, click on **Export to CSV File....**

## Reading the Line Group Usage Report

The report heading shows the NuPoint Unified Messaging system name in the title. This name is acquired from the Network Element and is configured through the [Network Element Configuration](#).

The report displays the following statistics:

| Columns                 | Displayed Information     |
|-------------------------|---------------------------|
| Time                    | mm/dd/yyyy hh:mm:ss AM/PM |
| Line Group              | 1-24                      |
| All Trunks Busy Seconds | Numeric value             |
| All Trunks Busy Count   | Numeric value             |

### 1.3.5.3.2.3 Run a Speech Block Usage Report

A Speech Block Usage report shows statistics on message numbers and speech blocks. The speech storage units, called “storage blocks”, depend on the storage hour capacity of the hard disk. Messages, mailbox names, greetings, prompts, and distribution list names all consume speech storage blocks.

The Speech Usage form is similar to Line Usage form except it does not have any Line Selections.

To run a Speech Block Usage Report:

1. In the navigation tree, click Report Generation, then click Statistics, and then click Speech Block Usage. The Speech Block Usage Report Options form is displayed.
2. Configure the following Speech Block Usage Report Options as required, and then click OK.

| Fields               | Values                                                                                                                                           |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Report resolution    | Select one of three: <ul style="list-style-type: none"> <li>• Summary only</li> <li>• 1 hour intervals</li> <li>• 15 minute intervals</li> </ul> |
| Time Range from Date | Select from the drop-down lists or click the Calendar pop-up and select a date.                                                                  |
| Time Range To Date   | Select from the drop-down lists or click the Calendar pop-up and select a date.                                                                  |
| Time Range from Time | Enter in 12 Hr and 60 min format (00:00-12:59). Time range can be from and to the same time.                                                     |
| Time Range To Time   | Enter in 12 Hr and 60 min format (00:00-12:59). Time range can be from and to the same time.                                                     |

3. The Speech Block Usage Report is displayed in dita format.

- To print the report, click on **Printer Friendly Version....**
- To save the report as a CSV file, click on **Export to CSV File....**

#### Reading the Speech Block Usage Report

The report heading shows the NuPoint Unified Messaging system name in the title. This name is acquired from the Network Elements and is configured through the [Network Element Configuration](#).

The report displays the following statistics:

| Columns               | Displayed Information     |
|-----------------------|---------------------------|
| Time                  | mm/dd/yyyy hh:mm:ss AM/PM |
| Total Message Numbers | Numeric value             |
| Free Message Numbers  | Numeric value             |
| Total Speech Blocks   | Numeric value             |
| Free Speech Blocks    | Numeric value             |

### 1.3.5.3.3 Procedures (Text Console)

#### 1.3.5.3.3.1 Line Group Usage Report – All Trunks Busy Statistics

The Line Group Usage Report, also called the Line Groups–All Trunks Busy Report, shows how many times and for how many seconds every port in a line group is busy simultaneously. This condition is called All Trunks Busy, or ATB.

- Two counters are used for this resource: seconds and number.

The system checks each line group every second for an ATB condition and adds one second to the group's seconds counter every time the condition occurs. The number counter is also incremented. Neither counter is incremented if at least one trunk within a group is not busy.

**Note:**

You must specify the line group(s), the start and stop times, and the start and stop days for the report.

The report can be presented as the Line Group Usage Report or the Line Usage Report. An excerpt from a sample standard report is shown [below](#). Reports may be requested for any or all parts of the most recent seven days' activities. You can display data for a single line group or a range of line groups.

#### To Run the Line Group Usage (ATB) Report

1. Enter **A** for Line Group Usage (ATB) from the Statistics Menu (enter **S** from the Reports Menu).

The system displays the Line Group ATB Report Menu.

|                            |
|----------------------------|
| LINE GROUP ATB REPORT MENU |
|----------------------------|

- (A) Beginning Group (1 - 24) = [1]
- (B) Ending Group (1 - 24) = [24]
- (C) Beginning Hour (0 - 23) = [8]
- (D) Ending Hour (0 - 23) = [17]
- (E) Beginning Day (0 - 6) = [1]
- (F) Ending Day (0 - 6) = [5]
- (G) Summary = [N]
- (R) Run Report
- (X) Exit

**2.** Choose the group or range of groups to report:

- Enter **A** and the number of the first group in the range to report.
- Enter **B** and the number of the last group in the range to report.
- Enter the same group number for both A and B to report only one group.

**3.** Enter **C** to select the time interval for the data to display:

- Enter the first hour of the time period to report (0 = midnight; 12 = noon.)
- Enter **D** and the last hour of the time period.
- Notice that the default values are 8 (8 a.m.) to 17 (5 p.m.)

The system retains statistical data for one week (7 days); 0 = Sun., 1 = Mon., 2 = Tue. ... 6 = Sat. The default is Mon - Fri.

**4.** Enter **R** to run the report.

The system prompts you to choose a report destination.

**5.** Select the report destination.

The Line Group Usage Report displays All Trunks Busy data for each line group, in 15-minute increments, for each hour of the chosen interval.

The Line Usage Report shows a single value for each line group.

**Note:**

Reports always run in the order of ascending date. If you designate a beginning hour that is greater than the ending hour, the report automatically switches them. However, if the beginning day number is greater than the ending day number, the report will wrap-around. For example, if the beginning day is 03 and the ending day is 01, the report order will be: 03, 04, 05, 06, 01.

## Sample Line Group Usage (ATB) Report

| LINE GROUP ATB 15min REPORT                           |       |       |       |       |       |      |
|-------------------------------------------------------|-------|-------|-------|-------|-------|------|
| Thu Aug 1, 1996 10:46 am                              |       |       |       |       |       |      |
| 07/29/96 8hr-16hr --- minutes interval ---            |       |       |       |       |       |      |
| Port Group 1 [Message Center]                         |       |       |       |       |       |      |
| DAY=01 HOUR=08                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=09                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=10                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=11                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=12                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=13                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=14                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=15                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| DAY=01 HOUR=16                                        | 00-14 | 15-29 | 30-44 | 45-59 | TOTAL | BUSY |
| ATB_SEC                                               | 0     | 0     | 0     | 0     | 0     | 0 %  |
| ATB_CNT                                               | 0     | 0     | 0     | 0     | 0     |      |
| HIGHEST ATB_SEC: 0 sec at 8,9,10,11,12,13,14,15,16 hr |       |       |       |       |       |      |
| LOWEST ATB_SEC: 0 sec at 8,9,10,11,12,13,14,15,16 hr  |       |       |       |       |       |      |

## Reading the Line Group Usage (ATB) Report

In the sample report, the heading shows the date and time that the report was run.

The first line shows the date of the first statistic in the report and the time interval when the data was gathered.

**PORT GROUP**

The data displayed immediately below this entry refer to Line Group 1.

**DAY = 01 HOUR = 15**

The data displayed refers to the hour between 3 p.m. and 4 p.m. on Monday. Entry 00-14 indicates that the data in the column was gathered during the first 15-minutes of the hour; 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15-minutes of the hour; 45-59 refers to the final 15-minutes of the hour.

**TOTAL**

The data for the four 15-minute intervals. If a hyphen appears in place of a numerical value, it means that data have not been gathered.

*EXAMPLE:* If the report is run at 3:30 p.m., and the report interval is for hours 12 - 15 (noon to 3 p.m.), the entries for hour 15 (3 to 4 p.m.) show hyphens.

**BUSY**

The percentage of the hour when all trunks were busy.

*EXAMPLE:* Between 3 p.m. and 4 p.m., Group 1 had an ATB condition that occurred for 150 out of 3600 seconds; this would be 4% of the time.

**ATB\_SEC**

The total number of seconds in the time period that an ATB condition occurred.

**ATB\_CNT**

The number of times that an ATB condition occurred. The counter is incremented when an ATB condition first occurs. The ATB condition must clear and reoccur before the counter is incremented again.

*EXAMPLE:* If you had an ATB condition that lasted for 3 seconds, the ATB-SEC counter increases by 3, but the ATB\_CNT counter is increased by 1.

**HIGHEST ATB\_SEC**

The greatest total amount of time that ATB conditions occurred in a fifteen-minute interval for the period reported. (It does not mean the longest single interval during which an ATB occurred.) In other words, this period is the busiest during the interval reported.

**LOWEST ATB\_SEC**

The least total amount of time that ATB conditions occurred in a fifteen-minute interval for the period reported. (It does not mean the shortest single interval during which an ATB occurred.) This period has the slowest traffic during the interval reported.

## Reading the Line Usage Report

The Line Usage Report (summary) displays the line groups by numbers and provides the total number of seconds, the total number of times, and the total percentage of time that an ATB condition occurred in that line group for the entire period reported.

This report is less specific than the Line Group Usage Report, but it allows you to see at a glance which line group received the most traffic for a specified time interval. In addition, by comparing the ATB count with the ATB seconds count, you can determine the average duration of the ATB condition during a specific period for each line group.

### 1.3.5.3.3.2 Line Group Usage–Line–Statistics Report

The Line Group Usage–Line–Report shows the number of seconds that individual ports in a line group are busy and how many calls each port receives over a specified reporting period. You can choose to display the data for a single line group or for a range of line groups. The reporting period can be any hour, or range of hours, from the current day or portions of the most recent seven days.

You can choose to run either a full report, which gives the statistics in 15-minute increments for each hour of the reporting period, or a summary report, which shows the average line group usage for each hour. The [figure](#) at the end of this topic provides an excerpt from a sample Line Group Usage–Line–Report.

## To Run the Line Group Usage–Line–Report

1. Enter **G** for Group Usage–Line from the Statistics Menu.

The system displays the Line Group Usage Report Menu.

|                                           |
|-------------------------------------------|
| LINE GROUP USAGE REPORT MENU              |
| (A) Beginning Hour (0 - 23) = [8]         |
| (B) Ending Hour (0 - 23) = [17]           |
| (C) Beginning Group Number (1 - 24) = [1] |
| (D) Ending Group Number (1 - 24) = [24]   |
| (E) Beginning Day (0 - 6) = [1]           |
| (F) Ending Day (0 - 6) = [5]              |
| (R) Run Report                            |
| (X) Exit                                  |

**2. Enter **A** to select the time interval for the data to display.**

- Enter the first hour of the time period to report  
(0 = midnight; 12 = noon).
- Enter **B**, then enter the last hour of the time period.

Notice that the default values are 8 (8 a.m.) to 17 (5 p.m.)

**3. Choose the group, or range of groups, to report:**

- Enter **C** and the number of the first group in the range to report.
- Enter **D** and the number of the last group in the range to report.
- Leave **C** and **D** at the default settings to report all groups.
- Enter the same group number for both C and D to report only one group.

The system retains statistical data from 12:00 midnight of the previous day.

- Option **E** allows you to choose today's information or yesterday's data (the default setting is Monday).
- Enter **F** to choose the ending day.

**4. Enter **R** to run the report.**

The system prompts you to choose a report destination.

**5. Enter the report destination to begin the report.**

## Sample Standard Line Group Usage-Line-Report

```

                                LINE GROUP USAGE 15min REPORT
                                Thu Aug 1, 1996 10:58 am

08/01/96  8hr-16hr  --- minutes interval ---  Group #5 [DTMF To PABX]

LINE      1:3:0 HOUR=08 00-14    15-29    30-44    45-59    TOTAL USAGE
SECONDS                                     0      11      0      0      11      0 %
CALLS                                           0      0      0      0      0

LINE      1:3:1 HOUR=08 00-14    15-29    30-44    45-59    TOTAL USAGE
SECONDS                                     0      0      10     0      10      0 %
CALLS                                           0      0      0      0      0

LINE      1:3:0 HOUR=09 00-14    15-29    30-44    45-59    TOTAL USAGE
SECONDS                                     0      0      0      0      0      0 %
CALLS                                           0      0      0      0      0

LINE      1:3:1 HOUR=09 00-14    15-29    30-44    45-59    TOTAL USAGE
SECONDS                                     0      0      0      0      0      0 %
CALLS                                           0      0      0      0      0

```

**Reading the Line Group Usage-Line-Report**

In the sample report, the heading shows the date and time that the report was run.



The first line of the report shows the date and time interval when the data were gathered.

## GROUP

The lines belong to Line Group 1.

## LINE 1:0:3 HOUR = 14

The data displayed immediately below refers to the triplet 1:0:3 (module 1, slot 0, port 3) for the time period between 2 p.m. and 3 p.m. Entry 00-14 indicates that data in the column were gathered during the first fifteen minutes of the hour; 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15 minutes of the hour; 45-59 refers to the final 15-minutes of the hour.

## TOTAL

The data for the four 15-minute intervals. When a hyphen appears in place of a numerical value, it means that data have not been gathered.

*EXAMPLE:* If the report is run at 3:30 p.m., and the report interval is for hours 12 - 15 (noon to 3 p.m.), the entries for hour 15 (3 p.m. to 4 p.m.) show hyphens.

## USAGE

The percentage of the hour the line was busy.

*EXAMPLE:* Line 1:0:0 was busy for 300 seconds out of 3600 or for 8% of the time between

2 p.m. and 3 p.m.

## SECONDS

The total number of seconds that the line was busy during the time period.

## CALLS

The number of calls that were received by the line during the time period.

## Reading the Line Group Usage–Line–Summary Report

The summary report displays the line groups by number and gives the total number of seconds and the total number of times that a line in that line group was used during the entire period reported. This report is less specific than the standard report, but it allows you to see at a glance which line group receives the most traffic during the specified time interval.

### 1.3.5.3.3.3 *Line Usage Statistics Report*

#### **Overview**

The Line Usage Report shows the number of seconds that individual ports were busy and how many calls each line received over a specified reporting period. You can choose to display the data for a single line or for a range of line numbers. The reporting period can be any hour, or range of hours, from the current day or from portions of the most recent seven days.

An excerpt from a sample Standard Line Usage Report is shown here:

```
LINE
USAGE 15min REPORT
```

Thu May 14, 20XX 2:01 pm

05/11/XX 8hr-12hr --- minutes interval ---

DAY=01 LINE=1:0:183

HOUR=08 00-14 15-29 30-44 45-59 TOTAL USAGE

SECONDS 0 0 0 0 0 0 %

CALLS 0 0 0 0 0

HOUR=09 00-14 15-29 30-44 45-59 TOTAL USAGE

SECONDS 0 0 0 0 0 0 %

CALLS 0 0 0 0 0

HOUR=10 00-14 15-29 30-44 45-59 TOTAL USAGE

SECONDS 0 0 0 0 0 0 %

CALLS 0 0 0 0 0

HOUR=11 00-14 15-29 30-44 45-59 TOTAL USAGE

SECONDS 0 0 0 0 0 0 %

CALLS 0 0 0 0 0

HOUR=12 00-14 15-29 30-44 45-59 TOTAL USAGE

SECONDS 0 0 0 0 0 0 %

CALLS 0 0 0 0 0

HIGHEST USAGE: 0 sec at 8,9,10,11,12 hr

LOWEST USAGE: 0 sec at 8,9,10,11,12 hr

### Reading the Standard Line Usage Report

In the sample report, the heading shows the date and time that the report was run.

The first line of the report shows the date and time interval during which the data were gathered.

**DAY = 01 LINE = 1:0:183** The data displayed immediately below refer to the triplet 1:0:183 (module 1, slot 0, port 183), on Monday. Entry 00-14 indicates that data in the column were gathered during the first 15-minutes of the hour; 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15-minutes of the hour; 45-59 refers to the final 15-minutes of the hour.

**TOTAL** The data for the four 15-minute intervals. If a hyphen appears in place of a numerical value, it means that the data have not been gathered.

*EXAMPLE:* If the report is run at 3:30 p.m., and the report interval is for hours 12-15 (noon to 3 p.m.), the entries for hour 15 (3 to 4 p.m.) show hyphens.

**USAGE** The percentage of the hour the line was busy.

**SECONDS** The total number of seconds that the line was busy during the time period.

**CALLS** The number of calls received by the line during the time period.

**HIGHEST USAGE** The greatest total amount of time that the line was busy in a single 15-minute interval of the reporting period.

**LOWEST USAGE** The least total amount of time that the line was busy in a single 15-minute interval of the reporting period. This period has the slowest traffic for the line during the interval reported.

## Reading the Line Usage Summary Report

The Line Usage Summary Report displays the ports by triplet, gives the total number of seconds that each line is busy, and the total number of calls that each line receives during the entire report period. The summary report is less specific than the standard report, but it allows you to see at a glance which line receives the most traffic for the specified time interval. In addition, by comparing the number of seconds that a port is busy with the number of calls that the line receives, you can determine the average duration of a call during this period for each port.

## Run the Line Usage Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(L) Line Usage**.
2. Select **(A) Add Lines to Report** and enter the number of the first line in the range to report. To report all lines, leave (A) an (B) at the default settings. To report only one

line, enter the same number at both. Enter the triplet as: <module>:<slot>:<port> in one of the following formats:

- Line number range: <module>:<slot>:<port>-<module>:<slot>:<port>.
- Wild card entry \* (all lines all modules), or <module>:\* (all lines on <module>), or <module>:<slot>:\* (all ports on <module>:<slot>).
- Enter multiple values, as described, separated by commas.

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

**3.** In the Line Usage Report menu:

- Select **(B) Drop Lines to Report** and enter the number of the last line in the range to report using the format described in step 2.
- Select **(D) Beginning Hour** and enter the last hour of the time period to report. (0 = midnight; 12 = noon. Default is 8)
- Select **(E) Ending Hour** and enter the last hour of the time period to report. (Default is 17.)
- Select **(F) Beginning Day** and enter the first day of the week to report (Sun-Sat = 0-6. Default is Mon - Fri.)
- Select **(G) Ending Day** and enter the last day of the week to report.
- (Optional) Select **(H) Summary =** and choose **N** for detailed report or **Y** for a summary report. (Default is N.)
- Select **(R) Run report.**

**4.** Select an output routing for the report:

- **C** to send the report to the console without pausing
- **F** to send the report to a file on the server

The Standard Line Usage Report displays data for each line, in 15-minute increments, for each hour of the chosen interval. The Line Usage Summary Report shows a single value for each line.

### 1.3.5.3.3.4 Mailbox Statistics Reports

#### Overview

Mailbox usage statistics reports are available through both the Mailbox Maintenance Menu and the Reports > Statistics > Mailbox Statistics Menu.

The Mailbox Maintenance Menu offers the following reports discussed in the Mailbox Configuration section:

- [Mailbox Data Inquiry Report](#)
- [Mailbox Block Inquiry Report](#)
- [Mailbox Dump Report](#)

The Reports > Statistics Menu offers three reports that provide summary "snapshots" of current mailbox usage and speech storage.

- Total Speech and Account Breakdown Report
- [Idle Mailboxes Report](#)
- [Mailbox Totals Report](#)

### **Total Speech and Account Breakdown Report**

The Total Speech and Account Breakdown Report summarizes account (mailbox) statistics and speech statistics for all mailboxes in the system. Speech storage is used for messages, names, and greetings. A sample Total Speech and Account Breakdown Report is shown here:

## ACCOUNT STATISTICS

Mailboxes: 8814 0 %

Dist Lists: 0 0 %

Copy Lists: 0 0 %

Config Records: 0 0 %

Statistics Records: 0 0 %

-----

Total: 42445043204294967290 %

Total Free Used

Message Numbers 268403456 268403422 0 %

Speech Blocks 36478574 28807719 21 %

## SPEECH STATISTICS

Amount Frames Blocks Blocks

-----

greet1: 13 4957 0 0 %

greet2: 1 224 0 0 %

greet3: 1 192 0 0 %

greet4: 1 224 0 0 %

names: 9 134635984 0 0 %

dlnames: 0 0 0 0 %

fax greet: 4 2784 0 0 %

fax msg: 0 0 0 0 %

messages: 9 245467360 7670855 21 %

blocks used by greets and names: 0

blocks used by fax messages/greets: 0

average time in seconds for messages: 44399

(END)

## Run the Total Speech and Account Breakdown Report

1. From the Main menu, select **(R) Reports**, **(S) Statistics**, and then **(R) Mailbox Statistics**.
2. Select **(B) Total Speech Account Breakdown**.
3. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

The system displays, saves, or prints account statistics, speech statistics, and a summary of message statistics.

## Idle Mailboxes Report

The Idle Mailboxes Report

- Shows mailbox numbers that are not logged into by their owners
- Summarizes mailbox usage statistics
- Lists FCOS, LCOS, and department codes assigned to idle mailboxes
- Shows the number of mailboxes that are logged into or that receive messages as "Mailboxes with Activity"



A sample Idle Mailbox Report is shown here:

```
>>>
Mitel Corporation <<<
```

#### MAILBOX STATISTICS

Fri Nov 13 14:54:22 20XX

The following mailboxes have NEVER logged in:

1234 1235 1236 1250 1251 1252 1253

1254 1260 1261 1262 1263 1264 5000

5002 5008 5108 5399 5400 8521 9998

9999 10000 10001 10002 10003 10004 10005

MAILBOX STATISTICS since Tue Nov 1, 20XX 8:00 am

8814 Mailboxes included in this report

2 Mailboxes with activity

8812 Mailboxes have never logged in

2 Mailboxes have logged in

7 Mailboxes with pagers

0 Total calls to pagers

0.0 Average calls to pagers per subscriber

0 Wakeup messages received

10 Total messages deposited

25 Total greets played

52 Total logins

14.1 User connect time (minutes)

4.5 Caller connect time (minutes)

0.0 Disk usage (minute\_size\*hours\_kept)

0.2 Average user connect time

0.1 Average caller connect time

FCOS Mailboxes

## Run the Idle Mailboxes Report

1. From the Main menu, select **(R) Reports**, **(S) Statistics**, and then **(R) Mailbox Statistics**.
2. Select **(I) Idle Mailboxes**.
3. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

The system displays numbers, FCOS, LCOS, and department codes of all idle mailboxes. The report summarizes idle mailbox activity.

## Mailbox Totals Report

The Mailbox Totals Report gives the same type of information as the Idle Mailboxes Report; however, it reports *all* mailboxes on the system. The "Mailboxes with Activity" entry shows the number of mailboxes that are logged into or that receive messages.

### To Run the Mailbox Totals Report

1. From the Main menu, select **(R) Reports**, **(S) Statistics**, and then **(R) Mailbox Statistics**.
2. Select **( M)** for Mailbox Totals Report
3. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

The system displays, saves, or prints numbers of all mailboxes, FCOS, LCOS and department codes assigned to mailboxes. It summarizes mailbox activity.

## 1.3.5.3.3.5 Message Counts Usage Statistics Report

### Overview

The Message Counts Usage Report shows the number of messages received, the number of messages still available, and the percentage of message storage available in a specified reporting period.

The reporting period can be any hour or range of hours in the current day or portions of the most recent seven days. You can chose to run either a full report, which gives the statistics in 15-minute increments for each hour of the reporting period, or a summary

report, which shows the average message usage for each hour. An excerpt from a sample Standard Message Counts Usage Report is shown here:

```
>>>  
Mitel Corporation <<<
```

#### MESSAGE USAGE 15min REPORT

Fri Nov 13, 2009 3:10 pm

11/09/09 8hr-17hr --- minutes interval --- Max Messages=268403456

MESSAGE HOUR=08 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=09 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=10 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=11 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=12 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=13 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

MESSAGE HOUR=14 00-14 15-29 30-44 45-59 AVERAGE

MESSAGE FREE 268403424 268403424 268403424 268403424 268403424

PERCENT USED 0 % 0 % 0 % 0 % 0 %

## Reading the Standard Message Counts Usage Report

In the sample report, the heading shows the date and time that the report was run.

The first line of the report shows the date and time interval that the data were gathered and the total number of messages received during that time period. This line is repeated for each day of the report.

**MESSAGE HOUR = 08** The data displayed immediately below were gathered during the hour between 8 a.m and 5 p.m. Entry 00-14 indicates that data in the column were gathered during the first 15-minutes of the hour; 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15-minutes of the hour; 45-59 refers to the final 15-minutes of the hour. The report covers data hourly.

**AVERAGE** The average value for the four 15-minute samples. If a hyphen appears in place of a numerical value, it means that data have not been gathered.

**MESSAGE FREE** The number of messages *not in use at the time of sampling*.

**PERCENT USED** The number of messages in use, as a percentage of the maximum number of messages allowed on the system.

## Reading the Message Counts Usage Summary Report

The summary report displays, by day and by hour

- Total number of messages used
- Total number of messages available
- Percentage of message storage used

The summary report is less specific than the standard report, but it allows you to easily determine the hours when message storage is at its peak and the hours with low message storage.

You can use the report to detail the hours immediately before and after midnight in order to judge the effectiveness of the automatic purge.

**EXAMPLE:** If message storage is near or above 80% on a regular basis, the LCOS of most mailboxes on the system should be adjusted to give these mailboxes a shorter message retention time. This makes the purge more effective, and frees message storage more quickly.

As an alternative, the maximum number of messages and maximum message length parameters can be decreased for as many system LCOS as is feasible.

## Run the Message Counts Usage Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(M) Message count usage**.
2. In the Line Group Usage menu:
  - select **(A) Beginning Hour** and enter the first hour of the time period to report (0 = midnight; 12 = noon. Default is 8)
  - select **(B) Ending Hour** and enter the last hour of the time period to report. (Default is 17.)
  - select **(C) Beginning Day** and enter the first day of the week to report (Sun-Sat = 0-6. Default is Mon - Fri.)
  - select **(D) Ending Day** and enter the last day of the week to report
  - (optional) select **(E) Summary =** and choose **N** for detailed report or **Y** for a summary report. (Default is N.)
  - select **(R) Run report**
3. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

The standard Message Usage Report displays data for each hour of the chosen interval in 15-minute increments. The Message Usage Summary Report shows a single value for each hour.

### 1.3.5.3.3.6 Speech Blocks Usage Statistics Report

#### Overview

Each system has a maximum number of storage units available on the hard disk. The number of speech storage units, called "speech blocks", depends on the storage hour capacity of the hard disk. Messages, mailbox names and greetings, prompts, and distribution list names consume speech storage blocks.

The Speech Blocks Usage Report shows the following information for a specified reporting period:

- Maximum number of speech blocks for your system
- Number of blocks in use
- Percentage of message storage available

The reporting period can be any hour or range of hours from the current day or from portions of the most recent seven days. You can choose to run either a full report, which gives the statistics in 15-minute increments for each hour of the reporting period, or a

summary report, which shows the average speech blocks usage for each hour. A sample Speech Blocks Usage report is shown here:

```
>>>
Mitel Corporation<<<
```

#### SPEECH USAGE 15min REPORT

Fri Nov 13, 20XX 3:18 pm

11/09/XX 8hr-17hr --- minutes interval --- Max Speech Blks=36478574

SPEECH HOUR=08 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29252256 29252256 29252256 29241265 29249508

PERCENT USED 20 % 20 % 20 % 20 % 20 %

SPEECH HOUR=09 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29241265 29241265 29241265 29241265 29241265

PERCENT USED 20 % 20 % 20 % 20 % 20 %

SPEECH HOUR=10 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29227570 29227570 29227570 29227570 29227570

PERCENT USED 20 % 20 % 20 % 20 % 20 %

SPEECH HOUR=11 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29238007 29238007 29238007 29238007 29238007

PERCENT USED 20 % 20 % 20 % 20 % 20 %

SPEECH HOUR=12 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29227015 29227015 29227015 29227015 29227015

PERCENT USED 20 % 20 % 20 % 20 % 20 %

SPEECH HOUR=13 00-14 15-29 30-44 45-59 AVERAGE

BLOCKS FREE 29227015 29213322 29213322 29213322 29216745

PERCENT USED 20 % 20 % 20 % 20 % 20 %

## Reading the Standard Speech Blocks Usage Report

In the sample report, the heading shows the date and time that the report was run.

The first line of the report shows the date and time interval when data were gathered and the maximum number of available speech storage blocks on the system (**Max Speech Blks**). This line is repeated for each day of the report.

**SPEECH HOUR = 08** The data displayed immediately below was gathered during the hour between 8 a.m. and 5 p.m. A column entry of 00-14 indicates data were gathered during the first 15-minutes of the hour; an entry of 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15-minutes of the hour; 45-59 refers to the final 15-minutes of the hour.

**AVERAGE** The average value of the four 15-minute samples. If a hyphen appears in place of a numerical value, it means that the data have not yet been gathered.

**BLOCKS FREE** The number of speech blocks *not in use at the time of sampling*.

**PERCENT USED** The number of speech blocks in use, as a percentage of the maximum number of speech blocks allowed on the system.

## Reading the Speech Blocks Usage Summary Report

The summary report displays the number of speech blocks used, the number that are free, and the percentage of speech storage used for each hour. The summary report is less specific than the standard report, but it allows you to determine the hours when speech storage is at its peak. The report also indicates the hours that have low speech storage.

To obtain an accurate picture of message and non-message related speech storage, the results of this report can be compared with the results of the Message Usage Report.

If names and greetings consume a large percentage of speech storage and leave too little storage for transient messages, you have the following options:

- (a) Decrease the maximum greeting length allowed in the LCOS for that system
- (b) Limit the recording of names for certain FCOS
- (c) Perform both (a) and (b)

## Run the Speech Blocks Usage Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(S) Speech Blocks Usage**.



**2.** In the Speech Blocks Usage menu:

- select **(A) Beginning Hour** and enter the first hour of the time period to report (0 = midnight; 12 = noon. Default is 8)
- select **(B) Ending Hour** and enter the last hour of the time period to report. (Default is 17.)
- select **(C) Beginning Day** and enter the first day of the week to report (Sun-Sat = 0-6. Default is Mon - Fri.)
- select **(D) Ending Day** and enter the last day of the week to report
- (optional) select **(E) Summary =** and choose **N** for detailed report or **Y** for a summary report. (Default is N.)
- select **(R) Run report**

**3.** Select an output routing for the report:

- **C** to send the report to the console without pausing
- **F** to send the report to a file on the server

The standard Speech Blocks Usage Report displays data for each hour of the chosen interval, in 15-minute increments. The Speech Blocks Usage Summary Report shows a single value for each hour.

### 1.3.5.3.3.7 Complete Summary Report

#### Overview

The Complete Summary Report is also known as the Total Statistics Summary Report. The report provides information for the previous week, in Sunday-to-Saturday order, and shows total statistics for items such as:

- Message counts
- Speech blocks
- Network usage
- Amount of storage capacity consumed on the hard disk
- Amount of storage capacity available on the hard disk.

A sample Total Statistics Summary report is shown here:

```

Mitel Corporation <<<                                     >>>

TOTAL STATISTICS SUMMARY REPORT
Fri Nov 13, 2009 3:26 pm

-----< SUNDAY >-----

Date: Sun Nov 8 23:00:02 2009
Last Reset: Fri Nov 6 13:41:37 2009
Total Messages: 0 Lowest Messages Free: 99999999
Total Speech: 36478574 Lowest Speech Free: 29347353
Total Calls: 0 Total Seconds: 0:00:00
Line ATB Count: 0 Line ATB Seconds: 0:00:00
VR Sessions: 0 VR Total Secs: 0:00:00
VR ATB Count: 0 VR ATB Seconds: 0:00:00
VR No Res Cnt: 0
NETWORKING <===== PEAKS =====><===== TOTALS
=====>

MESSAGES: IN QUEUE MINUTES LATENCY DELIVERED UNDELIV RECEIVED
BATCH: 0 0 0:00:00 0 0 0
URGENT: 0 0 0:00:00 0 - 0

-----< MONDAY >-----

Date: Mon Nov 9 23:00:02 2009
Last Reset: Fri Nov 6 13:41:37 2009
Total Messages: 0 Lowest Messages Free: 99999999
Total Speech: 36478574 Lowest Speech Free: 29024995
Total Calls: 2 Total Seconds: 0:00:04
Line ATB Count: 0 Line ATB Seconds: 0:00:00
VR Sessions: 0 VR Total Secs: 0:00:00

```

## Reading the Complete Summary Report

The Complete Summary Report entries have the following meanings:

Each day of the week has a banner with the day name, the date, and the date of the last system reset.

**TOTAL MESSAGES** The number of messages available on the system.

**LOWEST MESSAGES FREE** The lowest number of messages that are not in use that day (system checks every fifteen minutes).

**TOTAL SPEECH** The number of speech blocks available on the system.

**LOWEST SPEECH FREE** The lowest number of speech blocks that are not in use that day (system checks every fifteen minutes).

**TOTAL CALLS** The number of calls processed by the system.

**TOTAL SECONDS** The number of seconds that the ports are busy.

**LINE ATB COUNT** The number of times that an ATB condition occurs in a line group.

**LINE ATB SECONDS** The total number of seconds the entire line group is busy.

**NETWORKING MESSAGES** The peak and total amounts for network delivery of messages (NP Net) in both regular and urgent queues. Numbers indicate peak times and daily totals.

## Run the Complete Summary Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(C) Complete Summary Report**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

### 1.3.5.3.3.8 Total System Statistics Report

#### Overview

The Total System Statistics Report shows the amount of storage capacity consumed on the hard disk and the amount available. A sample Total System Statistics Report is shown here:

```
>>>
Mitel Corporation <<<
```

#### SYSTEM STATISTICS

Mon Nov 16 08:39:15 20XX

Total Free Used

Message Numbers 268403456 268403424 0 %

Disk Usage (4KB) 36478574 28594986 22 %

Account Sectors 11197 188803 6 %

Prompt Blocks

british 6282

dutch 7229

english 6872

```
Calls
answered since Mon Nov 16, 20XX 8:06 am: 2
```

#### Reading the Total System Statistics Report

System Statistics entries have the following meanings:

**MESSAGE NUMBERS** The links between the messages, greetings, and names associated with mailboxes and the mailboxes themselves. Each message, name, or greeting uses one message number.

**DISK USAGE** Number of disk records used and free.

**ACCOUNT SECTORS** All mailbox and system information, including users' mailbox numbers, distribution lists, passcodes, and any line with phone line exceptions.

**SPEECH BLOCKS** All speech recorded through the telephone in the form of messages, comments, greetings, list names, and names. Approximately 2.2 seconds of speech consume one speech block.

**PROMPTS** Lists each set of prompts loaded on your system and the number of speech blocks used. Use this data to determine whether you have space for additional prompts.

### Run the Total System Statistics Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(T) Total System Statistics**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server
3. The system displays the output. Press **Q** to return to the menu.

### 1.3.5.3.3.9 Virtual Drive Statistics Report

#### Overview

The Virtual Drive Statistics Report shows the amount of storage capacity consumed on each of the drive partitions and the amount available. Hard disks in the system are partitioned into multiple logical, or virtual drives.

The report fields are the same as the Total System Statistics Report. A sample Virtual Drive Statistics Report is shown here:

```
>>>  
Mitel Corporation <<<
```

#### SYSTEM STATISTICS

Mon Nov 16 09:43:54 20XX

Total Free Used

Virtual Drive #129

Message Numbers 3750 3749 0 %

Speech Blocks 16000 15996 0 %

Virtual Drive #130

Message Numbers 3750 3749 0 %

Speech Blocks 16000 15996 0 %

Virtual Drive #131

Message Numbers 3750 3749 0 %

Speech Blocks 16000 15996 0 %

Virtual Drive #132

Message Numbers 3750 3749 0 %

Speech Blocks 16000 15996 0 %

Virtual Drive #133

Message Numbers 3750 3749 0 %

Speech Blocks 16000 15937 0 %

### Reading the Total System Statistics Report

System Statistics entries have the following meanings:

**MESSAGE NUMBERS** The links between the messages, greetings, and names associated with mailboxes and the mailboxes themselves. Each message, name, or greeting uses one message number.

**DISK USAGE** Number of disk records used and free.

**SPEECH BLOCKS** All speech recorded through the telephone in the form of messages, comments, greetings, list names, and names. Approximately 2.2 seconds of speech consume one speech block.

### Run the Virtual Drive Statistics Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(V) Virtual Drive Statistics**.
2. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server
3. The system displays the output. Press **Q** to return to the menu.

### 1.3.5.3.3.10 Network Usage Statistics Report

#### Overview

The Network Usage Report gives 15-minute "snapshots" of network message activity for a specified reporting period. This period can be any hour or range of hours from the current day or the previous six days. A sample of a Network Usage report is shown here:

```

>>>
Mitel Corporation<<<

NETWORK USAGE 15min REPORT

Mon Nov 16, 20XX 10:53 am

11/16/XX 8hr-9hr --- minutes interval ---

MESSAGE DAY=01 HOUR=08 00-14 15-29 30-44 45-59 AVERAGE

BATCH IN QUEUE 0 0 0 0 0

URG IN QUEUE 0 0 0 0 0

BATCH MAX LENGTH 0 0 0 0 -

URG MAX LENGTH 0 0 0 0 -

BATCH LATENCY H:M:S 0:00:00 0:00:00 0:00:00 0:00:00 -

URG LATENCY 0:00:00 0:00:00 0:00:00 0:00:00 -

BATCH DELIVERED 0 0 0 0 0

URG DELIVERED 0 0 0 0 0

TOTAL UNDELIVERED 0 0 0 0 0

BATCH RECEIVED 0 0 0 0 0

URG RECEIVED 0 0 0 0 0

UNDLV RMT MBOX 0 0 0 0 0

UNDLV NETQ FULL 0 0 0 0 0

TOTAL FRAME TX 0 0 0 0 0

TOTAL FRAME RX 0 0 0 0 0

UNDLV NWK 0 0 0 0 0

NETWORK UNDELIVERED 0 0 0 0 0

```



## Reading the Standard Network Usage Report

In the sample report, the heading shows the node name, the report name, the date, and the time that the report was run.

The first line shows the date and time interval when the data were gathered.

**HYPHEN (-)** (In any column) indicates that the system was not processing messages during the report period (for example, during a power failure or when the system was taken offline for maintenance). A 0 (zero) in any column means the system was operable, but there was no activity.

**MESSAGE DAY = 01, HOUR = 08** Indicates that the data displayed immediately below were gathered on Monday, during the hour between 8 a.m. and 9 a.m. Entry 00-14 indicates that data in the column were gathered during the first 15-minutes of the hour; 15-29 refers to the second 15-minutes of the hour; 30-44 refers to the third 15-minutes of the hour; 45-59 refers to the last 15-minutes of the hour.

**AVERAGE** The average value of the four 15-minute samples. If a hyphen appears in place of a numerical value, it means that the data have not been gathered.

*EXAMPLE:* If the report is run at 3:30 p.m., and the report interval is for hours 12-15 (noon

to 3 p.m.) of the same day, the entries for hour 15 (3 p.m. to 4 p.m.) will be hyphens.

**BATCH IN QUEUE** The total number of batch (non-urgent) messages and receipt updates present in the network queue during the time period.

**URG IN QUEUE** The total number of urgent messages in the network queue during the time period.

**BATCH MAX LENGTH** The total number of minutes of recorded speech in the network batch queue during the time period.

**URG MAX LENGTH** The total number of minutes of recorded speech in the urgent network queue during the time period.

**BATCH LATENCY** The maximum number of seconds that a message remained in the batch network queue during the time period.

**URG LATENCY** The maximum number of seconds that a message remained in the urgent network queue during the time period.

**BATCH DELIVERED** The total number of batch messages delivered to their destination nodes during the time period. (Receipt updates do not count.)

**URG DELIVERED** The total number of urgent messages delivered to their destination nodes during the time period.

**TOTAL UNDELIVERED** The total number of messages (batch and urgent) rejected by their destination nodes during the time period. (Receipt updates do not count.)

## The Network Usage Summary Report

The Network Usage Summary Report gives peak (maximum) and total statistics for network message activity during a specified reporting period.

**PEAKS** Statistics for maximum activity during the reporting period. Although separate statistics are kept for batch and urgent message queues, these statistics are not broken down by destination node. In other words, urgent queue statistics refer to urgent messages accumulated for every node on the network.

## Run the Network Usage Report

1. From the Main Menu, select **(R) Reports**, **(S) Statistics**, and then **(N) Network Statistics**.
2. In the Speech Blocks Usage menu:
  - select **(A) Beginning Hour** and enter the first hour of the time period to report (0 = midnight; 12 = noon. Default is 8)
  - select **(B) Ending Hour** and enter the last hour of the time period to report. (Default is 17.)
  - select **(C) Beginning Day** and enter the first day of the week to report (Sun-Sat = 0-6. Default is Mon - Fri.)
  - select **(D) Ending Day** and enter the last day of the week to report
  - (optional) select **(E) Summary =** and choose **N** for detailed report or **Y** for a summary report. (Default is N.)
  - select **(R) Run report**
3. Select an output routing for the report:
  - **C** to send the report to the console without pausing
  - **F** to send the report to a file on the server

The standard Network Statistics Report displays data for each hour of the chosen interval, in 15-minute increments. The summary report shows a single value for each hour.

## 1.3.5.4 Billing Reports

### 1.3.5.4.1 Overview - Billing Reports

The system generates four billing reports. Each report provides the charges for individual mailboxes by statistic, then calculates the total amount due. Each report serves a different purpose.

- **Billing Reports** are the standard reports, usually run monthly.
- **Mailbox Blocked Reports** (Blocked Billing Reports) retain a special format and are usually sent out to other databases via the serial port.
- **Previous Billing Reports** are run when a copy of the Billing Report from the last billing cycle is desired, or when a problem occurs during the "Gather" step of the billing procedure.
- **Termination Reports** are run when a mailbox is checked out and deleted, or when paging service is discontinued during a billing cycle.

This section outlines the steps involved to generate a Billing Report and provides instructions for running reports.

## 1.3.5.4.2 Procedures (Web Console)

### 1.3.5.4.2.1 About Billing Reports

After the server performs a gather, the statistics and charges that are calculated go into the Billing Report. The report gives a breakdown of the charges for individual mailboxes by statistics, then calculates the total amount that is due.

The Billing Report appears on three tabs:

#### Current Data

The Current Data tab reports the charge for the FCOS assigned to the mailbox, then lists the charges for each statistic that applies to the mailbox. Statistics for which the dollar amount is zero are not reported.

Charges are based on the rates that are in effect at the time the report is generated. No mailbox data is changed by adjusting rates or generating the report, as long as a new gather is not performed. If you find any errors in rates after the report is run, adjust the rates then run the report again (omitting the gather).

#### Previous Data

The information in the Previous Data tab is identical to the Current Data tab, except that it uses the data from the previous billing data file.

#### Termination Data

A typical use of the Termination Data information is in the hotel or motel environment. The report can be run either before or after the mailbox is checked out, but the results can be different:

- If you run the Billing Report **before** the mailbox is checked out, and there are unplayed messages, the Termination Data tab will not show charges for disk usage for these messages, since this resource is calculated when messages are deleted.

- If you run the Billing Report **after** the mailbox is checked out, the Termination Data tab shows charges for all messages, since all messages must be deleted in order to check out the mailbox. To zero the billing counters, you must delete, then recreate, the mailbox.

To charge only for messages that the mailbox holder has played, run the Billing Report before the unplayed messages are deleted.

To charge for **all** messages received, whether they were played or not, check the mailbox out first, then run the Billing Report.

To generate a billing report, you must:

1. [Set the billing rates.](#)
2. Perform an [automatic gather](#) or a [manual gather](#).
3. [Run the Billing Report.](#)

### 1.3.5.4.2.2 Run a Billing Report

A Billing Report is generated for a mailbox and is run from the Billing Report view. Mailbox data is displayed on the form.

**Note:**

Running a Billing Report generates pop-ups in your browser window.

To run a Billing Report:

1. In the navigation tree, click Report Generation, then click Billing, and then click Billing Report. The Billing Report Statistics (below) are displayed.
2. In the Mailbox: field, enter the number of the mailbox you want to run a billing report for, and then click Search. The data for the Current tab is displayed.
3. To generate a report for printing, click Printer Friendly Version...
4. To export the report to a comma-separated value (CSV) file, click Export to CSV file...

**Note:** By default, Microsoft Excel does not display UTF-8 characters properly. To export a file with UTF-8 characters successfully, open the file in Notepad, click Save As and save the file without any changes.

5. In the Options pop-up screen, select Billing Info from **Current Mailbox**, **All Mailboxes**, or **Mailbox Range** and then select Gathering Period from **Current Data**, **Previous Data** or **Termination Data**.

## Billing Report Statistics

Each billing report displays the following information and statistics:

### Mailbox Information

| Field                       | Information                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mailbox:                    | The number of the mailbox that the report was run on                                                                                                                                                                                                                                                                                                           |
| Owner:                      | Name of the mailbox user                                                                                                                                                                                                                                                                                                                                       |
| Department:                 | Department code of the mailbox user                                                                                                                                                                                                                                                                                                                            |
| Data Gathered On:           | Date and Time (mm/dd/yyyy, hh:mm:ss AM/PM).                                                                                                                                                                                                                                                                                                                    |
| Total Charge: (for the tab) | This data is calculated by the system.<br><br>Below the Total Charge: field is a breakdown of statistics making up the total according to the billing categories on the Billing Rates Form. The statistics are organized according to Item, Count, and Charge, respectively. If the numeric value for any statistic is 0, then the statistic is not displayed. |

## 1.3.5.4.3 Procedures (Text Console)

### 1.3.5.4.3.1 Run the Billing Report

The Billing Report is usually run monthly, but can be run as many times as you wish during a single billing cycle. As long as a new Gather is not performed, adjusting rates or generating the report does not change mailbox data. If you find errors in rates after the report is run, adjust the rates, then run the report again (but omit the Gather). Charges are based on the rates that are in effect at the time that the report is generated.

### Run the Billing Report

1. Request a [Gather](#) to ensure that the Billing Report reflects current charges (unless you want a report of previous charges).
2. From the Main menu, select **(R) Report Generation**, **(B) Billing**, and then **(B) Billing Report**.
3. Select an output routing for the report:
  - C to send the report to the console without pausing
  - P to send the report to the console, pausing as the screen fills
  - F to send the report to a file on the server
  - A to append the report to an existing file on the server

4. At the **Range of extensions to bill?** prompt, enter a mailbox or range in one of the following formats:

- Single mailbox number (from 1 to 9999999999)
- Range of mailbox numbers (for example: 2000-2999) OR
- Press **Enter** to bill all mailbox numbers

If you want to bill two different ranges of mailbox numbers, you must run the report twice.

5. At the **FCOS service to bill?** prompt, enter FCOS (1-640) in one of the following formats:

- a = All
- e = Even-numbered
- o = Odd-numbered
- l = Lower half
- u = Upper half
- Range of first-last (for example: 1-5)
- Series of numbers separated by commas (for example: 1,3,5)
- Single number. OR
- Press **Enter** to choose mailboxes regardless of FCOS assigned.

**Note:**

FCOS 65 to 640 are billed at the rate for FCOS 64.

If you want to bill more than one FCOS, but not all, you must run a separate report for each FCOS.

1. At the **LCOS service to bill?** prompt, enter LCOS (1-640) in one of the formats outlined in step 5, OR press **Enter** to choose mailboxes regardless of LCOS assigned. To bill selected LCOS, run a separate report for each one.
2. At the **GCOS service to bill?** prompt, enter a GCOS number or range from 1 through 64 OR press **Enter** to choose mailboxes regardless of GCOS assigned (including affinity GCOS 65-32,000).
3. At the **NCOS service to bill?** prompt, enter an NCOS number or range from 1 through 64 OR press **Enter** to choose mailboxes regardless of NCOS assigned.
4. • At the **Department code to bill?** prompt, enter a single department code (1 to 10 characters), OR press **Enter** to bill all mailboxes regardless of department code.
5. • At the **Pager system number to bill?** prompt, enter a pager system number (0 through 15), OR press **Enter** to choose mailboxes regardless of pager system assigned. To bill a single group of pagers (with the same pager system number),

enter the number of the pager system. Separate reports for each pager system can be run if you wish.

The system runs the report according to the choices entered and sends it to the selected destination.

## Reading the Billing Report

The Billing Report prints out the charges for each mailbox individually by statistic, then it gives a total.

Statistics with a zero (0) dollar amount are not reported. When charges are reported for all mailboxes, the system concludes the report with a Billing Report Summary and returns to the Billing Menu.

### 1.3.5.4.3.2 Mailbox Blocked Report (Blocked Billing Report)

## Overview

The Mailbox Blocked Report (sometimes called Blocked Billing Report) retains a special format and is usually sent out through the serial port to other databases. It presents the same information as the Billing Report but in blocked form—without titles or summaries.

Use this report when you want to organize the billing data into your own format, such as for an invoice or monthly statement.

## To Run the Mailbox Blocked Report

1. From the Main menu, select **(R) Report Generation**, **(B) Billing**, and then **(M) Mailbox Blocked Report**.
2. Complete steps 3 through 10 under [Run the Billing Report](#).

## Reading the Mailbox Blocked Report (Field Descriptions)

To help you identify the field names and field lengths of statistics provided in the Mailbox Blocked Report, use the following table. All fields are right justified; all fields other than the mailbox number are blank-filled.

| Field Name      | Field Length<br>(Number of Characters) |
|-----------------|----------------------------------------|
| Mailbox number  | 16                                     |
| Department code | 10                                     |

| Field Name                                                           | Field Length<br>(Number of Characters) |
|----------------------------------------------------------------------|----------------------------------------|
| User messages                                                        | 5                                      |
| Caller messages                                                      | 5                                      |
| Wakeup messages                                                      | 5                                      |
| Logins                                                               | 5                                      |
| Greets                                                               | 5                                      |
| User connect time                                                    | 5                                      |
| Caller connect time                                                  | 5                                      |
| Disk usage                                                           | 10                                     |
| Calls to pagers                                                      | 5                                      |
| Calls for message delivery                                           | 5                                      |
| FCOS number (Repeated 16 times for line group billing.)              | 3                                      |
| LCOS number (Repeated 16 times for line group billing.)              | 3                                      |
| GCOS number (Repeated 16 times for line group billing.)              | 5                                      |
| Number of network messages                                           | 5                                      |
| Number of urgent network messages                                    | 5                                      |
| Number of network nodes sent to                                      | 5                                      |
| Number of network nodes sent urgent to                               | 5                                      |
| Number of remote network recipients sent to                          | 5                                      |
| Number of remote network recipients sent urgent to                   | 5                                      |
| 0.1-minute increments of network messages sent                       | 5                                      |
| 0.1-minute increments of network messages sent urgent                | 5                                      |
| 0.1-minute increments of network nodes sent to                       | 5                                      |
| 0.1-minute increments of network nodes sent urgent to                | 5                                      |
| 0.1-minute increments of remote network recipients sent to           | 10                                     |
| 0.1-minute increments of remote network recipients sent urgent to    | 10                                     |
| Number of network receipt responses                                  | 5                                      |
| Number of network messages received                                  | 5                                      |
| Number of network urgent messages received                           | 5                                      |
| 0.1-minute increments of message length received over network        | 5                                      |
| 0.1-minute increments of urgent message length received over network | 5                                      |



### 1.3.5.4.3.3 Previous Billing Report

The Previous Billing Report is identical to the Billing Report except that it uses data from the **previous** billing data file. Run a Previous Billing Report when a copy of the Billing Report from the previous billing period is required.

#### To Run the Previous Billing Report

1. From the Main menu, select **(R) Report Generation**, **(B) Billing**, and then **(P) Previous Billing Report**.
2. At the **Where should billing data come from? (F/H/X)** prompt, select **H**.
3. Complete steps 4 through 10 under [To Run the Billing Report](#).

## 1.3.6 Administration by Phone

### 1.3.6.1 Overview

A special feature of this system allows you to perform various administrative functions from a telephone. The Administration by Phone feature is convenient when the system's maintenance console is located at a distance from the workstation.

Although this feature cannot completely replace console administration, telephone administration software supports numerous features available from the console, and is appropriate for specific functions discussed in this section.

**Note:** If your system has more than one line group and more than one administrator's mailbox, you must ensure that you call the line group associated with the administrator's mailbox that you are using in order to conduct Administration by Phone.

Administration by Phone is not available to mailboxes with the NP TDD line group configuration.

#### Telephone Administration Timing

Certain timing parameters are programmed into Administration by Phone to detect inactivity and to safeguard the system against unauthorized use. These time-out factors make it essential for you to be well-prepared before you begin a telephone administration session.

- Three to five seconds of response time are permitted for each prompt before it announces "no change" and returns to the Administration Menu.
- Any activity causes a one-minute timer to start, after the system accesses administration. If one minute lapses without input, the system automatically disconnects, and the entire access procedure must be repeated.

- If you are running out of time, enter the digit 1 (one) in response to any prompt, to restart the timer. The system issues an error message and repeats the prompt.

### 1.3.6.2 Access the Telephone Administration Menu

Administration by Phone can only be performed from the administrator's mailbox. Follow these steps to access the telephone Administration Menu:

1. Enter the system's main extension number to reach NP Receptionist.
2. Log in to the administrator's mailbox:
  - Press the star key (\*) to enter the message center.
  - Enter the administrator's mailbox number to enter the Voice Mail system
  - Press the star key (\*) to indicate that you are the owner of this mailbox

You hear the Administrator's system greeting: "Hello <administrator's name>. Please enter your passcode."

1. Enter the administrator's mailbox telephone passcode. You are now logged in; you hear the standard prompt:

1. • Enter **M** to make a new message
  - Enter **U** to change User options
  - Enter **X** to exit

1. Press **U** (the **8** key) for the User Options Menu. You hear the standard User Options Menu, offering options to change name, greeting, passcode, etc.
2. Press the star key (\*) to access the Administration Menu. The system plays the telephone Administration Menu:

| Press | Menu                                                             |
|-------|------------------------------------------------------------------|
| A     | Add a New Mailbox                                                |
| D     | Delete a Mailbox                                                 |
| M     | Modify a Mailbox                                                 |
| P     | Change a Mailbox Passcode                                        |
| K     | Change System Clock                                              |
| I     | Initiate Mailbox Backup to Floppy Diskette (no longer supported) |
| U     | Usage Statistics                                                 |
| X     | Exit Administration                                              |

## To Record a Name for the Administrator's Mailbox

The system plays a greeting to the administrator when you log in. A name can be recorded with the Name command.

1. Log in to the administrator's mailbox by following Steps 1 to 3 in "Access the Telephone Administration Menu".
2. When you hear the Main Menu, press **U** (the **8** key) for the User Options Menu.
3. Press **N** (the **6** key) to change the mailbox Name.
4. Press **R** (the **7** key) to Record the name.

For security reasons, **do not** name the mailbox "Administrator's Mailbox". Unauthorized users should not know that they have accessed a special-purpose mailbox.

### 1.3.6.3 Add a New Mailbox by Phone

#### To Add a Mailbox by Phone

The following sequence shows the prompts and responses necessary to add a mailbox by phone. This procedure can only be performed from the administrator's mailbox.

1. [Access the Telephone Administration Menu.](#)
2. Press **A** (the **2** key) to Add a mailbox.
3. When prompted, enter:
  - the mailbox number to add
  - a Features class of service (FCOS)
  - a Limits class of service (LCOS)
  - a two-digit message waiting type
4. The system responds: "Mailbox <number> added." and then returns to the Administration Menu.

**Note:**

To confirm that the values entered are correct, press **M** (the **6** key) to modify the mailbox you just added. Press the **#** key (pound) in response to each prompt to leave all values unchanged.

## Console versus Phone

There are important differences between creating a mailbox on the Text/Web console and adding a new mailbox by phone.

- Programming for NP Receptionist cannot be added by using the phone. The system does not prompt for treatment types, mailbox extension numbers, or attendant extension numbers.
- When Administration by Phone prompts for a Features class of service, enter the FCOS. The system accepts any FCOS number from 1 through 640, regardless of whether any feature bits are programmed for that FCOS. Error messages are **not** issued; be certain to enter the correct FCOS.
- Enter the LCOS when Administration by Phone prompts. The system accepts any LCOS number from 1 through 640; be certain to enter the correct LCOS.
- Any valid message waiting indicator can be assigned to the mailbox, but information such as paging cannot be added by phone.
- This message waiting indicator does not work without extra programming. Mailboxes requiring extra programming may be created on the maintenance console. See [MWI Types](#).

### 1.3.6.4 Delete a Mailbox by Phone

You can delete a single mailbox by phone, but you cannot delete a range of mailboxes by phone. You can only delete a mailbox from the administrator's mailbox.

To delete a mailbox by phone:

1. [Access the Telephone Administration Menu](#).
2. Press **D** (the 3 button) to delete a mailbox.
3. When prompted, enter the mailbox number to delete. You hear the message "Mailbox [number] has [number] messages total. If you really intend to delete mailbox [number], enter the mailbox number again."
4. Enter the mailbox number again. The server responds with "Mailbox deleted," and returns you to the Administration Menu.
5. Press **X** (the 9 button) to exit from the Administration Menu.

### 1.3.6.5 Modify A Mailbox by Phone

When Modify is selected from the Administration Menu, the system gives the current mailbox number, class of service, mailbox type, and an AC message waiting lamp address; then, it prompts for any changes. You can only perform this procedure from the administrator's mailbox.

To modify a mailbox by phone:

1. [Access the Telephone Administration Menu.](#)
2. Press the **M** (the 6 button) to modify a mailbox.
3. When prompted, enter the mailbox number to modify. The server responds with the current mailbox number, class of service, mailbox type, mailbox message waiting type, if applicable; then prompts you for changes. To leave any value unchanged, press the **star (\*)** button in response to the prompt:
  - enter a new mailbox number, if required
  - enter a new Features class of service (FCOS).
  - enter a new Limits class of service (LCOS).
  - enter a 2-digit message waiting type

The server responds with "Mailbox modified," and returns you to the Administration Menu.
4. Press **X** (the 9 button) to exit the Administration Menu.

### 1.3.6.6 Change/Reset Mailbox Passcode or Enable/Disable Tutorial by Phone

You can set or clear the passcode and enable the tutorial for a mailbox by phone. This feature is useful to start new mailbox owners on the system or to clear the passcode of a mailbox owner who forgets his or her passcode. You can only perform this procedure from the administrator's mailbox.

1. [Access the Telephone Administration Menu.](#)
2. Press **P** (the 7 key) to change a mailbox Passcode.
3. Enter the number of the selected mailbox.
4. Enter the new passcode (four to 10 digits), OR *enter four 0s (zeros) to clear the passcode. The system confirms the passcode change.*
5. When prompted, press **Y** (the 9 key) if you want a tutorial on this mailbox, OR press **N** (the 6 key) if you do not want a tutorial on this mailbox.
6. Press **X** (the 9 key) to exit the Administration Menu.

#### CAUTION:

CAUTION: Do not give the administrator a trivial passcode. When you hear the message: "I'm sorry, you cannot access your mailbox at this time. Good-bye," it is often due to a passcode problem.

### 1.3.6.7 Set the System Date and Time

You can review or alter the system date and time by phone. This feature is useful to make the one-hour correction for daylight savings time. You can only perform this procedure from the administrator's mailbox.

Press \* (star) at any time to cancel the procedure and exit the menu.

To set date and time:

1. [Access the Telephone Administration Menu.](#)
2. Press **K** (the **5** key) to change the system clock. The system responds with the current date and time.
3. When prompted, enter the following values, or press # to leave a value unchanged:
  - the one- or two-digit month (1 for January, 12 for December)
  - one- or two-digit day
  - two-digit year (last two digits of the year)
  - three-digit time (for example, enter 145 for 1:45) and press **A** for a.m or press **P** for p.m.

The system responds: "The date changed to <day>, <date>, <year>, <time>."

4. Press **X** (the **9** key) to exit the Administration Menu.

### 1.3.6.8 Enable an Alternate Company Greeting

To enable an alternate greeting:

1. Dial the server extension number.
2. Log into the administrator's mailbox.
  - Press the **star (\*)** button then enter the administrator's mailbox number.
  - Enter the administrator's passcode.
  - Press the **8 button** for User Options.
3. Press the **4 button** for Greetings.
4. Specify an alternate for the company day greeting or night greeting, or both, as follows:
  - For an alternate to the day greeting, press the **3 button** followed by the **3 button**.
  - For an alternate to the night greeting, press the **6 button** followed by the **3 button**.
  - For an alternate to both greetings, press the **2 button**.

5. Press the **9 button** to exit to the Main Menu and make the alternate greeting take effect. The alternate greeting will play instead of the company greeting specified in the preceding step.

### 1.3.6.9 Report System Usage Statistics by Phone

You can use the phone to obtain system and mailbox summary usage statistics for 30 mailboxes at a time. Instead of running a Total Statistics Report during weekly maintenance, this procedure can be used to determine whether a manual message purge is necessary. [Statistics Reports](#) discusses mailbox statistics reports and message purging.

#### To Control the Report

- Respond to the prompt that asks you for the first mailbox number. NuPoint Unified Messaging reports the system statistics and starts the mailbox report at the selected mailbox. To cancel the report at this point, do not respond to the prompt.
- Extend the report by pressing **C** (the **2** key) after the statistics for the first 30 mailboxes are listed (when prompted). The system responds by reporting statistics for the next 30 mailboxes.
- To stop the summary report, press any key at any time.

#### To Generate Usage Statistics by Phone

1. [Access the Telephone Administration Menu.](#)
2. Press **U** (the 8 button) to get Usage statistics.
3. When prompted, enter a mailbox number at which you want to begin summary. The system responds "NuPoint Voice storage is [number] percent full, [number] minutes out of [number] total." Next, the system lists the statistics for the first mailbox: "Mailbox [number], [name], has [number] messages total, [number] urgent, [number] unplayed, using [number] seconds." Then, the system lists the statistics for the next 29 mailboxes.
4. When prompted, press **the 2 button** to continue listing. The system lists statistics for the next 30 mailboxes. You can press any key at any time during the summary to stop. When the listing is finished, the system plays the message, "End of summary."
5. Press **X** (the 9 button) to exit from the Administration Menu.

### 1.3.6.10 Inquire About Mailboxes by Phone

Neither the Inquire nor the Search function is available by phone. However, the following information can be obtained:

**Usage Statistics:**

1. [Access the Telephone Administration Menu.](#)
2. Press **U** (the 8 button) to get Usage statistics and enter a mailbox number to start the inquiry. Press the \* (star) key to stop the report after the required statistics have been supplied.

**Feature Class of Service, Limits Class of Service, Message Waiting Type, and AC Message Waiting Lamp Address:**

1. [Access the Telephone Administration Menu.](#)
2. Press **M** (the 6 key) to Modify from the Administration Menu.
3. Press the # (pound) key in response to each prompt to leave the current values unchanged. Press the \* (star) key to stop.

## 1.3.7 Telephone Answering Service

### 1.3.7.1 Overview

The NuPoint UM system contains an application designed specifically for Telephone Answering Service (TAS) Bureau use. This section highlights features useful to a TAS bureau.

Individual privileges and restrictions can be added to build customized Feature and Limits Classes of Service ([FCOS](#) and [LCOS](#)).

### 1.3.7.2 DID Mailboxes

DID mailboxes allow callers to dial a telephone number that is answered with the mailbox greeting. While some systems can use the PBX forwarding capability to allow the voice mail system to answer calls with the user's mailbox greeting, DID mailboxes answer the calls directly.

**Logging in to DID Information-Only Mailboxes (Including Greeting-Only Mailboxes)**

Mailboxes with Greeting-only, Chain, and Time classes of service (and any other FCOS that issue greetings and do not receive outside caller messages) are collectively referred to as "Information-only" mailboxes. The login procedure for DID Information-only mailboxes differs from the procedure for mailboxes with other FCOS.



## To Log in to a DID Information-Only Mailbox

To eliminate confusion, subscribers who choose DID Information-only mailboxes should be informed of this login procedure.

1. Press the \* key (star), or 0 key (zero), while the greeting is playing. This process does not interrupt the greeting; the greeting continues to play. The system prompts you to enter a passcode (if the mailbox is passcode protected).

**Note:**

You do not have to wait for the prompt, but you must wait until the entire greeting plays before entering your passcode.

2. Enter your passcode. You are now logged in.

## Recording the First Greeting for DID Information-Only Mailboxes

New DID Information-only mailboxes do not have greetings. When a new user tries to access the mailbox to record a greeting, the system responds: "That is not a valid mailbox number." The user must press the \* key (star) or 0 key (zero) (while "That is not a valid mailbox number" plays) and enter the passcode.

This procedure can be confusing for a new user. To alleviate the confusion, perform the following steps:

1. Initially assign Unlimited FCOS (FCOS 1) to the mailbox.
2. Log in to the mailbox, and record a greeting to welcome the new subscriber.
3. After the greeting is recorded, use the **Modify** command to give the mailbox the correct FCOS ([Modify a Mailbox by Phone](#)).

## Login Tip for DID Mailbox Users

When a subscriber has a DID mailbox that can receive messages (non-Information-only class of service), toll charges can be saved by using this tip:

When a user calls in to check for messages and the phone rings, the user should hang up immediately. Ringing indicates that no unplayed messages exist in the mailbox; if users hang up before the system answers, the call is not charged. If the system answers the call with the mailbox greeting before callers hear ringing, there are unplayed messages in the mailbox.

### 1.3.7.3 The Message Attendant Application

Designed specifically for Telephone Answering Service (TAS) bureau use, the Message Attendant application provides an open line for TAS operators to dictate messages into client mailboxes. The open line allows the operator to access client mailboxes quickly. Because clients retrieve their messages by calling the system and logging into their mailboxes in the standard manner, operator time is not required for this function.

#### Message Attendant Prompts and Commands

The Message Attendant application uses three different tones to prompt the operator. As with other applications, the system issues a "beep" tone when prompting to record a name, greeting, or message. A "beep-beep" home base tone, tells the operator that the system is waiting for input of a mailbox number. As soon as the system knows the mailbox number, it issues a "bloop-bloop" pause mode indicator and waits for further commands from the operator. The commands to record a message are as follows:

| Key Pressed | Operation                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------|
| 2 or #      | Begin record mode. This command is used both to begin a message and to append to a message just recorded. |
| 3           | Discard message, and return to Pause mode.                                                                |
| 7           | Review message, and return to Pause mode.                                                                 |
| 1, 9, or *  | Send message, and exit to home base.                                                                      |
| *           | Return to home base from either Record or Pause mode.<br><br>This command also saves any recording made.  |

### 1.3.7.4 TAS Operator Procedures

The TAS operator must deliver messages to the client's mailbox. In addition, the operator may be required to change the name, greeting, and/or passcode for a mailbox.

#### To Leave a Message in a Mailbox

1. Seat the headphone jack, dial into the system, and hear the characteristic "beep-beep" home base tone.
2. Answer the call, dial the called party's mailbox number, and hear the "bloop-bloop" pause mode indicator.
3. Press the **2** key or **#** key (pound) to begin recording, hear the "beep" record prompt tone, and dictate the message.

4. Press the **1** key, **9** key, or \* key (star) to send the message, and hear the "beep-beep" home base tone. You are now ready to answer the next call.

OR

Press **R** (the **7** key) to Review, press **D** (the **3** key) to Discard, and press the **1** key, **9** key, or \* key (star), to send the message.

### To Record Names and Greetings and Enter Passcodes:

If the client's mailbox is capable of being checked in and out, the TAS operator can change the client's name, greeting, or passcode.

#### Note:

To give a mailbox the capability of being checked in and out, the Administrator must answer **Y** to the question: "Can mailbox be checked in or out?" when the mailbox is created.

1. Seat the headphone jack, dial into the system, and hear the characteristic "beep-beep" home base tone.
2. Dial the mailbox number, and hear the "bloop-bloop" pause mode indicator.
3. Enter one of the following commands:

### To Record a Name:

1. Press **N** (the **6** key). The system responds: "Record a new name for <mailbox number>. (Beep)"
2. Record the mailbox user's name.
3. Press the **1** key, **9** key, or \* key (star), to save the recorded name and return to the home base tone.

### To Record a Greeting:

1. Press **G** (the **4** key). The system responds: "Record a new greeting for <user's name>. (Beep)"
2. Record a greeting for the mailbox user's callers.
3. Press the **1** key, **9** key, or \* key (star) to save the greeting and return to the home base tone.

**To Enter or Change a Mailbox Passcode:**

1. Press the **5** key. The system responds: "Enter a four-digit passcode for <user's name>, four zeros to clear the passcode. (Beep)".
2. Enter the new passcode and hear the "beep-beep" home base tone.

## 1.4 Optional Features

### 1.4.1 Installing an Optional Feature

You must have purchased a license for the new feature prior to installing it. This license must also first be propagated to the NuPoint Unified Messaging system, through either an online or offline synchronization with the AMC. For more information about synchronization, see the *NuPoint Unified Messaging Technician's Handbook*.

**Note:** MiCollab versions of NuPoint UM use a different procedure (below).

#### **For NuPoint UM Standalone**

You can use either the MSL server manager or MSL server console to install software blades.

You can download and install software blades in a single step, or you can download them for installation at a later time. The first option ties up your computer for a short period of time. The second option, which is known as "caching," enables you to initiate the download and then use your computer for other purposes.

#### **Server Manager**

To install an optional feature from the **MSL server manager** web interface:

1. Open a web browser and enter the address of the MSL server manager (http:\\<IP address or FQDN of NuPoint UM server>\server-manager)
2. Log in as "admin".
3. In the ServiceLink menu, click **Blades**.
4. To ensure that you are seeing the most recent list, click **Update List**.
5. Scroll through the list and locate the blade for the feature that you are adding to the system.

**6.** Do one of the following:

- To install a new blade immediately, click the [Install](#) link beside it.
- To download a blade for installation at a later time, click the [Cache](#) link beside it. Complete the installation process by clicking the Install link.

**7.** A license agreement screen appears. Accept the license agreement to continue with the installation.**8.** The system installs the software blade for the new feature.**9.** Reboot the server when the blade installation is complete.**Server Console**

To install an optional feature from the **MSL server console**:

1. Access the server console at the server, or remotely using PuTTY.
2. Navigate to the **Access server manager** option and then select **Yes** to proceed.
3. When prompted, log in as "admin".
4. Insert NuPoint UM Software DVD 1 or 2 into the DVD-ROM drive.

| DVD Name         | DVD File Name          | DVD Contents                                                                                                                                                           |
|------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NPM Blades-DVD 1 | NP-UM_x.x.x.x.DVD1.iso | <ul style="list-style-type: none"> <li>• NuPoint Unified Messaging installer</li> <li>• OCP</li> <li>• Software (language prompts)</li> <li>• Documentation</li> </ul> |
| NPM Blades-DVD 2 | NP-UM_x.x.x.x.DVD2.iso | <ul style="list-style-type: none"> <li>• Speech Auto Attendant</li> <li>• Text to Speech</li> <li>• Speech Recognition engine</li> </ul>                               |

**5.** Navigate to the **Blades** option and locate the blade for the feature that you are adding to the system.**6.** Do one of the following:

- To install a new blade immediately, click the [Install](#) link beside it.
- To download a blade for installation at a later time, click the [Cache](#) link beside it. Complete the installation process by clicking the Install link.

**7.** A license agreement screen appears. Accept the license agreement to continue with the installation.

8. The system installs the software blade for the new feature.
9. Reboot the server when the blade installation is complete.

#### For MiCollab Versions of NuPoint UM:

1. Access the server console at the server, or remotely using PuTTY.
2. Select the option to **Install Mitel Applications from CD/DVD**. The available options are displayed.
3. Highlight the option, or options, you want to install and press the space bar to select. Select **OK**.
4. Select **Continue** to confirm the selection.
5. When prompted, insert the NuPoint UM DVD with the specified volume label (for example, NPUM 14.1.1.17) and select **Continue**. The server caches the selected software.
6. Select **Next** to install the cached software.
7. When installation is complete, select **Next** to return to the console menu.

## 1.4.2 Direct Drop Overview

The base for the Direct Drop feature in NuPoint is the Activity message in CMG Speech with following diversion to a Virtual Machine (VM) system or the Direct Drop feature in InAttend where the attendant transfers a waiting call to a VM system.

The Direct Drop feature suppresses the user greeting when a call is diverted from BluStar Collaboration Management (CMG) Speech or InAttend to NuPoint. Direct Drop works only with MX-One integrations with NPM. To enable Direct Drop on CMG deployments of InAttend, a user Activity must be set in CMG (Message Diversion) or a Direct Drop made by attendant in InAttend. Refer to *CMG Help* for instructions on how to set the user Activity.

#### Note:

Standalone InAttend does not use CMG and setting the user Activity is not supported. If InAttend integrates with a third-party server using **Transfer to Voice Mail** option, then Direct Drop of the call is supported. See *InAttend User Guide* for more information.

When Direct Drop is enabled, CMG plays the Activity message of the user before the call is diverted to NuPoint to record the message while suppressing the user defined Welcome message. Therefore, callers hear only the message “Please leave your message at the tone” and then the beep. In CMG deployments of InAttend, with no user

Activity set, for calls reaching NuPoint directly from MX-One and for calls forwarded to NuPoint, the user greeting plays as usual if the line group is set to NuPoint Voice.

## Configuring Direct Drop

### In CMG

1. NuPoint needs to exist as an External VM system in CMG Speech.
2. This external VM system needs to be defined in a CMG User Group with the Pilot number of Direct Drop line group configured on NuPoint.
3. Specific users need to have this User Group defined in the CMG Speech tab.

### In NuPoint

To configure Direct Drop in NuPoint:

1. In the server manager, under **Applications**, click **NuPoint Web Console**.
2. In the navigation tree, under **Offline Configuration**, click **Edit Offline Configuration**.
3. Click **Line Groups**.
4. Click **Add** to add a new line group. Select the application parameter as **Direct Drop**, select the user interface as **NuPoint Voice** or **Call Director**, and enter a Pilot Number.
5. Click **Save**.

### In InAttend

To configure Direct Drop in Standalone InAttend, refer to the *InAttend Configuration Guide*.

## Enabling Direct Drop

To enable Direct Drop in Standalone InAttend, refer to the *InAttend Configuration Guide*.

To enable Direct Drop in CMG deployments of InAttend, a user Activity must be specified and set on the CMG for the destination mailbox. Activities can be set for a specific duration on the CMG. The following Activity options are predefined on the CMG:

- Lunch break
- Left for the day
- Away from desk
- Meeting
- Business trip
- Visiting a customer
- Vacation

- Not available
- Back soon
- Sick leave

With Direct Drop enabled, the system greetings play as usual, but all user greetings are suppressed. Some of the user greetings are listed below:

- General Greetings
- Conditional Personnel Greetings (Forward, Busy, and No answer)
- Primary Personnel Greetings
- Daily Greetings (Default, Today)
- Extended Absence Greetings

## 1.4.3 Call Detail Recorder

### 1.4.3.1 Description

#### 1.4.3.1.1 About Call Detail Recorder

**Note:**

This option must be enabled/configured using the **Text Console**.

Call Detail Recorder (CDR) is an optional feature that implements a call accounting system that is referred to in the telecommunications industry as call detail recording. This section describes the features and capabilities of the Call Detail Recorder optional feature. It works with the NuPoint Voice application on the NuPoint UM server and must be enabled/configured using the Text console. You can generate reports about call detail information using either the Web console or the Text console.

CDR creates a record of each call transaction (such as a voice message) on the NuPoint Unified Messaging server. Records are stored in a single-line, fixed-length format. They are uniquely identified by consecutive Call Sequence Numbers, which range from 1 to 999999. After record 999999 is written, the next record is number 1. Records are not overwritten when the Sequence number goes back to 1. Overwriting only occurs when the defined maximum number of records have been stored.

The CDR application is designed to be run by one user at a time to avoid two people overwriting each other's selections. If the CDR Main Menu is running on one terminal, and a second user tries to start the CDR Main Menu, it terminates after giving the second user an error message.



CDR runs continuously once you start it. Even if you shut down or reboot the server, CDR restarts when the NuPoint Voice application loads. Similarly, if you stop CDR, it remains off until you restart it from the CDR menu.

Most configuration options can be changed while CDR is running EXCEPT the following:

- Deleting CDR records
- Reducing the maximum number of CDR records. However, you can *increase* the maximum number while CDR is running.

## CDR Features

Call Detail Recorder is designed for easy data transport to another computer system. The remote site can then process the call information using any appropriate application. Call Detail Recorder provides the following features:

- Multiple call types, including network
- Call details using abbreviated codes
- Flexible output file format (40 160 columns per line)
- File wraparound capability
- Warning messages before CDR records are overwritten
- Active status maintained across server resets
- Administrator-defined CDR file limit
- Online report generator
- Output file download capability, including:
  - Limited download search criteria
  - Administrator-defined field delimiter, pad string, and length
  - ASCII/Text transfer support
  - Test download capability
  - Auto-disconnect after download

## CDR Records

CDR creates a record of each call transaction on the NuPoint UM server (for example, a voice message). Records are stored in a single-line, fixed-length format. They are uniquely identified by consecutive Call Sequence Numbers, which range from 1 to 999999. After record 999999 is written, the next record is number 1. (Call Sequence Numbers "turn over," just like the odometer in a car.) Records are not overwritten when the Sequence number goes back to 1. Overwriting occurs when the defined maximum number of records have been stored.

**Note:** CDR records are sometimes referred to as "messages" in the menus or prompts.

## CDR Fields

The CDR Record Fields table below lists the 26 fields that can appear in a CDR record. For information about field length and/or formatting, see [CDR Reports](#).

CDR records contain certain fields that need further explanation. These fields contain two-digit numerical codes that identify certain details of every call monitored. The tables that follow this one describe the meanings of these fields:

- Field 13: CDR Call Types
- Field 14: CDR Access Types
- Field 15: CDR Termination Types
- Field 23: CDR Error Codes

Finally, you can see the interrelationship of the above fields by referring to [Interpreting Your Results](#).

| CDR Record Fields |              |                                                                                                             |
|-------------------|--------------|-------------------------------------------------------------------------------------------------------------|
| Field             | Abbreviation | Meaning                                                                                                     |
| 1                 | CSN          | Call sequence number                                                                                        |
| 2                 | DATE         | Call start date                                                                                             |
| 3                 | TIME         | Call start time                                                                                             |
| 4                 | STIM         | Call stop time                                                                                              |
| 5                 | PORT         | Port number (Module, Port, and Line)                                                                        |
| 6                 | SYID         | Server System ID (site code)                                                                                |
| 7                 | CDUR         | Call duration                                                                                               |
| 8                 | FMBX         | From mailbox (when using tree or chain mailbox) or originating mailbox                                      |
| 9                 | TMBX         | To mailbox (destination mailbox or mailbox called; also mailbox logged into by user)                        |
| 10                | FNUM         | Originating telephone number or network node number                                                         |
| 11                | TNUM         | Destination telephone number or network node number, or mailbox transferred to from a tree or chain mailbox |
| 12                | MSG          | Server speech message number                                                                                |
| 13                | CT           | Call type ( see CDR Call Types table )                                                                      |
| 14                | AT           | Access type (see CDR Access Types table)                                                                    |
| 15                | TT           | Termination type (see CDR Termination Types table)                                                          |
| 16                | ME           | Invalid mailbox entries                                                                                     |

| CDR Record Fields |              |                                        |
|-------------------|--------------|----------------------------------------|
| Field             | Abbreviation | Meaning                                |
| 17                | PE           | Invalid Passcode entries               |
| 18                | MS           | Number of messages sent                |
| 19                | MP           | Number of messages played or received  |
| 20                | MD           | Number of messages discarded           |
| 21                | MK           | Number of messages kept                |
| 22                | TA           | Number of failed transfer attempts     |
| 23                | EC           | Error code (see CDR Error Codes Table) |

### Call Types (Field 13)

CDR allows you to determine different types of calls, which lets you bill them at different rates, for example, or ignore certain types you include in your basic service package. The table below shows the available call types you can track.

Call Type (CT) is the 13th field in each CDR record.

You should use Call Type 1 only when you need as much detail as possible, such as when troubleshooting. It lists every message sent to and from each mailbox. For example, if a user sends one message to a distribution list with four users, and you are logging Call Type 1 messages, CDR generates four records, one for each recipient. If you do not log Call Type 1, CDR still creates one record indicating that a user sent four messages (4 appears in the MS field).

| CDR Call Types |                                                                                                             |           |                                   |
|----------------|-------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------|
| Call Type      | Meaning                                                                                                     | Call Type | Meaning                           |
| 01             | Local message delivery (to local mailboxes, by outside caller or user) Use only when maximum detail needed. | 15        | Incoming Busy-forwarded call      |
| 02             | Outgoing NP WakeUp call                                                                                     | 16        | Incoming No-answer-forwarded call |
| 03             | Telephone call placement                                                                                    | 17        | Incoming Indirect                 |
| 04             | This call type no longer used                                                                               | 18        | Outgoing NP Net call set up       |
| 05             | Paging call or outside message delivery                                                                     | 19        | Incoming NP Net call set up       |
| 06             | This call type no longer used                                                                               | 20        | This call type no longer used     |
| 07             | Outgoing NP Net call                                                                                        | 21        | This call type no longer used     |
| 08             | Cut-through paging call                                                                                     | 22        | Outgoing NP Net disconnect        |

| CDR Call Types |                                    |           |                               |
|----------------|------------------------------------|-----------|-------------------------------|
| Call Type      | Meaning                            | Call Type | Meaning                       |
| 09             | This call type no longer used      | 23        | Incoming NP Net disconnect    |
| 10             | Incoming NP Net call               | 24        | This call type no longer used |
| 11             | Mailbox Purge                      | 25        | This call type no longer used |
| 12             | Incoming direct call               | 26        | This call type no longer used |
| 13             | Incoming direct call - No passcode | 27        | NuPoint Voice resource access |
| 14             | Incoming Call-forwarded call       | 28        | NP View network access        |

Each of these Call Types and their related fields is described in the "Analyzing CDR Data" section.

### Networking Application Call Types

NP Net has its own call types (see the table above) that display Call Setup information. These call types only log the time used by the handshaking process to connect a pair of NP Net servers. In addition to the Call Setup message types, NP Net has its own incoming and outgoing call types that log the time used in transmitting or receiving each individual message between two NP Net servers. Finally, there are two NP Net disconnect call types.

### Access Types (Field 14)

Access Type (AT) is the 14th field in each CDR record and shows how the caller or user accessed the server. You can use Access Types for differential billing or to determine your clients' usage of the server. The following table shows the possible access types.

| CDR Access Types |                                            |             |                                      |
|------------------|--------------------------------------------|-------------|--------------------------------------|
| Access Type      | Meaning                                    | Access Type | Meaning                              |
| 01               | Outside caller                             | 10          | This access type no longer used      |
| 02               | Mailbox user                               | 11          | NP Net receipt update                |
| 03               | Mobile DID user                            | 12          | Name broadcast                       |
| 04               | Outside caller to template mailbox         | 13          | Greeting broadcast                   |
| 05               | This access type no longer used            | 14          | Passcode broadcast                   |
| 06               | NP View session over TCP /IP network       | 15          | Message Delivery, billed (all-types) |
| 07               | Outside caller called into NP Receptionist | 16-22       | This access type no longer used      |

| CDR Access Types |                                                 |             |                         |
|------------------|-------------------------------------------------|-------------|-------------------------|
| Access Type      | Meaning                                         | Access Type | Meaning                 |
| 08               | Message Delivery, non-billed (all types)        | 23-25       | Reserved for future use |
| 09               | User accessed Administration-by-Phone functions | 40          | NP OnDemand feature     |

### Termination Types (Field 15)

Termination Type (TT) is the 15th field of each CDR record. It indicates how the call was ended. Again, you can use this for differential billing or to determine your clients' usage of the server. The following table lists the Termination Types available.

Termination Types 1 through 8 are generated at the completion of a call. Types 9 and 10 are for calls that continue after a record is logged. For example, if an outside caller leaves a message and stays on the line to hear the prompt, the caller can then leave a message for another user. CDR creates a second record for the next action the caller performs. This subsequent record indicates the mailbox being used in the From Mailbox field (FMBX, field number 8).

| CDR Termination Types |                                                                                                                                                       |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Termination Type      | Meaning                                                                                                                                               |
| 00                    | Unknown                                                                                                                                               |
| 01                    | Call completed successfully                                                                                                                           |
| 02                    | Caller/user hung up                                                                                                                                   |
| 03                    | Call failed                                                                                                                                           |
| 04                    | Caller/user disconnected by the server, or three invalid mailboxes entered sequentially, or invalid passcode entries, or no response from caller/user |
| 05                    | Caller/user transferred to an extension                                                                                                               |
| 06                    | Caller/user transferred to attendant                                                                                                                  |
| 07                    | Caller/user transferred to E-mail                                                                                                                     |
| 08                    | Message delayed by recipient (used with Call Placement)                                                                                               |
| 09                    | Caller/user transferred to mailbox (from tree or chain mailbox)                                                                                       |
| 10                    | Caller/user recycled (completed call, performed another function)                                                                                     |

### Error Codes (Field 23)

The Error Code (EC) is the 23rd field in the CDR record. It indicates if there was any error or problem with the call. You can use error codes for differential billing (for example, only bill calls with certain codes) or to determine if there is a problem with the server when troubleshooting.

The following table lists the available Error Codes and their meanings.

| CDR Error Codes |                                                                     |            |                                                |
|-----------------|---------------------------------------------------------------------|------------|------------------------------------------------|
| Error Code      | Meaning                                                             | Error Code | Meaning                                        |
| 00              | Unknown error. Contact your support representative.                 | 12         | Message rejected by destination                |
| 01              | Call successfully completed                                         | 13         | Mailbox was in use when user called            |
| 02              | Call terminated due to excess invalid mailbox number entry attempts | 14         | Could not transfer caller/user to an extension |
| 03              | Call terminated due to excess invalid passcode entry attempts       | 15         | Could not transfer caller/user to an attendant |
| 04              | Timeout on waiting for input                                        | 16         | Could not transfer caller/user to E-mail       |
| 05              | Too many bad access code entries                                    | 17         | Access to mailbox denied                       |
| 06              | Destination was busy                                                | 18         | This error code no longer used                 |
| 07              | Destination did not answer                                          | 19         | This error code no longer used                 |
| 08              | Network node does not exist                                         | 20         | Time limit reached                             |
| 09              | Mailbox does not exist                                              | 21         | Message is bad or does not exist               |
| 10              | Invalid telephone number                                            | 22         | Destination mailbox is full                    |
| 11              | Invalid extension number                                            | 23         | This error code no longer used                 |

### 1.4.3.1.2 CDR Disk Storage

CDR storage space consists of one or more CDR record blocks that are stored in the server account drive. Each block stores up to 64 CDR records. The maximum number of blocks that you can allocate is 15,625, which could store up to 999,999 CDR records. Since each block occupies one account record (also called OAA record), allocating too many blocks for CDR can interfere with the ability of the server to accept or deliver messages.

When you start to change the number of CDR records, the server tells you how many account records are available. Then you can determine how many of those to allocate for CDR records. You can also check [Total System Statistics](#) for more details on account record use. Remember, other server applications cannot use any of the space you allocate to CDR.

## Maximum Number of Records

The CDR Configuration Menu allows you to set the maximum number of CDR records to be logged on the server before a wraparound takes place. A wraparound occurs when the server has stored the maximum number of records. The next CDR record stored overwrites the oldest block (64 CDR records). Do not confuse this "wraparound" feature with the "turning over" of the Call Sequence Number. Once the Sequence Number reaches 999999, it resets the next number to 1, like an odometer. However, only the Sequence Number is reset; records or blocks are not overwritten.

Before configuring the CDR application, you should estimate how many records you want to store. Determine how often you want to download your data (for external processing); a typical sequence would be once per week. Then you should note the number of ports (phone lines) your server has, how many calls per time period each port handles, and how many records are stored per call (for example, using a tree or chain mailbox creates two records per call).

EXAMPLE: Assume your server has 120 ports and receives 100 calls per day per port. Assume that one CDR record per voice message is generated (certain features or integrations can generate more). You plan to download data weekly, so you must store a week's worth of records.

$\text{Calls} \times \text{Ports} \times \text{Days} = 100 \times 120 \times 7 = 84000$  records needed

To compute the number of accounting records you need, divide the number of CDR records needed by 64 and round up to the next whole number (integer):

$\text{CDR records} / 64 \text{ records/block} = \text{blocks needed}$

$84000 / 64 = 1312.5 \rightarrow 1313$  blocks (accounting records)

Monitor your actual server performance to see if your estimate was accurate. It is better to err on the higher side to avoid overwriting the oldest records. The more CDR records you plan to log, the more accounting records you need. Call Type 1, in particular, creates a large number of CDR records. Remember that the accounting records are also used for mailboxes and distribution lists, so you must determine how many of these to allocate to CDR. Once allocated to CDR, you cannot use them for other operations. To make them available again for normal mailbox processing, you would have to lower the maximum number of CDR records and then delete the existing CDR data.

Use this worksheet to compute your server's storage needs. The sample worksheet below has been filled out with the example used above. Blank worksheets are available in the Appendix.

| Sample CDR Disk Storage Space Worksheet      |             |          |
|----------------------------------------------|-------------|----------|
| Instruction                                  | Your Answer | Comments |
| 1. Ports in NuPoint Unified Messaging server | 120         |          |

| Sample CDR Disk Storage Space Worksheet             |             |                                   |
|-----------------------------------------------------|-------------|-----------------------------------|
| Instruction                                         | Your Answer | Comments                          |
| 2. Average calls per day                            | 100         |                                   |
| 3. Number of days between CDR downloads             | 7           |                                   |
| 4. Call adjustment                                  | 1           | CDR records per call, usually = 1 |
| <b>5. Multiply ports x calls x days</b>             | 84000       | Total CDR records                 |
| <b>adjustment (step1 x step2 x step 3 x step 4)</b> |             |                                   |
| 6. Divide step5 by 64                               | 1312.5      | 64 records per block              |
| 7. Round up to next whole number                    | 1313        | Record blocks needed              |

## Changing the Maximum Number

Once you compute how many records you need, enter that number in the **Maximum Number of CDR msgs** parameter. If you type ? for help, the server indicates how many account records are available. If you change the number of records stored, new storage is not allocated until you exit the CDR Configuration menu.

To use CDR, you must change the default from 0 to a positive number, or you cannot store any records.

If you reduce this number, you must delete the CDR records to free up account records. You do not need to delete after increasing the number of records stored. You can reduce the number of records only if CDR is stopped. Be sure to restart CDR after stopping it to change number of records saved.

The server warns you if you request too many CDR records to allow enough records for normal mailbox and distribution list operation. If you get this warning, it is recommended that you enter a smaller number of CDR records, or it could impact server performance. You are required to leave a minimum of 300 account records in order to run the NuPoint Voice application.

## Total System Statistics

This is a **Text Console** menu choice that displays server statistics. Use it to find the total number of available speech blocks, when determining CDR record (message) space. See below for an example of the output.

Check total system statistics before entering CDR, since both are under the Report Generation menu. This way you do not have to exit and reenter CDR. If you only need to know the number of account records, then you can choose the *Max Number of CDR*



*msgs* parameter in the Configuration Menu. The server displays the number of available account records before asking you to enter a new number.

## TOTAL STATISTICS SUMMARY REPORT

Fri Apr 21, 1995 12:26 pm

-----&lt; SUNDAY &gt;-----

Date: Sun Apr 16 23:15:07 1995

Last Reset: Sat Apr 15 08:52:55 1995

Total Messages: 90000 Lowest Messages Free: 86377

Total Speech: 384000 Lowest Speech Free: 325480

Total Calls: 0 Total Seconds: 0:00:00

Line ATB Count: 0 Line ATB Seconds: 0:00:00

NETWORKING <===== PEAKS =====><===== TOTALS  
=====>

MESSAGES: IN QUEUE MINUTES LATENCY DELIVERED UNDELIV RECEIVED

BATCH: 9 0 0:00:00 0 0 27

URGENT: 0 0 0:00:00 0 - 1

-----&lt; MONDAY &gt;-----

Date: Mon Apr 17 23:15:06 1995

Last Reset: Mon Apr 17 15:14:50 1995

Total Messages: 90000 Lowest Messages Free: 86234

Total Speech: 384000 Lowest Speech Free: 324377

Total Calls: 0 Total Seconds: 0:00:00

Line ATB Count: 0 Line ATB Seconds: 0:00:00

NETWORKING <===== PEAKS =====><===== TOTALS  
=====>

MESSAGES: IN QUEUE MINUTES LATENCY DELIVERED UNDELIV RECEIVED

BATCH: 55 0 0:00:00 0 0 354

URGENT: 0 0 0:00:00 0 - 34

## Logfile Messages

CDR logs the following message into the server error logfile when the CDR file nears the maximum number of records allowed (see [Maximum Number of Records](#) earlier in this section):

<module> <task-ID> <date> <time>: CDR file is X% full at <CSN>

### Note:

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

The parameters are explained in the table below. Error messages are logged when CDR storage is 85, 90, and 95 percent full. Here is a sample message:

1 0341 03/22 3:28:15: CDR file is 85% full at 605123

| CDR Log File Parameters |                                                  |
|-------------------------|--------------------------------------------------|
| Parameter               | Meaning                                          |
| <module>                | The module (host) number                         |
| <task-ID>               | The task identification number                   |
| <date>                  | The current date                                 |
| <time>                  | The current time                                 |
| X                       | Percentage of capacity reached (85, 90, or 95)   |
| <CSN>                   | Call Sequence Number being processed at the time |

When CDR storage reaches 100% of the number allowed, the following message is logged to the server error logfile:

<module> <task-ID> <date><time>: CDR space is re-used at <CSN>

At this point, new CDR records are overwritten onto the oldest ones, sequentially. This is called a wraparound. See "[Maximum Number of Records](#)" earlier in this section.

Example:

```
1 0341
03/22 3:28:15: CDR file is re-used at
605123
```

## Handling New Records

A new CDR record is not written to disk immediately, but is delayed for a certain period of time to reduce disk access. CDR normally writes to disk all records received once every

180 seconds, or when the CDR record block is full (64 records). You can change this delay from anywhere between 10 and 600 seconds with the Maximum Delay parameter.

Decreasing this parameter is not recommended, as it could impact server performance. Increasing this parameter, while improving performance, leaves you at risk of losing more data in the event of a power outage or server failure.

Any changes you make to the report configuration take effect immediately. However, you have to exit the Report Menu in order for the CDR Configuration changes to be saved. New CDR records coming into the server while the report menu is accessed are not always available if you run a report. In order to get the latest records, you might have to exit the Report Menu and then reenter it to include the newest records.

### Deleting CDR Records

CDR allows you to erase the contents of the entire CDR storage space. Deleting records does not reset the server's Call Sequence Number, however. For example, if CDR records numbered 100000 through 200000 were stored before you deleted them, the next CDR record received is assigned Call Sequence Number 200001.

Since CDR automatically overwrites old records when storage space is full, it is not necessary to delete records routinely after each download.

You must delete existing CDR records if you are lowering the maximum number of records stored; otherwise, the lower number does not take effect, and the space is not released for use as accounting records.

### CDR Disk Storage Worksheet

Worksheet for computing CDR Disk Storage:

| Instruction                                   | Your Answer | Comments                          |
|-----------------------------------------------|-------------|-----------------------------------|
| 1. Ports in NuPoint Unified Messaging server  |             |                                   |
| 2. Average calls per day                      |             |                                   |
| 3. Number of days between CDR downloads       |             |                                   |
| 4. Call adjustment                            |             | CDR records per call, usually = 1 |
| 5. Multiply ports x calls x days x adjustment |             | Total CDR records                 |
| (1 x 2 x 3 x 4)                               |             |                                   |
| 6. Divide (5) by 64                           |             | 64 records per block              |
| 7. Round up to next whole number              |             | Record blocks needed              |

Sample:

| Instruction                                                          | Your Answer | Comments                          |
|----------------------------------------------------------------------|-------------|-----------------------------------|
| 1. Ports in NuPoint Unified Messaging server                         | 120         |                                   |
| 2. Average calls per day                                             | 100         |                                   |
| 3. Number of days between CDR downloads                              | 7           |                                   |
| 4. Call adjustment                                                   | 1           | CDR records per call, usually = 1 |
| 5. Multiply ports x calls x days x adjustment<br><br>(1 x 2 x 3 x 4) | 84000       | Total CDR Records                 |
| 6. Divide (5) by 64                                                  | 1312.5      | 64 records per block              |
| 7. Round up to next whole number                                     | 1313        | Record blocks needed              |

### 1.4.3.1.3 Line Numbers

One configuration choice for you to determine is which lines to enable. Lines enabled in the CDR Configuration Menu have their call traffic saved as CDR records.

Each line number is expressed as a *triplet*, where module, slot, and port number are separated by colons (:). If you have a one-module server, you can refer to just the slot and port number. If you have a multi-module server, you must specify the module number as well, or the server assumes you are configuring Module 1 only.

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

| Module (Host)                                                | Slot                     | Port (virtual)           |
|--------------------------------------------------------------|--------------------------|--------------------------|
| NuPoint UM 60 ports = always 1                               | Always 0 for mail ports. | 0 - licensed port limit, |
|                                                              | Always 5 for fax ports.  | no duplicates allowed    |
| NuPoint UM 120 ports = always 1                              |                          | OR                       |
| NuPoint UM <b>640</b> = specify 1 or 2<br><br>(default is 1) |                          | * for all ports          |

An example of a triplet is 1:0:2. This means Module 1, Slot 0, and Port 2. This is distinct from 2:0:2, which would be on Module 2, and from 1:0:1 which is Port 1 on the same Module and Slot as the first case. Triplets do not use colons when stored in CDR records; module, slot, and port are two-character numerics in a six-character field. The above triplet is stored by CDR as 010002.

When configuring Line Numbers for CDR, you have several menu options that help you set up the lines you want to monitor. The Enable all Lines option chooses every line in your server automatically. You do not have to worry about how many modules, ports, or lines you have. If you want to use CDR on a subset of your lines, the Enable Individual Lines and Disable Individual Lines options are available. You can specify which lines to add to or subtract from the list of monitored lines. The Show Individual Lines option displays the list of lines that are monitored by CDR.

You can use the wildcard character (\*) when specifying which lines to enable or disable. For example, the triplet 2:0:\* represents all lines on Module 2, Slot 0. The expression 1:\* represents all ports and lines on Module 1 (the second wildcard is redundant). Use the Enable and Disable options to add or remove lines, and the Show option to verify your selection. If you wish to enable all but a very few lines, your easiest course is to Enable All Lines, then Disable the lines you do not want. You must exit the CDR Configuration Menu in order to save any changes made within these options.

Download your data frequently if you enable all lines; this is the maximum data possible and overwriting can occur if CDR space is used up.

**Note:** If you enter a triplet and leave out one set of numbers, the server assumes you are specifying Module 1. For example, if you enter 0:4, it assumes Module 1, Slot 0, Port 4.

## 1.4.3.2 Operation (Text Console)

### 1.4.3.2.1 Configure CDR

This procedure describes how to set the configuration options in CDR Configuration Menu. If you perform this procedure when you set up CDR for the first time, you do not have to do it again unless you need to change a setting.

**Note:**

If you want to reduce the number of CDR records stored, you must first [stop CDR](#) if it is running.

To configure CDR:

1. From the Main menu, select **(R) Reports** and then **(A) Call Detail Recorder** and then **(A) Configure Menu**.

**2. Select (A) Configure Menu.****3. Do one of the following:**

- To enable all lines, select **(A) Enable all lines** and then enter **Y**.
- To enable individual lines, select **(B) Enable individual lines** and enter the [line triplet](#) that represents the line to add.

**4. Select (E) Call Types and enter one of the following:**

- **A** for all call types
- A single call type **number** (1-28), for example, 4.
- A **range** of call types, for example 1-20.
- A comma-separated **list** of call types, such as 1,3,5,7.
- A **combination** of ranges and list, for example 1-4,6,7-9,12.
- **?** for a list of call types and their definitions.

**5. Select (F) Max number of CDR msgs and enter a number of CDR records (messages) to store (1-999999).**

- CDR records are stored in blocks of 64 records. It is recommended that you choose a number that is divisible by 64, to maximize disk storage efficiency.
- If you reduce the number of CDR records stored, the area committed to disk storage is not reduced until you delete the records. If you increase the number of records, disk storage changes when you exit the CDR Configuration Menu.
- You must leave a minimum of 300 accounting records in order to run the NuPoint Voice application. You are not permitted to leave fewer records than this.

**6. Select (H) Max delay to write CDR records to disk and enter the delay in seconds (10-600).** CDR records are buffered as they come in, and written to disk as the buffer fills. The larger the delay, the fewer disk write operations are performed. This increases the possibility that you could lose some data in the event of a server failure. It is recommended that you not reduce this parameter below the default of 180 seconds.**7. Exit the CDR configuration menu to save your choices.** If you reduced the number of CDR messages stored, you must [Delete CDR messages](#) first.

## 1.4.3.2.2 Starting and Stopping CDR

Once started, CDR continues to run until you select Stop CDR. If you reset your system, CDR automatically starts up again. If you stop CDR, it remains stopped until you select "Start CDR" again.

To **start** CDR:

1. From the Main menu, select **(R) Reports** and then **(A) Call Detail Recorder**. Ensure that your configuration and report settings are set as required.

2. Select **(B) Start**. The system confirms that CDR is started.
3. Select **(X)** to Exit.

To **stop** CDR:

1. From the Main menu, select **(R) Reports** and then **(A) Call Detail Recorder**. Ensure that your configuration and report settings are set as required. Ensure you are at a good point to stop CDR, such as a low-usage time. When CDR is stopped, it does not log any activity.
2. Select **(C) Stop**. The system prompts you to confirm. Type **stop cdr** (all upper-case or all lower-case) to confirm.
3. The system confirms that CDR is stopped.
4. Select (X) to exit.

### 1.4.3.2.3 Delete Existing CDR Records

This procedure describes how to delete the current CDR messages stored on disk.

**Note:**

Once messages are deleted, they cannot be restored.

To delete existing CDR messages:

1. From the Main menu, select **(R) Reports Menu**, and then **(A) Call Detail Recorder**.
2. **Stop CDR** if it is running.
3. Select **(D) Delete**.
4. Select **(A) Delete Messages** and then press **Y** to confirm deletion, or press **N** to stop the procedure.
5. Exit the CDR menu.

### 1.4.3.3 Reporting

#### 1.4.3.3.1 CDR Reports

You can generate on-screen reports of your CDR message data. There are a number of ways to customize these reports, including which messages to include, which fields to include, and how to format your report. Report creation and modification options are available in the CDR Report menu.



Although you cannot use the Web Console to enable or configure CDR, you can use it to produce custom CDR reports.

## Report Options

These are the options available in the CDR Report menu. You must exit the Report Menu to save any changes you make here.

## Report Details

There are 26 fields, or report details, that can be stored in a CDR record. You can include a subset of the available information in your report, which is the set of information you will later download. If you only need some of the data, you can specify which fields you want to include in the report.

The [CDR Record Fields](#) table lists all fields and their descriptions. The following table lists their field lengths and formats, so you can compute your report width and set up your remote application properly.

## Call Types

You can select any or all 28 Call Types in your report. In particular, Call Type 1 creates a large number of messages, and you might not want to include it. See [CDR Records](#) for a list of Call Types.

Do not confuse specifying which Call Types are stored by the server with which Call Types are included in your report. The former is chosen in the Configuration Menu, the latter in the Report Menu.

| CDR Record Field Lengths and Formats |      |        |                                   |  |
|--------------------------------------|------|--------|-----------------------------------|--|
| Field                                | Code | Length | Format                            |  |
| 1                                    | CSN  | 6      | nnnnnn                            |  |
| 2                                    | DATE | 6      | mmddyy (month, day, year)         |  |
| 3                                    | TIME | 6      | hhmmss (hour, minute, second)     |  |
| 4                                    | STIM | 6      | hhmmss (hour, minute, second)     |  |
| 5                                    | PORT | 6      | mmppll (module, port, line)       |  |
| 6                                    | SYID | 4      | xxxx (first 4 chars of site code) |  |
| 7                                    | CDUR | 4      | ssss (seconds)                    |  |
| 8                                    | FMBX | 14*    | nnnnnnnnnnnnnnnn                  |  |
| 9                                    | TMBX | 14*    | nnnnnnnnnnnnnnnn                  |  |
| 10                                   | FNUM | 16*    | nnnnnnnnnnnnnnnn                  |  |
| 11                                   | TNUM | 16*    | nnnnnnnnnnnnnnnn                  |  |

| CDR Record Field Lengths and Formats |      |        |          |
|--------------------------------------|------|--------|----------|
| Field                                | Code | Length | Format   |
| 12                                   | MSG  | 7      | nnnnnnnn |
| 13                                   | CT   | 2      | nn       |
| 14                                   | AT   | 2      | nn       |
| 15                                   | TT   | 2      | nn       |
| 16                                   | ME   | 2      | nn       |
| 17                                   | PE   | 2      | nn       |
| 18                                   | MS   | 2      | nn       |
| 19                                   | MP   | 2      | nn       |
| 20                                   | MD   | 2      | nn       |
| 21                                   | MK   | 2      | nn       |
| 22                                   | TA   | 2      | nn       |
| 23                                   | EC   | 2      | nn       |
| 24                                   | FS   | 2      | nn       |
| 25                                   | FP   | 2      | nn       |
| 26                                   | PS   | 2      | nn       |

n = numeric character, x = alphanumeric character, other characters are defined. \* = maximum length possible for this variable field. The default length is 11.

## Field Lengths

You can adjust the field lengths of four CDR fields: 8, 9, 10 and 11 (FMBX, TMBX, FNUM and TNUM). These fields contain mailbox or telephone numbers. For example, if all your mailboxes are four characters, you can set fields 8 and 9 (the From and To Mailbox fields) to a length of 4 instead of 11 (the default). This saves space in your output. You can also increase the length of these fields, if necessary.

If your field data is shorter than the field length, the data is right-justified and filled with the string pad character you specify. This pad character is described below.

## Field Delimiter

You can specify a field delimiter to make data processing easier on the remote computer system. For example, some processing applications require comma separated fields. The default delimiter is a space between details.

Enter 0 for a space, 1 for a tab, or any other character for another delimiter. Be sure you know what field delimiter is required by the remote application using the data.

## Report Width

Once you know how many details to include, and you have determined field lengths for the adjustable details, you can set a width for the report by using the Number of Columns

option. This allows you to better view the on-screen report or to allow one entire record on one line for a remote download.

The default is 40 columns, and you can specify a number between 40 and 160. If your CDR records need more columns than your screen can display, it wraps extra characters to a second or third line. Select a width based on whether you want to display the report on your server console or download the data. Use the larger widths for downloading. Most VT-100 terminal displays are 80 columns wide--72 or 80 is a good choice for these terminals.

When setting this parameter, be aware of how many details you specified for your report, and the field lengths you set. This ensures that your report is readable without unexpected wraparound.

### **Call Sequence Number Range**

You can adjust your report to include all CDR records, or a range of records, by choosing a starting and ending Call Sequence Number. By determining when certain calls were placed, this feature allows you to report messages for a specific time period.

CDR assigns consecutive sequence numbers to each call until number 999999; the next call is assigned number 1. If CDR exceeds its maximum number of records, it overwrites the oldest record. However, the newest record does not reuse the oldest record's sequence number. Either of these occurrences can cause the ending number to be lower than the starting number for a particular time period. A lower ending sequence number is no problem for CDR, but you should be aware of the possibility.

### **Search Capability**

You can specify a search string for your report using the Search For option. This is useful if you want to see data for a particular mailbox or telephone number. Your search string can be up to 160 characters. Enter a period (.) to reset the search to blank.

Since you cannot specify the position of your search string, searches for a particular call type, such as "01," are meaningless. Your results list all occurrences of "01" anywhere in all CDR records. The feature is best used for finding longer strings, such as telephone or mailbox numbers.

To ensure you are finding a particular string, use the delimiter character as a boundary. This prevents finding your string within a larger field. For example, if you are searching for mailbox 5760, and enter the search string 5760, you also find records with the DN 4085555760 and 2125760555. To prevent this, use the search string " 5760 " (this example assumes a space is your delimiter and that your mailbox field lengths are set to four characters).

## String Pad Character

You can specify which character to use to pad data fields. The default is 0 (zero). Padding is used when the result takes up fewer characters than the space allotted for the field. For example, if your mailbox fields are 11 characters, and a record contains four-digit mailbox information, a pad character of zero results in 00000001234. If you change the pad character to a space, your result is 1234.

### Note:

You cannot enter a period (.) as your string pad character.

## Sample Output

The figure below shows a sample of CDR report output. The delimiter is a blank, and all report details (fields) are shown. The report width is set to 80, so each CDR record is on two lines (this avoids splitting any of the data fields). The field lengths are set to 11 (the default), and are zero-filled (that is, padded with leading zeroes).

This report was created by the Generate On-Screen Report option.

```

275282 071892 025245 025250 0412 0000 0005 000000000000 00000003563
000000000000 55223183563 00000000 05 08 01 00 00 00 00 00 00 01 00 00 00

275284 071892 025236 025422 0401 0000 0106 000000000000 00000003565
000000000000 000000000000 0622073 17 02 02 00 00 01 00 00 00 00 01 00 00 00

275290 071892 034454 034517 0213 0000 0023 000000000000 00000003728
000000000000 000000000000 00000000 16 02 01 00 00 00 00 00 00 00 01 00 00 00

275294 071892 044933 045039 0413 0000 0066 000000000000 00000003561
000000000000 19134510876 0623891 04 08 01 00 00 00 00 00 00 00 01 01 00 02

275371 071892 081446 081903 0000 0000 0257 00000005223 000000076582
000000000001 00000000140 0622103 07 08 01 00 00 00 00 00 00 00 01 00 00 00

275459 071892 101125 101135 0307 0000 0010 000000000000 00000003001
000000000000 000000000000 00000000 12 01 01 00 00 00 00 00 00 00 01 00 00 00

275908 071992 100211 100237 0314 0000 0026 000000000000 000000000000
17035504009 000000000000 00000000 21 08 01 00 00 00 00 00 00 00 01 00 00 00

275912 071992 100237 100345 0314 0000 0068 00000004000 00000003512
17035504009 000000000000 1015499 09 08 01 00 00 01 00 00 00 00 01 00 00 00

```

## Sample CDR Report Output

There are also report options that create immediate results. Display CDR Statistics produces the following output:

REPORT STATISTICS:

Call Sequence Number of oldest message: 1633

Call Sequence Number of next message: 1642

Display Download Statistics produces the following output:

DOWNLOAD STATISTICS:

Most recent Call Sequence Number: 230

Most recent Record: 2

Download Start Time: 1-Sep-92 5:05:21 pm

Download Stop Time: 1-Sep-92 5:05:57 pm

Download Result: OK

The download statistics are only updated when you download new CDR records. If you select a range of Sequence Numbers to download, the statistics are not affected.

## 1.4.3.3.2 Procedures (Text Console)

### 1.4.3.3.2.1 Set CDR Report Options

This procedure describes how to set or change the options in CDR Report Menu. None of the following commands are required to create a report. If this procedure is properly done once, you do not have to do it again unless you need to change a setting.

To set CDR Report Options

1. From the Main menu, select **(R) Reports** and then **(A) Call Detail Recorder** and then **(D) Report Menu**.

2. Select **(A) Details** and enter any of the following:

- **A** for all call details
- A single call detail **number** (1-26), for example, 9
- A **range** of call details, for example 10-23
- A comma-separated **list** of call details, such as 11,13,15,17
- A **combination** of ranges and list, for example 1-4,6,7-9,12
- **?** for a list of call details and their definitions

3. To change field lengths, select **(B) Field Lengths** and select the field length to change:

- **A** for Source Mailbox
- **B** for Destination Mailbox
- **C** for Source Node or Number
- **D** for Destination Node or Number

4. When prompted for field length, enter **anumber** for the length of the field you selected: Source and Destination Mailbox field length (1-14) or Source and Destination Number field length (1-16). Repeat this step until you have changed all field lengths you wish to. Then exit the Field Length Menu to save the new field lengths.

5. Select **(C) Call Types** and enter one of the following:

- **A** for all call details
- A single call detail **number** (1-26), for example, 9
- A **range** of call details, for example 10-23
- A comma-separated **list** of call details, such as 11,13,15,17
- A **combination** of ranges and list, for example 1-4,6,7-9,12
- **?** for a list of call details and their definitions

**Note:**

You must select the call types you want in the CDR Configuration Menu to store them in CDR Records. If you select them in the CDR Report Menu and not in the CDR Configuration Menu, you will not have the information.

1. Select **(D) Field delimiter character** and enter the field delimiter to separate data fields in your report. Enter **0** for a space, **1** for a tab, or enter any other printable ASCII character.
2. Select **(E) Starting Call Sequence Number** and enter the call sequence number (1-999999) at which to start.
3. Select **(F) Ending Call Sequence Number** and enter the ending sequence number.

4. Select **(G) Number of columns** and enter a report width in number of columns (40-160).
5. Select **(J) Search for** and enter a search string (1-160 characters). To ensure your search checks the correct field, use the field delimiter character as a boundary in your search string. For example, to find occurrences of mailbox number 5678, enter " 5678 "(assuming mailbox field length is set to 4 and the field delimiter character is a space).
6. Select **(K) String pad character** and select a character to fill any right-justified fields in the report (the default character is '0').
7. Exit the CDR menu to save your choices.

### 1.4.3.3.2 Create CDR Report

To create a CDR report:

1. Ensure that you have [set up CDR report options](#).
2. From the Main menu, select **(R) Reports** and then **(A) Call Detail Recorder** and then **(D) Report Menu**.
3. Select **(H) Generate onscreen report**. The report displays on your console screen. If your console is connected to a printer, you can send the report there.
4. When the report is complete, exit the CDR Report menu.

### 1.4.3.3.3 Procedures (Web Console)

#### 1.4.3.3.3.1 Run a Call Detail Record Report

1. In the navigation tree, click Report Generation >Call Detail Record.
2. On the **Record Description** tab, enter Time Range, Mailbox Range, and Call Types data as described in the table below.
3. On the **Field Selections** tab, select the CDR fields that you want included in the report.
4. Click OK. To print the report, click **Printer Friendly Version**. To save the report as a CSV file, click **Export to CSV File**.

#### Call Detail Record Fields Description

| Record Description Tab Fields | Description                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------------------|
| Time Range:                   |                                                                                               |
| Unlimited                     | Includes all time ranges.                                                                     |
| From Date                     | Select a start date from the drop-down lists. Or click the Calendar pop-up and select a date. |
| To Date                       | Select an end date from the drop-down lists. Or click the Calendar pop-up and select a date.  |

| Record Description Tab Fields | Description                                                                        |
|-------------------------------|------------------------------------------------------------------------------------|
| From Time                     | Enter start time in 12 Hr and 60 min format (00:00-12:59 ).                        |
| To Time                       | Enter end time in 12 Hr and 60 min format (00:00-12:59).                           |
| Mailbox Range                 |                                                                                    |
| All Mailboxes                 | Default                                                                            |
| Mailbox Range                 | Maximum 25 digits. Mailbox numbers separated by a hyphen (for example, 2002-2050). |
| Call Types                    |                                                                                    |
| All Call Types                | Default                                                                            |



| Record Description Tab Fields | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                         | <p>Range is 01-28. Only one continuous range is allowed (for example, 2002-2050).</p> <p>Call Types are:</p> <ul style="list-style-type: none"> <li>• 01 - Local message delivery (to local mailboxes, by outside caller or user) Use only when maximum detail needed.</li> <li>• 02 - Outgoing NP-UM WakeUp call</li> <li>• 03 - Telephone call placement</li> <li>• 04 - (This call type no longer used)</li> <li>• 05 - Paging call or outside message delivery</li> <li>• 06 - (This call type no longer used)</li> <li>• 07 - Outgoing NP-UM Net call</li> <li>• 08 - Cut-through paging call</li> <li>• 09 - (This call type no longer used)</li> <li>• 10 - Incoming NP-UM Net call</li> <li>• 11 - Mailbox Purge</li> <li>• 12 - Incoming direct call</li> <li>• 13 - Incoming direct call - No passcode</li> <li>• 14 - Incoming Call-forwarded call</li> <li>• 15 - Incoming Busy-forwarded call</li> <li>• 16 - Incoming No-answer-forwarded call</li> <li>• 17 - Incoming Indirect</li> <li>• 18 - Outgoing NP-UM Net call setup</li> <li>• 19 - Incoming NP-UM Net call setup</li> <li>• 20 - (This call type no longer used)</li> <li>• 21 - (This call type no longer used)</li> <li>• 22 - Outgoing NP-UM Net disconnect</li> <li>• 23 - Incoming NP-UM Net disconnect</li> <li>• 24 - This call type no longer used</li> <li>• 25 - (This call type no longer used)</li> <li>• 26 - (This call type no longer used)</li> <li>• 27 - NuPoint Voice resource access</li> <li>• 28 - NP-UM View network access</li> </ul> |

| Record Description Tab Fields | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field Selection Tab Fields    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Field Selections              | <ul style="list-style-type: none"> <li>• Call sequence number (disabled, selected by default)</li> <li>• Call start date (disabled, selected by default)</li> <li>• Call start time (disabled, selected by default)</li> <li>• Call stop time</li> <li>• Port number</li> <li>• System ID (disabled, selected by default)</li> <li>• Call duration (disabled, selected by default)</li> <li>• From mailbox</li> <li>• To mailbox</li> <li>• Speech message number</li> <li>• Call type</li> <li>• Access type</li> <li>• Termination type</li> <li>• Invalid mailbox entries</li> <li>• Invalid passcode entries</li> <li>• Number of messages sent</li> <li>• Number of messages played/received</li> <li>• Number of messages discarded</li> <li>• Number of messages kept</li> <li>• Number of failed transfer attempts</li> <li>• Error code</li> <li>• Number of fax messages sent</li> <li>• Number of fax messages played</li> <li>• Number of fax pages</li> </ul> |

## 1.4.3.4 Analyzing CDR Data

### 1.4.3.4.1 Interpreting Your Results

Your billing software can evaluate certain CDR fields in order to determine which of several possible mailbox transactions occurred. See the CDR Record Field Relationships table below for the values these fields can take. Explanations are abbreviated somewhat,

but each field has a cross-reference back to its full table if you need more explanation. Refer to this field relationship table as you follow the examples listed below.

For example, there is a clear relationship between the TIME (call start time) and STIM (call stop time) fields, along with the CDUR (call duration) field. If STIM minus TIME is not equal to CDUR, this suggests either a problem or other user actions on the server. FMBX and TNUM are related when using a tree or chain mailbox; FMBX is the one dialed into, and TNUM is the mailbox transferred to.

The examples in this section show how you can use CDR for your billing application. Refer to each call type and the possible field values for successful and failed calls. Your application should examine these fields when creating bills for your customers.

Useful fields for processing call types are shown in the table below. Other recommended fields are listed within each call type's section.

### CDR Record Field Relationships

| CDR Field                             | 1           | 2                | 3                | 4                | 5                               | 6 | 7 | 8                | 9                | 10               | 11               | 12               | 13     | 14     | 15     | 16     | 17     | 18     | 19     | 20     | 21     | 22     | 23     | 24     | 25     | 26     |
|---------------------------------------|-------------|------------------|------------------|------------------|---------------------------------|---|---|------------------|------------------|------------------|------------------|------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| CDR Field Abbreviation<br>(Table 2-1) | C<br>S<br>N | D<br>A<br>T<br>E | T<br>I<br>M<br>E | S<br>T<br>I<br>M | P<br>O<br>R<br>T<br>Y<br>I<br>D |   |   | C<br>D<br>U<br>R | F<br>M<br>B<br>X | T<br>N<br>U<br>M | F<br>N<br>U<br>M | T<br>N<br>U<br>M | C<br>T | A<br>T | T<br>T | M<br>E | P<br>E | M<br>S | M<br>P | M<br>D | M<br>K | T<br>A | E<br>C | F<br>S | F<br>P | P<br>S |

| Value | Call Type(Field 13)           | Access Type(Field 14)           | Termination Type(Field 15)          | Error Code(Field 23)           |
|-------|-------------------------------|---------------------------------|-------------------------------------|--------------------------------|
| 01    | Local message delivery        | Outside caller                  | Call completed                      | Call successfully completed    |
| 02    | Outgoing NP Wake Up call      | Mailbox user                    | Caller/user hung up                 | Excess entry attempts          |
| 03    | Telephone call placement      | Mobile DID user                 | Call failed                         | Excess passcode attempts       |
| 04    | This call type no longer used | Outside caller to template mbox | Disconnected by the server          | Timeout on waiting for input   |
| 05    | Paging call                   | This access type no longer used | Transferred to an extension         | Excess bad access code entries |
| 06    | This call type no longer used | NP View session over TCP/IP     | Transferred to attendant            | Destination was busy           |
| 07    | Outgoing NP Net call          | Outside caller to AutoAttendant | Caller/user transferred to E-mail   | Destination did not answer     |
| 08    | Cut-through paging call       | Message delivery, non-billed    | Message delayed by recipient        | Network node does not exist    |
| 09    | This call type no longer used | Accessed Admin-by-Phone         | Tree/chain mbox transfer to mailbox | Mailbox does not exist         |

| Value | Call Type(Field 13)              | Access Type(Field 14)           | Termination Type(Field 15) | Error Code(Field 23)             |
|-------|----------------------------------|---------------------------------|----------------------------|----------------------------------|
| 10    | Incoming NP Net call             | This access type no longer used | Caller/user recycled       | Invalid telephone number         |
| 11    | Mailbox Purge                    | NP Net receipt update           |                            | Invalid extension number         |
| 12    | Incoming direct call             | Name broadcast                  |                            | Message rejected by destination  |
| 13    | Incoming direct call-no passcode | Greeting broadcast              |                            | Mailbox in use when user called  |
| 14    | Incoming call-forwarded          | Passcode broadcast              |                            | Could not transfer to extension  |
| 15    | Incoming busy-forwarded          | Message delivery, billed        |                            | Could not transfer to attendant  |
| 16    | Incoming no answer-forwarded     | This access type no longer used |                            | Could not transfer to E-mail     |
| 17    | Incoming indirect                | This access type no longer used |                            | Access (to mailbox) denied       |
| 18    | Outgoing NP Net call setup       | This access type no longer used |                            | This error code no longer used   |
| 19    | Incoming NP Net call setup       | This access type no longer used |                            | This error code no longer used   |
| 20    | This call type no longer used    | This access type no longer used |                            | Time limit reached               |
| 21    | This call type no longer used    | This access type no longer used |                            | Message is bad or does not exist |
| 22    | Outgoing NP Net disconnect       | This access type no longer used |                            | Destination mailbox is full      |
| 23    | Incoming NP Net disconnect       |                                 |                            | This error code no longer used   |
| 24    | This call type no longer used    |                                 |                            |                                  |
| 25    | This call type no longer used    |                                 |                            |                                  |
| 26    | This call type no longer used    |                                 |                            |                                  |
| 27    | NuPoint Voice resource access    |                                 |                            |                                  |
| 28    | NP View network access           |                                 |                            |                                  |
| 40    |                                  | NP OnDemand                     |                            |                                  |

Abbreviations: xfer=transfer mbox = mailbox VM=NuPoint Voice

| Useful Fields for Processing All Call Types |         |                       |
|---------------------------------------------|---------|-----------------------|
| CDR Field                                   | Field # | CDR Field Description |

|      |    |                               |
|------|----|-------------------------------|
| CSN  | 1  | Call sequence number          |
| DATE | 2  | Call start date               |
| TIME | 3  | Call start time               |
| STIM | 4  | Call stop time                |
| PORT | 5  | Port number (module and line) |
| CDUR | 7  | Call duration                 |
| CT   | 13 | Call type                     |
| AT   | 14 | Access type                   |
| TT   | 15 | Termination type              |
| EC   | 23 | Error code                    |

Each call type has a table of values for successful completion or failure to complete the call. In most cases, the access type, termination type, and error code always contain the same values, regardless of the call type. These values are listed here:

| Standard Field Values for Most Call Types |               |               |
|-------------------------------------------|---------------|---------------|
| CDR Field, #                              | Success       | Failure       |
| AT (14)                                   | 08 (delivery) | 08 (delivery) |
| TT (15)                                   | 01 (success)  | 03 (failure)  |
| EC (23)                                   | 01 (no error) | varies        |

If a call type generates different values than listed in this table, these values are shown in **bold type**. Error code values for call failure vary with the call type, so check each call type's table for a list of expected error code values.

### Example of CDR Results

Here is a sample call.

An outside caller reached chain/tree mailbox 2000, then logged into mailbox 2001, made a message, logged out of mailbox 2001, then pressed a key to recycle to another NuPoint Voice session. The resulting CDR output is shown here:

```
275284 071892 025236 025422 0401 0000 0106 000000000000 00000002000
000000000000 00000002001 0000000 17 02 09 00 00 00 00 00 00 00 01 00 00 00
```

```
275285 071892 025423 025830 0401 0000 0247 00000002000 00000002001
000000000000 000000000000 0622073 17 02 10 00 00 01 00 00 00 00 01 00 00 00
```

The bold type shows Call Type 17 (Incoming), with Access Type 02 (Mailbox User), Termination Types 09 (Tree/chain mailbox transfer) and 10 (Recycle).

In addition, the first record shows no FMBX (outside caller), a TMBX of 2000 and a TNUM of 2001. The second record shows a FMBX of 2000 and a TMBX of 2001, indicating that the caller accessed 2001 through a chain or tree (2000).

### 1.4.3.4.2 Processing Each Call Type

Following are the relevant fields and expected values for you to use in processing each call type.

#### Call Type 1 (Local Message Delivery)

Call Type 1 is used for transmitting messages to mailbox users from other users. See Call Types 12-17 for handling messages received from an outside caller.

#### CAUTION:

Call Type 1 creates numerous CDR records, which are the details of Call Types 8 through 17. In particular, enabling Call Type 1 creates a CDR record for every mailbox in a distribution list or broadcast mailbox. Unless you need the specifics of Call Type 1, do not enable it in the Configuration Menu.

| Field Values for Call Type 1 |                                                            |                                                                                                                                                                                                                                            |
|------------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery                                        | Failed Delivery                                                                                                                                                                                                                            |
| AT (14)                      | <b>08 (delivery)</b><br><br><b>14 (passcode broadcast)</b> | 08 (delivery)                                                                                                                                                                                                                              |
| TT (15)                      | 01 (success)                                               | 03 (failure)                                                                                                                                                                                                                               |
| EC (23)                      | 01 (no error)                                              | <b>09(mailbox bad or does not exist)</b><br><br><b>12(destination mailbox can't receive msg)</b><br><br><b>17(message denied: wrong FCOS)</b><br><br><b>21(cannot allocate msg for destination mbox)</b><br><br><b>22(mailbox is full)</b> |

Other useful fields:

**FMBX (8)** Mailbox originating the message **TMBX (9)** Destination mailbox to which the message is delivered to **MSG (12)** The server's speech message number **MS (18)** Number of messages sent (usually 1)

### Call Type 2 (Outgoing Auto-Wakeup)

This is an outgoing call made by the server. You can determine whether the outgoing number involves long-distance charges in processing this call type.

| Field Values for Call Type 2 |                     |                                                                                                                                      |
|------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery                                                                                                                      |
| AT (14)                      | 08 (delivery)       | 08 (delivery)                                                                                                                        |
| TT (15)                      | 01 (success)        | 03 (failure)                                                                                                                         |
| EC (23)                      | 01 (no error)       | <b>06(destination telephone was busy)</b><br><br><b>07(call was not answered)</b><br><br><b>10(bad destination telephone number)</b> |

Other useful fields:

**TMBX (9)** Mailbox number of the message originator **TNUM (11)** Destination telephone number dialed by server **MS (18)** Number of messages sent (usually 1)

### Call Type 3 (Telephone Call Placement)

Call Type 3 indicates a message sent to an outside telephone number. While this is similar to a Call Type 2, additional Termination Types are possible on call failure. There are also more possible resulting Error Codes.

| Field Values for Call Type 3 |                     |                                                                              |
|------------------------------|---------------------|------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery                                                              |
| AT (14)                      | 08 (delivery)       | 08 (delivery)                                                                |
| TT (15)                      | 01 (success)        | <b>03 (failure)</b><br><br><b>04(disconnected)</b><br><br><b>08(delayed)</b> |

| Field Values for Call Type 3 |                     |                                                                                                                                                                                                                                                                                                                                   |
|------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery                                                                                                                                                                                                                                                                                                                   |
| EC (23)                      | 01 (no error)       | <b>03(excess invalid passcode attempts)</b><br><br><b>06(destination telephone was busy)</b><br><br><b>07(call was not answered)</b><br><br><b>09(originating mailbox is bad)</b><br><br><b>10(bad destination telephone number)</b><br><br><b>12(rejected by recipient)</b><br><br><b>21(message is bad or no longer exists)</b> |

Other useful fields:

**TMBX (9)** Mailbox number of the message originator **TNUM (11)** Destination telephone number dialed by the server **MSG (12)** The server's speech message number

### Call Type 5 (Paging or Message Delivery)

Call Type 5 can be either a paging or a message delivery call. Both types involve the server calling a telephone number specified by the user. Any field not specified below as specifically paging or message delivery applies to any Call Type 5 record. In the Error Code field, the first three errors apply to paging and message delivery, and the last three errors only to message delivery.

The paging portion of Call Type 5 is similar to Call Type 2. Fields vary for the Message Delivery portion. Message delivery is also similar to Call Type 2, but since the called party has to log into a mailbox and enter a passcode, the resulting field values are different.



| Field Values for Call Type 5 |                                                                    |                                                             |
|------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery                                                | Failed Delivery                                             |
| AT (14)                      | 08 (delivery) <i>Paging</i>                                        | 08 (delivery) <i>Paging</i>                                 |
|                              | 02(user logged in, got msg) <i>Message Delivery</i>                | 01(call received by non-subscriber) <i>Message Delivery</i> |
|                              | 15(user logged in, got msg, bill flag set) <i>Message Delivery</i> |                                                             |
| TT (15)                      | 01 (success)                                                       | 03 (failure) <i>Paging</i>                                  |
|                              |                                                                    | 04(disconnected) <i>Message Delivery</i>                    |
| EC (23)                      | 01 (no error)                                                      | 06(destination telephone was busy)                          |
|                              |                                                                    | 07(call was not answered)                                   |
|                              |                                                                    | 09(mailbox is bad or doesn't exist)                         |
|                              |                                                                    | 10(bad destination telephone number)                        |
|                              |                                                                    | 03(excess invalid passcodes) <i>Message Delivery</i>        |
|                              |                                                                    | 04(timeout or no response) <i>Message Delivery</i>          |

Other useful fields for both Paging and Message Delivery:

**TMBX (9)** Mailbox number of the message originator **TNUM (11)** Destination telephone number dialed by the server **MSG (12)** The server's speech message number

These fields are only used in Message Delivery calls:

**MP (19)** Number of messages played or received

If a paging message is unsuccessful, any retry of the message creates an additional Type 5 record.

You can tell the difference between a Paging and a Message Delivery record by checking if any of the above four fields are greater than zero. Look for the Messages Played (MP) field, as the purpose of Message Delivery is to notify a user that there are unplayed messages in the mailbox.

### Call Type 7 (Outgoing NP Net)

Call Type 7 is similar to Call Type 2, except it involves networking. This call should be preceded by a header record of Call Type 18 or another Call Type 7. It should be followed by another Call Type 7 or a disconnect of Call Type 22. Verify that these calls occurred on the same line number by checking the PORT field.

| Field Values for Call Type 7 |                     |                                                                                                   |
|------------------------------|---------------------|---------------------------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery                                                                                   |
| AT (14)                      | 08 (delivery)       | 08 (delivery)                                                                                     |
| TT (15)                      | 01 (success)        | 03 (failure)                                                                                      |
| EC (23)                      | 01 (no error)       | <b>04(timeout occurred)</b><br><br><b>08(invalid destination node)</b><br><br><b>23(bad link)</b> |

Other useful fields:

**FMBX (8)** Mailbox number of the message originator **TMBX (9)** Destination mailbox number **TNUM (11)** Network node number of destination mailbox **MSG (12)** Message number of the message sent

### Call Type 8 (Cut-Through Paging)

Call Type 8 is similar to Call Type 5 (paging). You should examine the telephone number called to determine long-distance charges, if any.

| Field Values for Call Type 8 |                     |                 |
|------------------------------|---------------------|-----------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery |
| AT (14)                      | 08 (delivery)       | 08 (delivery)   |
| TT (15)                      | 01 (success)        | 03 (failure)    |

| Field Values for Call Type 8 |                     |                                                                                                                                                                               |
|------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                 | Successful Delivery | Failed Delivery                                                                                                                                                               |
| EC (23)                      | 01 (no error)       | <b>04(timeout or no response)</b><br><br><b>06(destination telephone was busy)</b><br><br><b>07(call was not answered)</b><br><br><b>10(bad destination telephone number)</b> |

Other useful fields:

**TMBX (9)** Mailbox number of the message originator. **TNUM (11)** Destination telephone number dialed by the server.

### Call Type 10 (Incoming NP Net)

Call Type 10 is similar to Call Type 1, except it involves networking. This call should be preceded by a header record of Call Type 19 or another Call Type 10. It should be followed by another Call Type 10 or a disconnect of Call Type 23. Verify that these calls occurred on the same line number by checking the PORT field.

| Field Values for Call Type 10 |                                                                                                                                                               |                                                                                                                                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                  | Successful Delivery                                                                                                                                           | Failed Delivery                                                                                                                                               |
| AT (14)                       | <b>08 (delivery)</b><br><br><b>11(receipt update)</b><br><br><b>12(name broadcast)</b><br><br><b>13(greet broadcast)</b><br><br><b>14(passcode broadcast)</b> | <b>08 (delivery)</b><br><br><b>11(receipt update)</b><br><br><b>12(name broadcast)</b><br><br><b>13(greet broadcast)</b><br><br><b>14(passcode broadcast)</b> |
| TT (15)                       | 01 (success)                                                                                                                                                  | 03 (failure)                                                                                                                                                  |

| Field Values for Call Type 10 |                     |                                                                                                                                                                                        |
|-------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                  | Successful Delivery | Failed Delivery                                                                                                                                                                        |
| EC (23)                       | 01 (no error)       | <b>04(timeout occurred)</b><br><br><b>09(mailbox bad or no longer exists)</b><br><br><b>17(delivery of msg to destination mbox denied)</b><br><br><b>22(destination mbox was full)</b> |

Other useful fields:

**FMBX (8)** Mailbox number of the message originator **TMBX (9)** Destination mailbox number **FNUM (10)** Message originator's network node number **TNUM (11)** Network node number of destination mailbox **MSG (12)** Received message's number, created by the server

### Call Type 11 (Mailbox Delete on Purge)

Call Type 11 is not really a call type, but a status update. A CDR record with a Call Type 11 indicates that the mailbox associated with it (FMBX) was purged either because its messages were played or because its unplayed messages retention limit (in its LCOS) had expired. This is associated with the NP OnDemand optional feature, where mailboxes are only created as callers request them.

See "Call Types 12 Through 17" for additional information on how CDR handles the NP OnDemand feature. For more information on NP OnDemand, refer to its documentation.

| Field Values for Call Type 11 |                     |                 |
|-------------------------------|---------------------|-----------------|
| CDR Field, #                  | Successful Delivery | Failed Delivery |
| AT (14)                       | 08 (delivery)       | 08 (delivery)   |
| TT (15)                       | 01 (success)        | 03 (failure)    |
| EC (23)                       | 01 (no error)       |                 |

Other useful fields:

FMBX (8) Mailbox number deleted

### Call Types 12 Through 17 (Incoming)

Call Types 12 through 17 produce the same field results, so they are presented as one type in this section. Table 6-12 shows the distinction between these six Call Types.

| Call Types 12 Through 17 |                                                            |
|--------------------------|------------------------------------------------------------|
| Call Type                | Definition                                                 |
| 12                       | Incoming directly to mailbox                               |
| 13                       | Incoming directly to mailbox with no passcode required     |
| 14                       | Incoming hard-forwarded to mailbox                         |
| 15                       | Incoming busy-forwarded to mailbox                         |
| 16                       | Incoming forwarded to mailbox on Ring No Answer            |
| 17                       | Incoming indirect (tree/chain, recycle to another mailbox) |

**Note:** In most other call types, the standard result for the access type field (AT, 14) is 08 (delivery). This result should *not* occur with the Incoming call types.

These call types have a number of possible results for access type and termination type. Use the error code to determine call success or failure.

The field values for Call Types 12-17 are listed in Table 6-16. Other useful fields for Call Types 12 through 17 are:

**FMBX (8)** Mailbox number (if available) of mailbox accessed/entered **TMBX (9)** Mailbox number of mailbox accessed or destination mailbox **TNUM (11)** Mailbox/extension number transferred to after TMBX **MSG (12)** Message number of the last message recorded or accessed **ME (16)** Invalid mailbox entries **PE (17)** Invalid passcode entries **MS (18)** Number of messages sent **MP (19)** Number of messages played/received **MD (20)** Number of messages deleted **MK (21)** Number of messages kept **TA (22)** Number of failed transfer attempts **P S (26)** Number of cut-through pages initiated by the caller

| Field Values for Call Types 12-17 |                                          |                                          |
|-----------------------------------|------------------------------------------|------------------------------------------|
| CDR Field, #                      | Successful Delivery                      | Failed Delivery                          |
| AT (14)                           | 01(outside caller)                       | 01(outside caller)                       |
|                                   | 02(mailbox user/<br>subscriber)          | 02(mailbox user/<br>subscriber)          |
|                                   | 03(mobile DID user)                      | 03(mobile DID user)                      |
|                                   | 04(template mailbox<br>caller)           | 04(template mailbox<br>caller)           |
|                                   | 05This value no longer<br>used           | 05This value no longer<br>used           |
|                                   | 07(outside caller to<br>Receptionist )   | 07(outside caller to<br>Receptionist )   |
|                                   | 09(user accessed Admin-<br>by-phone)     | 09(user accessed Admin-<br>by-phone)     |
|                                   | 10This value no longer<br>used           | 10This value no longer<br>used           |
|                                   | 40(mailbox on demand)                    | 40(mailbox on demand)                    |
| TT (15)                           | 01 (success)                             | 02(caller/user hang up)                  |
|                                   | 02(caller/user hang up)                  | 03 (failure)                             |
|                                   | 04(NuPoint Voice<br>disconnected call)   | 04(Server disconnected<br>call)          |
|                                   | 05(caller/user transfer to<br>extension) | 05(caller/user transfer to<br>extension) |
|                                   | 06(caller/user transfer to<br>attendant) | 06(caller/user transfer to<br>attendant) |
|                                   | 07(caller/user transfer to<br>E-mail)    | 07(caller/user transfer to<br>E-mail)    |
|                                   | 08(transfer to another<br>mailbox)       | 08(transfer to another<br>mailbox)       |

| Field Values for Call Types 12-17 |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                      | Successful Delivery | Failed Delivery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| EC (23)                           | 01 (no error)       | <b>02(too many bad mailbox entries)</b><br><br><b>03(too many bad passcode entries)</b><br><br><b>04(time out occurred)</b><br><br><b>05(too many bad access code entries)</b><br><br><b>13(mailbox in use when user called)</b><br><br><b>14(could not transfer to extension)</b><br><br><b>15(could not transfer to attendant)</b><br><br><b>16(could not transfer to E-mail)</b><br><br><b>17(access to mailbox was denied)</b><br><br><b>20(time limit reached)</b><br><br><b>22(destination mailbox was full)</b> |

**NP OnDemand** is an Optional Feature. When a mailbox is created, the access type is 40, with an error code of 0 showing successful creation. The first record for an NP OnDemand mailbox contains the first message sent. Subsequent messages to this mailbox have access types used for existing messages. When the mailbox is purged, the server creates a CDR record showing Access Type 40 and Call Type 11.

For more information on the feature, refer to the NP OnDemand documentation.

### Call Type 18 (Outgoing NP Net Setup)

Call Type 18 is similar to Call Type 2, except for the network node number. However, it is used as a header record, and should be followed by one or more Call Type 7 (Outgoing NP Net call) records, and finally a Call Type 22 (Outgoing NP Net disconnect). Your

billing application should log all such records on the same line number, so check the PORT field.

| Field Values for Call Type 18 |                       |                                                                                                                                                                                                                                                     |
|-------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDR Field, #                  | Successful Call Setup | Failed Call Setup                                                                                                                                                                                                                                   |
| AT (14)                       | 08 (delivery)         | 08 (delivery)                                                                                                                                                                                                                                       |
| TT (15)                       | 01 (success)          | 03 (failure)                                                                                                                                                                                                                                        |
| EC (23)                       | 01 (no error)         | <b>04(timeout occurred)</b><br><br><b>06(destination server was busy)</b><br><br><b>07(destination server did not answer)</b><br><br><b>08(invalid destination node)</b><br><br><b>23(could not establish network link with destination server)</b> |

Other useful fields:

**TNUM (11)** Network node number of destination mailbox

### Call Type 19 (Incoming NP Net setup)

Call Type 19 is similar to Call Type 1, except for the network node number. However, it is used as a header record, and should be followed by one or more Call Type 10 (Incoming NP Net call) records, and finally a Call Type 23 (Incoming NP Net disconnect).

| Field Values for Call Type 19 |                       |                                                                                                   |
|-------------------------------|-----------------------|---------------------------------------------------------------------------------------------------|
| CDR Field, #                  | Successful Call Setup | Failed Call Setup                                                                                 |
| AT (14)                       | 08 (delivery)         | 08 (delivery)                                                                                     |
| TT (15)                       | 01 (success)          | 03 (failure)                                                                                      |
| EC (23)                       | 01 (no error)         | <b>04(timeout occurred)</b><br><br><b>23(could not establish network link with remote server)</b> |

Other useful fields:



**FNUM (10)** Network node number of message originator (if available)

### Call Types 22, 23 (Outgoing/Incoming NP Net disconnect)

Call Types 22 and 23 always report a successful disconnect. The fields should yield the standard results. Call Type 22 should be preceded by a Call Type 18 (Outgoing NP Net call setup) record and one or more Call Type 7 (Outgoing NP Net call) records. Call Type 23 should be preceded by a Call Type 19 (Incoming NP Net call setup) record and one or more Call Type 10 (Incoming NP Net call) records. In tracking these call chains, verify that they all occurred on the same line number (PORT field).

| Field Values for Call Types 22-23 |                       |
|-----------------------------------|-----------------------|
| CDR Field, #                      | Successful Disconnect |
| AT (14)                           | 08 (delivery)         |
| TT (15)                           | 01 (success)          |
| EC (23)                           | 01 (no error)         |

Other useful fields:

**TNUM (11)** Network node number of dest. mailbox (for outgoing calls) **FNUM (10)** Network node number of originator (for incoming calls)

### Call Types 24 Through 27 (E-Mail)

Call Types 24 through 27 are used with e-mail applications. CDR records for e-mail applications are generated by specific applications, with format specific to the application. Refer to the documentation for e-mail applications for more information. Additional call types are reserved to allow for future and custom e-mail applications. Contact your support representative for more information on using CDR with e-mail.

| Field Values for Call Type 24-27 |                                                                                                                                |                    |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------|
| CDR Field, #                     | Success                                                                                                                        | Failure            |
| AT (14)                          | <b>05</b> This value no longer used<br><br><b>10</b> This value no longer used<br><br><b>16-22</b> These values no longer used | 00 (unknown error) |
| TT (15)                          | 07(Caller transferred to e-mail)                                                                                               | 03 (failure)       |

| Field Values for Call Type 24-27 |               |                                                                           |
|----------------------------------|---------------|---------------------------------------------------------------------------|
| CDR Field, #                     | Success       | Failure                                                                   |
| EC (23)                          | 01 (no error) | <b>16(E-mail access failed)</b><br><br><b>19This value no longer used</b> |

Other useful fields:

**TNUM (11)** Network node number of dest. mailbox (for outgoing calls) **FNUM (10)** Network node number of originator (for incoming calls)

### Call Type 28 (NP View)

Call Type 28 shows a call made through the NP View application. Here are the possible values.

| Field Values for Call Type 28 |                          |                 |
|-------------------------------|--------------------------|-----------------|
| CDR Field, #                  | Success                  | Failure         |
| AT (14)                       | 06 (session over TCP/IP) |                 |
| TT (15)                       | 01 (success)             | 04 (disconnect) |
| EC (23)                       | 00 (unknown error)       |                 |

Other useful fields:

**TMBX (9)** Destination mailbox **FNUM (10)** Network node number of originator (for incoming calls)

#### Note:

The PORT field should contain the low-word of the IP address instead of a triplet.

## 1.4.3.4.3 Hacker Detection

You can monitor attempted server break-ins with CDR. If the termination type (Field 15 or TT) equals 4 (Caller/user disconnected by the server), then the mailbox fields (FMBX and TMBX) will have invalid numbers you can examine. The invalid mailbox and passcode fields (Fields 16 and 17, ME and PE) would have entries. FMBX, TMBX and TNUM then contain the three invalid numbers. Fields names are specified in the [CDR Fields](#) table, and termination types in the [CDR Termination Types](#) table. An example of how the CDR output might look is shown here:

275284 071892 025236 025422 0401 0000 0106 000000000000 **00000019999**  
**00000012345** 000000000000 **00000054321** 12 01 **04 02 01** 00 00 00 00 00 01 00 00 00

## 1.4.4 Call Director

### 1.4.4.1 Description

Call Director is an optional feature that you can use to create automated attendant and call processing applications, known as *call flows*, for your organization, departments, and for individual mailboxes and extensions. A call flow is a collection of call-processing actions that control how an incoming call is handled. Without Call Director, NuPoint Unified Messaging simply sends an incoming call to the called person's voice mailbox.

Call flow actions direct NuPoint Unified Messaging to:

- Play a message
- Perform a call transfer
- Forward a call to a specified voice mailbox, extension, external phone, or the Dial-by-Name application
- Send a page or a text message, or
- Hang up

Call flow owners can be either the mailbox owner or the System Administrator. End users can program personal call flows that are associated with their own voice mailboxes. The Administrator can manage personal call flows as well as corporate call flows that are applied to line groups. The Administrator is also responsible for the global configuration settings that determine how individual call flows work. These settings include call transfer sequences, valid extension lengths, attendant's extension number, and time-outs.

You can configure Call Director using either the Text console or the Web console but all interactions with Call Director are made using the **Web Console** and the Telephone User Interface (TUI). The TUI is used for audio recording and to enable and disable the "Override" call flow action.

Call Director functionality includes the ability to edit line group configuration, edit a call flow, create call flow templates and generate Call Director reports.

**Note:**

Call redirection features such as call forwarding can be overridden only from Call Director, not from the [NP Receptionist](#).

## Conditions

Call Director is a licensed option activated by FCOS bit **292** (Enable NP Call Director). Each desktop with the required FCOS bit consumes one license. If you have 400 Call Director licenses and you configure 500 users with FCOS 292, only 400 of those users have access to Call Director.

**Note:**

Call Director replaces NP Agent. NP Agent and Call Director are NOT compatible; any NuPoint Agent call box applications you want to use in Release 9.0 or later, must be recreated in Call Director.

### 1.4.4.2 Call Director - Configuration

To configure the Call Director optional feature:

1. Make Call Director available to users by assigning an FCOS that includes feature bit **292** (Enable NP Call Director). This bit causes the Call Director tab to be displayed in the Web View interface.

**Note:**

Ensure that you have adequate Call Director licenses before adding the bit to an FCOS. Call Director is licensed on a per-mailbox basis. If you assign the Call Director FCOS to more mailboxes than you have Call Director licenses for, then the feature may work only intermittently. To avoid this situation, verify the number of Call Director licenses you have assigned before assigning the FCOS to mailboxes.

To verify how many licenses you have:

1. Use the **Text console** to run the [Call Director Database Report](#). This will give you listings of how many Call Director Mailboxes are in use and which mailboxes are using them.

**Note:**

When you assign an FCOS containing the Call Director bit **292** (Enable NP Call Director) to a mailbox, the mailbox is not immediately enabled with the Call Director feature. A Call Director Database update (below) is required to enable Call Director for new users.

To update the Call Director database:

2. You can wait for the automatic update that is done at midnight every night, or you can perform a manual update. To perform a manual update from the **Text console** Main menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then **(H) Update Call Director Database**.
3. Create a Line Group for Call Director.

### 1.4.4.3 Call Director - Operation

To access Call Director in the Web Console:

1. Access the Web Console.
2. In the Address bar of your browser, type the following URL, substituting the actual hostname or IP address of your NuPoint UM server:  
  
**`http://<hostname or IP address of server>/npm-admin`**
3. On the Web Console login page, enter your Administrator user name and password.
4. In the navigation tree, click **Call Director**. From here you can configure properties and manage call flows.

**Note:**

For detailed instructions, see the **Call Director** section of this guide, located directly after this (Optional Features) section.

To access Call Director TUI functions:

1. Log into your NuPoint UM Administrator voice mailbox.

## 2. Press \*.

- Do one of the following:
- To administer templates, press **2**.
- To administer user call flows, press **8**.
- To administer line group call flows, press **5**
- Do one of the following:
- Enter the voice mailbox number of the user whose personal call flow you want to modify.
- Enter the line group number of the corporate call flow that you want to modify.
- Press **#**, and then follow the voice mail prompts to do one or more of the following.
- Enable or disable Override.
- Listen to a current message, or record a new message.

For more information, see the *Mitel TUI Quick Reference Guide* available at Mitel Online.

## 1.4.5 Competitive TUI Emulation

### 1.4.5.1 Competitive TUI Emulation - Description

The Competitive TUI Emulation feature provides a telephone user interface (TUI) that emulates the TUI of other commonly used voice mail systems. You can assign this feature to users who are familiar with a competitive TUI so that they do not need to learn the NuPoint Unified Messaging TUI. Users can use the Competitive TUI for common functions including playing, saving, making, forwarding, answering, and deleting messages, as well as reaching user options. Outside callers and administrators, however, must use the standard NuPoint Unified Messaging TUI.

This feature is controlled for individual mailboxes through FCOS feature bit **288**, Enable TUI Emulation and by the LCOS Prompt language selection, "TUI Emulation".

#### Conditions

Competitive TUI Emulation is not supported for use with

- The Administrator's mailbox
- Billing information enabled by feature bit 276
- The Enhanced Auto Wakeup feature of the [NP WakeUp](#) optional feature, enabled by feature bit 287
- The [Speech Navigation](#) feature, enabled by feature bit 99
- Feature bits 158 (Continue Sending Message), 276 (Press 0 for More Billing Info), 287 (Enable Enhanced Auto Wakeup), and 300 (Enable Secure Tutorial).

## Installation

You install the Competitive TUI Emulation option and the required prompts from the NuPoint UM software installation CD/DVD. Follow the instructions for [Optional Feature installation](#).

### 1.4.5.2 Competitive TUI Emulation - Configuration

To configure Competitive TUI Emulation, use the Text console:

1. [Customize an FCOS](#) to include feature bit **288** (Enable TUI Emulation).
2. [Create an LCOS](#) with the language set to **TUI Emulation**. Set any other LCOS settings required for the user.
3. For the required mailboxes, assign the customized FCOS and LCOS.

### 1.4.5.3 Competitive TUI Emulation - Operation

You can use the TUI Emulation feature to play, save, make, give, answer, and delete messages, or to reach the User Options menu.

To use the TUI:

1. Log in to your mailbox.
2. At the Main menu
  - Press **1** to play messages.
  - Press **2** to make a message.
  - Press **4** to reach the User Options menu.
  - Press **9** to log out and exit.
3. While playing a message, you can
  - Press **1** to rewind the current message.
  - Press **2** to toggle between pausing and restarting the current message.
  - Press **3** to skip forward in the current message.
  - Press **5** to hear the date and time for the current message.
  - Press **9** to return to the Main menu.
  - Press **0**, then **0** to reach the attendant.
  - Press **1**, then **1** to go back to the start of the current message.
  - Press **3**, then **3** to skip to the end of the current message.
  - Press **0** for help.

#### 4. After playing a message, you can

- Press **1** to play the next message.
- Press **4** to replay the current message.
- Press **5** to hear the date and time for the current message.
- Press **6** to forward the current message to another user.
- Press **7** to delete the current message.
- Press **7**, then **9** to delete the current message and exit to the Main menu.
- Press **8** to reply to the current message.
- Press **9** to save the current message.
- Press **9**, then **9** to save the current message and exit to the Main menu.
- Press **0**, then **0** to reach the attendant.
- Press **0** for help.

## 1.4.6 Cut-Through Paging

### 1.4.6.1 Cut-Through Paging - Description

Cut-through Paging (CTP) is an enhancement to the paging feature. CTP allows the caller/user to input a telephone number for the page recipient to call. The telephone number can be between 1 and 25 digits and is sent to the recipient's pager as part of the paging notification.

In addition, the CTP feature allows the page recipient the option of requesting a page notification receipt. If requested, a notification receipt is deposited in the recipient's mailbox after each cut-through page. A page notification receipt allows the recipient to keep a record, through NuPoint Voice messages, of all messages received.

Cut-through Paging is supported for the English language, only.

The CTP feature is configurable by Feature Class of Service (FCOS) bits. A page recipient's mailbox can be configured four different ways:

- **Method 1:** The mailbox can receive a telephone number OR a recorded message, but not both. Mailbox will not receive page notification receipts.
- **Method 2:** The mailbox can receive a telephone number, a recorded message, or both a telephone number and a recorded message. The mailbox will not receive page notification receipts.
- **Method 3:** The mailbox can receive a telephone number or a recorded message but not both. The mailbox will receive page notification receipts.
- **Method 4:** The mailbox can receive a telephone number, a recorded message or both. The mailbox will receive page notification receipts.



| Method | Telephone Number | Recorded Message | Both | Page Notification Receipts |
|--------|------------------|------------------|------|----------------------------|
| 1      | Y                | Y                | N    | N                          |
| 2      | Y                | Y                | Y    | N                          |
| 3      | Y                | Y                | N    | Y                          |
| 4      | Y                | Y                | Y    | Y                          |

CTP is supported for single-addressee messages only. Users creating multiple-addressee messages will not be able to access CTP.

Like all pages, the cut-through page is only sent when the current time is within the mailbox's configured page "start" time and "stop" time window. In addition, the CTP recipient is paged once only.

Page notification receipts are not supported for broadcast mailboxes.

### 1.4.6.2 Cut-Through Paging - Configuration

CTP is controlled at the mailbox level through FCOS bits. There are no other configuration changes to the system - the NuPoint Voice system and Pager line groups are both configured normally.

#### CTP-specific FCOS Bits

The CTP FCOS bits are as follows:

- **171 Cut-through Paging:** When added to a mailbox's FCOS, it activates CTP for the mailbox. The caller/user can leave a telephone number or a message but not both telephone number and a message at the same time.
- **172 Cut-through Paging and Messaging:** When added to a mailbox's FCOS, it activates CTP for the mailbox. The caller/user can leave a telephone number, a message, OR both a telephone number and a message.
- **173 Receive Cut-through page Notify Receipt:** When added to a mailbox's FCOS, the mailbox will receive a notification receipt for each CTP page. Otherwise, the mailbox will not receive a notification receipt for each CTP page.

#### Other FCOS Bits

Other FCOS bits also affect the functionality of the CTP feature:

- **70 User Options Menu** and **77 Change Pager Schedule:** CTP paging is an extension of regular paging, therefore, paging must also be configured.
- **10 Enhanced Outcall Paging Options:** English prompts. CTP is only supported in English, therefore, the English prompts FCOS bit should be set.

- **4 Outside Caller Functions:** If On, the caller must enter the feature activation key ("1" the 4 key) to activate CTP. If Off, the caller can enter the telephone number directly, without using the feature activation key.
- **5 Play Outside Caller Menu Prompts:** If the outside caller menu is off, the outside caller will not receive outside caller function prompts. Note FCOS bit 5 requires that FCOS bit 4 be set.
- **75 Audit Receipt Message:** If not configured (not enabled), the page recipient configured for page receipt notification will not be able to play the message associated with the page receipt. A mailbox configured with page receipt notification should be configured with FCOS bit 75 set on.

## Configuring a CTP Mailbox

To configure a CTP Mailbox:

1. Define an FCOS for CTP (see [Related Topics](#)):
2. Copy/add all FCOS bits from your regular pager mailbox's FCOS to the CTP FCOS.
3. If not already included, add FCOS bit **10** (Enhanced Outcall Paging Options: English prompts) to the CTP FCOS. This is because the feature is only supported in English. It is a good idea to delete all other language prompts from the CTP FCOS.
4. Add the required CTP features using the feature bits from the list below:
  - **171:** A mailbox which can receive a telephone number or a recorded message but not both; no page notification receipt.
  - **172:** A mailbox which can receive a telephone number and/or a recorded message; no page notification.
  - **171 & 173:** A mailbox which can receive a telephone number or a recorded message but not both; with page notification receipt.
  - **172 & 173:** A mailbox which can receive a telephone number and/or a recorded message; with page notification receipt.
5. Define a Mailbox.
6. Assign the CTP FCOS you defined in step 1 to the mailbox.
7. Set the message waiting type to "5". This is required for all pager mailboxes (CTP or regular).
8. Set all other pager parameters as usual.

### 1.4.6.3 Cut-Through Paging - Operation

There are five parts to the user interface for CTP:

- Mailbox Owner Greeting Setup
- Feature Activation Key
- Outside Caller Interface

- System User Interface
- CTP Recipient (Mailbox Owner) interface

## CTP Mailbox Owner Greeting Setup

The NuPoint Voice greeting does not prompt the caller to access CTP so the CTP mailbox owner's greeting should inform the caller that CTP is available.

## Feature Activation Key

The feature activation key defined for CTP is "I" (the 4 key) on the telephone set. This key is used by the caller/system user to access CTP.

## Outside Caller Interface

This section describes outside caller CTP access scenarios. Depending on mailbox configuration, the outside caller can access CTP at two different points within the NuPoint Voice session: immediately after the mailbox owner greeting OR after recording a message. As previously mentioned, it is the responsibility of the mailbox owner to inform the caller about CTP in his/her greeting.

### Scenario 1: Leave a telephone number (activate CTP), for a CTP Mailbox that has Outside Caller Functions On and Outside Caller Menu On.

1. Dial the desired party. If the called party is unavailable, you are forwarded to the NuPoint Voice system.
2. After the mailbox owner greeting, press "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
3. Enter your telephone number (1-25 digits) followed by a "#". If you do nothing, NuPoint Voice times out and prompts you again for the telephone number. After the second time out NuPoint Voice hangs up.
4. After the telephone number is entered, NuPoint Voice repeats the telephone number entered. NuPoint Voice prompts you with options as before; including the new option to delete and re-enter your telephone number.
5. If you do not wish to delete and re-enter your telephone number, skip to step 8.
6. To re-enter your telephone number, press "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
7. Enter your telephone number (1-25 digits) followed by a "#". After the telephone number is entered, NuPoint Voice plays it back.
8. At the prompt, enter "X" (the 9 key). NuPoint Voice confirms sending your telephone number with, "Your page sent."
9. Hang up.

## **Scenario 2: Leave a telephone number (activate CTP), for a CTP Mailbox which has Outside Caller Functions Off:**

1. Dial the desired party. If the called party is unavailable, you are forwarded to the NuPoint Voice system.
2. After the mailbox owner greeting, enter your telephone number (1-25 digits) followed by a "#". The feature activation key ("I")  
  
is not required when the outside caller functions are turned off. If you do nothing, NuPoint Voice assumes you are recording a message.
3. If a telephone number is entered, NuPoint Voice repeats the telephone number entered. NuPoint Voice confirms the sending of your telephone number with "Your page sent."
4. If the line group is configured for multiple messages, NuPoint Voice will prompt the caller to send another message or forward to the attendant. Otherwise, NuPoint Voice hangs up.
5. Hang up.

## **Scenario 3: Leave a telephone number after recording a message (Note: this option is only available if the CTP mailbox is configured with FCOS bit 172 and Outside Caller Functions On and Outside Caller Menu On)**

1. Dial the desired party. If the called party is unavailable, you are forwarded to the NuPoint Voice system.
2. After the mailbox owner greeting, record a message. NuPoint Voice prompts you with options as before; including the option to enter your telephone number.
3. Press "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
4. Enter your telephone number (1-25 digits) followed by a "#". If you do nothing, NuPoint Voice times out and prompts you again for the telephone number. After the second time out NuPoint Voice hangs up.
5. After the telephone number is entered, NuPoint Voice repeats the telephone number entered. NuPoint Voice prompts you with options as before; including the new option to delete and re-enter your telephone number.
6. If you do not wish to delete and re-enter your telephone number, skip to step 9.
7. To re-enter your telephone number, press "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
8. Enter your telephone number (1-25 digits) followed by a "#". After the telephone number is entered, NuPoint Voice plays it back.
9. At the prompt, enter "X" (the 9 key). NuPoint Voice confirms sending your telephone number with, "Your page sent."
10. Hang up.

**Scenario 4: Leave a telephone number after recording a message (Note: this option is only available if the CTP mailbox is configured with FCOS bit 172 and Outside Caller Functions Off):**

1. Dial the desired party. If the called party is unavailable, you are forwarded to the NuPoint Voice system.
2. After the mailbox owner greeting, record a message.
3. Enter your telephone number (1-25 digits) followed by a "#" before the end of recording timeout. If you do nothing, NuPoint Voice times out the recording. After the telephone number is entered, NuPoint Voice plays back the number.
4. NuPoint Voice confirms sending your telephone number and message with "Your message and page sent".
5. If the line group is configured for multiple messages, NuPoint Voice will prompt the caller to send another message or forward to the attendant. Otherwise, NuPoint Voice hangs up.
6. Hang up.

**Scenario 5: Leave a telephone number before recording a message. (Note: this option is only available if the CTP mailbox is configured with FCOS bit 172 and Outside Caller Functions On and Outside Caller Menu On.)**

1. Dial the desired party. If the called party is unavailable, you are forwarded to the NuPoint Voice system.
2. After the mailbox owner greeting, enter "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
3. Enter your telephone number (1-25 digits) followed by a "#". If you do nothing NuPoint Voice times out and prompts you again for the telephone number. After the second time out NuPoint Voice hangs up. After the telephone number is entered, NuPoint Voice plays it back.
4. At the prompt, press "D" (the 3 key). You are prompted to leave a message.
5. Record a message. NuPoint Voice confirms the completion of your recording.
6. At the prompt, enter "X" (the 9 key) to exit.
7. NuPoint Voice confirms the sending of your telephone number and message with "Your message and page sent."
8. Hang up.

**Scenario 6: Leave a message only, dial the party as always and record your message after the NuPoint Voice recording beep.**

**System User Interface**

The CTP feature is only available for single-addressee messages. It is not available for multiple-addressee messages.

**Scenario 1: Leave a telephone number (activate CTP):**

1. Dial NuPoint Voice and enter as a system user.
2. Select to make a new message as usual, however, address the message to one addressee only.
3. After the recording beep, enter "I" (the 4 key). NuPoint Voice prompts you to leave your telephone number.
4. Enter your telephone number (1-25 digits) followed by a "#". If you do nothing NuPoint Voice times out and prompts you again for the telephone number. After the second time out NuPoint Voice returns to the "Make" menu.
5. After the telephone number is entered, NuPoint Voice repeats the telephone number entered. NuPoint Voice prompts you with options as before; including the new option to delete and re-enter your telephone number.
6. If you do not wish to delete and re-enter your telephone number, skip to step 9.
7. To re-enter your telephone number, press "I" (the 4 key). NuPoint Voice prompts you to leave a telephone number.
8. Enter your telephone number (1-25 digits) followed by a "#". After the telephone number is entered, NuPoint Voice plays it back.
9. At the prompt, press "X" (the 9 key). NuPoint Voice confirms sending your telephone number with "Your page sent."
10. Hang up.

**Scenario 2: Leave a telephone number after recording a message (Note: this option is only available the CTP mailbox is configured with FCOS bit 172):**

1. Dial NuPoint Voice and enter as a system user.
2. Select to make a new message as usual, however, address the message to one addressee only.
3. Record your message. NuPoint Voice prompts you to leave your telephone number.
4. Press "I" (the 4 key). NuPoint Voice prompts you to leave your telephone number.
5. Enter your telephone number (1-25 digits) followed by a "#". If you do nothing NuPoint Voice times out and prompts you again for the telephone number. After the second time out NuPoint Voice returns to the "Make" menu.
6. After the telephone number is entered, NuPoint Voice plays it back.
7. At the prompt, press "X" (the 9 key). NuPoint Voice confirms sending your telephone number and message with "Your message and page sent."
8. Hang up.

**Scenario 3: Leave a message only, enter NuPoint Voice as a system user and address and record you message as always.**

## CTP Recipient Interface

The User Interface for the CTP recipient is divided into two areas: Pager Interface and Mailbox Interface. The Pager Interface describes what CTP recipients receive through their pagers. The Mailbox Interface describes what CTP recipients receive in their mailboxes.

### CTP Recipient Pager Interface

The cut-through page is only sent when the current time is within the mailbox's configured page "start" time and "stop" time window. The cut-through page will be sent only once (pager frequency = 1). If the cut-through page is unsuccessful, then the page will follow the regular page recovery process as defined for the recipient's mailbox.

The telephone number entered by the caller/user will be sent as a post-pager string prefix with a "greet" command. The "greet" command signals NuPoint Voice not to send the telephone number until the pager has answered. The telephone number will override the recipient's default post-pager string (predefined in the mailbox configuration). If the recipient's pager is analog, the pager unit beeps and then plays the DTMF tones for the telephone number to call. If the recipient's pager is digital, the digital readout displays the telephone number to call. If the recipient's pager is voice, the pager says "Please call NNX-XXXX,," where NNX-XXXX is the telephone number entered by the caller/user.

If the page recipient's mailbox is configured for notification receipt, the recipient will receive one page if the caller/user leaves both a telephone number and a message, however, if the page recipient's mailbox is configured for no notification receipt, the recipient will be paged twice if the caller/user leaves both a telephone number and a message—once for the telephone number and once for the message.

### CTP Recipient Mailbox Interface

The messages received in the CTP recipient's mailbox depend on the caller/user action and the mailbox configuration.

#### Case 1 - Caller/user leaves only a telephone number:

- If the mailbox is configured for no page notification receipt, the mailbox will have no page notification receipt and no message.
- If the mailbox is configured for page notification receipt, the mailbox will have one page notification receipt.

#### Case 2 - Caller/user leaves only a recorded message:

- If the mailbox is configured for no page notification receipt, the mailbox will have one message.
- If the mailbox is configured for page notification receipt, the mailbox will have one message.

**Case 3** caller/user leaves a telephone number and a recorded message:

- If the mailbox is configured for no page notification receipt, the mailbox will have no page notification receipt and one message.
- If the mailbox is configured for page notification receipt, the mailbox will have one page notification receipt and no message.

### NuPoint Voice Interface

CTP results in two NuPoint Voice interface changes for the CTP mailbox owner.

1. When the CTP mailbox owner accesses NuPoint Voice, the greeting now lists the number of page receipts, number of unplayed messages, and the total number of messages. If there are no page receipts, the greeting will list the number of unplayed messages and the total number of message, as before.
2. When the CTP mailbox owner listens to the page notification receipt, NuPoint Voice says:

"Receipt for page received <time stamp>. You were paged by NNX-XXXX. <recorded message>."

<time stamp>: gives the time the receipt was received.

<recorded message>: plays the recorded message. If nothing was recorded, <recorded message> will be empty.

## 1.4.7 Language Prompts

### 1.4.7.1 Overview - Language Prompts

#### Description

Your NuPoint UM base license provided up to three "full sets" of system prompts in different languages, along with "overlay" prompts that can customize the basic prompts. The default language for NuPoint UM is North American English and this full set is automatically installed when you install NuPoint UM. Your base license then allows you to install up to two other languages. If more languages are required, you may license and install a maximum of 25 language prompt sets.

#### Prompt Languages

Prompts are available in multiple languages as well as a "Numeric Full Set", which supplies the full prompt set with numerical values, and counts as a separate language license.



If your system needs to use a language other than NA English, and you have a spare language license, you can install the full set language prompt software blade. To uninstall a language used in a line group or LCOS language, you must manually update the language selected in the line group or LCOS. (For detailed instructions on how to manage software, refer to the *NuPoint Unified Messaging Technician's Handbook*.)

## Overlay Prompts

NuPoint UM also provides prompt overlays, which are customized prompt sets that replace certain prompts in the base language. For example, there are many customized hotel overlays, each of which replaces the standard NuPoint UM prompt with a custom prompt for that particular hotel. (For example, "Welcome to the Message Center" may be replaced by "Welcome to the Holiday Inn Select Hotel".) Overlay prompts do not require licensing.

Numeric overlays replace all alphabetic prompts with numeric ones. (For example, "Press P to play the message." becomes "Press 7 to play the message." when a numeric overlay is applied.)

## Configuration

After the prompts have been installed on the system, they can be activated on the system in one of these ways:

- **Apply to Entire Line Group:**
  - Specify the default prompt languages for the entire line group. You can specify a single language for a unilingual system or five languages for a multilingual system. When users call a multilingual system and reach the Message Center auto attendant or NuPoint Receptionist application, they are asked to select their preferred language for NuPoint prompts. For example, if you call an English-French multilingual system, you will be asked to select either English or French. You will then receive prompts only in that language.
- **Apply to Individual Mailboxes:**
  - You can define a prompt language in an LCOS and then assign that LCOS to individual mailboxes; use this option if some users require a different language or prompt set. For example, you can install the optional Numeric Full Set prompt language along with the default mnemonic prompts ("Press P to play"). Control which users receive the "Press 7 to play" prompts by assigning the LCOS that contains the numeric prompt set to their mailboxes.

## Operation

Mailbox settings always override the Line Group setting. For example, if mailbox 2002 (French) calls in to Line Group 1 (English), Line Group 1 responds with a French prompt.

Mailboxes that have an LCOS setting of "default" always receive prompts in the language assigned to the Line Group.

Callers who do not have a mailbox on the system are handled differently depending on the Line Group configuration:

- **Unilingual Service** - If the line group has one prompt language, callers are greeted initially in that language. The language of subsequent prompts is determined by the mailbox number they select.
- **Multilingual Service** - If the line group has two or more prompt languages, callers are asked to select their preference. The language of subsequent prompts is determined by the language they select. If a mailbox number with a custom LCOS language setting is then selected, the prompt language is determined by the mailbox itself (not by the Line Group); this occurs because mailbox settings override the Line Group setting.

**Note:**

To override the LCOS mailbox settings (and have a multilingual system play prompts in the selected language rather than the mailbox language), assign an FCOS with feature bit 51, [Do Not Switch Languages for Outside Caller](#), to the mailbox.

**Prompts Example:**

ABC Company has two line groups that respond to incoming calls.

- Line **Group 1** provides unilingual service in French and has an LCOS with NA English assigned.
- Line **Group 2** provides multilingual service in English and French and has an LCOS with French assigned.

The company has the following internal mailboxes:

| Mailbox # | LCOS Language assigned: |
|-----------|-------------------------|
| 2000      | Default                 |
| 2001      | NA English              |
| 2002      | Canadian French         |

| When this Mailbox... | ...calls this Line Group... | ... prompts are in this language: |
|----------------------|-----------------------------|-----------------------------------|
| 2001 (English)       | 1 (English)                 | English                           |
| 2001 (English)       | 2 (English and French)      | English                           |
| 2002 (French)        | 1 (English)                 | French                            |

| When this Mailbox...                    | ...calls this Line Group...                      | ... prompts are in this language:                                                                                                                                 |
|-----------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Caller who has no mailbox on the system | 1 and then selects mailbox 2001 (English)        | Initial welcome message is in French , and asks the caller to select a mailbox. After the caller selects 2001, prompts change to English to match the mailbox.    |
| Caller who has no mailbox on the system | 2 and then selects French as the prompt language | Initial welcome message is in English and French, and asks the caller to select a language preference. After the caller selects French, prompts change to French. |

## Text to Speech Prompts

The Text to Speech prompts language provides the conversion of email text to spoken language in the Advanced UM feature and also provides prompts in the Speech Auto Attendant feature. These prompts are mandatory for both features.

### 1.4.7.2 Web Console

#### 1.4.7.2.1 Activate Language Prompts

You can modify a line group or LCOS so that users receive prompts in an alternate language. In addition, you can specify up to five languages for a line group in order to create a "Multilingual Service" that asks users to select their preference (for example, English, German and French) when they initially reach the Message Center or Receptionist application.

#### Note:

- Before you can specify alternate language(s) for a line group or an LCOS, you must install the alternate-language prompt software.
- To program language prompts for a Centrex or UI tenant group, you must use the Text Console. See [Activate Language Prompts for Tenant Groups](#).

## LCOS Language Configuration with One Language

To program an LCOS with a single alternate language:

1. In the navigation tree, select **Class of Service > Limits COS**.
2. Select the LCOS you want to modify and then click **Edit**.
3. In the Limits list box, select **Language**.
4. In the **Language** list, select the language to assign to this LCOS.

5. Click **Save**.
6. Assign the custom LCOS to the selected mailboxes.

## Line Group Language Configuration with One Language

To program a line group with a single alternate language for unilingual service:

1. In the navigation tree, select **Active Configuration > Line Groups**.
2. Select the checkbox beside the line group whose languages you want to configure.
3. Click **Edit**.
4. Under **Prompt Language**, select the desired language from the **Language 1** drop-down box.

Leave all other Prompt Language fields disabled.

5. Click **Save**.

## Line Group Language Configuration with Up To Five Languages (Multilingual Service)

To program a line group with five alternate languages for multilingual service:

1. In the navigation tree, select **Active Configuration > Line Groups**.
2. Select the checkbox beside the line group whose languages you want to configure.
3. Click **Edit**.
4. Select the desired primary language from the **Language 1** drop-down box.
5. Select up to four other languages from the **Language 2-5** drop-down boxes.
6. For the **Language Selection Prompt**, do one the following:

- Select **Automatic** to have the language selection prompt generated automatically based on the languages specified. To suppress the prompt for the primary language (and keep the message brief), select **Say 2nd language prompt only**.

—OR—

- Select **Custom** to use a customized language selection prompt.
  - Record the prompt in the specified languages (for example, "For service in English, press 1. Pour le service en français, appuyez sur 2.") in 8 KHz, 8-bit, mono u-law format and save the file to an accessible location.
  - Click **Import**, browse to the location of the file, select it and click **OK**.
7. Enter the **Language Selection Timeout**, in seconds (default is 3 seconds). If a caller fails to select a language within the timeout period, the system will automatically use the primary language.
  8. Click **Save**.

9. Record a multilingual corporate greeting for the NuPoint system hunt group pilot number through the NuPoint administrator mailbox. Record the greeting in the primary language followed by the same greeting in the other languages; for example: "Welcome to Mitel Networks; Bienvenue à Mitel Networks; Bienvenido a Mitel Networks."
10. Call into the NuPoint system hunt group pilot number and ensure that the prompts are played correctly.
11. Instruct mailbox users to record multilingual greetings for their mailboxes. Again, users should record their mailbox greetings in the primary language followed by the same greeting in the other languages; for example: "You have reached the voice mailbox of Jean Julian, please leave a message; Vous avez atteint la boîte aux lettres de Jean Julien, s'il vous plaît laissez un message; Usted ha llegado al buzón de voz de Jean Julian, por favor deje un mensaje."

When an external caller connects with the voice mail hunt group pilot number, the system plays your multilingual corporate greeting and then prompts the caller to select the desired language. For example: "Welcome to Mitel Networks; Bienvenue à Mitel Networks. For Service in English, press 1; Pour le service en français, appuyez sur 2; Para el servicio en español, presione 3."

When a caller reaches a user's mailbox, the system plays the multilingual mailbox greeting: "You have reached the voice mailbox of Jean Julian, please leave a message; Vous avez atteint la boîte aux lettres de Jean Julien, s'il vous plaît laissez un message; Usted ha llegado al buzón de voz de Jean Julian, por favor deje un mensaje."

The following conditions apply to the Multilingual Service:

- The multilingual service does not apply to Speech Auto Attendant (SAA).
- The multilingual service applies to calls to the NuPoint voice mail hunt group pilot number.
- Callers select multilingual prompts at the system-level only, not at the mailbox level.
- If a mailbox has a custom LCOS language setting, this overrides the Line Group language setting.
- The caller only selects the prompt language once, before the first system prompt is played.
- Mailbox owners are not prompted to select a prompt language when they log into their mailboxes.
- The system plays the prompt languages in the order they have been programmed. For example, if you select the English as the primary language, French as the secondary language, and Spanish as the tertiary language, the system-generated automatic prompt plays: "For service in English, press 1; Pour le service en français, appuyez sur 2; Para el servicio en español, presione 3."
- If the caller selects a language, terminates the call and then calls back again within sixty seconds, the system will remember the caller's preference and play prompts in

the previously selected language. If the caller waits longer than sixty seconds before calling back, the system will play the regular language selection prompt.

### 1.4.7.3 Text Console

#### 1.4.7.3.1 Activate Language Prompts for Tenant Groups

Use the text console to program language prompts for tenant groups associated with Centrex and Unified Integration applications. Use the [web console](#) for *all* other implementations.

##### Tenant Group Language Configuration with One Language

To program a Centrex or UI tenant group with a single alternate language for unilingual service:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(H) Configure Unified Integration**,
2. Select **(G) Tenant Group Number =** and enter a **number** (1-24) for the tenant group you want to program.
3. Select **(L) Default prompt language =** to display the tenant prompts languages menu.
4. Select **(P)** to display the primary prompt language selection menu.
5. Select a language option from the list.
6. Select **(X)** to exit and save your changes.

##### Tenant Group Language Configuration with Five Languages (Multilingual Service)

###### Note:

If you create [call flow](#) for a tenant group with multilingual service, you must set the Prompt Language to "Auto" and not include the "Language Router" action.

To program a Centrex or UI tenant group with a single alternate language for multilingual service:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**, and then **(H) Configure Unified Integration**,
2. Select **(G) Tenant Group Number =** and enter a **number** (1-24) for the tenant group you want to program.
3. Select **(L) Default prompt language =** to display the tenant prompts languages menu.

4. Select **(P)** to display the primary prompt language selection menu, and then select a language option from the list.
5. Select **(S)** to display the secondary prompt language selection menu, and then select a language option from the list.
6. Select **(X)** to exit and save your changes.
7. Record a multilingual corporate greeting for the NuPoint system hunt group pilot number through the NuPoint administrator mailbox. Record the greeting in the primary language followed by the same greeting in the other languages; for example: "Welcome to Mitel Networks; Bienvenue à Mitel Networks".
8. Call into the NuPoint system hunt group pilot number and ensure that the prompts are played correctly.
9. Instruct mailbox users to record multilingual greetings for their mailboxes. Again, users should record their mailbox greetings in the primary language followed by the same greeting in the other languages; for example: "You have reached the voice mailbox of Jean Julian, please leave a message; Vous avez atteint la boîte aux lettres de Jean Julien, s'il vous plaît laissez un message."

When an external caller connects with the voice mail hunt group pilot number, the system plays your multilingual corporate greeting and then prompts the caller to select the desired language. For example: "Welcome to Mitel Networks; Bienvenue à Mitel Networks. For Service in English press 1; Pour le service en français, appuyez sur 2."

When a caller reaches a user's mailbox, the system plays the multilingual mailbox greeting: "You have reached the voice mailbox of Jean Julian, please leave a message; Vous avez atteint la boîte aux lettres de Jean Julien, s'il vous plaît laissez un message."

The following conditions apply to the Multilingual Service:

- The multilingual service does not apply to Speech Auto Attendant (SAA).
- The multilingual service applies to calls to the NuPoint voice mail hunt group pilot number.
- Callers select multilingual prompts at the system-level only, not at the mailbox level.
- If a mailbox has a custom LCOS language setting, this overrides the tenant group language setting.
- The caller only selects the prompt language once, before the first system prompt is played.
- Mailbox owners are not prompted to select a prompt language when they log into their mailboxes.
- The system plays the prompt languages in the order they have been programmed. For example, if you select the English as the primary language and French as the secondary language, the system-generated automatic prompt plays: "For service in English, press 1; Pour le service en français, appuyez sur 2."
- If the caller selects a language, terminates the call and then calls back again within sixty seconds, the system will remember the caller's preference and play prompts in

the previously selected language. If the caller waits longer than sixty seconds before calling back, the system will play the regular multilingual greeting.

## 1.4.8 NP Fax

### 1.4.8.1 Description

#### 1.4.8.1.1 Overview

NuPoint Fax is an optional, software-only feature (no fax card required on the server) that allows NuPoint Voice users and outside callers to exchange faxes through user mailboxes and special mailboxes. NuPoint Fax provides a set of fax-related features and limits that you can assign to NuPoint Voice mailboxes.

With NuPoint Fax, fax documents are stored as electronic fax messages in NuPoint Voice mailboxes. From there, faxes can be delivered to any fax machine at any time, distributed to other mailboxes, sent over a network, or viewed on a PC (in the Messages tab of the Web View Interface).

The Fax feature works in a network configuration where the NuPoint Unified Messaging server is integrated directly with a Mitel MiVoice Business or with another PBX through a Dialogic Media Gateway (formerly PIMG). For more information, see [Fax Scenarios](#).

**Note:**

Using Fax with the Web View Interface requires a Web session (you must have an Internet connection).

NuPoint Fax provides a solution to many of the problems inherent in typical fax communication:

- Callers sending a fax do not have to wait due to the receiving fax machine being busy with another transmission.
- Faxes are stored in password-protected user mailboxes. Faxes do not sit at the fax machine for anyone to read.
- Recipients receive notification when a new fax arrives. Incoming faxes do not sit for days because recipients do not know they are there.
- Faxes can be annotated with voice messages (also called voice cover sheets), relieving the sender of typing out explanatory notes.
- The recipient decides when and where a fax is printed out. For example, a NuPoint Fax user away from the office can call their NuPoint Voice mailbox and direct a fax, deposited there by someone else, to be delivered to a hotel, an airport, or another



location where there is a convenient fax machine. After reading the fax, the user can call back into their mailbox and send the fax to another party, for example, a prospective client waiting for a quote.

For end-user features and operating information, see the *NuPoint Unified Messaging Web View Help* and *Messaging User Guide*.

### 1.4.8.1.2 About NuPoint UM Fax Applications

NuPoint UM Fax applications include Fax Mail, Outbound Fax, Fax Broadcast, Guaranteed Fax, Fax Publishing, and Walkaway Fax. You can use one or more of these applications, in any combination. For more information about planning and configuring these applications, see [Fax Planning](#).

#### Fax Mail

Fax Mail is the most general and widely used application of NuPoint Fax. With Fax Mail, incoming faxes are stored electronically as "fax messages" in a user's mailbox—the same mailbox that stores voice messages. Users are then notified of their new fax messages in the same manner as with voice messages (for example, message waiting light, pager, stutter dial tone).

By calling into their mailboxes, users can retrieve their fax messages at any time by sending them to any fax machine. In addition, users can call into their mailboxes from fax phones and retrieve their fax messages "online" at that fax machine. Users of Fax Mail have the same options that are available to them through voice mail: fax messages can be played, answered, or given to another mailbox, distribution list, or off-system telephone (fax) number. For instructions on how users can manage their fax messages from the Web View Interface and TUI, refer to the *NuPoint Unified Messaging Web View Help* and the *Messaging User Guide*.

#### Outbound Fax

Sending fax messages (outbound messages) requires that the fax group be assigned to an outdial line group, such as a Pager group. Users can send fax messages using any of the following components of NuPoint UM:

- **the Telephone User Interface (TUI):** Use the TUI to send a fax message, or a combined voice and fax message. For instructions, see the *NuPoint Unified Messaging User Guide*.
- **the Web View:** Use the Compose Fax button on the Messages tab of the Web View interface. For detailed instructions, see the *Web View help*.
- **the Fax Print Driver application:** Download and install this desktop tool (from DVD or Web View) to send a fax using any software that has a print function. For instructions, see the *NuPoint Unified Messaging User Guide*.

The Fax Printer Driver application runs on Windows 10 (64-bit), Windows 8 Professional (64-bit) and the following 32-bit and 64-bit variants of Windows 7:

- **Windows 7 Pro:** Regular and N
- **Windows 7 Enterprise:** Regular and N
- **Windows 7 Ultimate:** Regular and N

The features in the N Edition software are the same as their equivalent full versions, but do not include Windows Media Player. You can download Windows Media Player without charge for the N Editions.

**Note:**

The Fax Printer driver does not support files in TIFF format on Windows 7.0, Windows 8.0 and Windows 10 . It does, however, support other common file formats (DOC, PDF, XLS, etc).

Destinations can include any other users' mailboxes or fax numbers. Users can receive confirmation by voice mail and email concerning whether their fax transmissions have succeeded or failed.

**Fax Broadcast**

Fax Broadcast allows a user to make and send a fax message simultaneously to multiple destinations using a distribution list. The destinations can include any other users' mailboxes, users on another NP Voice system connected with the NuPoint Net digital network, or outside telephone numbers. For example, a product manager could disseminate price changes to the sales force with a copy of the new price list and an attached voice message explaining the changes. Fax Broadcast messages can be scheduled for future delivery (when rates are lower), and the NuPoint Unified Messaging server can automatically retry calls to numbers that are busy or do not answer.

**Guaranteed Fax**

With NuPoint Fax, delivery of incoming faxes can be guaranteed even when the company or department fax machine is busy, runs out of paper, or is otherwise disabled. One or more Guaranteed Fax mailboxes are assigned to a hunt group with the fax machine. When the machine is busy, the incoming faxes are routed to and stored in the mailboxes; the caller never realizes that the fax did not go directly to a fax machine. The mailboxes then automatically and continually try to deliver the stored faxes to the same or another fax machine.

## Fax Publishing

You can configure a NuPoint Fax mailbox to deliver a voice message and a fax to a caller who accesses the mailbox. This provides a convenient way to publish frequently requested information to employee users, customers, or any outside callers.

The caller can reach the mailbox containing the appropriate information directly or be led by voice prompts through a mailbox tree or chain structure. The mailbox containing the fax can do either of the following:

- Play a voice cover sheet or a menu or both, giving the caller the choice to either receive the fax online or enter a telephone number for delivery of the fax.
- Immediately begin transmitting the fax.

## Walkaway Fax

Walkaway Fax appears to the sender exactly like a regular fax machine. With this feature, callers dial a telephone number (from a fax machine or a PC running fax software) and immediately send a fax, without a voice cover sheet, directly into a user's mailbox. Callers do not have to respond to prompts or monitor the call. The walkaway Fax Mailbox listens for fax tone while playing a greeting, and if detected, receives the incoming fax. If none is detected, normal message recording ensues.

### 1.4.8.1.3 Fax Scenarios

This section illustrates incoming and outgoing fax scenarios. The configuration procedures discussed in these scenarios can be found in the [Installation and Configuration section](#).

## Incoming Fax


Several incoming fax scenarios are possible with the NuPoint Unified Messaging Fax feature, where a user receives a fax, views it, and prints it. This section overviews some scenarios of fax reception and how they must be configured.

### Note:

For information on user operation of the Fax feature with the Web View interface, refer to the NuPoint Unified Messaging *Web View Help*; and for information on user operation of the Fax feature with the TUI, refer to the NuPoint Unified Messaging *User Guide*.

The Incoming Fax Reception diagram shows the fax document travelling from the TDM to the IP domain via a T1 trunk before reaching the NuPoint Unified Messaging server. NuPoint Unified Messaging Fax is pass-through implementation of FAX over IP (FoIP).

The illustration below shows the PBX being integrated with a NuPoint Unified Messaging server, using a PIMG box, but direct integration with a Mitel MiVoice Business ICP is also supported.

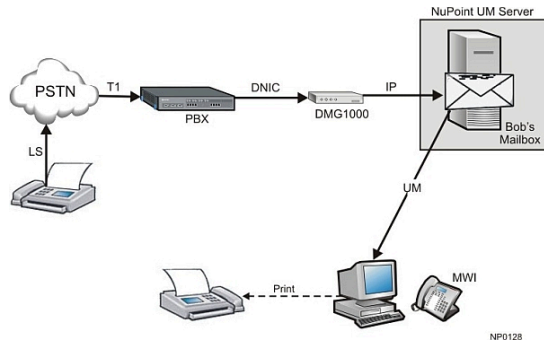

## Incoming Fax Reception

A typical incoming fax scenario consists of the following flow of events:

1. The far-end sends a fax by dialing the fax number of the NuPoint Unified Messaging recipient. This is typically a Direct Inward Dial (DID) number that the recipient has for their incoming faxes.
2. The call arrives at the PBX via a T1 trunk. The PBX has been programmed to route this DID number to a (phantom) set that is always forwarded to the voice mail hunt group.
3. The call is routed to the PIMG via DNIC integration.
4. The call then lands on a voice mail port on the NuPoint Unified Messaging server. This port has Fax resources allocated to it.
5. The Fax is then decoded and stored in the recipient's mailbox as a new message.
6. The NuPoint Unified Messaging server then lights the Message Waiting Indicator (MWI) of the recipient's phone.
7. The recipient dials into their voice mail and sees that there is a fax message; or the user checks the Messages tab in their Web View (must be a licensed UM Standard Web View user) and sees that there is a new fax message; or the user checks their e-mail inbox (UM Standard SMTP option) and see that there is a new fax message.
8. The recipient then uses the Web View (UM Standard Web View) and a TIFF or PDF viewer to view the fax.
9. The recipient uses the printing functionality in the TIFF Viewer to send the fax to a printer to keep a hard copy of the fax.

## Scenario 1 - Setting up Incoming Fax Reception for Departmental Fax Numbers (Public Fax)

ACME Manufacturing needs three main fax numbers that it wants to publish. One is for sales, one for support and one for the production floor. These are 727-SALE (7253), 727-HELP (4357) and 727-ENGI (3644) respectively. Incoming faxes to one of these numbers

will be distributed to interested personnel in that department. To configure this scenario with NuPoint UM Fax, the tasks are as follows:

1. Obtain the DID numbers from the local PSTN.
2. Program (phantom) sets on the PBX that hosts the NuPoint Unified Messaging server, with DNs 7253, 4357 and 3644.
3. Configure these sets to always forward to the NuPoint Unified Messaging voice mail hunt group.
4. Program DID routing to forward calls to particular (phantom) sets. Typically, this is done by simply absorbing the NXX part of the DNIS and routing the call to the extension matching the remaining digits.
5. Create three mailboxes on the NuPoint Unified Messaging server, with numbers 7253, 4357 and 3644.
6. Give them an FCOS with bits: 122 (broadcast), 190 (receive fax), 198 (receive fax only), 203 (walkaway fax).
7. Create one distribution list for each mailbox.
8. Add mailboxes of interested parties to the particular lists. Give these interested parties either UM basic or UM+MWI.
9. Define a fax group and associate it with a line group.
10. Now whenever an inbound fax lands on the SALE mailbox, those sales personnel on the SALE distribution list will receive the fax in their mailbox. They can then read the fax either in their Email Inbox (UM basic) or by using the Web View interface (UM+MWI).

## Scenario 2 - Setting up Fax Reception for a Personal Fax Number (Personal Fax)

Mike in Sales would like to have his own fax number, 727-MIKE (6453), that he can give to his clients. This number is different than the DID number to his phone: 727-6452. This is so that he can receive confidential faxes from clients without sharing them with his colleagues. To configure private fax reception for Mike:

1. Obtain the DID number 727-6453 from the local PSTN.
2. Program a (phantom) set on the PBX with the directory number 6453.
3. Configure this set to always forward to the NuPoint Unified Messaging voice mail hunt group.
4. Program DID routing to forward calls to this set. Typically this is done by simply absorbing the NXX part of the DNIS and routing the call to the extension matching the remaining digits.
5. Create a mailbox on the NuPoint Unified Messaging server with the number 6453.
6. Assign the mailbox an FCOS with bits: 122 (broadcast), 190 (receive fax), 198 (receive fax only), 203 (walkaway fax).
7. Create one distribution list for this mailbox.

8. Add Mike's mailbox (6452) to this distribution list.
9. Give Mike either UM Standard SMTP or UM Standard Web View (to be able to use the Web View Interface).

### Scenario 3 - Setting up Fax Reception for Multiple Mailboxes (Personal Fax)

Mike's office neighbours, seeing that Mike has his own DID number for fax, may want the same feature. Not everyone is as highly productive as Mike, but ACME would like to give everyone the ability to receive confidential/personal faxes without spending money for a DID. To provide personal fax reception to others without spending money on DIDs:


1. Give FCOS bits: 190 (Receive Fax Messages), and 203 (Walkaway Fax for Callers) to those wishing to receive faxes.
2. Tell these users to change their voice mail greetings to instruct callers about how to send them a fax: "Hello, this is Bob. If you would like to send me a fax, please press the SEND button now."

To send a fax to one of these mailboxes, the caller would call that person's extension. When the extension forwards the call to voice mail, upon hearing the greeting, the caller can press the SEND button on their fax machine.

### Outgoing Fax

Several outgoing fax scenarios are possible with the NuPoint Unified Messaging Fax feature, where a user forwards a fax to email, sends to a fax number, or replies by email to a fax message. This section overviews user operation of the Fax feature, using the Web View interface and the TUI. For detailed end-user instruction, refer to the NuPoint Unified Messaging *Web View Help* and the *Messaging User Guide*.

The illustration below shows a MiVoice Business ICP directly integrated with a NuPoint Unified Messaging server.

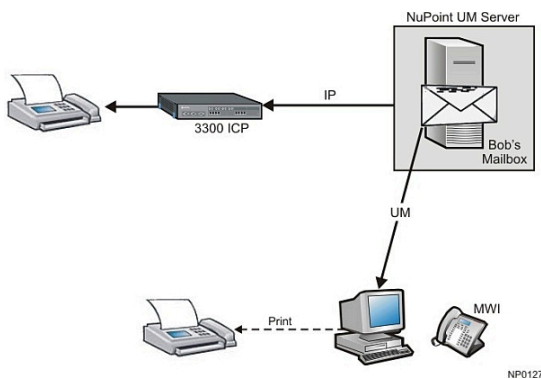

## Scenario 1 - Sending a Fax to a Fax Machine

A user can send a fax that they have received to a fax machine so that they have a hard copy of the fax or so that others can receive the fax. A fax can be sent to multiple fax machines.

From the Web View

For detailed user instructions about sending a fax from the Web View interface, refer to the NuPoint Unified Messaging *Web View Help*.

1. A received fax is stored in the recipient's mailbox as a new message.
2. NuPoint Unified Messaging lights the MWI of the recipient's phone.
3. The recipient dials into their voice mail and sees that there is a new fax message, or the user checks their Message tab in the Web View interface (must be a licensed UM Standard Web View user) and sees that there is a new fax message.
4. The recipient uses the Web View to view the fax (this launches the TIFF viewer available on the recipient's PC).
5. The recipient decides to send the fax to the local fax machine.
6. The recipient selects the fax message and presses the "Send Fax" button in the Web View interface, enters the number of the fax machine, and sends the fax to that machine.

From the TUI

For user instructions about sending a fax message to a fax machine from the TUI, refer to the NuPoint Unified Messaging *User Guide*.

1. A user has a fax in their mailbox that they would like to send to a fax machine.
2. The user dials into their voice mail and the TUI gives them the option to send the fax message to a fax number.

## Scenario 2 - Forwarding a Fax to E-Mail

From the Web View interface or the user's email account, a user can forward a fax message by e-mail, as a .TIF attachment. Refer to the NuPoint Unified Messaging *Web View Help*.

## Scenario 3 - Reply to a Fax by E-Mail

From the Web View interface or the user's email account, a user can reply to a fax message by e-mail, with or without the fax as a .TIF attachment. Refer to the NuPoint Unified Messaging *Web View Help*.



## 1.4.8.2 NP Fax Conditions

### 1.4.8.2.1 NP Fax - Conditions

In addition to the following conditions, refer to the NuPoint Unified Messaging *Engineering Guidelines* for recommendations about implementing a Fax solution.

- The system must have a fax group assigned to an outbound line group to deliver faxes send faxes. Additionally, a “fax pager index” must be set in the user’s mailbox.
- The system must have a fax group assigned to an inbound line group to receive faxes.
- The Fax feature supports fax reception from G3-compliant fax machines that produce CNG tone.
- To minimize packet loss and jitter, it is recommended that the NuPoint Unified Messaging server be connected to the PBX or MiVoice Business Gateway via one hop only.
- NuPoint Fax can be configured on any NuPoint UM server. Note that Fax only operates on the active server in an Active/Passive configuration.
- A maximum of six Fax channels can be configured on a NuPoint Unified Messaging server.
- If all six Fax channels are in use when a user is sending a fax, the fax is queued for re-try. When an outside caller sends a fax and all channels are busy, that caller receives an "unsuccessful transmission" message.
- You must have an Internet connection to use Fax with the Web View interface (requires a Web session).
- NP View is not supported for use with NuPoint Fax.
- NuPoint Unified Messaging does not support a specific TIFF or PDF viewer for reading faxes. If a user has difficulty reading faxes with a viewer, it is recommended that they refer to the help documentation for that viewer or try using a different viewer.
- Apple QuickTime Player is not supported within the Web View interface for users to display fax .tif files. It is recommended that Quick-Time be configured not to play .tif files, on the user's PC. For this procedure, refer to the *Web View Help*.
- Tenanting: Each tenant has their own line groups. Each may also need to have their own fax DID. This can be accommodated by one or more fax groups since one fax group can be associated with many line groups. Keep in mind that there are only 6 fax channels on one server that can be shared.
- Migration of Fax from a NuPoint Messaging Release 7.0 system is supported; however, as with line groups, fax group definitions are not migrated and must be reprogrammed manually. Note that all fax ports must be configured in the range of 5:0 to 5:5. The Cover Page FCOS is supported after conversion. Migration from a Release 7.0 system will handle all FCOS relating to inbound Fax features. For more information about migrating from a Release 7.0 system, see the *NuPoint Unified Messaging Technician's Handbook*.
- Fax messages are supported in the NuPoint Unified Messaging system backup and restore operations.



- The Event Recorder will contain all Fax-related error messages. For more information about Event Recorder, see the *NuPoint Unified Messaging Technician's Handbook*.
- NuPoint UM does not support the use of the NP Fax feature as a fax server.

## 1.4.8.3 FAX Planning

### 1.4.8.3.1 Overview

This section provides information to help you understand and plan the changes that you must make to your software configuration when you add NuPoint Fax applications to your NuPoint Unified Messaging server. It describes all of the software options for NuPoint Fax, and explains how they are used in the various applications.

The following topics are discussed:

- Planning Outside Caller Access
- Fax Class of Service Parameters
- Adding NP Fax options to Class of Service
- Planning Fax Mailboxes

### 1.4.8.3.2 Fax Class of Service Parameters

The system administration menus contain NuPoint Fax configuration parameters for feature, limit, and network classes of service (FCOS, LCOS, and NCOS). All of these options are described below. Read through the descriptions before completing the Fax [worksheets](#). Some of the options are similar to those for voice messaging, some are not unique to fax handling but must be assigned to a mailbox for using Fax with the Web View Interface, and some are unique to fax handling. When you assign a NuPoint Fax feature to a mailbox, the appropriate user and outside caller prompts are enabled automatically. The voice prompts are described in the NuPoint Unified Messaging *User Guide*.

**Note:**

FCOS assignments take effect only after one or more fax channels have been assigned to a line group.

#### FCOS Feature Bits for Fax

The feature bits described below are used with NuPoint Fax.

## 110 Make/Give to Telephone Number

Allows a mailbox owner to make or give a message to a telephone number outside the mailbox system; known as “call placement.” This feature bit is required for a user to send faxes to external numbers. It is not required if faxes will be sent to internal numbers only. This feature bit is required for the fax printing feature.

## 190 Receive fax messages (master feature)

This feature allows a mailbox to receive fax messages. When callers reach the mailbox, they are first prompted to leave a voice message (cover sheet), then prompted to press L to leave a fax with the voice message. Callers can ignore the message prompt and press L to leave a fax without a voice cover sheet. When the user accesses the mailbox, the user is informed that there is a message with a fax there and given options to retrieve the fax online or direct the fax to a fax machine after hearing the voice message.

### Note:

- Mailboxes must also include one or more of the fax delivery features (193, 194, 195, 237) to permit the users to retrieve faxes stored in the mailboxes.
- If feature bit 240 is enabled, callers do not need to press L to begin sending a fax; the system will detect an incoming fax when it does not hear speech.
- If feature bit 290 is also assigned to the mailbox, users can view fax messages through the Web View interface.

## 191 Make fax messages

When this feature is assigned to a mailbox, the mailbox owner can make a voice message, and then press L to leave a fax with the message. The fax is then delivered to the addressed party or parties with the voice message.

## 192 Give fax messages

This NuPoint Fax feature allows users who are able to receive faxes in their mailboxes to forward the faxes along with voice comments directly to other users or to outside lines. They cannot include another fax as a comment.

### Note:

This feature requires feature bit 190.

### 193 Deliver fax to default fax phone number

This feature allows a user to have faxes delivered to a personal (default) fax telephone number after listening to the voice annotation. This number can be a department or company fax machine and is entered by the system administrator during configuration. When the user selects this option, another menu is played giving further options to schedule delivery, cancel delivery, or deliver the fax now.

**Note:**

This feature requires bit 190. The system must have a fax group connected to an outbound line group to deliver faxes to phone numbers.

### 194 Deliver fax online

This feature permits users accessing their mailboxes from a fax phone to receive stored faxes online.

**Note:**

This feature requires feature bit 190. The system must have a fax group connected to an inbound line group to deliver faxes online.

### 195 Deliver fax to designated telephone number

When this feature is included in a mailbox and the user wishes to retrieve a fax or deliver it to someone else after listening to the voice annotation, the prompt "Press 1 to input a number for this fax" is included in the fax transmittal options menu. After the user selects "1" and inputs the number, another menu is played giving the choices of scheduling the delivery, canceling it, or having the fax delivered now.

**Note:**

This feature requires bit 190 for fax functionality and bit 95 to schedule fax delivery. The system must have a fax group connected to an outbound line group to deliver faxes to phone numbers. Additionally, a "fax pager index" must be set in the user's mailbox.

### 196 User changeable default fax phone number for fax delivery

This feature allows users to change their personal (default) fax delivery numbers through the user options menu in their mailboxes.

**Note:**

This feature requires bit 193.

**197 Fax on demand**

This feature is for Fax Publishing. When it is assigned to a greeting only mailbox, the caller is greeted and given a prompt to get ready to receive the fax deposited in the mailbox, either online or at another number. The mailbox LCOS and RCOS control the delivery features.

**Note:**

This feature requires feature bit 194 and/or 195.

**198 Receive fax messages only**

This feature prevents a mailbox from receiving voice messages and allows it to receive only fax messages. It is used for both Guaranteed Fax and broadcast mailboxes in Fax Mail. No greeting or prompts are played to the calling party and only faxes are recorded. A fax session starts immediately when the server answers the call.

A Guaranteed Fax mailbox must have both this bit (198) and message delivery enabled.

**Note:**

This feature requires feature bit 190.

**199 Automatic receipt for successful fax message sent**

When this feature is included in a mailbox and the user schedules a fax delivery, a receipt with a time stamp is automatically placed in the mailbox indicating whether the transmission succeeded or failed. When this feature is *not* included in a mailbox, a receipt is issued only if the transmission fails.

Users can also receive email notification concerning the status of the fax transmission. To receive confirmation of successful and failed fax transmissions, configure an email address and enable this feature for the user's mailbox. To receive confirmation of successful fax transmissions only, configure an email address but leave the feature disabled.

**Note:**

This feature requires feature bit 190 and feature bit 193 or 195.

**200 Fax cover page**

This feature causes the system to send a cover page with outgoing faxes. The cover page identifies the user as the fax recipient at the company or department fax machine. Mailbox owners can fax a personal cover page into their mailboxes which the system sends each time they retrieve faxes. When a cover page is deposited in the system administrator's mailbox, it becomes the company fax cover page and it is delivered with faxes retrieved by users who do not have a personal cover page. If neither a personal cover page nor a company cover page is available, the system generates a default cover page.

If this bit is not enabled in an FCOS, the system does not send any cover sheet with outgoing faxes.

**Note:**

Feature bit 230 disables the mailbox personal fax cover page option so that mailbox owners cannot override the company or default cover page.

**203 Walkaway fax**

A mailbox with this feature is set to expect calls from fax machines rather than from live callers. When a call is routed to a mailbox with this feature, CNG (tone transmitted by a fax machine when it calls another fax machine) detection is enabled while the mailbox greeting is playing. If the system detects fax tone, it processes the incoming fax. If it does not detect fax tone, it plays the recorded mailbox greeting and prompts. This permits callers to dial into a user's mailbox and immediately send a fax without a voice cover sheet, and without having to respond to prompts or monitor the call.

Feature bit 256 causes the system to play a brief introductory prompt for walkaway fax mailboxes.

**Note:**

When feature bit 203 is active, the system listens for fax tone (CNG) in order to act like a receiving fax machine when the call is initiated by a sending fax machine.

When feature bit 240 is active, the system always defaults to accepting a fax when it does not detect voice. This is similar to the function of bit 203, however, callers will hear fax signals if their voice recording times out.

This feature requires feature bit 190.

## **206 Fax delete**

This feature automatically deletes a fax from a mailbox after it has been delivered. It is used in Guaranteed Fax to prevent re-sending the same message to the fax machine.

### **Note:**

Feature bit 237 (Automatically deliver fax to default number) overrides this feature. 237 is for user mailboxes, not guaranteed fax mailboxes. Do not use both bits in the same FCOS.

## **207 Fax verify**

This feature is assigned to Guaranteed Fax mailboxes which are on the same hunt group as the fax machines. It checks incoming faxes with those already stored in the mailbox to prevent the same fax from rotating through the hunt group and getting stored in the mailbox again when the fax machine is down or busy.

## **230 Deny change to fax cover page**

This feature disables a mailbox owner's ability to create a personal fax cover page. If feature bit 200 is enabled, the system will send either a company cover page (if one has been placed in the administrator's mailbox) or the system default cover page. This feature has no effect if bit 200 is not enabled.

## **235 Display from field on fax cover page**

This feature adds the "From" field to the default fax cover page. The field identifies the *system* that the fax came from, such as, "ABC Communications Fax Service." It does not identify the mailbox owner. The text of the "From" field is set in the Fax Service and Promotional Message Menu.

## **236 Display promotional field on fax cover page**

This feature adds a promotional message field to the default fax cover page. The text of the promotional message field is set in the Fax Service and Promotional Message Menu.

## 237 Automatic fax retrieval

This feature allows the mailbox owner to have faxes downloaded automatically to a pre-configured default fax number when faxes arrive in the mailbox. The fax or voice/fax message is automatically moved to the saved queue and the message waiting indicator is not triggered. This feature is intended to make it easier for mailbox owners who regularly use the same fax machine to retrieve their faxes. The mailbox owner can also enable or disable this feature from the user options menu.

**Note:**

When this feature is active, the mailbox owner should check the target fax machine frequently, since fax messages do not activate a message waiting indicator.

This feature overrides feature bit 206 (Discard fax message after delivery). 206 is for guaranteed fax mailboxes only. Do not include both bits in the same FCOS.

## 239 Retrieve all unplayed faxes

This feature makes it easier for mailbox owners to get their faxes. If they do not have automatic fax delivery enabled, they have the option to have all faxes concatenated and sent at once. The user selects the “retrieve all faxes” option from the user options menu and all the faxes are automatically sent to the user’s default fax number.

**Note:**

This feature requires one or more of feature bit 193, 194, or 195.

## 240 Receive fax on record time-out

This feature makes it easier for callers to send fax-only messages and voice/fax messages. In the case of fax-only messages, a caller can dial into a mailbox, press start, and walk away. In the case of the voice/fax message, the caller does not need to press L to send the fax.

**Note:**

When feature bit 203 is active, the system listens for fax tone (CNG) in order to act like a receiving fax machine when the call is initiated by a sending fax machine. Without bit 203, callers to a mailbox must press L to indicate that they want to leave a fax.

When feature bit 240 is active, the system always defaults to accepting a fax when it does not detect voice. This is similar to the function of bit 203, except that the user does not have to press L to leave a fax. However, callers will hear fax signals if their voice recording times out.

This feature requires feature bit 190.

### **256 Enable fixed greeting for walkaway fax**

The feature bit causes walkaway fax mailboxes to play the prompt, "Press 1 or wait..." before playing the mailbox greeting.

### **290 Enable UM Standard Web View**

This feature bit must be assigned to a user's mailbox along with feature bit 190 (Receive Fax Messages) for the user to receive and view Fax messages in the Messages tab of the Web View Interface.

### **LCOS Limits for Fax**

The following fax limits can be included in limits classes of service (LCOS).

#### **Number of digits for fax phone number for fax delivery**

This limit restricts the user to the set number of dialing digits when retrieving or redirecting a fax to a designated number. For example, 3 or 4 digits would only allow faxes to be redirected to an internal extension, but 11 or 12 digits would let the user send faxes long distance. If no digits are specified, then the number of digits defaults to that entered for the outside caller dialing plan in the Online Configuration Menu.

#### **Note:**

This limit works in conjunction with RCOS NPA/NXX screening.

#### **Number of fax messages per mailbox**

This limit is the maximum number of faxes that can be stored in a mailbox at any one time.

#### **CNG tone detection length**

This limit is the number of seconds that the NuPoint Unified Messaging server waits to detect the CNG tone from a calling fax machine when walkaway fax is enabled (feature bit 203). This limit should be set to zero except for sites with very noisy phone circuits.



### **Fax delivery retry frequency**

This limit is the number of times the server attempts to send a fax message until it is successfully sent. The system retries fax delivery when it encounters ring no answer, busy, or no available fax resource.

### **Fax delivery retry interval**

This limit is the number of minutes the system waits between retries on delivering a fax message.

### **Played fax message retention**

This limit is the maximum number of hours that played faxes can be stored in a mailbox.

### **Unplayed fax message retention**

This limit is the maximum number of hours that unplayed faxes can be stored in a mailbox.

### **Urgent fax message retention**

This limit is the maximum number of hours that urgent faxes can be stored in a mailbox.

### **Fax receipt retention**

This limit is the maximum number of hours that fax receipts can be stored in a mailbox.

### **Call Placement limits**

Call Placement limits include the same limits and retry intervals and message phone length. Use these parameters to configure fax behavior when using the **Fax Printer Driver** or **Web View** to send faxes.

### **NCOS Networking Features for Fax**

The following options determine a user's fax capability over an NP Net network to other NuPoint Unified Messaging servers. These are entered as part of the network class of service (NCOS).

#### **10 Make fax messages to the network**

This feature allows a user to make a fax message and send it over the network.

## 11 Give fax messages to the network

This feature permits users to forward fax messages deposited in their mailboxes to users on another system over the network. It does not allow users to make a fax message to the network.

## 12 Answer fax messages to the network

A user with this feature can reply to a fax message that was sent from another system over the network. If feature bit 38 is activated, the original message, voice and fax, will be sent with the reply back across the network.

## NuPoint Fax and RCOS

Like all other types of outbound calls, outbound NuPoint Fax calls are controlled by the Restriction Class of Service of the sending mailbox. A mailbox owner cannot have a fax delivered to a phone number that is blocked in their RCOS.

### 1.4.8.3.3 Adding NP Fax Options to COS

Add NP Fax options to mailboxes exactly as you would voice message options. You can include them in existing or new FCOS, LCOS, and NCOS. You must generate new COS for applications that are exclusive to NP Fax, such as Guaranteed Fax and Fax Publishing.

Here are some fax mail FCOS options:

- **VIP FCOS + 190-196 and 200:** User can receive and send fax messages and include a cover sheet. Callers must use the phone keypad to send a fax.
- **VIP FCOS + 190-196, 200, and 203:** Same as above, but callers can also send walkaway fax messages.
- **VIP FCOS + 198 and 200:** Fax only mailbox; receives fax messages with no voice annotation and supports a cover page. Use bits 193-195 to retrieve messages.

To plan adding Fax options, refer to the [NP Fax COS Planning Worksheet](#) (below). The Fax FCOS and NCOS bits and names are included at the top of the worksheet for your reference.

If you add fax features to an existing COS without renumbering the COS, existing mailboxes with that COS assigned will take on the added fax features. If you create a new COS by copying an existing one and modifying it, you must assign the new COS to mailboxes

Note that there are entries for users' standard mailboxes and users' broadcast fax mailboxes. If a user is likely to receive many fax calls, they should have a separate extension for faxes that has an associated broadcast mailbox. The broadcast mailbox contains a distribution list consisting of only the user's standard NP Voice mailbox.


Messages or faxes left in the broadcast mailbox are immediately transferred to the user's standard mailbox, as shown below.

To prevent broadcast mailboxes from filling up, the FCOS should not include the Receive message bit.

To prevent broadcast mailboxes from filling up, the FCOS should not include the Receive message bit.

To prevent broadcast mailboxes from filling up, the FCOS should not include the Receive message bit.

## Broadcast Mailbox Fax Mail Application

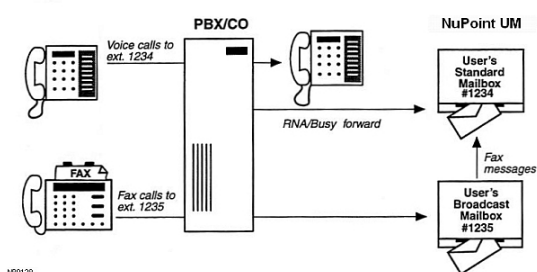

## NP Fax COS Planning Worksheet (Sample)

### FaxMemo COS Planning Worksheet

#### Fax Feature Bits

| Number | Description                                               |
|--------|-----------------------------------------------------------|
| 190    | Receive Fax Messages                                      |
| 191    | Make Fax Messages                                         |
| 192    | Give Fax Messages                                         |
| 193    | Deliver Fax to Default Fax Phone Number                   |
| 194    | Deliver Fax Online                                        |
| 195    | Deliver Fax to Designated Phone Number                    |
| 196    | User Changeable Default Fax Phone Number for Fax Delivery |
| 197    | Fax on Demand                                             |
| 198    | Receive Fax Messages Only                                 |
| 199    | Automatic Receipt for Fax Sent                            |
| 200    | Personal Fax Cover Page                                   |
| 203    | Walkaway Fax                                              |
| 206    | Fax Delete                                                |

#### Fax Feature Bits (continued)

|     |                                           |
|-----|-------------------------------------------|
| 207 | Fax Verify                                |
| 230 | Deny Changes to Fax Cover Page Options    |
| 235 | Add "From" Field on Fax Cover Page        |
| 236 | Add "Promotional" Field on Fax Cover Page |
| 237 | Automatic Fax Retrieval                   |
| 239 | Retrieve All Unplayed Faxes               |
| 240 | Receive Fax on Record Time-Out            |
| 256 | Enable Fixed Greeting for Walkaway Fax    |
| 290 | Enable Standard UM Web View               |

#### Fax NCOS Bits

| Number | Description                   |
|--------|-------------------------------|
| 10     | Make Fax Message to Network   |
| 11     | Give Fax Message to Network   |
| 12     | Answer Fax Message to Network |

#### COSs for User's Normal Mailbox

| FCOS # to Modify | New FCOS Number | New FCOS Name | FAX Feature Bits to Add |
|------------------|-----------------|---------------|-------------------------|
| 10               | 22              | VIP Fax       | 190, 196, 200, 203      |
|                  |                 |               |                         |
|                  |                 |               |                         |

| LCOS Number | Number of Digits for Fax Delivery | # Fax Msgs per Mailbox | Fax Delivery Retry Frequency | Fax Delivery Retry Interval | CNG Tone Detection Length | Played Fax Msg Retention | Unplayed Fax Msg Retention | Urgent Fax Msg Retention | Fax Receipt Retention |
|-------------|-----------------------------------|------------------------|------------------------------|-----------------------------|---------------------------|--------------------------|----------------------------|--------------------------|-----------------------|
| 1           | 11                                | 5                      | 5                            | 2                           | 0                         | 336                      | 168                        | 72                       | 72                    |
|             |                                   |                        |                              |                             |                           |                          |                            |                          |                       |
|             |                                   |                        |                              |                             |                           |                          |                            |                          |                       |

| NCOS # to Modify | New NCOS Number | New NCOS Name | FAX NCOS Bits to Add |
|------------------|-----------------|---------------|----------------------|
| 1                | 1               | Network Fax   | 10, 11, 12           |
|                  |                 |               |                      |
|                  |                 |               |                      |

#### FCOS for User's Fax Broadcast Mailbox

| FCOS # to Modify | New FCOS Number | New FCOS Name | FAX Feature Bits to Add |
|------------------|-----------------|---------------|-------------------------|
|                  |                 |               |                         |
|                  |                 |               |                         |
|                  |                 |               |                         |

NP0136\_2

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

## NP Fax COS Planning Worksheet (Blank)

### FaxMemo COS Planning Worksheet

#### Fax FCOS Bits

| Number | Description                                               |
|--------|-----------------------------------------------------------|
| 190    | Receive Fax Messages                                      |
| 191    | Make Fax Messages                                         |
| 192    | Give Fax Messages                                         |
| 193    | Deliver Fax to Default Fax Phone Number                   |
| 194    | Deliver Fax Online                                        |
| 195    | Deliver Fax to Designated Phone Number                    |
| 196    | User Changeable Default Fax Phone Number for Fax Delivery |
| 197    | Fax on Demand                                             |
| 198    | Receive Fax Messages Only                                 |
| 199    | Automatic Receipt for Fax Sent                            |
| 200    | Personal Fax Cover Page                                   |
| 203    | Walkaway Fax                                              |
| 206    | Fax Delete                                                |

#### Fax FCOS Bits (continued)

|     |                                           |
|-----|-------------------------------------------|
| 207 | Fax Verify                                |
| 230 | Deny Changes to Fax Cover Page Options    |
| 235 | Add "From" Field on Fax Cover Page        |
| 236 | Add "Promotional" Field on Fax Cover Page |
| 237 | Automatic Fax Retrieval                   |
| 239 | Retrieve All Unplayed Faxes               |
| 240 | Receive Fax on Record Time-Out            |
| 256 | Enable Fixed Greeting for Walkaway Fax    |
| 290 | Enable UM Standard Web View               |

#### Fax NCOS Bits

| Number | Description                   |
|--------|-------------------------------|
| 10     | Make Fax Message to Network   |
| 11     | Give Fax Message to Network   |
| 12     | Answer Fax Message to Network |

#### COSs for User's Normal Mailbox

| FCOS # to Modify | New FCOS Number | New FCOS Name | FAX FCOS Bits to Add |
|------------------|-----------------|---------------|----------------------|
|                  |                 |               |                      |
|                  |                 |               |                      |
|                  |                 |               |                      |

| LCOS Number | Number of Digits for Fax Delivery | # Fax Msgs per Mailbox | Fax Delivery Retry Frequency | Fax Delivery Retry Interval | CNG Tone Detection Length | Played Fax Msg Retention | Unplayed Fax Msg Retention | Urgent Fax Msg Retention | Fax Receipt Retention |
|-------------|-----------------------------------|------------------------|------------------------------|-----------------------------|---------------------------|--------------------------|----------------------------|--------------------------|-----------------------|
|             |                                   |                        |                              |                             |                           |                          |                            |                          |                       |
|             |                                   |                        |                              |                             |                           |                          |                            |                          |                       |
|             |                                   |                        |                              |                             |                           |                          |                            |                          |                       |

| NCOS # to Modify | New NCOS Number | New NCOS Name | FAX NCOS Bits to Add |
|------------------|-----------------|---------------|----------------------|
|                  |                 |               |                      |
|                  |                 |               |                      |
|                  |                 |               |                      |

#### FCOS for User's Fax Broadcast Mailbox

| FCOS # to Modify | New FCOS Number | New FCOS Name | FAX FCOS Bits to Add |
|------------------|-----------------|---------------|----------------------|
|                  |                 |               |                      |
|                  |                 |               |                      |
|                  |                 |               |                      |

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

NP0135\_2

## 1.4.8.3.4 Planning Fax Mailboxes

Planning and configuration for mailboxes in each NuPoint Fax application is slightly different. This section contains information and sample worksheets for mailbox configuration for each application:

- [Fax Mail](#)
- [Fax Broadcast](#)
- [Guaranteed Fax](#)
- [Fax Publishing](#)

A worksheet is also supplied for [Fax Cover Page planning](#).

**Note:**

There is no separate worksheet for Walkaway Fax. You can add Walkaway Fax to any of the other NuPoint Fax applications by enabling the appropriate feature bits (190, 203, 256) in an FCOS.

**Fax Mail Mailbox Configuration**

The Fax Mail Mailbox Worksheet associates mailboxes with COS options. A sample worksheet is shown below. You can photocopy and complete a blank Fax Mail Mailbox Worksheet (below) following the sample worksheet and the instructions given here.

List all the mailbox owners and their current mailbox numbers on the sheet. Add the new COS numbers for the current mailboxes. If you are going to use broadcast mailboxes, add those mailbox numbers and the COS to be assigned to them. Remember that the broadcast mailboxes must be new boxes. If possible, use a numbering scheme for the broadcast mailboxes that is easy for the users to remember when they need to give their fax numbers out to callers.

**Fax Mail Mailbox Worksheet (Sample)****Fax Mail Mailbox Worksheet**

| Mailbox Owner's Name | Current Mailbox to Update |      |      |      |                                            | Fax Broadcast Mailbox to Create |      |      |      |
|----------------------|---------------------------|------|------|------|--------------------------------------------|---------------------------------|------|------|------|
|                      | Number                    | FCOS | LCOS | NCOS | Default Telephone Number for Fax Retrieval | Number                          | FCOS | LCOS | NCOS |
| Smith                | 3511                      | 10   | 1    | 1    | 555-3200                                   | 6511                            | 21   | 3    | -    |
| Pacheque             | 4673                      | 10   | 1    | 1    | 555-3200                                   | -                               | -    | -    | -    |
|                      |                           |      |      |      |                                            |                                 |      |      |      |
|                      |                           |      |      |      |                                            |                                 |      |      |      |
|                      |                           |      |      |      |                                            |                                 |      |      |      |
|                      |                           |      |      |      |                                            |                                 |      |      |      |
|                      |                           |      |      |      |                                            |                                 |      |      |      |
|                      |                           |      |      |      |                                            |                                 |      |      |      |

NP0137

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

**Fax Mail Mailbox Worksheet**

## Fax Mail Mailbox Worksheet

[illegible]

NP0138

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## Fax Broadcast Mailbox Configuration

If you set up special distribution list mailboxes for fax broadcasting, use the Fax Broadcast Mailbox Worksheet at the end of this manual. A sample worksheet is shown below. Use one worksheet for each distribution list mailbox. Enter the mailbox number to create or modify and the COSs to assign to it, then list the mailboxes and owners' names for the distribution (broadcast) list.

## Fax Broadcast Mailbox Worksheet (Sample)

### Fax Broadcast Mailbox Worksheet

Mailbox No: 6777 Name: Sales Fax Broadcast

FCOS No: 20      LCOS No: 5      NCOS No: -

### Distribution (Broadcast) List

| Mailbox # | Owner's Name |
|-----------|--------------|
| 4212      | Douglass     |
| 4256      | Garcla       |
| 4235      | Johnson      |
| 4354      | Sojourner    |
| 4222      | Budris       |
| 4343      | Dayharsh     |
| 4274      | Vilahu       |
|           |              |

NP0139

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_  
Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

## Fax Broadcast Mailbox Worksheet

**Fax Broadcast Mailbox Worksheet**

Mailbox No: \_\_\_\_\_ Name: \_\_\_\_\_

FCOS No: \_\_\_\_\_ LCOS No: \_\_\_\_\_ NCOS No: \_\_\_\_\_

**Distribution (Broadcast) List**

| Mailbox # | Owner's Name |
|-----------|--------------|
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |

| Mailbox # | Owner's Name |
|-----------|--------------|
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |
|           |              |

NP0140

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

## Guaranteed Fax Mailbox Configuration

For Guaranteed Fax, use the VIP FCOS with bits 198, 206, and 207 and enable message delivery. This mailbox delivers one copy of each fax message it receives to your fax machine and deletes each fax after it is successfully sent to the machine.

A sample Guaranteed Fax Mailbox Worksheet is shown below. Blank worksheets for photocopying are at the end of this manual. Fill in the telephone numbers in the hunt group. For example, if your fax machine is on 555-3200, assign mailboxes to 555-3201, 555-3202, and so on. Enter the COS for the mailboxes and the fax number you want them to deliver faxes to.

## Guaranteed Fax Mailbox Worksheet (Sample )

**Guaranteed Fax Mailbox Worksheet**

Fax Machine No./Name: 555-3200 Sales Order Entry

| Hunt Group Phone Number | Mailbox Number | FCOS | LCOS | Call Fax Number |
|-------------------------|----------------|------|------|-----------------|
| 3201                    | 3201           | 22   | 6    | 3200            |
| 3202                    | 3202           | 22   | 6    | 3200            |
|                         |                |      |      |                 |
|                         |                |      |      |                 |

NP0141

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

## Guaranteed Fax Mailbox Worksheet

**Guaranteed Fax Mailbox Worksheet**

Fax Machine No./Name: \_\_\_\_\_

| Hunt Group Phone Number | Mailbox Number | FCOS | LCOS | Call Fax Number |
|-------------------------|----------------|------|------|-----------------|
|                         |                |      |      |                 |
|                         |                |      |      |                 |
|                         |                |      |      |                 |
|                         |                |      |      |                 |

NP0142

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_



## Fax Publishing Mailbox Configuration

For fax publishing, you can use any of these types of mailboxes:

### Tree

A tree mailbox routes callers to other mailboxes when they press one of the keypad numbers. You must assign the proper features to the mailbox (refer to the Mailboxes section) create distribution list 01 in the mailbox with the “go to” mailboxes in keypad input order, and record a message in the mailbox directing the caller to press specific keypad numbers for different information. The “go to” mailboxes can also be tree mailboxes, branching the caller further for more specific information.

### Chain

A chain mailbox accepts other mailbox numbers from the caller and branches to them. Refer to the [Mailboxes](#) section for chain mailbox features.

### Greeting with fax

This mailbox plays your recorded greeting and directs the caller to receive the associated fax.

### Greeting only

This type of mailbox can be used within a fax publishing and audiotext application to give a voice only information message, such as the initial welcome greeting to callers.

### Fax on demand

Use a greeting only mailbox with bits 194, 195, and 197 to permit callers to receive a pre-stored fax online or at a caller-designated number.

### Fax only

A fax only mailbox plays any greeting and immediately prepares to receive a fax. This can be used in larger fax publishing or audiotext applications to allow the caller to input a fax message.

A sample Fax Publishing Mailbox Worksheet follows. Blank worksheets are at the end of this manual. For tree and chain publishing, you need a separate worksheet for each mailbox. Number the worksheets and fill the sheet numbers in the “Continue on Sheet” or “Go to Sheet” columns, so you can follow the progression through the tree or chain.

Write out the greeting, if any, that you want recorded in the mailbox. Enter a description or title of the fax document you want stored in the fax transmittal mailbox or attach it to the worksheet.

## Fax Publishing Mailbox Worksheet (Sample)

**Fax Publishing Mailbox Worksheet**

Mailbox No: 5223 Name: Fax Publishing Index Sheet No: 1

Mailbox Type (Check only one):  
☐ Tree ☐ Chain ☐ Greeting Only ☐ Fax Only ☒ Greeting with Fax

FCOS No: \_\_\_\_\_ LCOS No: \_\_\_\_\_

| Input | Go To Mailbox # | Continue on Sheet # |
|-------|-----------------|---------------------|
| 1     |                 |                     |
| 2     |                 |                     |
| 3     |                 |                     |
| 4     |                 |                     |
| 5     |                 |                     |
| 6     |                 |                     |
| 7     |                 |                     |
| 8     |                 |                     |
| 9     |                 |                     |

| Input | Go to Sheet # |
|-------|---------------|
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |

Greeting: You have selected the index of all documents available in the fax publishing system

\_\_\_\_\_

\_\_\_\_\_

Fax Document: Index

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

NP0143

## Fax Publishing Mailbox Worksheet

**Fax Publishing Mailbox Worksheet**

Mailbox No: \_\_\_\_\_ Name: \_\_\_\_\_ Fax Publishing Index: \_\_\_\_\_ Sheet No: \_\_\_\_\_

Mailbox Type (Check only one):  
☐ Tree ☐ Chain ☐ Greeting Only ☐ Fax Only ☐ Greeting with Fax

FCOS No: \_\_\_\_\_ LCOS No: \_\_\_\_\_

| Input | Go To Mailbox # | Continue on Sheet # |
|-------|-----------------|---------------------|
| 0     |                 |                     |
| 1     |                 |                     |
| 2     |                 |                     |
| 3     |                 |                     |
| 4     |                 |                     |
| 5     |                 |                     |
| 6     |                 |                     |
| 7     |                 |                     |
| 8     |                 |                     |
| 9     |                 |                     |

| Input | Go to Sheet # |
|-------|---------------|
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |
|       |               |

Greeting: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Fax Document: \_\_\_\_\_

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

NP0144

## Company Fax Cover Page

The last item you need to plan is your company fax cover page. The cover page is delivered with all faxes, except faxes from users who have their own cover page. Lay out an 8.5" by 11" page with your design. You should include your company name, address, telephone number, and fax number. You can also add your company logo and a short message indicating that the fax is from your company.

Fax the company cover page into the system administrator's mailbox(es) from the User Options Menu. You can assign separate administrator's mailboxes, each with a different cover page, to each outbound line group with fax capability.

If you do not enter a company cover page, the system sends a default cover page for users with no personal cover page. The default cover page contains the mailbox owner's name, the number of pages in the fax, the time and date, and if desired, a from field and a promotional field.

### Note:

If you enter a company cover page, it takes precedence over the default cover page and does not include the dynamic information provided on the default cover page.

If feature bit 200 is not enabled for a mailbox, the system does not send any cover page with faxes from that mailbox.

## Company Fax Cover Page Worksheet (Sample)

**Company Fax Cover Page Worksheet**

| Line Group No. | Admin Mailbox No. | FCOS | LCOS | NCOS | Description of Fax Cover Page |
|----------------|-------------------|------|------|------|-------------------------------|
| 1              | 9998              | 10   | 1    | 1    | ABC Comm.                     |
| 2              | 9991              | 10   | 1    | 1    | Fax-It-To-You                 |
|                |                   |      |      |      |                               |
|                |                   |      |      |      |                               |
|                |                   |      |      |      |                               |
|                |                   |      |      |      |                               |

NP0145

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

## Company Fax Cover Page Worksheet

**Company Fax Cover Page Worksheet**

| Line Group No. | Mailbox No. | FCOS | LCOS | NCOS | Description of Fax Cover Page |
|----------------|-------------|------|------|------|-------------------------------|
|                |             |      |      |      |                               |
|                |             |      |      |      |                               |
|                |             |      |      |      |                               |
|                |             |      |      |      |                               |
|                |             |      |      |      |                               |
|                |             |      |      |      |                               |

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

Configured By: \_\_\_\_\_ Date: \_\_\_\_\_

NP0146


## 1.4.8.3.5 Planning Outside Caller Access

With the NuPoint Fax optional feature, outside callers can leave fax messages for mailbox owners just as if they were sending a fax to a fax machine. In most instances, callers believe they are dialing directly to a fax machine, and are not prepared to perform any special functions to deliver a fax. Therefore, for the fax mail application

to be effective, the system must allow the callers to deposit faxes into the appropriate mailboxes without any unexpected requirements.

In most NuPoint Fax installations, mailbox owners have two mailboxes on the system. The first is their standard mailbox where they receive and play their messages. The second is a broadcast mailbox with walkaway fax enabled. This mailbox is transparent to the mailbox owner and automatically sends fax messages into the mailbox owner's standard mailbox upon message receipt, as shown below. The reason for the broadcast mailbox is to allow mailbox owners to publish a telephone number where callers can send a fax directly to them. This second number goes directly to the broadcast mailbox without first ringing at any telephone. This allows for a situation that is familiar to both the caller and the mailbox owner.

### The Broadcast Fax Mailbox Setup

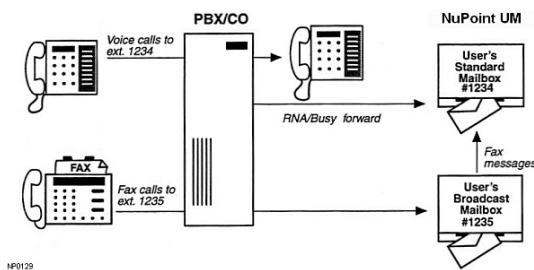


There are several ways that callers sending faxes can be routed to the correct mailboxes. These include DID routing, Switch Integration routing, Switch Tie Trunk Integration routing, and General Access. It is possible to combine two or more of these methods to meet user needs and cost requirements.

**Note:** The primary purpose of the call routing scenarios in this chapter is to show possible switch connections. There are many ways to configure line groups and assign fax resources. Fax resources can be dedicated to a single line group or shared by inbound and outbound line groups.

### DID Fax Call Routing

The simplest routing method is to connect a second NuPoint Fax-equipped inbound line group to DID trunks directly from the CO. In this scenario, each mailbox owner that has fax mail capability is provided with a DID telephone number that allows a caller to deposit a fax message, or voice and fax message, into a broadcast mailbox on the system. Because the DID method involves additional trunks from the central office that bypass the PBX, it can be used in any switch environment. It does incur the expense of the DID lines and DID numbers for all users with NuPoint Fax capability.

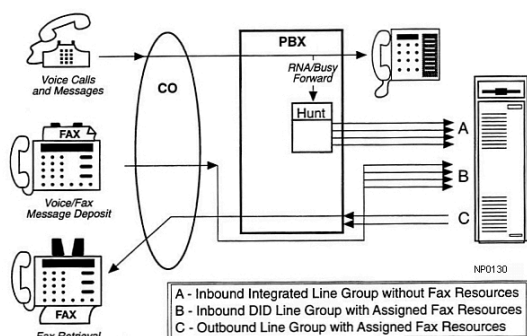

## Switch Integration Fax Call Routing

Fax Mail is supported by many of the PBX and Centrex integrations. Switch integration works the same way as DID fax call routing in that the caller is directed immediately to the appropriate mailbox. This method requires every person with Fax Mail capability to have a second DID number (both CO and PBX) that goes to a software-only *phantom* extension on the PBX. The phantom extension numbers must correspond to the broadcast mailbox numbers, and must be hard-forwarded to the NuPoint Voice pilot number. This method of fax call routing is shown below.

### Method 1

The advantage of this method is that fax calls are answered immediately by the desired party's NuPoint Fax broadcast mailbox, and it does not require any trunks directly from the central office. However, it does require the expense of an additional DID number for each mailbox owner with fax capability.

Not all switches support a phantom extension capability. If your switch does not support this, then you must use another method. If your switch supports multiple in-bound line groups, you can use the second method of switch integration.

### Method 2

## Switch TIE Trunk Integration Fax Call Routing


This method utilizes the tandem switching capabilities of many PBXs. If the integration routing method is not supported by your switch, this method still allows you to use a line group to the switch from the CO, but could require additional cards in the PBX. This method also requires everyone with fax capability to have a second DID number from the CO.

When the switch receives a call on one of the DID lines, it passes the call and its related information to the NuPoint Unified Messaging server over a set of TIE trunks. The call information allows the server to connect the caller to the appropriate mailbox.

One disadvantage of TIE trunk integration is that many PBXs do not allow callers to transfer on TIE trunks. If most of the calls on these trunks are fax calls though, few callers need to transfer.

## General Access Fax Call Routing

The alternative to DID or switch integration routing is to have a single fax message number that, upon answering, requests that the caller enter the mailbox number of the party who will receive the fax. The figure below shows these calls routed directly to the inbound line group. The advantage of this access method is the security and screening that it offers, since only those who know the mailbox number can access it. This method is available on any PBX or key system with no special hardware or software requirements.

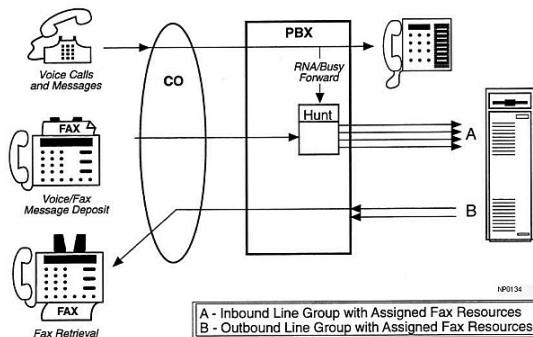

## 1.4.8.4 Installation and Configuration

### 1.4.8.4.1 Overview

#### Before You Begin

Before you begin a configuration session:

- 1. You must purchase and [install the Fax feature](#).
- 2. Plan your Fax configuration (see the [Fax Planning](#) section).
- 3. Ensure that you have the following items to use during configuration of Fax Applications:
  - A NuPoint Unified Messaging server console (video monitor and keyboard) and module, with power on
  - At least two telephones for configuration testing
  - Completed worksheets. (Use the blank [worksheets](#) to help you configure Fax. Instructions for completing the worksheets are contained in the Fax Planning section. The configuration procedures assume that you have completed the appropriate worksheets.)

#### Configuration

Configuration of all fax applications consists of the following tasks:

1. **Define a Fax group:** add a group of virtual Fax channels, quantity determined by Fax feature licensing to a maximum of 6 channels.
2. **Assign the Fax group to Line Groups** that require Fax capabilities. Assign fax to incoming line groups (like NuPoint Voice) to allow for receipt of fax messages. Assign to outgoing line groups (Pager/Outdial) to allow for transmission of outbound fax messages. **Note:** Fax resources are shared among line groups. If all available lines are busy processing incoming fax messages, then no lines are available for outbound messages. In this case, the outgoing messages are queued for retry. (In the case of all lines being busy, the sender of a new incoming fax will receive an error message indicating an unsuccessful transmission.)
3. **Customize an FCOS and LCOS with the Fax feature bits and limits.**
4. **Assign the new COS values to the mailboxes** that require fax features. For outbound fax using the Fax Printer Driver application, configure mailbox Call Placement options.

This section supplies detailed instructions to perform these configuration tasks.

### 1.4.8.4.2 Configuring Fax Applications

These instructions assume that you have purchased and installed the Fax feature and familiarized yourself with the Fax Planning section. All Fax applications follow the same basic configuration. These instructions apply to the following applications:

- Fax Mail
- Walkaway Fax
- Fax Broadcast
- Guaranteed Fax
- Fax Publishing
- Outbound Fax

To configure Fax applications:

1. Complete the [NuPoint Fax COS Planning Worksheet](#) and the appropriate worksheet for your application:
2. [Fax Mail Mailbox Worksheet](#)
3. [Fax Broadcast Worksheet](#)
4. [Guaranteed Fax Mailbox Worksheet](#)
5. [Fax Publishing Mailbox Worksheet](#)
6. Define fax groups and assign them to the line groups that will be used for the fax application. You can use a shared fax group on an inbound line group to deposit faxes into the fax publishing system. You need a dedicated fax group for callers to retrieve faxes, either online or by entering a fax machine phone number.

**Note:**

- You should define the fax groups on the currently inactive configuration.
- If you are providing users with broadcast mailboxes for fax reception, you must customize one FCOS for fax users and another FCOS for the broadcast mailboxes. If you offer different levels of service to users, you might have to customize more than one FCOS.
- To enable users to download the Fax Printer from the Web View GUI, ensure that the FCOS does not include feature bit 303 (Disable Web View Downloads).

7. Based on your completed NuPoint Fax COS Planning Worksheet, [customize an FCOS](#) to include the following bits:

| For Fax Mail: | For Walk away Fax: | For Fax Broadcast | For Guaranteed Fax | For Fax Publishing | For Outbound Fax |
|---------------|--------------------|-------------------|--------------------|--------------------|------------------|
| 190           | 190                | 122               | 198                | 194                | 110              |
| 191           | 203                | 190               | 206                | 195                | 193              |
| 192           | 256                | 198               | 207                | 197                | 195              |
| 193           |                    | 203               |                    |                    | 290              |
| 194           |                    |                   |                    |                    |                  |
| 195           |                    |                   |                    |                    |                  |
| 196           |                    |                   |                    |                    |                  |
| 198           |                    |                   |                    |                    |                  |
| 199           |                    |                   |                    |                    |                  |
| 200           |                    |                   |                    |                    |                  |
| 203           |                    |                   |                    |                    |                  |
| 230           |                    |                   |                    |                    |                  |
| 235           |                    |                   |                    |                    |                  |
| 236           |                    |                   |                    |                    |                  |
| 237           |                    |                   |                    |                    |                  |
| 239           |                    |                   |                    |                    |                  |
| 240           |                    |                   |                    |                    |                  |
| 256           |                    |                   |                    |                    |                  |
| 290           |                    |                   |                    |                    |                  |

8. Based on your completed NuPoint Fax COS Planning Worksheet, [customize an LCOS](#) with the following limits parameters:

|                                                                |                                      |
|----------------------------------------------------------------|--------------------------------------|
| For Fax Mail, Walkaway Fax, Broadcast Fax, and Fax Publishing: | For Guaranteed Fax and Outbound Fax: |
|----------------------------------------------------------------|--------------------------------------|



|                                                                          |                                                       |
|--------------------------------------------------------------------------|-------------------------------------------------------|
| Maximum number of digits allowable for fax phone number for fax delivery | Maximum number of fax messages per mailbox            |
| Maximum number of fax messages per mailbox                               | CNG tone detection length (recommended value of zero) |
| CNG tone detection length (recommended value of zero)                    | Unplayed fax message retention                        |
| Fax delivery retry frequency                                             | Urgent fax message retention                          |
| Fax delivery retry interval                                              |                                                       |
| Played fax message retention                                             |                                                       |
| Unplayed fax message retention                                           |                                                       |
| Urgent fax message retention                                             |                                                       |
| Fax receipt retention                                                    |                                                       |

9. If you have [NP Net](#) installed on your server, [customize an NCOS](#) with the following limits parameters, based on your fax planning worksheet:
  - 10 (Make Fax Message to Network)
  - 11 ( Give Fax Message to Network)
  - 12 ( Answer Fax Message to Network)
10. Based on your completed Fax Mail Mailbox Worksheets, configure user mailboxes for Fax Mail. Mailboxes for Fax Publishing can be [Tree](#), [Chain](#), or [Greeting Only](#).
11. (Optional) [Set billing rates](#) for NuPoint Fax.
12. Activate the configuration.
13. For each **Fax Broadcast** mailbox create distribution list 1 containing the recipients for faxes sent to that mailbox. Recipients can include local mailboxes, remote mailboxes on other NuPoint Unified Messaging servers connected by an NP Net network, or outdial telephone numbers.
14. To deposit the faxes into the **Fax Publishing** mailboxes, you must call the server from a fax machine. Log into each Fax Publishing mailbox as the mailbox owner (by pressing the star key before the mailbox number) and select the **8** key for user options, the **3** key for fax options, and then press the **5** key to leave a fax. When prompted, send the appropriate pages into the mailbox. Repeat for each mailbox in your Fax Publishing system. When a caller reaches one of the mailboxes, the server plays any recorded greeting in the mailbox and then tells the caller to get ready to receive the fax online or input a fax number to have the fax delivered.

### 1.4.8.4.3 Configuring Fax Applications

When NuPoint UM attempts to send a fax and encounters a busy line or a Ring-No-Answer (RNA) condition, it refers to the limits values set in the LCOS of the sending mailbox. You can configure the number of retries and the interval between retries. You can also limit the length of telephone number that can be faxed.

**IMPORTANT!**

- When faxes are sent using the **TUI**, settings must be configured in the **Fax Limits** menu.
- When faxes are sent using the **Fax Printer Driver** or Web View, settings must be configured in the **Call Placement limits** menu.

The TUI settings are set by default to try to send a fax once. If the fax fails, NuPoint UM will retry one more time after one minute has elapsed. If the retry fails, the system creates a fax receipt to notify you of the failure.

When using the Fax Printer Driver or Web View, the "RNA retry" default setting causes NuPoint to retry the fax 10 times at 60-minute intervals. (Note that in this case, a failure to send the fax will not provide a fax receipt for approximately 10 hours.) The "Busy retry" default setting causes NuPoint UM to retry up to 10 times at 10-minute intervals. The "Message Phone Length" parameter limits the length of the fax number you can dial. You can adjust these values as required.

To make the Fax Printer/Web View defaults the same as the TUI defaults (1 retry after 1 minute):

- Customize an LCOS to include the following **Call Placement limits**/settings:
  - RNA retry limit: 1
  - RNA retry interval: 1
  - Busy Retry limit: 1
  - RNA retry interval: 1

**Note:**

- If necessary, you can adjust the RNA and Busy retry limits if you want the fax to make more than one retry before failing.
- If the fax transmission itself fails (for example, fax machine error/power failure), NuPoint treats the fax attempt as a Ring No Answer.

#### 1.4.8.4.4 Set Up a Fax Cover Page

You can have a different fax cover page for each line group by assigning a unique administrator's mailbox to each line group and storing a different cover page in each administrator's mailbox. This procedure assumes that you have already installed the NuPoint Fax feature and configured at least one Fax Application (see [Configuring Fax Applications](#)).

**Note:**

- If no personal or company fax cover page is configured, then the server does not auto-generate a default cover page.
- If feature bit 200 is not enabled in the FCOS for the faxing mailbox, the system will not send any cover page.

## Cover Page Options

NP Fax provides three cover page options for faxes sent out from the server:

1. Each mailbox owner can have a **personal fax cover page**. This option allows a mailbox owner to fax their own cover page into their mailbox (via the User Options Menu). The system sends the personal cover page with any fax sent from the mailbox to a telephone number. Faxes retrieved online do not include a cover page.
2. The system can send a **company cover page**. If a cover page is put in the administrator's mailbox, it becomes the cover page for all faxes sent from that line group for all mailboxes that do not have a personal cover page. You can assign separate administrator's mailboxes, each with a different cover page, to each outbound line group with fax capability.
3. The mailbox owner can use a **TIFF file as a custom cover page**. The system uses the default cover page unless the user selects the custom cover page when composing a fax.

## Setting Up a Company Fax Cover Page

To set up a company fax cover page:

1. Plan the layout of the cover page on 8.5 x 11 paper. Include the following information:
  - Company Name
  - Address
  - Telephone Number
  - Fax Number
2. Make sure that the administrator's mailbox has an FCOS with the bit 200 (fax cover page) enabled.
3. Dial into the system administrator's mailbox from a fax phone and reach the User Options Menu. Press the **3** key for Fax Delivery Options and then the **2** key for Fax Cover Page. When prompted, fax the cover page into the mailbox.

## 1.4.8.4.5 Viewing Fax Messages

Fax-viewing is supported in Standard UM and in the Web View using either a TIFF or PDF viewer. Which application is required depends on the [Fax Download Setting](#).

To allow a user to view Fax messages with their Web View interface, you must assign feature bits 190 and 290 to the user's mailbox.

### Note:

- A TIFF or PDF viewer is not delivered as part of the NuPoint Messaging software or Fax feature option. For TIFFs, users should use the MS Paint or Photo Viewer application included with their Windows operating system. For PDFs, users should download Adobe Acrobat Reader from the internet.
- The Apple QuickTime Player is not supported within the Web View interface for users to display faxes in TIFF format. Quick-Time should be configured not to play TIFFs on the user's PC. For this procedure, refer to the *NuPoint Unified Messaging Web View Help*.
- To print fax messages, feature bit 110 (Make/Give to Telephone Number) must be enabled in the user's mailbox.

## 1.4.8.4.6 Procedures (Web Console)

### 1.4.8.4.6.1 Managing Fax Groups

#### Add a New Fax Group

To add a new fax group:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Fax Groups**. A list of defined fax groups is displayed.
4. Click **Add**.
5. In the **Number** field, enter a number (1-42) for this fax group.
6. In the **Module** list, select the number of the module (1-4) that you want included in this fax group.

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0. For post-Release 6.0 platforms, there is only one module and it is automatically selected.

1. To add Channels to this group, click **Add** in the Fax Channels section. The Add Channels to Fax Group dialog box is displayed. **Note:** The Add button is enabled only when your system has sufficient licenses and fax channels available.
2. Select one or more channels from the **Available Channels** list and then click **Add**.  
**Note:** Number of selected channels cannot exceed quantity of available licenses.

To assign a fax group to an existing line group (optional):

1. In the Connection to Line Groups section, click **Add**. The Connect Fax group to Line Group dialog box is displayed.
2. In the **Line Groups** list, select a line group with which to associate this fax group, and then click **Add**. The selected line group is added to the Line Groups list.
3. Click **Save** to add the new fax group.
4. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## Edit a Fax Group

To edit an existing fax group:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Fax Groups**. A list of defined fax groups is displayed.
4. Select the fax group you want to edit and then click **Edit**.
5. Edit the fax group fields as required and then click **Save**. **Note:** Module number is editable only if there are no channels added.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## Delete a Fax Group

To delete a fax group:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Fax Groups**. A list of defined fax groups is displayed.
4. Select the group you want to delete by selecting its check box, and then click **Delete**.  
A confirmation message is displayed.
5. Click **Yes** to delete the selected fax group.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**.  
Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## Set Up General Fax Limits

To set up general fax limits:

- Refer to the Fax limits section of the [LCOS Parameters and Defaults](#) list.
- To set up fax limits when using the Fax Printer Driver or Web View refer to [Configuring Ring No Answer and Busy Behavior](#).

## Configure a Mailbox for Fax

To configure a mailbox for fax:

- Refer to the [Edit Mailboxes](#) procedure and to the [Mailbox Parameters - Web Console](#) list.

## 1.4.8.4.7 Procedures (Text Console)

### 1.4.8.4.7.1 Define a Fax Group

Use this procedure to define a fax group with virtual fax channels. The number of channels you have is determined by licensing, up to a maximum of six channels. The numbering scheme of "slot:channel" is maintained for backward compatibility with older NuPoint Unified Messaging servers. For the purposes of defining a fax group, all fax channels reside in **slot 5** (5:0 to 5:5).

You can enable fax capabilities by assigning the fax group to up to 24 line groups. For incoming fax, associate the fax group with an incoming line group (like NuPoint Voice). For outgoing fax, associate the fax group with an outgoing line group (like Pager). See other topics in this section for procedures to associate fax groups with line groups.

To define a fax group:

1. From the Main Menu, select **(S) System Maintenance,(R) Reconfiguration,(R) Reconfigure System**, and then **(G) Offline Menu**.

2. From the Offline Menu, select **(G) Define Line Groups, Fax Groups**.
3. Select **(F) Define Fax Groups**. You can select menu options (S) and/or (U) to display information about existing fax groups.
4. Select **(G) Current Group=** and enter a **number** (1-24) for the fax group you are defining.
5. Select **(M) Module of Current Fax Group** and enter the **number** of the module (1-2) to include in the fax group.
6. Select **(A) Add Channels to Current Fax Group** and enter the slot number (always 5) and channel number (0-5) to add to the fax group, separated by a colon. For example:

| Entry:        | Specifies:                       |
|---------------|----------------------------------|
| *             | All channels in the given module |
| 5:*           | All channels in slot 5           |
| 5:0 - 5:2     | Channels 0 to 2 in slot 5        |
| 5:0, 5:2, 5:4 | Channels 0, 2, and 4 in slot 5.  |

1. To drop channels from a fax group, select (D) Drop Channels from Current Fax Group and enter the channels to remove, using the same format described in step 6.
2. Repeat the procedure for each fax group you want to define. (If you have line groups that have cards in more than one module and you want to give those line groups fax capability, then you must define a fax group for each module.)
3. Exit from the Fax Group Menu. If you want to assign the new fax group to a Line Group now, exit back to the Line Groups menu and go to [Assign Fax Group to Line Group](#).

### 1.4.8.4.7.2 Assign Fax Group to Line Group

To assign fax group to line groups:

1. If you are not already there, navigate to the Line Groups menu by selecting **(S) System Maintenance,(R) Reconfiguration,(R) Reconfigure System**, and then **(G) Offline Menu**.
2. From the Offline Menu, select **(G) Define Line Groups, Fax Groups**.
3. Select **(G) Current Group=** and enter a **number** (1-24) for the line group to which you want to assign a fax group.
4. Select **(C) Fax Group connections for current line group**. The system displays Line Group and Module (For example: Line group X, Module Y, where X is the line group that you selected in step 3, and Y is the first number of the first module that has voice ports in line group X.)

5. Enter the **fax group number** of the fax group to be connected with the lines of the current line group on the specified module. You can assign a fax group to more than one line group.
6. Repeat this procedure for each line group that you want to associate with fax groups.
7. Exit to the NuPoint Voice Configuration Offline Menu.
8. [Activate the inactive configuration](#) to make the changes take effect.
9. Assign the fax feature bits to the FCOS and LCOS that control the behavior of mailboxes that will be fax-enabled.

### 1.4.8.4.7.3 Set Limits for NuPoint Fax

To set up limits to govern the fax feature:

1. From the Main Menu, select **(S) System Maintenance,(R) Reconfiguration**, and then **(L) Limits COS**.
2. Select **(C) Choose Limits COS to Modify** and enter the number of the LCOS you want to modify.
3. Select **(N) Name Selected LCOS** and enter a descriptive name (1-15 characters) OR press Enter to accept the displayed name.

To set CNG Tone Detection Length for Walkaway Fax

1. Select **(P) Set NuPoint Fax Limits for Selected LCOS**.
2. Select **(C) Pre-greet Silence Interval to Improve Walkaway CNG Detection =**. This parameter should be 0 unless extremely noisy lines affect the CNG detection ability. Enter '.' to set the value to zero.

To set Fax Delivery Limits

1. Still in the NuPoint Fax Limits menu, select **(A) Maximum Number of Digits for Telephone Number** and enter the maximum number of digits (1-25) allowed in the fax phone number for fax delivery. Include access digits and area code requirements.
2. Select **(D) Fax Delivery Retry Frequency** and enter the number of retry attempts (0-255) the server will make to deliver a fax.
3. Select **(E) Fax Delivery Retry Interval** and enter the number of minutes between fax delivery retries.

To set Fax Storage Limits



1. Still in the NuPoint Fax Limits menu, select **(B) NuPoint Fax Message Count** and enter the maximum number of faxes (1-72) allowed or enter 0 to allow an unlimited number of faxes to be stored.
2. Exit to the Limits Class of Service menu and select **(D) Set Mailbox & Message Age Limits for selected LCOS**.
3. Select **(A) Played Fax Message Retention** and enter the number of hours (0-8760) a played fax message is kept if not deleted by the user.
4. Select **(B) Unplayed Fax Message Retention** and enter the number of hours (0-8760) an unplayed fax message is kept.
5. Select **(C) Urgent Fax Message Retention** and enter the number of hours (0-8760) an urgent fax message is kept.
6. Select **(D) Fax Receipt Retention** and enter the number of hours (0-8760) a fax receipt is kept if not deleted by the user.
7. Exit to System Configuration menu to save your changes.

#### 1.4.8.4.7.4 *Configure a Mailbox for NuPoint Fax*

To configure a new or existing mailbox for Fax Mail, Fax Publishing, Guaranteed Fax, or Fax Broadcast:

1. From the Main Menu, select **(M) Mailbox maintenance**.
2. Select **(C) Create new mailboxes** OR **(M) Modify Mailboxes** and enter the number of the mailbox to create/modify. (When you select (M), the word "New" precedes each prompt in the following instructions.)
3. Press **Enter** until you see the **Features Class of Service** prompt. Assign a fax-customized FCOS by entering the number of the FCOS (1-640) that includes fax feature bits. Press **Enter**.
4. At the **Limits Class of Service** prompt, enter the number of the LCOS that includes the applicable fax limits.
5. If you have NP Net, at the **Network Class of Service** prompt, enter the number of the NCOS that includes the applicable fax limits.
6. At the **Restrictions Class of Service** prompt, and then enter the number of the RCOS that includes the applicable fax restrictions.
7. For Guaranteed Fax, you need to set up message delivery to the target fax machine. If this mailbox isn't used for Guaranteed Fax, skip to the next numbered step.
8. Press **Enter** until you see the **Message waiting type #1** and then enter **5** for Pager.

9. At the **Pager Access Type** prompt, enter the letter of the index to be used for delivery to a fax machine. Valid choices are:
  - **I** Internal outdial index
  - **B** Billed outdial index
  - **U** Non-billed outdial index
  - **N** Undefined index
10. At the **Pager number** prompt, enter the phone number of the target fax machine.
11. At the **Post-pager number** prompt, enter any overflow from the pager number that did not fit in the **Page number** field; OR leave blank.
12. Skip the **Pager frequency** and **interval** prompts as these items are controlled by LCOS settings.
13. At the **Message delivery** prompt, enter Y to activate.
14. Press **Enter** until you see the **Pager start time** prompt, and then enter the time at which fax delivery is to start. Enter the time in hours and minutes followed by “am” or “pm,” for example 6:00pm. To have fax delivery enabled for all times, set both **Pager start time** and **Pager stop time** to the same value, such as 12:00am.
15. At the **Pager stop time** prompt, Enter the **time** at which fax delivery is to stop.
16. Press **Enter** until you see the **Fax retrieval pager access type** prompt, and then enter the letter of the index (I, B, U, or N) to be used for fax retrieval, OR enter a pager system number from 0 to 15.
17. At the **Default telephone number for fax retrieval** prompt, enter the default **number** (1-16 characters) of the fax phone the fax message is to be delivered to. This field can contain any additional [characters necessary for outdialing](#).
18. At the **Call placement pager access type** prompt, enter the letter of the index (I, B, U, or N) to be used for fax retrieval, OR enter a pager system number from 0 to 15.  
**Note:** This entry is required to send fax from the Web View interface.
19. At the **Time zone offset** prompt, enter the **number** of hours difference between the time zone of the mailbox owner and the local time zone of the NuPoint Unified Messaging server. Valid values are from -23 to +23. This number must match the offset of one of the time zones set in the Time Zone Configuration Menu.
20. Press **Enter** to skip through each of the remaining mailbox configuration prompts. After the last prompt, the system displays the mailbox configuration, then prompts for the next mailbox number.

At this point, the parameter settings are saved and you can continue with mailbox configuration or exit.

### 1.4.8.5 FAX Billing and Statistics

## 1.4.8.5.1 Introduction

The server keeps records of fax traffic, both at the system and mailbox level. Mailbox owners can be billed for faxes sent and received, either in terms of the number of faxes, or the total number of pages.

You can set NuPoint Fax billing rates for the following types of usage:

- Number of received fax messages
- Number of sent fax messages
- Retrieval of non-billed fax messages
- Retrieval of billed fax messages
- Undelivered fax messages
- Number of fax pages received
- Number of non-billed fax pages received
- Number of billed fax pages received
- Fax disk usage

These different usages can be combined in many ways to provide users with defined billing levels. This section describes each usage type. For instructions to produce billing reports, see [Run a Billing Report](#). Fax statistics reports are also available to monitor the use of fax groups and fax storage.

NuPoint Unified Messaging servers offer two other methods of billing mailbox owners for fax usage:

- Fax transactions are recorded in Call Detail Recorder records, which can be downloaded to a computerized billing system for interpretation and billing.

OR

- The server can place fax calls using mailbox owners' long distance carriers and calling card numbers. This can eliminate the need for any further billing, because there is no toll incurred by the server.

## 1.4.8.5.2 Billing Parameters

The Billing Menu, reached from the Reports Menu, identifies several categories of system usage that you can configure for billing. The categories of Messages Received and Disk Usage contain fax fields:

### Messages Received

Messages Received contains fields both for faxes received and faxes sent. You can bill fax messages either on the number of messages or the number of pages. Additionally, you can bill retrieved fax messages in two categories: those for which the call was

placed using the mailbox owner's calling card (billed messages), or those that were dialed without using a calling card (non-billed messages). You can also place a rate on undelivered fax messages, which incur storage space while on the system.

For each of the fax fields in Messages Received Billing, you can set two rates: one for instances below a certain boundary (for example, the first ten faxes received each billing period), and another for each instance above the boundary (all faxes received after the first ten). You can also set the boundary between low and high usage.

### **Fax Received Messages**

This billing parameter allows you to bill mailbox owners based on the number of faxes that they receive during a billing period.

### **Fax Sent Messages**

This billing parameter allows you to bill mailbox owners based on the number of faxes that they make or give during a billing period. If a mailbox owner sends/gives a fax to a distribution list, each member of the distribution list counts as one fax message sent.

### **Fax Retrieval Non-Billed Messages**

This parameter bills mailbox owners for each successful outgoing fax call that the server makes using a non-billed access code. These calls may be local or long distance, depending on the configuration of access codes and the mailbox LCOS. Faxes that callers retrieve during a NuPoint Voice session are not counted in this billing parameter.

### **Fax Retrieval Billed Messages**

This parameter bills mailbox owners for each successful outgoing fax call that the server makes using a billed access code. These fax calls are made using the mailbox owner's long-distance carrier and calling card, thus the server does not incur any toll charges for the calls. Faxes that callers retrieve during a NuPoint Voice session are not counted in this billing parameter.

### **Fax Undelivered Messages**

You can use this billing parameter to charge for fax messages that are received into a mailbox, but never delivered to a fax machine. These messages are eventually purged from the system due to age.

### **Fax Pages Received Messages**

This billing parameter allows you to charge mailbox owners based on the number of fax pages received, regardless of the total number of faxes. If you are trying to serve a lot of customers with few fax ports, it may work better to bill your customers for fax pages rather than total faxes (see "Fax Received Messages," above), since a single fax that contains many pages can occupy a fax port for several minutes.

## **Fax Pages Sent Messages**

This billing parameter allows you to charge mailbox owners based on the number of fax pages sent, regardless of the total number of faxes. If you are trying to serve a lot of customers with few fax ports, it may work better to bill your customers for fax pages rather than total faxes (see “Fax Sent Messages,” above), since a single fax that contains many pages can occupy a fax port for several minutes.

## **Fax Pages Retrieval Non-Billed Messages**

This parameter bills mailbox owners for each page of successful outgoing fax calls that the server makes using a non-billed access code. These calls may be local or long distance, depending on the configuration of access codes and the mailbox LCOS. Faxes that callers retrieve during a NuPoint Voice session are not counted in this billing parameter.

## **Fax Pages Retrieval Billed Messages**

This parameter bills mailbox owners for each page of successful outgoing fax calls that the server makes using a billed access code. These fax calls are made using the mailbox owner’s long-distance carrier and calling card, thus the server does not incur any toll charges for the calls. Faxes that callers retrieve during a NuPoint Voice session are not counted in this billing parameter.

## **Disk Usage**

Disk Usage billing allows you to charge mailbox owners for the amount of storage used by their mailbox during a billing period. Fax messages, like voice messages, occupy space on the system’s hard disks. You can bill at different rates for voice messages and fax messages, if desired.

## **Fax Disk Use Rates**

Simply stated, this billing parameter sets a cost for fax storage on the system’s hard disk. Storage used during a billing period is the result of the size of each message times the length of time that the mailbox owner has it in his or her mailbox.

Because the density (amount of information) of a fax page varies, fax disk usage is not measured in units of pages or total faxes. Instead, fax disk usage is measured in units of comparable voice storage. In other words, if a fax message stored on the system’s hard disk takes up as much space as a two-minute message, it would be billed the same as a two-minute message. If a mailbox owner kept that fax message for five days before discarding it, the total usage would equal ten minutes of storage.

The average double-spaced fax page (8.5" x 11") requires the same amount of storage as about 12 seconds of voice recording. A very dense fax page can use the equivalent storage space as 40 or more seconds of voice recording.

As with the Messages Received parameters, you can set a low usage rate, high usage rate, and boundary for Fax Disk Use. The boundary is in units of equivalent voice storage minutes.

### 1.4.8.5.3 Set Billing Rates for Fax

You can set billing rates for fax usage by number of messages received and/or by disk usage.

- Follow [this procedure](#) to set billing rates for Fax messages received.
- Follow [this procedure](#) to set billing rates for Fax disk usage.

### 1.4.8.5.4 Fax Statistics

The NuPoint Unified Messaging server can produce individual mailbox and system-wide statistics on fax usage.

#### Mailbox Statistics

The Mailbox Dump (from the Mailbox Maintenance menu of the **Text Console**) report for individual mailboxes contains many pieces of information relating to NuPoint Fax. In addition to identifying the mailbox configuration, including COS assigned to the mailbox, the report shows:

- Whether the mailbox has a fax cover page or greeting
- The number of fax messages and pages received
- The number of fax messages and pages sent
- The number of fax messages and pages delivered (downloaded) by the user to a fax machine
- The number of undelivered faxes
- The disk space used by faxes in the mailbox

#### System Statistics

The Mailbox Statistics report (reached from the Statistics Menu of the **Text Console**) contains information about the total amount of disk space used for fax storage. Within the Speech Statistics section of the Total Speech and Account Breakdown report are numbers for:

- The number of fax greetings and messages on the system, and the total number of frames and blocks that each occupies. The report also shows the percentage of storage blocks filled by each type of fax.
- A summary of the number of storage blocks used by both fax messages and greetings combined.

## 1.4.8.5.5 About the Fax Group Usage Report

This **Text console** report provides several pieces of information regarding fax group usage that you can use to monitor your system configuration. The reporting period can be any portion of the most recent seven days, and any hour or range of hours during those days. You can choose either a full report, which gives the statistics in 15-minute increments, or a summary report, which you can use to scan for possible problem areas.

Below is a sample Fax Group Usage Report followed by an explanation of how to read the report.

### FAX GROUP USAGE 15min REPORT

Mon Jan 30, 20xx 7:50 am

01/30/XX 8hr --- minutes interval ---

Fax Group 1

DAY=01 HOUR=08 00-14 15-29 30-44 45-59 TOTAL BUSY

Transactions 1 8 22 21 52

Total Use 123 984 2706 2583 6396

No Resource Count 0 0 1 0 1

ATB Seconds 0 0 10 2 12 1 %

ATB Count 0 0 1 1 2

HIGHEST ATB\_SEC: 10 sec at 8 hr

LOWEST ATB\_SEC: 0 sec at 8 hr

### Reading the Fax Group Usage Report

The report heading shows the date and time that the report was run.

The first line of the report shows the date and time interval during which the data was gathered.

- **Fax Group *n*** The following information concerns this fax group.
- **DAY=01 HOUR=08** The data displayed immediately below refers to traffic on day 1 (Monday) between the hours of 8:00 am and 9:00 am. 00-14 indicates that data in that column was gathered during the first fifteen minutes of the hour; 15-29 refers to the second 15 minutes of the hour, and so on.

- **Total** The combined data for the four 15-minute intervals. If this column contains a hyphen, it means that the data for that hour has not yet been gathered. For example, if the report is run at 3:30 p.m., and the report interval is for hours 12-15 (noon to 3 p.m.) the entries for the hour 15 (3 to 4 p.m.) show hyphens.
- **Transactions** The total number of fax receptions/transmissions that the fax group processed during the time period. Note that this does not reflect the number of fax pages nor the number of faxes; a single outgoing fax call (a transaction) could send several faxes from one mailbox.
- If a fax transaction spans two reporting periods, the Total Use fields show the time used in each period. The Transactions field counts the fax in the period in which the transaction started.
- **Total Use** The number of seconds that the channels in the fax group were involved in fax transactions during the time period.
- **No Resource Count** The number of times that all fax channels in the fax group were in use and another voice port requested a fax channel. This indicates that the fax group is too small to service all requests and some requests are being rejected.
- **ATB Seconds** The total number of seconds that all fax channels in the fax group were in use simultaneously.
- **Busy** The percentage of the hour that all fax channels were busy and the potential for request rejection existed.
- **ATB Count** The number of times that all fax channels in the fax group were in use simultaneously.
- **HIGHEST ATB\_SEC:** This statistic identifies the busiest hour(s) for the fax group during the entire reporting period, and the number of seconds that all channels were busy during that hour.
- **LOWEST ATB\_SEC:** This statistic identifies the hour(s) that had the least amount of time when all channels were busy.

Below is a sample Total Fax Group ATB Summary Report.

#### TOTAL FAX GROUP ATB SUMMARY REPORT

Mon Jan 30, 1995 4:24 pm

01/23/95 8hr-17hr day1-day5

GROUP TRANSACTIONS TOT SEC NO RES ATB CNT ATB SEC BUSY

-----

1 345 60030 1 2 12 1 %

The fields in the Fax Summary Report are identical to the fields in the Fax Group Usage Report. The data reported is the summary for the entire reporting period. You can use the report to monitor fax group usage, and to look for possible trouble spots. You can then decide whether you need to run the more detailed Fax Group Usage Report.



## 1.4.8.5.6 Procedures (Web Console)

### 1.4.8.5.6.1 Run a Fax Group Usage Report

To run a Fax group usage report:

- Follow the instructions to [Run a Line Group Usage Report](#), selecting a line group that has Fax groups

## 1.4.8.5.7 Procedures (Text Console)

### 1.4.8.5.7.1 Run a Fax Group Usage Report

To enter the parameters for a fax group usage report (both standard and summary forms) and produce the report:

1. From the Main Menu, select **(R) Reports**, **(S) Statistics** and then **(F) Fax Group Usage**.
2. Select **(A) Beginning Group** and enter a **fax group number** between 1 and 24.
3. Select **(B) Ending Group** and enter a **fax group number** between 1 and 24. To report only one group, enter the same group number you entered in the Beginning Group field.
4. Select **(C) Beginning Hour** and enter the **number**, in military time, of the first hour of the time period for the report. The default is 8:00 a.m. (8). The range is 0 to 23 hours. 0 (zero) is midnight, 12 is noon, and 23 is 11:00 p.m.
5. Select **(D) Ending Hour** and enter the **number**, in military time, of the last hour of the time period for the report. Default is 5:00pm (17).
6. Select **(E) Beginning Day** and enter the **number** of the first day of the period for the report. (Sunday = 0, Monday = 1, Tuesday = 2, etc.) Default is Monday (1)
7. Select **(F) Ending Day** and enter the **number** of the last day of the period for the report. The default is Friday (5).
8. Select **(G) Summary** and then enter **Y** to run a summary report or **N** to run a standard report with details at 15-minute intervals.
9. Select **(R) Run Report** and then select an output routing for the report:
  - **C** to send the report to the console without pausing (CTL + S to stop scrolling; CTL + Q to restart)
  - **P** to send the report to the console, pausing as the screen fills
  - **F** to send the report to a file on the server
  - **A** to append the report to an existing file on the server

## 1.4.8.5.8 Troubleshooting

This topic provides instructions for troubleshooting NuPoint Fax. If you are unable to resolve a problem after following the guidelines below, contact your distributor or technical support.

### Configuration Problems

The majority of reported problems with NuPoint Fax are caused by configuration errors. Before testing for bad hardware, check the following areas of your NuPoint Voice configuration:

- Run a System Configuration Report and verify that each line group that is used for fax transactions has fax resources assigned to it.
- Run a Fax Group Usage Report and make sure that there is little or no blockage. If there are not enough fax resources (channels) assigned to a line group, fax calls may fail.
- Examine LCOS settings to make sure that limits are set appropriately for NuPoint Fax users. See [the Fax Planning section](#) for more information on LCOS settings.
- Examine FCOS settings to ensure that the correct features are enabled for NuPoint Fax application mailboxes and users. See [the Fax Planning section](#) for more information on FCOS settings.
- Check the configuration of any mailboxes that are reporting problems and make sure that they are assigned to classes of service that support NuPoint Fax.

### Hardware Problems

If the NuPoint Voice configuration seems to be okay, the problem may be in the sending/receiving fax machine. Follow these guidelines to help isolate the problem.

- If users are reporting a problem with a specific fax machine, use a different fax machine and attempt to send and/or receive a fax using the mailbox that is having the problem.
- If you hear the prompt:

Fax message complete

or

Your fax sent

the problem is probably with the receiving fax machine. Test the fax machine according to the manufacturer's instructions.

- If you hear the following prompt

*I'm sorry, I did not get your fax message*

or

*I'm sorry, I could not deliver your fax message*

- Check error logs for errors involving fax.
- Examine fax LEDs for transmit/receive status.

**Note:**

Although Fax is a software-only feature, the numbering scheme of "slot:channel" is maintained for backward compatibility purposes. All fax channels reside in slot 5 (5:0 to 5:5).

## Printing Problems

If users are unable to print fax messages, check to make sure that FCOS bit 110 - Make/Give to Telephone Number is enabled in their mailbox.

## 1.4.9 NP Forms

### 1.4.9.1 Overview

#### 1.4.9.1.1 Description

NP Forms is an optional voice forms feature for NuPoint Voice systems that allows callers to leave messages in a way that simulates written information on paper forms. This feature requires [installation](#) of the Miscellaneous Options blade. Applications include:

- Order entry
- Questionnaires
- Routine requests for information
- Overflow for busy ACD (Automatic Call Distributor) groups.

Callers accessing an NP Forms application are automatically moved through a series of prerecorded questions. The system waits for the caller to record an answer before moving on to the next question. System users can then log into a single mailbox and listen to the sequence of answers.

A sample NP Forms session for ordering forms might go as follows:

|          |                                                                                                                               |
|----------|-------------------------------------------------------------------------------------------------------------------------------|
| NP Form: | <i>You have reached the city government forms service. Please answer the following questions to have forms mailed to you:</i> |
|          | <i>Please state the name or the type of form.</i>                                                                             |
| Caller:  | I need the application for a small business license.                                                                          |
| NP Form: | Please state your full name and spell your last name after the tone.                                                          |
| Caller:  | Eric Meissner. M-E-I-S-S-N-E-R.                                                                                               |
| NP Form: | Please state your mailing address, including zip code, after the tone.                                                        |
| Caller:  | 4210 Monterey Road, San Francisco, California, 91010                                                                          |
| NP Form: | Please state a phone number where you can be reached during business hours. Include the area code.                            |
| Caller:  | Area code 415, 555-1234                                                                                                       |
| NP Form: | Thank you for calling. Good-bye.                                                                                              |

### 1.4.9.1.2 Inside an NP Forms Application

A typical NP Forms application uses three types of NuPoint Voice mailboxes:

- A [rotational mailbox](#) that plays an initial greeting and routes the call to one of several template mailboxes
- [Template mailboxes](#) with distribution lists that contain Greeting Only mailboxes and that collect the recorded answers to the questions
- [Greeting Only mailboxes](#) that contain the "questions" that callers will hear

The NP Form application mentioned above would have a structure similar to that shown here:

Note that the figure above is simplified to show only a single Template mailbox. In actual operation, an NP Forms application needs enough Template mailboxes to hold all caller responses (see [NP Forms Limitations](#)).

Distribution list 01 in the Rotational mailbox must contain all of the Template mailboxes. The first Template mailbox must have a distribution list 01 that contains the Greeting Only mailboxes for the MESA Form. The Rotational mailbox will pass control of each call to the first Template mailbox until that mailbox is full. It then passes calls to the second template mailbox, and so forth. Figure 1-2 shows this aspect of the sample NP Forms application.

Distribution list 01 in the Rotational mailbox must contain all of the Template mailboxes. The first Template mailbox must have a distribution list 01 that contains the Greeting Only mailboxes for the NP Form. The Rotational mailbox will pass control of each call to the first Template mailbox until that mailbox is full. It then passes calls to the second template mailbox, and so forth. The figure below shows this aspect of the sample NP Forms application.

### 1.4.9.1.3 Playback and Transcription

The Rotational mailbox serves as a single point of entry for retrieving all caller responses stored in any of the Template mailboxes. A transcriber can listen to caller responses by logging in to the NP Forms Rotational mailbox, which retrieves the stored responses from *all* Template mailboxes in its distribution list 01.

After login, the system prompts the transcriber to select either Unplayed or Saved messages. The number of messages reflects the number of callers that responded to any of the questions. When playing back the messages, the system separates responses to each question with a “bloop” sound. Transcribers can save and replay the messages, and can pause, skip forward, and skip backward during playback.

The system plays back responses in chronological order. Thus, it plays back all responses stored in the first Template mailbox before playing the responses from other Template mailboxes. More than one person can call into the Rotational mailbox at the same time to transcribe messages.

NP Forms is compatible with the autoplay feature (FCOS bit 52). With this feature enabled, a transcriber can listen to all responses without having to press the P key on the telephone to advance through the messages. (Transcribers must still press K or D to keep or discard the messages.)

**Note:**

To retrieve NP Forms messages, a transcriber calls the Rotational mailbox, *not* the template mailboxes.

### 1.4.9.1.4 NP Forms Mailbox Interaction

The numbered steps below illustrate the sequence and interaction of the mailboxes in an NP Forms call:

1. A caller dials a DID number or extension number that corresponds to the Rotational mailbox
2. The system plays the greeting/instructions recorded in the Rotational mailbox.
3. The Rotational mailbox transfers control of the call to one of the Template mailboxes.

4. The system plays the greeting in the first Greeting Only mailbox defined in distribution list 01 of the Template mailbox.
5. The system records the caller's response.
6. The system repeats steps 4 and 5 for each Greeting Only mailbox in distribution list 01 of the Template mailbox.
7. After recording the last caller response, the system plays a standard good-bye message or presents the caller with further options, depending on the FCOS settings of the Template mailbox.
8. At the end of the call, the system deposits all of the responses into the Template mailbox as a single message.

### 1.4.9.1.5 Tree Mailboxes and NP Forms

Tree mailboxes allow callers to press DTMF keys to choose from several options, and can be used either before or after an NP Forms application.

When a Tree mailbox precedes an NP Forms Rotational mailbox, callers can select alternatives to filling out the NP Form, such as transferring to a live attendant or leaving a message in another mailbox. By setting the Rotational mailbox as the first mailbox in distribution list 01 and including feature bit 120 (Default to First Child of Tree Mailbox) in the Tree mailbox FCOS, callers with rotary dial phones are automatically transferred to the NP Form where they are prompted with the first question.

If the last mailbox in distribution list 01 of the Template mailbox is a Tree mailbox, callers can select additional options after completing an NP Form. (The Template mailbox must contain FCOS bit 139.) The Template mailbox plays the greeting of the Tree mailbox, then allows callers to select from the choices listed in the greeting. This way callers can return to a "higher menu" or hold/transfer for live assistance. Again, if the FCOS for the Tree mailbox contains bit 120, callers with rotary phones can be automatically transferred to a specific extension or mailbox.

### 1.4.9.1.6 NP Forms FCOS Configuration

The NuPoint Voice software includes a pre-defined FCOS for use with NP Forms, and pre-defined FCOS for Rotational and Tree mailboxes. There are also several individual FCOS bits that allow some flexibility in configuring NP Forms.

#### NP Forms Default FCOS

- Default **FCOS 16** contains all of the feature bits necessary for a **Template** mailbox. Optionally, you can add bit **139** to allow callers to access other options after completing an NP Form.
- Default **FCOS 17** is predefined for a standard **Rotational** mailbox. Add feature bit **149** for Rotational mailboxes that are used in NP Forms.

- Default **FCOS 06** contains all of the feature bits necessary for the **Greeting Only** mailboxes that play the questions to NP Forms callers.
- Default **FCOS 15** is predefined to support **Tree** mailboxes. As an option, you can add feature bit **120** so that callers with rotary phones are automatically moved to the first Template (child) mailbox.

## NP Forms FCOS Bits

The FCOS bits that are useful in NP Forms applications are:

- **135 Defines template mailbox** - A mailbox with this feature plays the greetings stored in its child mailboxes, sequentially, and records a response after each greeting.
- **136 Don't say "End of Message"** -When set to On for a Template mailbox, the system does not say "End of message" after each message is played or recorded.
- **138 Don't say "Message complete"** - When set to On for a Template mailbox, the system does not say "Recording complete" after each message is recorded.
- **139 Template: assume last greet mailbox FCOS** -When set to On for a Template mailbox, the Template mailbox assumes the FCOS values of the last mailbox in distribution list 01 after playing the greeting, and call flow is altered accordingly. For example, if the last mailbox is a tree or chain mailbox, the caller can continue to interact with the system after completing the NP Form.
- When bit 139 is set to Off for a Template mailbox, callers always hear, "Thank you for calling, good-bye," after completing the NP Form.
- **149 Log into template through rotational mailbox** - When set to On for a Rotational mailbox, a transcriber can call into the Rotational mailbox and automatically pick up the messages from all Template (child) mailboxes.

## NP Forms Limitations

An NP Forms application can generate a lot of responses from callers, and these responses must be transcribed and taken off of the system or they will fill up the available voice storage. The NP Forms application has some built-in limits to reduce the chances of this happening.

- Each NP Forms application can have a maximum of 190 Template mailboxes.
- There can be no more than 200 questions (Greeting Only mailboxes) in distribution list 01 of the first Template mailbox. The other Template mailboxes in the NP Form do not need a copy of the distribution list; the system uses the distribution list in the first Template mailbox.
- Each Template mailbox can store a maximum of 200 responses. Since most NP Forms consist of several questions, each caller leaves several responses. If an NP Form has four questions, a single Template mailbox can store responses from 50 callers ( $200 = 4 \times 50$ ).
- NP Forms Rotational mailboxes automatically rotate on full. You cannot assign the Index or Period type of rotation.

- The system deposits caller responses in the first Template mailbox until it is full, then it rotates to the second Template mailbox, and so on. It cycles through all of the Template mailboxes before again putting responses in the first Template mailbox.

If all Template mailboxes in an NP Forms application are full, callers hear, "I'm sorry, I cannot deliver your message now. Please try again later."

## 1.4.9.2 Procedures

### 1.4.9.2.1 Configure an NP Forms Template Mailbox

This procedure describes how to configure an NP Forms Template mailbox and the Greeting Only mailboxes that will contain the questions for the NP Form.

1. Complete a [Rotational Mailbox Diagram](#) for each Rotational Mailbox, and a [Mailbox Worksheet](#) for all Template and Greeting Only mailboxes.
2. Create or modify the required [template mailboxes](#) and apply default **FCOS 16** for **Template** mailboxes.
3. Create or modify the [Greeting Only](#) mailbox that will play the first question to callers and apply default **FCOS 6** for Greeting-only mailboxes.
4. Configure all remaining child mailboxes in the same manner.

To create Distribution List 01 for the Template mailbox:

1. Create distribution list 01 with the following parameters:
  - Mailbox number of the Template mailbox
  - Distribution List Number 01
  - Sorted list
  - Add as members the mailbox numbers of all Greeting Only mailboxes

### 1.4.9.2.2 Create an NP Forms Application

### 1.4.9.2.3 Configure a Rotational Mailbox for NP Forms

This procedure describes how to configure a rotational mailbox for use with NP Forms, including setting index-type rotation and adding the template mailboxes to distribution list 01.

1. Complete a [Rotational Mailbox Diagram](#) , and a [Mailbox Worksheet](#) for each mailbox.
2. From the Main menu, select **(M) Mailbox maintenance**.



3. Create the mailbox by selecting **(C) Create new mailboxes** or **(M) Modify mailboxes** and enter the **number** of the mailbox to create/modify. To leave a parameter unchanged, press Enter to move to the next prompt.
4. Set all applicable parameters the same as for [Create a Standard Mailbox](#), except for the Features Class of Service parameter, where you will enter the default FCOS 17, or the number of a customized FCOS that includes all the applicable bits for a Rotational mailbox.
5. After responding to the last mailbox parameter, the system displays the mailbox configuration, then prompts for the next mailbox number to modify or create. At this point, the parameter settings for the template mailbox are saved. Press **Enter** at the Mailbox to create? prompt to return to the Mailbox maintenance menu.

To create Distribution List 01 for the Template mailbox:

1. Select **(L) List Maintenance** and then **(C) Create, Modify, or Show Distribution Lists**.
2. At the **Mailbox:** prompt, enter the number of the Rotational mailbox from step 3.
3. At the **Distribution List** prompt, enter **01**.
4. At the **(S)orted or (U)nsorted list?** prompt, enter **S**.
5. If you want, you can check the list to make sure the member is not already on it by entering **Y** to the **Check for duplicate before add (y/n)?** prompt.
6. At the **(A)dd, (D)elete, or (S)how list ?** prompt, enter **A** to add a member.
7. At the **Member:** prompt, add the mailbox **numbers** of the Template mailboxes in one of the following formats:
  - A single mailbox number, for example 3788
  - A continuous range of mailbox numbers, for example 3001-3788
  - A series of mailbox numbers, for example 3781,3782,3786,3788
  - You can mix formats of mailbox number entries, so you can specify all the mailbox numbers necessary in one attempt. For example, this entry is valid: 208,222-308,333,334,661
8. The system confirms each addition. When finished, press Enter at the **(A)dd** prompt.
9. At the **Save Changes to Distribution List?** prompt, press **Y**. The system reports the current members, reflecting members just added or deleted, and your changes are saved.

## 1.4.9.3 Worksheets

### 1.4.9.3.1 Worksheet Index

- [FCOS Worksheet](#)
- [Mailbox Individual Worksheet](#)

- NP Forms Diagram
- Rotational Mailbox Diagram
- Tree Mailbox Diagram

## 1.4.9.3.2 FCOS Worksheet

**FCOS Worksheet**

Features Class of Service Menu | **FCOS**

FCOS to modify  FCOS name  FCOS to copy

**FCOS Features**


|                     |                                                                                                                                               |                                              |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| 1 Greeting          | 060 062 063 064 065 161 162 224                                                                                                               |                                              |
| 2 Login             | 001 016 066 069 081 101 102 103 104 105 106 107 108 109 132 151 152 155 160<br>165 215 219 225                                                |                                              |
| 3 Logout            | 003 009 170 220                                                                                                                               | 4 Attendant Call 002 098 169                 |
| 5 Outside Caller    | 004 002 005 017 041 051 092 098 111 112 113 114 115 116 117 118 119 137 160<br>175 203 221                                                    |                                              |
| 6 Prompts           | 051 062 063 097 098 098 131 133 136 138 140 146 157 159 176 202 208<br>Language (1) 010 011 012 013 014 099 150 233 Interface (1) 209 210 211 |                                              |
| 7 Receive Msgs      | 039 040 041 042 043 044 045 046 047 088 111 112 113 114 115 116 117 118 119<br>127 173 175 179 185 190 198 199 223                            |                                              |
| 8 Play Msgs         | 060 006 007 039 046 047 048 049 C52 057 058 059 075 076 089 144 145 147 153<br>204 215 216                                                    |                                              |
| 9 Answer Msgs       | 029 019 030 031 038 147 158                                                                                                                   | 10 Keep/Discard Msgs 053 054 055 056 145 227 |
| 11 Make Msgs        | 020 021 022 023 032 034 061 067 092 095 110 126 157 158 171 172 188 191                                                                       |                                              |
| 12 Give Msgs        | 024 026 018 025 026 027 028 033 035 061 064 085 110 126 157 158 192                                                                           |                                              |
| 13 Msg Address.     | 018 019 021 023 025 027 030 031 067 095                                                                                                       |                                              |
| 14 User Options     | 070 015 071 072 073 074 077 078 093 094 095 124 125 127 130 142 143 148<br>180 195 196 201                                                    |                                              |
| 15 User Dist. Lists | 032 033 036 044 074 134 222                                                                                                                   | 16 Master Dist. Lists 034 035 045            |
| 17 Check In/Out     | 008 090 091                                                                                                                                   |                                              |
| 18 Super User       | 121 122 058 120 123 141 147 152 174 178 186 187 189 229 234                                                                                   |                                              |
| 19 Msg Wait Ind.    | 079 080 134 182 183 205 228 234                                                                                                               |                                              |
| 20 NuPoint Fax      | 190 191 192 193 194 195 196 197 198 199 200 203 206 207 230                                                                                   |                                              |
| 21 Paging           | 077 124 168 169 171 172 173 181 188 208 209 210 211 212 213 219                                                                               |                                              |
| 22 E-mail           | 154 170 184 205 217 220 221 224 225                                                                                                           | 23 Network/ NP Forms 135 138 149 156         |

FCOS/NEAR

 Baypoint Innovations

## 1.4.9.3.3 NP Forms Diagram

### NP Forms Diagram

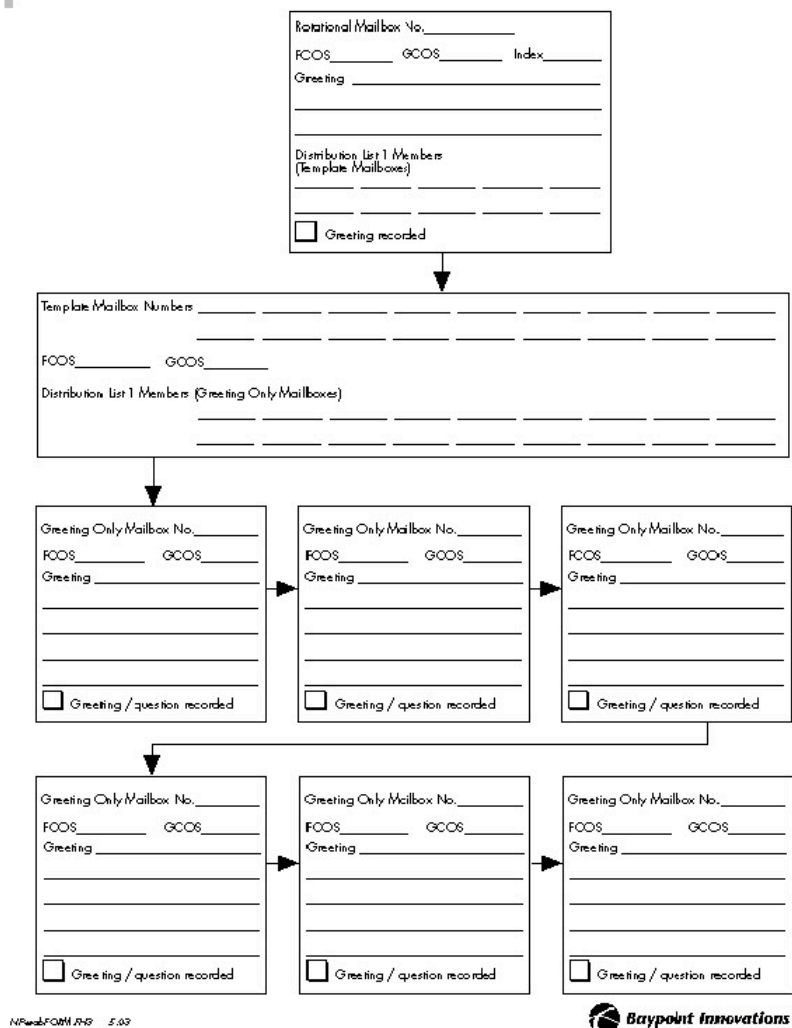


## 1.4.10 NP Net

### 1.4.10.1 Description

#### 1.4.10.1.1 Introduction

NP Net is an optional networking feature for NuPoint Unified Messaging servers. It allows you to connect NuPoint UM systems together to form a digital network. With NP Net, mailbox owners can make voice messages for mailboxes on remote servers in the same manner as they make messages to local mailboxes. For example, a user can log into a NuPoint UM Voice mailbox, make a message for several recipients, some local and some remote, and send that message. Users can also answer messages and forward

(give) messages to users on remote nodes. The figure below shows a simple NP Net network.

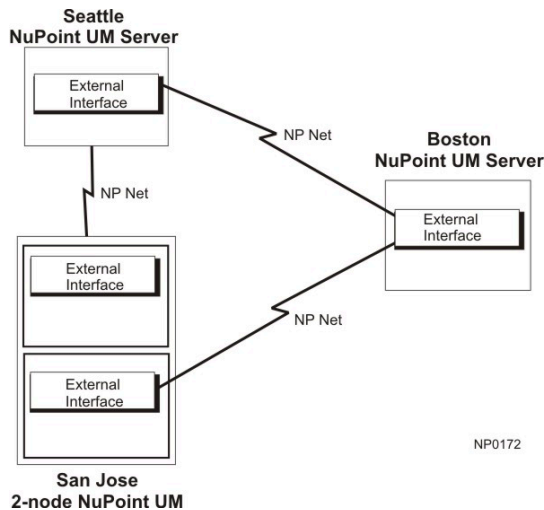

NP Net transmits messages in digital form, as opposed to actually playing messages over the phone lines to remote systems. Digital transmission increases throughput.

NP Net provides the user with **NP Net TCP/IP** networking. NP Net TCP/IP supports TCP/IP over Ethernet.

The building blocks of an NP Net network are the servers. Each server functions as a **node** on the network. NP Net is scalable so that it can work on all NuPoint UM server models, providing lower-cost, lower throughput networking on smaller servers and higher throughput messaging on larger servers.

### 1.4.10.1.2 Configuration Task List

The configuration steps for NP Net involve the following tasks:

1. Configure **TCP/IP** to define node characteristics.

The following configuration must be done from the **Text console**:


1. Configure the **Network Node Table** to identify the protocol and 'address' of each node on the network.
2. Modify the **Dial Plan** to allow network addressing.
3. Program the **Digits Translation Table** to determine the correct node and mailbox number.
4. Configure **Network Queuing** to control thresholds for sending messages.
5. Define a **Network Class of Service** to provide network privileges for users.
6. Apply the Network Class of Service to user mailboxes.

### 1.4.10.1.3 NP Net TCP/IP Overview

NP Net TCP/IP connects the servers together using Ethernet. NP Net TCP/IP can use an existing private network, or it can send messages over a public network. The high bandwidth of Ethernet connections allows for a large volume of network traffic, providing users with network service that is almost indistinguishable from local messaging.

In order to use NP Net TCP/IP, a server also must have the **Unified TCP/IP Interface** optional feature installed. This optional feature provides a single point of configuration for all TCP/IP applications on these servers.

#### NP Net TCP/IP Topology

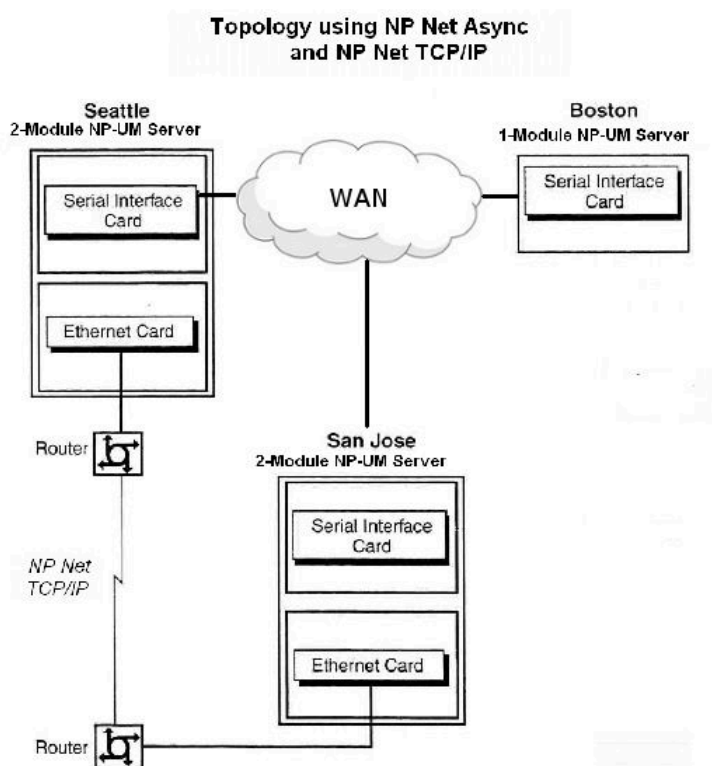

### 1.4.10.1.4 NP Net - Terms and Concepts

These concepts are discussed in more detail in later sections.

#### Network Dialing Plan

The NuPoint Voice dialing plan has characters to support network mailboxes. If an **N** or **P** precedes a number in a dialing plan position, it means that all mailboxes represented by that position are network mailboxes and will be processed by the NP Net software. See [Configuring Network Addressing](#) for more information about the network dialing plan.

## Digits Translation Table

The Digits Translation Table determines which messages go to which node. All network messages are compared to this table before being sent to the appropriate node. See [Configuring the Network Node Table](#) for more information about the digits translation table.

## Network Queues

Network messages are stored in local network queues until they are transmitted to remote nodes. Separate queues are kept for urgent and batch (non-urgent) messages to each remote node. Messages are queued until a message threshold is reached and a message delivery time window is open. The local node then initiates a connection with the appropriate remote node. See [Configuring the Network Queues](#) for more information about network queues.

## Network Node Table

To initiate a connection to a remote node, the local NP Net node must have all of the following information:

- the node number of the remote node
- the string that must be outdialed to reach that particular node, or the IP address of the node
- whether access to the remote node is enabled or disabled

As described previously, NP Net uses the Digits Translation Table to find the node number of the destination node. The Network Node Table matches the node number of each remote node with its corresponding hardware type, outdial string (access code), and access status. See [Configuring the Network Node Table](#) for more information on the Network Node Table.

## Network Class of Service

Network Classes of Service (NCOS) are used to control user privileges such as making or answering messages across the network. See [Configuring the Network Class of Service](#) for more information on Network Class of Service.

### 1.4.10.1.5 Message Flow Through an NP Net Network

This section describes how a voice message flows through the NP Net network. From the sender's point of view, if Name Broadcast mailboxes are used, there is no difference between sending a message to a local mailbox and sending one to a remote mailbox. (Name Broadcast mailboxes provide name confirmation across the network.) When a user receives a message from a remote mailbox, he or she hears "Remote message from [name]" where [name] is the name of the remote mailbox owner.


The diagram below is an overview of a message traveling from one node to another (San Jose to Boston). In this example, the dialing plan is configured such that mailbox numbers beginning with 8 are network numbers and that node 2 is Boston. In the discussion of the various NP Net functions in the following sections, the inner workings of the network are discussed in more detail.

The following paragraphs explain some of the processing shown in the diagram in more detail.

1. The user addresses a message to a destination mailbox, records it, and presses X to send the message, just as if it were being sent to a mailbox on the same system.
2. The NuPoint Voice software compares the leading digit of the destination mailbox with the dialing plan, where it finds an N or a P, indicating that the destination is a network mailbox.
3. The NuPoint Voice software then checks the Network Classes of Service (NCOS) assigned to the sender's mailbox to see if the operation is permitted.
4. The leading digits of the mailbox number are compared with the prefixes stored in the Digits Translation Table, where the number of the destination node is found.
5. The NuPoint Voice software checks the Network Node Table to be sure that the destination node is listed, and that access is enabled.
6. The message is put into the message queue that is waiting to be sent to that node.
7. The NP Net software checks the queue every thirty seconds to see if one of the queue thresholds has been reached, at which point it checks the Network Node Table for the hardware type, which provides the call setup instruction.
8. The connection is made, and messages are sent to the destination (remote) node.
9. The remote node uses the "digits to absorb" value to convert the mailbox number in the message header to a valid local mailbox by deleting the specified number of leading digits.
10. The remote node checks the size of the message to be sure that it does not exceed the node's network message limit. The remote node also checks the message size against the available space in the user's mailbox.
11. The remote node compares the Group Class of Service (GCOS) of the sending and receiving mailboxes, if the sender's Network Class of Service contains a feature that dictates this check. If the Gross match, or if they have even one group in common, the message is sent to the appropriate mailbox.
12. The receiving node converts the message timestamp (the message creation time) to local time and announces the converted time when the recipient plays the message. A receipt, which says that the recipient has not played the message, is sent back to the sender. If the sender keeps the receipt, NP Net will issue a receipt update during the first communications session established between the nodes after the recipient has played the message. The receipt update announces the time that the message was played, converted to the sender's local time.
13. If the recipient decides to answer the message, or if there is a receipt, the node number and sender's mailbox number attached to the original message identify the



destination mailbox on the originating node for return messages. Answers and receipts are not processed through the Digits Translation Table.

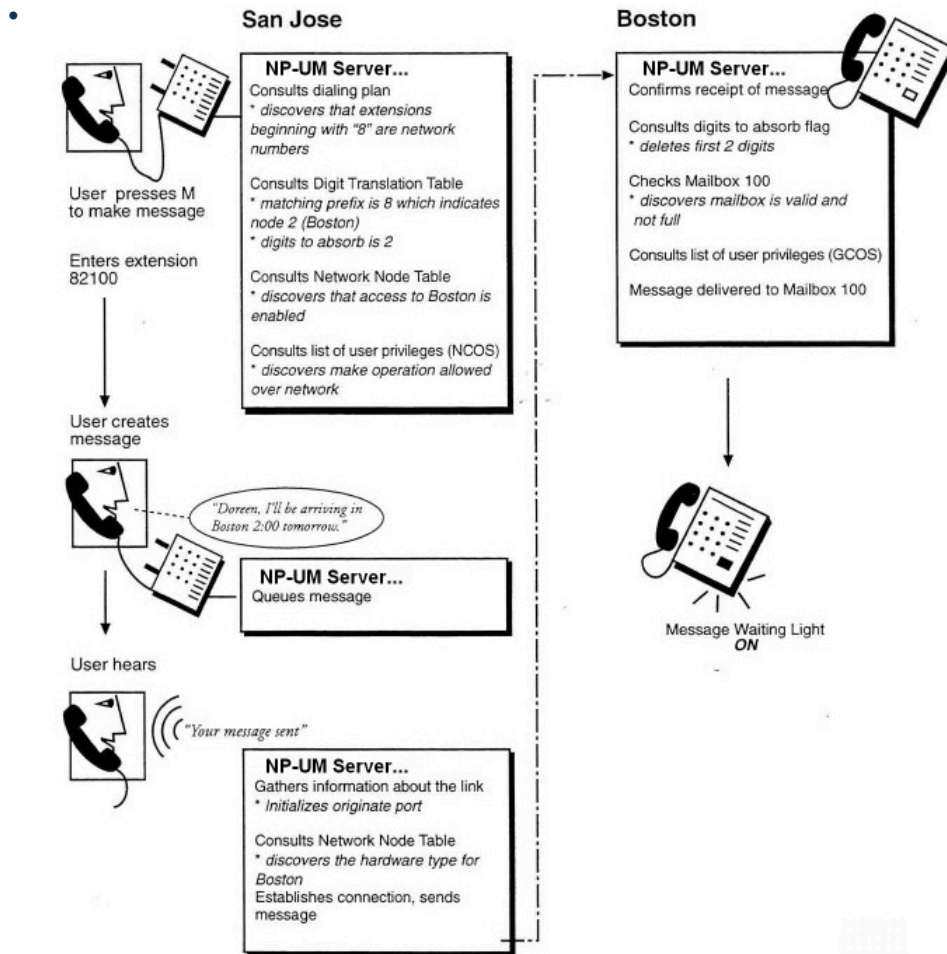

### 1.4.10.1.6 Overview of NP Net Installation and Configuration Tasks

The table below shows the tasks required to install and configure NP Net TCP/IP. Use this table as a road map to guide you during installation and configuration.

| For this task...                                                            | Reference information is here:           |
|-----------------------------------------------------------------------------|------------------------------------------|
| Install the NPUM Voicemail Networking software blade to enable NP NetTCP/IP | Installing an Optional Feature           |
| Configure NP Net TCP/IP                                                     | About NP Net TCP/IP                      |
| Configure the Network Node Table                                            | Configuring the Network Node Table       |
| Configure the dialing plan                                                  | Creating a Network Dialing Plan          |
| Configure the Digits Translation Table                                      | The Digits Translation Table             |
| Configure the network queues                                                | Configure Network Queues                 |
| Configure the network class of service                                      | Configuring the Network Class of Service |



| For this task...                            | Reference information is here: |
|---------------------------------------------|--------------------------------|
| Enable network messaging for user mailboxes | Configuring Network Mailboxes  |

## 1.4.10.2 Configuring TCP/IP

### 1.4.10.2.1 About NP Net TCP/IP

This section explains NP Net TCP/IP concepts and describes how to configure NP Net TCP/IP.

NP Net TCP/IP connects these servers together using TCP/IP over Ethernet or an appropriate wide-area network. NP Net TCP/IP can use an existing private network, or it can send messages over a public network. The high bandwidth of Ethernet connections allows for a large volume of network traffic.

NP Net TCP/IP requires an Ethernet card and the NPUM Voicemail Networking software blade. If you have not already done so, install the hardware and software. The rest of the information in this section assumes that you have completed those prerequisite steps.

#### NP Net TCP/IP Configuration

NP Net TCP/IP uses certain information that is configured in the TCP/IP Interface optional feature. You must be familiar with this information and you must have configured the TCP/IP interface before starting to configure NP Net TCP/IP. This information is:

- Module Number and Slot Number where the Ethernet card is installed
- The Operation Mode of the card, either primary or secondary
- Whether the card is enabled or disable the Ethernet Card
- Ethernet Card Configuration (either Ethernet 1 or Ethernet 3)
- Domain Name
- Node Name
- Node IP Address
- Subnet Mask
- Physical Network Number
- Broadcast Address
- Gateway IP Address

When you configure NP Net TCP/IP, as described in the Procedures section of this section, you define the following parameters:

- The **module number** that contains the Ethernet card to use for NP Net TCP/IP, and the number of the Ethernet card in that module. You can only configure NP Net TCP/IP on one module of a multi-module server.
- The **System Node Name**, which is used by NP Net in reports.

- The **System Local Node Number**, which is used by NP Net to do message routing (see [Configuring the Network Node Table](#) for information on configuring the Network Node Table).
- System **Network Message Limit** in number of minutes
- The number of **Send and Receive Circuits** (virtual circuits) to be used by NP Net. The number of circuits determines the throughput. You can configure a node with more of one type of circuit than the other, if needed.

## 1.4.10.2.2 Programming (Web Console)

### 1.4.10.2.2.1 Configuring TCP/IP

Before you begin, ensure that the NPUM Voicemail Networking software blade is installed.

#### To Configure NP Net TCP/IP

To configure NP Net TCP/IP parameters:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **NP Net TCP/IP**. The NP Net TCP/IP configuration screen displays.
4. Configure the following parameters:

| Parameter                    | Description                                                   | Value              |
|------------------------------|---------------------------------------------------------------|--------------------|
| Host Number to Configure     | Select the module number on which to configure NP Net TCP/IP. | 1 - 4              |
| Ethernet Card Configuration  | Enter the number of an enabled Ethernet card in the module.   | 1 - 2              |
| System Node Name             | Enter the name of the node being used for TCP/IP              | Max. 15 characters |
| System Network Message Limit | Enter the maximum number of minutes for a network message.    | 1 - 99             |
| Receive Circuits             | Enter the number of receive circuits to be used by NP Net.    | 2 - 9              |
| Send Circuits                | Enter the number of send circuits to be used by NP Net.       | 2 - 9              |
| System Local Node Number     | Enter the number of the local node.                           | 1 - 8191           |

5. Click **Save**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.4.10.2.3 Programming (Text Console)

### 1.4.10.2.3.1 Configuring TCP/IP

Before you begin, ensure that the NPUM Voicemail Networking software blade is installed.

#### Configure NP Net TCP/IP

This procedure describes how to configure the low-level NP Net TCP/IP parameters.

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu** and then **(N) NP Net TCP/IP Menu**.
2. Select **(H) Host Number to configure** and enter the **module number** on which to configure NP Net TCP/IP. The module must contain an Ethernet card.
3. Select **(I) Ethernet Card Configuration** and enter the **number** (1-2) of an enabled Ethernet card in the module. You can only configure NP Net TCP/IP on one module of a multi-module NP-UM system.
4. Select **(N) System Node Name** and enter the **name** (1-15 characters) of the node.
5. Select **(M) System Network message limit** and set the maximum **number of minutes** (1-99) for a network message. The local node will reject messages that exceed this limit.
6. Select **(R) Receive Circuits** and enter the **number** (2-9) of receive circuits to be used by NP Net. The number of circuits determines the throughput.
7. Select **(S) Send Circuits** and enter the **number** (2-9) of send circuits to be used by NP Net. You can configure a node with more of one type of circuit than the other, if needed.
8. Select **(T) System Local Node Number** and enter the **number** (1 - 8191) of the local node used by NP Net for message routing.
  - Note: The default system local node number is 1. Assign a different number (2, 3, etc.) to reduce the chance of conflicts with other systems.
9. Exit to the NuPoint Voice Configuration Main Menu to save your changes.
10. When you configure NP Net TCP/IP for the first time, you must **reboot** before you activate the configuration.

## 1.4.10.3 Configuring the Network Node Table

### 1.4.10.3.1 Network Node Table - Introduction

**Note:** Network Node Table programming must be done using the **Text Console**.

The Network Node Table stores information that is essential for the local node to communicate with other nodes on the network. The table contains one entry for each

node on the network, and that entry contains information such as the remote node number and its phone number or IP address. This section provides detailed information about the fields in the Network Node Table and how they are used by NP Net TCP/IP.

It is very important that you plan out your NP Net network before configuring the Network Node Table on each node. You must know the node number and phone number or IP address of each remote node, plus other information, before you can create an entry for the node. Be sure to completely fill in a section of a Network Node Table Configuration Worksheet for each remote node and one for the local node before starting to create entries in the table. (You should create an entry for the local node in the table as a reference, but set it to have access disabled.)

### 1.4.10.3.2 Network Node Table Configuration Worksheet

You configure the Network Node Table using the Network Node Access Table Maintenance Menu, which is a submenu of the Network Maintenance Menu. The fields in the Network Node Table Configuration Worksheet correspond to the information you must enter when you create a new node entry. The fields are described below the sample worksheet. Blank worksheets for you to copy and use are [here](#).

| NP Net<br>Network Node Table Worksheet   |                                           |       |  |
|------------------------------------------|-------------------------------------------|-------|--|
| Node Entry                               |                                           |       |  |
| Node Number <input type="text"/>         | Node Name <input type="text"/>            |       |  |
| TCP/IP Connection Y N                    | IP Address <input type="text"/>           |       |  |
| Hardware Type <input type="text"/>       | String (access code) <input type="text"/> |       |  |
| Parallel Link Delay <input type="text"/> | Maximum Links <input type="text"/>        |       |  |
| Analog AMIS Connection Y N               | Access Y N                                | 10047 |  |

#### Worksheet Definitions

**Node Number:** The number of the node for this entry. Each NP Net node on the network must be represented by a unique number. You can use numbers from 1 to 8191, but the maximum number of nodes is 1500.

**Node Name:** A descriptive name for the node (e.g. New York, Chicago) of up to 13 alphanumeric characters, including capitals and spaces. The node name is not required; NP Net software recognizes nodes by their numbers.

**TCP/IP Connection:** Circle Y for all remote nodes that the local node accesses using NP Net TCP/IP.

**IP Address:** The IP address of the remote node, if it uses NP Net TCP/IP.

**Hardware Type:** For NP Net TCP/IP nodes, the hardware type is always ETHERNET.

**Access:** Circle Y (accessed enabled) for all nodes except the local node. If necessary, you can set access to N to suspend access to a node without deleting the node from the Network Node Table.

When users try to make messages to a disabled node, they are informed that the destination is "not a valid remote mailbox number." When you disable access to a node that already has messages queued, the NP Net software holds the messages until the Message Waiting Threshold is reached, and then sends receipts to all senders, informing them that their messages could not be delivered. Once receipts are sent, the messages are purged from the queue.

**Parallel Link Delay:** (Requires the Parallel Links optional feature) Specify the number of minutes that an existing connection must be open before another link is established. Set this to 0 to have the originating node create a new connection as soon as the previous one succeeds.

**Maximum Links:** (Requires the Parallel Links optional feature) Specify the maximum number of links to be used to communicate to the remote node.

### 1.4.10.3.3 Programming (Text Console)

#### 1.4.10.3.3.1 Create or Modify a Network Node Table Entry

Use this procedure to create a new entry in the Network Node Table for NP Net TCP/IP.

1. Fill out a Network Node Access Table worksheet.
2. From the Main Menu, select **(S) System Maintenance**, **(W) Network Menu**, **(M) Network Maintenance**, and then **(T) Network Node Table**.
3. Select **(C) Create new node entry** or **(M) Modify a node entry** and enter the node **number** (1 to 8191) for which you want to create/modify an entry. Press Enter to retain the current setting of any parameter.
4. At the **Select Protocol [TAV]?** prompt, do one of the following:
  5. select **T** if the node will be accessed using **TCP/IP**
  6. select **A** if the node will be accessed with an analog (**AMIS**) connection
  7. select **V** if the node will be accessed using **VPIM** (for nodes that do not accept proprietary TCP/IP)

To configure **TCP/IP** connections:

- At the **Node name** prompt, enter the **name** (1-12 numeric characters, including spaces) of the new node.
- At the **IP Address** prompt, enter the **IP address** of the new node.
- At the **Select Encoding Type** prompt, enter **H** for **G.711** or enter **N** for **NMS**
- At the **Access (Y/n)** prompt, specify whether access to the node should be on (**Y**) or off (**n**).

To configure **AMIS** connections:

- At the **Node name** prompt, enter the **name** (1-12 numeric characters, including spaces) of the new node.
- At the **String?** prompt, enter the string (up to 16 alphanumeric characters) required to access this node. (This is usually a phone number, for example, 6135922122).
- At the **Access (Y/n)** prompt, specify whether access to the node should be on (**Y**) or off (**n**).

To configure **VPIM** connections:

- At the **Domain Name** prompt, enter the domain name of the new node (for example, mitel.com).
- At the **Select Encoding Type** prompt, enter **G** for **G.721**, **H** for **G.711**, or enter **N** for **NMS**.
- At the **Select Prefix to Use** prompt, enter **D** to use the default prefix, **N** to use no prefix, or **A** to use an alternate prefix, and then specify the alternate prefix.
- At the **Access (Y/n)** prompt, specify whether access to the node should be on (**Y**) or off (**n**).

If you have installed the Parallel Links optional feature, you are prompted to configure it now.

1. At the **Parallel link delay** prompt, set the **number of minutes** that the existing connection or connections must be open before a parallel connection is established. If you enter 0, a new link is created as soon as the previous link succeeds.
2. At the **Maximum parallel links** prompt, set the maximum **number** (1-8) of parallel links that the node can establish with another node. Do not exceed the number of physical links that both nodes can support.

NP Net displays a message that the entry for the node has been created. You can repeat the steps above to create more node entries, or press **Enter** to return to the Network Node Access main menu. Select **(L) List the node table** to view all nodes.

- **Node Number:** The number of the node for this entry. Each NP Net node on the network must be represented by a unique number. You can use numbers from 1 to 8191, but the maximum number of nodes is 99.
- **Protocol:** NP Net on Release 8.5 or later supports only one protocol for communication with the remote nodes. This protocol is TCP/IP Connection. Select "Y" for all remote nodes that the local node accesses using NP Net TCP/IP.

**Note:**

The other two protocols "Basic NP Net" and "Analog AMIS Connection" are not used in communication with remote nodes.

- **Node Name:** A descriptive name for the node (e.g. New York, Chicago) of up to 12 alphanumeric characters, including capitals and spaces. The node name is optional (but highly recommended to help clarify the location where your system will be connecting) since NP Net software recognizes nodes by their numbers.
- **IP Address:** The IP address of the remote node, if it uses NP Net TCP/IP.
- **Node (Encoding) Type:** The encoding type indicates whether the node is configured to receive/send messages in G.711 format or NMS format.

**Note:**

This option is only applicable for Release 8.5 and later systems and you need to specify the G.711 format in this field.

- **Access:** Select "Y" (accessed enabled) for all nodes except the local node. If necessary, you can set access to "N" to suspend access to a node without deleting the node from the Network Node Table.

**Note:**

When users try to make messages to a disabled node, they are informed that the destination is "not a valid remote mailbox number." When you disable access to a node that already has messages queued, the NP Net software holds the messages until the Message Waiting Threshold is reached, and then sends receipts to all senders, informing them that their messages could not be delivered. Once receipts are sent, the messages are purged from the queue.

### 1.4.10.3.3.2 Delete a Network Node Table Entry

Use this procedure to delete nodes from the Network Node Table.

1. From the Main menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance, and then (T) Network Node Table.**
2. Select **(D) Delete node entry** and enter the **number or a range of numbers** of the node or nodes to delete.
3. At the **Delete (Y/N)** prompt, press **Y** to confirm the deletion or **N** to cancel the deletion.
4. Press **Enter** to return to the Network Node Access Table menu.

### 1.4.10.3.3.3 View the Network Node Table

To view Network Node information:




1. From the Main Menu, select **(S) System Maintenance**, **(W) Network Menu**, **(M) Network Maintenance**, and then **(T) Network Node Table**.
2. To inquire about a single node, select **(I) Inquire about a node entry** and then enter the **number** of the node for which you want information.
3. To view the entire network node table, select **(L) List the node table**.
4. Press **Enter** to return to the Network Node Table menu.

## 1.4.10.4 Configuring Network Addressing

### 1.4.10.4.1 Configuring Network Addressing - Overview

When a user addresses a message, the NuPoint Voice software must be able to identify the address as either a local mailbox or a remote mailbox. If it is a remote mailbox, the NuPoint Voice software must be able to identify the correct remote node and the correct mailbox on that node.

The Dialing Plan identifies the message address as either a local mailbox or a remote mailbox. The Digits Translation Table determines the correct node of the remote mailbox and how to derive the mailbox number from the address entered. The diagram below shows how these two filters work together:

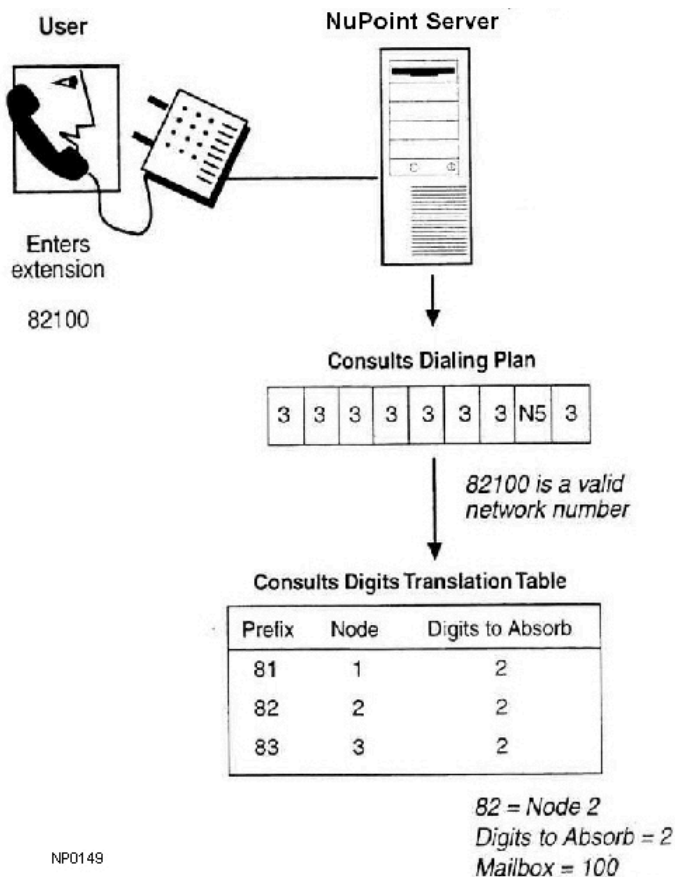



## 1.4.10.4.2 Planning Network Addressing

Your NP Net network will be much easier to maintain and expand if you carefully plan network addressing in advance. You must consider any existing switch extension numbering and NuPoint Voice dialing plans, and then create dialing plans on all nodes that allow easy access to all other nodes.

Use the Planning Network Addressing Worksheet to gather the information that you need to create a network addressing scheme that meets your needs. Study the sample worksheet and descriptions below, and then copy the [blank worksheet](#) and fill in the information for your network. Be sure to include an entry for your local node.

**NP Net**  
**Planning Network Addressing Worksheet**

---

Node Entry

Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9

Node Name  Length of Mailbox Numbers -- 4 4 -- -- --

---

Node Entry

NP0150 Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9

Node Name  Length of Mailbox Numbers -- 5 5 V -- --

### Worksheet Definitions

**Node Number:** The number of the node for this entry. Each NP Net node on the network must be represented by a unique number. You can use numbers from 1 to 8191, but the maximum number of nodes is 1500.

**Node Name:** The name or location of the node.

**Mailboxes Start With:** Circle the numbers that are used at the node as the first digit in user mailboxes. For example, if mailboxes at a node are in the 3000 and 4000 range, circle 3 and 4.

**Length of Mailbox Numbers:** For each number that you circled, write in the number of digits in mailboxes that start with that number. If mailboxes have variable lengths, write V.

## 1.4.10.4.3 The Digits Translation Table

### Note:

Digits Translation Table programming must be performed using the **Text Console**.

The Digits Translation Table is the "sorting machine" or "routing table" for network messages. When a user addresses a message to a remote mailbox, NP Net compares the mailbox address to the prefixes listed in the Digits Translation Table. The Digits Translation Table tells where the message is going, and how many digits the remote node must delete ("absorb") to find the destination mailbox.

The following excerpt from a Digits Translation Table indicates that any mailbox addresses that begin with 21 or 22 are to be routed to node 2 (Chicago), and any addresses that begin with 23 are to be routed to node 8 (Dallas). In addition, the remote nodes must strip off two digits (the prefix) to find the destination mailbox number.

Node Node Digits To

Prefix Number Name Absorb

21 2 Chicago 2

22 2 Chicago 2

23 8 Dallas 2

It is recommended that the table be the same in each node. You can enter your local node number in this table. If some nodes are not allowed to communicate with certain remote nodes, then use the [GCOS](#) feature to properly segregate those communities of interest.

**Note:**

Digits Translation Table programming must be done using the Text Console.

## Node Prefixes

All network messages are routed by the node prefixes in the Digits Translation Table. Node prefixes are the leading digits of network mailbox numbers that are unique to a node. In the sample Digits Translation Table above, the prefix 23 uniquely identifies node 8; only network addresses at node 8 begin with the digits 23.

The length of an individual prefix depends on whether you are using access codes (see below) and whether mailboxes on two or more nodes share the first, second, third, fourth, etc. digits. Each prefix consists of a number of shared leading digits, plus one digit that is found only in the mailboxes of a single node.

**Example:**

The San Jose node has the following dialing plan:

4,N4,N4,N4,4,4,4,4

This means that the remote mailbox numbers that San Jose can access begin with 2, 3, or 4, and consist of four digits.

The Chicago node (Node 2) uses mailbox numbers 2000 to 2999, and 3000 to 3250

The New York node (Node 4) uses mailbox numbers 3260 to 3999, and 4000 to 4499

The Dallas node (Node 6) uses mailboxes 4500 to 4999

Because none of the nodes have overlapping mailbox numbers, the digits to absorb count is 0 for all prefixes. The San Jose Digits Translation Table would look like this:

Node Node Digits To

Prefix Number Name Absorb

2 2 Chicago 0

30 2 Chicago 0

31 2 Chicago 0

320 2 Chicago 0

321 2 Chicago 0

322 2 Chicago 0

323 2 Chicago 0

324 2 Chicago 0

325 2 Chicago 0

326 4 New York 0

327 4 New York 0

328 4 New York 0

329 4 New York 0

33 4 New York 0

34 4 New York 0

35 4 New York 0

36 4 New York 0

37 4 New York 0

38 4 New York 0

39 4 New York 0

40 4 New York 0

41 4 New York 0

42 4 New York 0

43 4 New York 0

44 4 New York 0

45 6 Dallas 0

46 6 Dallas 0

47 6 Dallas 0

48 6 Dallas 0

49 6 Dallas 0

If a message is made for remote mailbox 3267, NP Net checks the table, sees that prefix 326 matches this mailbox, adds a flag to the message that tells the remote node to absorb no leading digits from the incoming mailbox number, then adds the message to the queue for node 4.

Note the variation in the number of digits needed to make a prefix unique to a node. Chicago is the only node using mailboxes that begin with 2, so that prefix only needs to be one digit. Chicago and New York both use mailboxes in the 3200 series, so these prefixes must be taken out to the third digit to be unique.

Another thing that is noteworthy about this dialing plan is that no remote mailbox numbers overlap, either with each other or with local San Jose mailboxes. New York, Chicago, and Dallas could use mailbox numbers that begin with 1, 5, 6, 7, 8, and 9, but users on the San Jose system cannot send messages to these mailboxes through NP Net. The San Jose dialing plan will need to be configured differently in order to enable messages to those mailboxes. The Digits To Absorb feature can be used to add this flexibility to the dialing plan.

## Digits To Absorb

You assign a Digits To Absorb number to each prefix in the Digits Translation Table. The number of digits can be from 0 to 10. After NP Net matches the destination mailbox number to a prefix, it attaches the corresponding Digits To Absorb count to the message. The remote node deletes the specified number of leading digits to convert the network mailbox number to a local mailbox number. You must configure each node to send Digits

To Absorb counts that allow remote nodes to translate network mailbox numbers to valid local mailbox numbers.

## Digits to Absorb and Local Mailboxes

If local mailbox numbers match a dialing plan position that contains an N, then there must be a prefix entry in the Digits Translation Table that has the local node number.

If every node on the network uses the same dialing plan, all mailboxes must be the same length. For example, if every node on a network uses the dialing plan *N7,N7,N7,N7,N7,N7,N7,N7*, users on every node are permitted to make messages for local or remote mailboxes that have 7 digit numbers only. Since NP Net does not absorb digits from local mailboxes, all local mailboxes on every system must be 7 digits; therefore, no digit absorption is possible throughout the network. The following section shows a way to formulate a network-wide dialing plan to avoid this limitation.

## Using the Digits to Absorb Feature to Create "Access Codes"

The digits to absorb feature can simplify Digit Translation Table configuration by allowing each node administrator to formulate "access codes" for the other nodes on the system. A user enters the access code for the node before entering the mailbox number of the recipient when making a message for a remote mailbox. For example, if the access code for Boston is 82 and the mailbox you want to reach is 100, you would enter 82100.

You can implement this feature with the either N or the P character in the dialing plan. With the N implementation, users will enter just the access code and mailbox. With the P implementation, users will enter a "network" access code digit, identifying that a network message is being made, then a "node" access code, identifying the destination node, then the destination mailbox number.

The access codes are prefixes in the Digits Translation Table; the associated digits to absorb count tells the remote node to delete the access code to obtain the local mailbox number. Problems with mailbox number overlap between remote nodes are avoided, since the "real" mailbox number (the local mailbox number on the remote node) is obtained after the message is sent.

## Using the Digits to Absorb Feature to Create Same-Length Mailbox Numbers

If you want users to always enter the same number of digits for all network addresses, you can use the Node Prefixes and the Digits to Absorb feature in the Digits Translation Table to "pad out" the mailbox numbers for nodes that use shorter extensions. For example, if node 2 uses 3-digit extensions and node 6 uses 4-digit extensions, you can create prefixes for node 2 that are one digit longer than the prefixes for node 6. You also set the Digits to Absorb count for node 2 to be one digit greater than the Digits to Absorb for node 6. The sample Digits Translation Table below shows this kind of configuration.

Node Node Digits To

Prefix Number Name Absorb

211 2 Chicago 3

22 6 Dallas 2

## 1.4.10.4.4 Creating a Network Dialing Plan

When you initially configure NP Net software on your server, you must set the dialing plans so that users can send network messages. You must set the dialing plan of every line group (NuPoint Voice, NP Receptionist, and so on) from which users will be allowed to send network messages. If any line group has more than one application, such as NP Receptionist and an integration, remember to change all of the dialing plans. Do not change PBX dialing plans for Enhanced SMDI line groups.

If the dialing plan for a particular application is not changed, a user who calls in on the line group dedicated to that application will be unable to make messages for remote mailboxes. For example, Message Delivery uses the dialing plan specified for the Pager Application. When Message Delivery calls a user at a pre-programmed telephone number because there is an unplayed message in the mailbox, the user enters the mailbox passcode and is logged into the mailbox.

If the Pager Application dialing plan is not changed to match the Network Dialing Plan, the user will be unable to make messages to remote mailboxes. To communicate with remote mailboxes, the user must call the standard NuPoint Voice number, where he or she will log in under the NuPoint Voice application.

When you configure the dialing plans for NP Net messaging, you must choose to use a network prefix digit, direct network addressing digits, or a star-prefix dialing plan.

### Using a Network Prefix Digit

A network prefix dialing plan uses one number to indicate that the mailbox address that follows is a network address. For example, if 9 is the network prefix digit, users must press 9 and then the network mailbox address to send network messages.

You specify a network prefix digit in the dialing plan with the letter P, followed by the number of allowable digits in a network mailbox address (*including* the prefix digit). For example, if 9 is the network prefix digit and network mailbox addresses have 6 digits, the dialing plan might look like:

0,0,0,4,4,4,0,0,P7

Notice that the P is in the 9s position, and it allows for seven digits: the network prefix digit plus a six-digit network mailbox address. The system strips off the prefix digit before comparing the mailbox address to the Digits Translation Table. In other words, if a user addresses a message to 9234567, the system compares 234567 against the Digit Translation Table.

In this example, if the sender attempts to address a message by pressing 9 and five digits (or any number other than six), the system says that the address is not valid. Local mailbox numbers cannot begin with the same digit as the prefix digit.

The P character can make dialing plans very flexible, especially when adding NP Net to a server that has an established mailbox dialing plan. For example, if both the local node and remote nodes have mailboxes that begin with 6 and 7, the administrator can tell users to press 9 plus the mailbox number to make a message for a remote mailbox. The 6 and 7 positions in the dialing plan can still be used by local mailboxes, and the previously unused dialing plan position 9 is reserved for remote mailboxes. The system handles the mailbox 678123 differently than 9678123.

## Using Variable-Length Network Addresses

It is not uncommon for different nodes on a network to have mailboxes that do not have the same number of digits. For example, node 1 may have 4-digit mailboxes and node 2 may have 5-digit mailboxes. There are two ways to accommodate this situation in network addressing.

If you want users to always enter the same number of digits for all network addresses, you can use the Digits to Absorb feature in the Digits Translation Table to "pad out" the shorter mailbox numbers. See [Digits Translation Table](#) for more information on this technique.

The other alternative is to use the P and V characters together in the dialing plan. (The V character indicates a variable-length mailbox number; see [About Dialing Plans](#) for more information on the V character.) This combination allows users to address messages by entering a network prefix digit followed by the minimum number of digits required to uniquely identify a remote node and mailbox. For example, if node 3 uses 5-digit mailbox numbers and node 4 uses 4-digit mailbox numbers, the following dialing plan on node 1 would allow addressing to mailboxes on both nodes:

0,0,0,4,4,4,0,0,PV

If the prefixes in the Digits Translation Table matched the node numbers, then a user could address a message to mailbox 44564 on node 3 by entering 9344564, and to mailbox 3445 on node 4 by entering 943445.

## Addressing by Area Code and Phone Number

You can also use the P character to allow addressing messages by area code and phone number. This type of dialing plan is useful when users have DID or Centrex-type service and callers are used to reaching them by dialing 7 or 10 digits (without going through an operator). It can alleviate conflicts between telephone/mailbox numbers on different nodes that share the same telephone number prefix (the first three digits of a seven digit telephone number).

For example, two nodes may have telephone numbers that begin with 257. A dialing plan with P11 in the 1s position would allow users to address network messages by entering 1 + the area code + the mailbox number, just as though they were dialing long-distance calls. The P in the dialing plan means that the 1 is dropped. The Digits Translation Table is configured to match the area codes and route messages to the correct remote nodes. When a message reaches a remote node, the three area code digits are deleted, and the message is delivered to the local seven digit mailbox number.

## Using Direct Network Addressing Digits

If you do not want to use a prefix digit for network addressing, or if you want to use fully integrated local and remote mailbox numbers, you can use direct network addressing digits. The N character in a dialing plan position indicates that mailbox addresses that begin with that digit are network mailboxes, and should be processed by the NP Net software. The N is always followed by the number of valid digits in the network mailbox address. For example, the following dialing plan indicates that addresses that start with 7 or 8 are 6-digit network addresses.

0,0,0,4,4,4,N6,N6,0

In this example, when a message is addressed to a mailbox number that begins with 7 or 8, the NP Net software finds the destination node by comparing the leading digits of the mailbox number with the prefixes stored in the Digits Translation Table. Those prefixes would start with 7 or 8; the first digit is not stripped off when you use the N character.

Note that local mailbox numbers can also begin with 7 or 8, but they must have 6 digits, and the Digits Translation Table must contain prefixes that match the local mailboxes with the local node number. If the node number in the table matches the local node number, the message is sent immediately to the local mailbox (local messages sent through a network dialing plan are not queued). Senders do not need a Network Class of Service to send local messages, even though the dialing plan position indicates a network mailbox destination. Billing and statistics are the same as for local messages sent through a conventional dialing plan.

You can use this strategy is to create a same-length dialing plan for every node on the network, such as *N7,N7,N7,N7,N7,N7,N7,N7,N7,N7*. This means that every time a message is made for a mailbox, the address is checked against the Digits Translation Table to find the destination node. The main advantage of this type of dialing plan is that a user enters the same number of digits to reach a mailbox on any node.

## Creating a Uniform Network Dialing Plan

You can use a uniform dialing plan if the mailbox numbers on each node have unique ranges (for example, mailbox numbers on node 2 are in the range of 3000 to 3500 and no other nodes have mailbox numbers in that range). The advantage of a uniform dialing plan is that users can simply dial the mailbox number to access remote mailboxes. The disadvantage is that you must take local mailboxes into account in the Digits Translation Table. Mailbox number distribution takes careful planning, since local mailbox numbers



cannot conflict with mailbox numbers on any remote node. You can resolve conflicts by adding *access codes* to remote mailbox numbers, then using the *digits to absorb* feature to tell the receiving system to delete the access code to find the true mailbox number. The *digits to absorb* feature is described earlier in this section.

### Using a Star Prefix Dialing Plan

NuPoint Unified Messaging servers that do not have any open positions in the dialing plan may need to use a star prefix dialing plan for network addressing. The star prefix dialing plan provides the functionality of both the N and P characters, although the functions have different names. If the P function were assigned to the 9 position in a star prefix dialing plan, a user would press 9\* and then the network mailbox address to send a network message.


See [About Dialing Plans](#) for more information about star prefix dialing plans.

## 1.4.10.4.5 Using Broadcast Mailboxes for Transparent Network Messaging

Transparent network messaging means that there is no difference to the user between sending a message to a remote mailbox and sending a message to a local mailbox. The user does not enter a network prefix when addressing a message, and the user hears the name confirmation of the mailbox owner.

You can use broadcast mailboxes to achieve this transparency. A message broadcast mailbox automatically sends any messages that it receives to the mailboxes in its first distribution list. A name broadcast mailbox automatically sends the owner's recorded name to the mailboxes in its distribution list number 9, to be used as the recorded name for those mailboxes. You enable these features in the FCOS of the broadcast mailboxes. See [Types of Mailboxes](#) for more information about broadcast mailboxes.

For complete network transparency, every user on every node must have a mailbox on every node. A user's mailbox on the local node has name broadcast enabled, so that the user's recorded name is broadcast to that user's mailboxes on all other nodes. The user's mailboxes on remote nodes all have message broadcast enabled, so that all messages made for that user are broadcast to the local node. The diagram below shows this type of configuration:

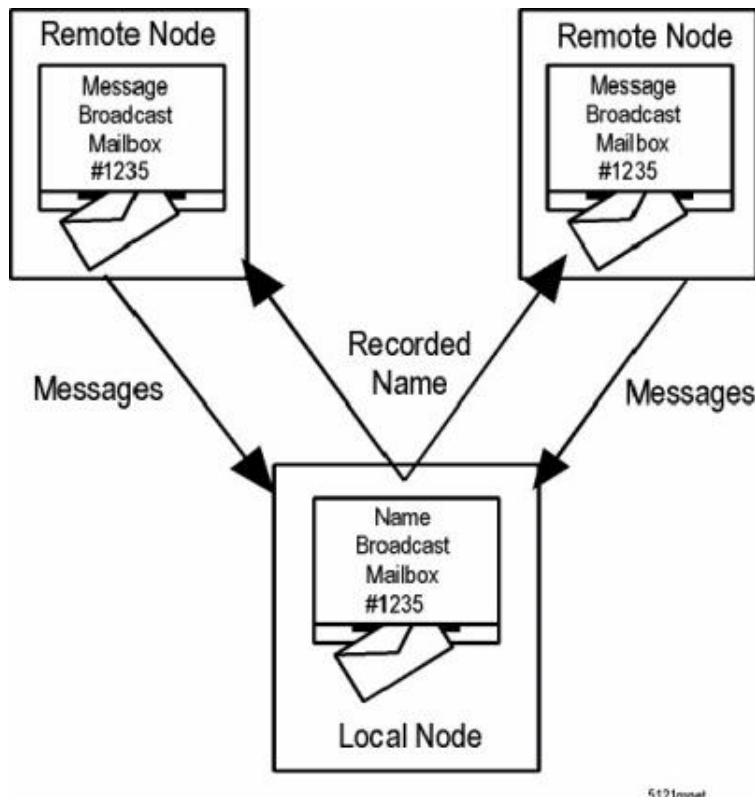

Users always address messages to mailboxes on their local node. Because the recipient mailbox is local, the sender hears the mailbox name confirmation. If the mailbox is configured as a broadcast mailbox for a user on a remote node, the mailbox forwards the message over the network to the local node of the recipient.

**Note:** Broadcast mailboxes put an extra burden on system administrators. You must still configure the Digits Translation Table to provide the routing required for network messages. In addition, mailbox adds, moves and changes must be coordinated across the network, and the distribution lists in the broadcast mailboxes must be kept current. See [Configuring Network Mailboxes](#) for information about adding remote mailbox addresses to distribution lists.

### 1.4.10.4.6 Network Addressing Examples

The following examples illustrate various ways of configuring network addressing to meet the needs of different networks.

#### Example 1: Adding Simple Access Codes

A network consists of four nodes: San Jose (Node 1), Chicago (Node 2), New York (Node 4) and Dallas (Node 6). Before the NP Net optional feature was installed, the San Jose node had three digit local mailboxes that began with digits 3 through 8. If the administrator wants to retain this structure, she can use dialing plan position 9 for remote mailboxes. The following changes makes this possible:

- The old San Jose dialing plan of 0,0,3,3,3,3,3,0 is changed to 0,0,3,3,3,3,3,N5.
- The access codes for all remote nodes begin with 9
- Each prefix has a digits to absorb count of 2
- The Digits Translation Table for San Jose looks like this:


| Node   | Node Digits To     |
|--------|--------------------|
| Prefix | Number Name Absorb |
| 92     | 2 Chicago 2        |
| 94     | 4 New York 2       |
| 96     | 6 Dallas 2         |

The access code length depends on how many number combinations are needed to cover all the nodes on the system, but the codes should not be so long that it is a chore for users to send remote messages. In the example above, the access codes can be up to 8 digits, since mailbox numbers can be up to 11 digits, but it is unreasonable to expect system users to remember 8 digit access codes and 3 digit mailbox numbers. A very large network would require more positions for remote nodes to make this scheme workable.

This method is useful for NuPoint Unified Messaging servers like the one in the example, where NP Net software is installed on an established system that has a pool of users who have memorized many mailbox numbers and do not want them to change. It is also practical for NuPoint Unified Messaging servers on which both NP Net and NP Receptionist are installed. Mailbox numbers can match NP Receptionist extension numbers without regard to the extension/mailbox structures of other nodes.

### Example 2: Access Codes and Variable Length Remote Mailbox Numbers

Suppose one has the network shown below. The Chicago node (Node 2) has four digit mailboxes that start with 3, the New York node (Node 4) has six digit mailboxes starting with 4 or 5, and the Dallas node (Node 6) has three digit mailboxes that start with 5. Optimally, all these mailboxes must be served by the same dialing plan position. The access codes for all remote nodes can still begin with 9, as that digit is not part of any existing dialing scheme. Let's analyze each node individually:

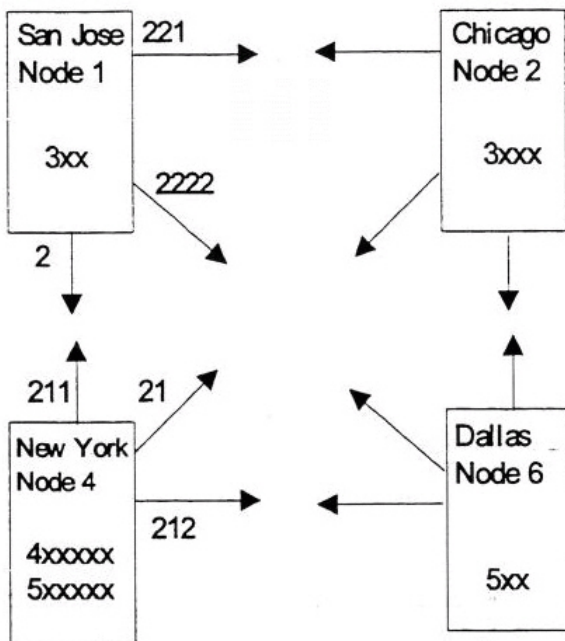

## San Jose

Users on the San Jose node would like to enter the same number of digits to send messages to mailboxes on any of these three remote nodes, even though the destination mailbox numbers have different lengths. A digits absorbed count for each prefix is suddenly very useful. Since New York remote mailboxes already have six digits, the administrator decides that users will only need to enter a one digit access code (i.e. 9) to reach New York. The digits to absorb count for the New York node is 1. The prefixes listed for New York in the Digits Translation Table must include at least the first digit of all possible valid mailbox numbers on the node, to make all mailboxes accessible, and to make all prefixes unique. The dialing plan in San Jose is changed to 0,0,3,0,0,0,0,0,N7 to accommodate the New York node. Local mailboxes are unaffected by the change.

To access the four-digit mailboxes on the Chicago node, the Digits Translation Table must have three digit prefixes (access codes) to conform with the seven-digit network dialing plan (three digit access code plus a four digit extension equals seven digits). The digits to absorb count is also 3 for all Chicago prefixes.

The Dallas node uses three-digit mailboxes, so it needs a four digit access code to conform with the dialing plan. The digits to absorb count is 4 for all Dallas prefixes.

## San Jose Digit Translation Table

Node Node Digits To

Prefix Number Name Absorb

221 2 Chicago 3

2222 6 Dallas 4  
24 4 New York 1  
25 4 New York 1

**New York, Chicago, and Dallas**

The administrators for the New York, Chicago, and Dallas nodes all decide that users on their servers will address network messages with a prefix digit, a node access code, and variable length mailbox numbers. This simplifies their system planning and maintenance.

All three sites use 9 as the network prefix digit, so the dialing plan for New York is

0,0,0,6,6,0,0,0,PV

The Digit Translation Tables for all three nodes look follow the same pattern. The table for New York is shown below.

| Node   | Node Digits | To          |
|--------|-------------|-------------|
| Prefix | Number      | Name Absorb |
| 1      | 1           | San Jose 1  |
| 2      | 2           | Chicago 1   |
| 6      | 6           | Dallas 1    |

When a user in New York wants to address a message to mailbox 325 in San Jose, he enters 91325. The New York node recognizes the address as a network address and strips off the 9 because of the P character in the dialing plan. It then compares the remaining digits with the prefixes in the Digits Translation Table and finds that the message is for San Jose. When the San Jose node receives the message, it strips off one digit and delivers the message to mailbox 325.

1.4.10.4.7 Digits Translation Table Tasks

1.4.10.4.7.1 Create New Prefix/Node Pairs

Use this procedure to create a new entry in the Digits Translation Table. Each entry associates a dialed prefix with a node, and sets the number of digits for the remote node to absorb from the network mailbox number.

- 1. From the Main Menu, select **(S) System Maintenance, (W)Network Menu, (M) Network Maintenance**, and then **(D)Digits Translation**.
- 2. Select **(C) Create new prefix/node pairs** and enter the **number** (1-8191) of the new entry.

3. At the **Absorb digits** prompt, enter the **number** (0-12) of digits to absorb from the network mailbox number.
4. At the **Prefix** prompt, enter a dialed prefix **number** (1 to 99,999,999,999) that indicates a message for the node in step 2.
5. Repeat step 4 to associate additional prefixes with the node, or press **Enter** to stop entering prefixes.
6. Repeat steps 2 through 5 to create entries for additional nodes. Press **Enter** when you have finished creating entries for all nodes.

### 1.4.10.4.7.2 Delete Prefix/Node Pairs

This procedure describes how to delete prefix/node pairs from the Digits Translation Table.

1. From the Main Menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance, and then (T) Network Node Table**.
2. Select **(D) Delete prefix/node pairs** and enter a valid prefix **number** (or range of numbers separated by hyphen) to delete.
3. You are prompted to confirm the deletion. For single prefixes, enter **Y** to delete. For ranges of prefixes, type the word **delete** when prompted to confirm.

### 1.4.10.4.7.3 View the Digits Translation Table

To see an online display of information about prefix/node pairs in the Digits Translation Table:

1. From the Main Menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance, and then (D) Digit Translation Menu**.
2. To view a single entry or range: select **(I) Inquire about prefix/node pairs** and enter a valid prefix number or hyphen-separated range of numbers to display.
3. To view the entire digits translation table: select **(L) List the dta table**. The server displays the report.

#### Sample Report:

```
>>>
www.mitel-amc.com <<<
```

PREFIX/NODE PAIR REPORT

Wed Jan 13 13:54:46 20xx

Prefix Node Absorb Cnt

700 700 3

801 801 3

802 802 3

803 803 3

804 804 3

5 Prefixes found

#### 1.4.10.4.7.4 Modify the Node Number for a Prefix

Use this procedure to change the node number and number of digits to absorb associated with a prefix in the Digits Translation Table.

1. From the Main Menu, select **(S) System Maintenance**, **(W) Network Menu**, **(M) Network Maintenance**, and then **(D) Digit Translation** Menu.
2. Select **(M) Modify the node number for a prefix** and enter a valid prefix **number** or hyphen-separated range of numbers.
3. At the **New node number:** prompt, enter a valid node number.
4. At the **Absorb cnt:** prompt, enter the number of digits (0-12) to absorb. The system displays the prefix to modify and prompts you to confirm.
5. Press **Y** to confirm modification or **N** to leave unchanged.

#### 1.4.10.4.8 Configuring the Network Queues

##### 1.4.10.4.8.1 Configuring the Network Queues - Overview

###### Note:

Network Queue programming must be performed using the **Text Console**.

You can control when a local NP Net node originates connections with remote nodes by configuring the network queues. You can set the different parameters that control when a queue is ready to send, such as time of day and number of messages waiting in a queue. You can also set the number of times that the local node tries to connect to a remote node once it determines that it is time to send the messages.


You can use the network queue parameters to help control toll charges with dial-up NP Net connections. If all of your connections are TCP/IP, you probably want to set the queues to send messages immediately.

There are some basic functions of NP Net queues that you should understand before configuring the queue parameters:

- Messages addressed to remote nodes are stored in separate queues; there is an urgent message queue and a batch message queue for each node.
- The queues are checked every 30 seconds to find out if it is ready to send.
- The parameters that you set for queues apply to all nodes, but each queue is monitored separately. When the urgent queue for remote node 2 is full, the local node originates a connection to that node; it does not originate connections to any other nodes until their queues are full.
- Each node only originates connections when it needs to *send* messages, however, once a connection is established between two nodes, any messages queued for the originating node on the answering node are also sent, so messages go both ways. (If a node makes a connection to send only urgent messages, the answering node is only allowed to send messages from its urgent queue.)

After you have set the queue parameters, you should closely monitor the network queue statistics to ensure that the thresholds are set at realistic values. The cost of sending a network queue must be balanced against the need to receive messages in a timely manner and the need to clear network queue storage space. The storage aspect is particularly important when controlling costs; network message delivery that is triggered by reaching the message block use threshold will probably occur when tariffs are highest, since most messages are recorded during normal business hours.

The figure below shows the hierarchy of the various thresholds. The Time Window overrides the Message Count, Message Waiting Time, and Total Message Minutes parameters, but the Time Window is overridden by the Message Blocks Used threshold.

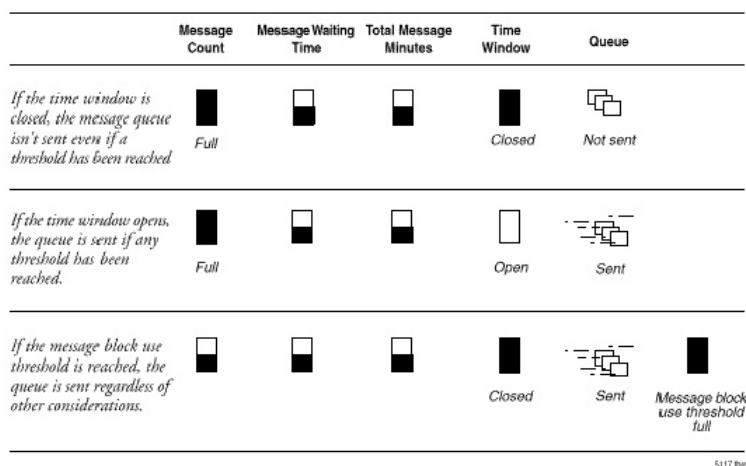



## 1.4.10.4.8.2 Network Queues Worksheet

The Network Queues Worksheet is designed to help you plan and record the settings of the network queues. The fields on the worksheet match the information that you must supply when configuring the queues. Study the sample worksheet and the definitions that follow, and then copy the [blank worksheet](#) and fill it in.

**NP Net  
Network Queues**

---

**Network Queue Limits**

Message Block Use Threshold (80-100%):

Maximum Call Setup Tries:

Call Setup Retry Interval (minutes):

---

**Network Queue Time Windows**

Always Open? ☒ Weekdays ☐ Weekends

Weekday Start Time (hour:min am/pm): Batch  Urgent

Weekday Stop Time (hour:min am/pm): Batch  Urgent

Weekend Start Time (hour:min am/pm): Batch  Urgent

Weekend Stop Time (hour:min am/pm): Batch  Urgent

---

**Network Queue Thresholds**

Message Count Threshold: Batch  Urgent

Message Waiting Threshold: Batch  Urgent

Total Message Minutes Threshold: Batch  Urgent

NP0152

### Worksheet Definitions: Network Queue Thresholds

Network queue thresholds allow you to control when messages are sent to another node. Cost is an important consideration when setting these parameters; the first minute of a call is tariffed higher, so it is more economical to send a group of messages than to send each message separately.

You can set different network queue thresholds and time windows for urgent and batch messages. (All messages not specifically marked urgent by the sender are considered batch.) With this two-tiered system, routine messages are sent at a time when the call is more economical, while more important messages are delivered promptly. (It is recommended that you set realistic batch limits or restrict the assignment of Network Classes of Service that allow the user to send urgent messages over the network to prevent users from marking all remote messages urgent.) The batch queues and remote queues of each remote node are monitored individually by NP Net.

**Message Count Threshold:** The number of messages, names, greetings, and receipt updates that must be waiting in a queue for a certain node before that queue becomes ready to send. This threshold is appropriate for sites where users tend to make frequent, short messages. The default message count threshold for batch messages is 5; for urgent messages, it is 0.

**Message Waiting Threshold:** The length of time, in minutes, that the oldest message will be kept waiting in the queue before the queue becomes ready to send. If the queue has a very restrictive time window (for example, if batch messages can be sent only between 12:00 am and 5:00 am), set this threshold to a low value to ensure that all network queues are ready to send when the window opens. The default message waiting threshold for batch messages is 10 minutes; for urgent messages, the default is 0 minutes (no waiting).

**Total Message Minutes:** The number of minutes of speech that must be waiting in a queue for a certain node before that queue becomes ready to send. This threshold is appropriate for systems where system storage tends to be high, but it is not triggered efficiently by frequent, short messages. If the node tends to process a high volume of short messages, the message count threshold is a better choice. The default Total Message Minutes threshold for batch messages is 5 minutes of speech; for urgent messages, the default is 0 minutes of speech.

### **Worksheet Definitions: Network Queue Time Windows (Start/Stop Times)**

The start and stop times create a limited time period during which messages can be sent to remote nodes. This time window overrides all message thresholds; queues that are ready to send will not trigger a call unless the window is open. Conversely, when the time window opens, queues that have not yet met any of the thresholds will not be sent. The time window and thresholds must be carefully set, to ensure that messages do not remain queued for an unacceptable period of time.

You set separate time windows for batch and urgent messages. Within these categories, you set time windows for weekdays and weekends. In the default configuration, network queue time windows for batch and urgent messages are always open.

**Always Open:** Circle Weekdays or Weekends for either urgent or batch queues if you do not want message sending to be restricted by time of day.

**Weekday Start Time:** Write in the time of day that you want the local node to start sending messages on weekdays, provided that at least one of the network queue thresholds has been met.

**Weekday Stop Time:** Write in the time of day that you want the local node to stop sending messages on weekdays.

**Weekend Start Time:** Write in the time of day that you want the local node to start sending messages on weekends, provided that at least one of the network queue thresholds has been met.

**Weekend Stop Time:** Write in the time of day that you want the local node to stop sending messages on weekends.

## Worksheet Definitions: Network Queue Limits

Network queue limits control network queue storage and determine how often, and at what interval, a node should attempt to send a network queue to another node before the queue is considered "undeliverable."

**Message Block Use Threshold:** The percentage of total queue storage that must be full to trigger an automatic connection. The Message Block Use Threshold is a "safety valve" that forces the node to empty queues when total network queue storage is almost full.

When the message block use threshold is reached, the system checks the network queues for the node with the greatest number of messages waiting and marks that queue as ready to send. The queue is sent immediately; the message block use threshold overrides all other thresholds, including network queue time windows. The system will continue to send queues until message storage falls below the threshold.

You can set the message block use threshold at any value between 80% and 100%. The default threshold is 80%.

**Maximum Call Setup Tries:** The maximum number of calls that an originating node will make to try to establish a connection with another node. The default value is 50.

**Call Setup Retry Interval:** The time, in minutes, between attempts to establish a connection. The default interval is 10 minutes.

An originate link executes the originate actions of the hardware type up to three times in immediate succession when attempting to call another node. These three calls constitute one try; that is, the call setup tries counter is increased only after all three attempts have failed.

When a first attempt at originating a call fails (the node may be busy communicating with another node on the system, for example), the node waits the amount of time specified by the call setup retry interval before repeating the originating actions. This sequence will continue until communications are established or the maximum call setup tries threshold has been reached.

If all attempts to communicate with the destination node fail, all users who sent messages to that node are notified that these messages could not be delivered.

### 1.4.10.4.8.3 Programming (Text Console)

#### 1.4.10.4.8.3.1 Configure Network Queues

To configure the network queue parameters, including message thresholds, time windows, and queue limits:

1. From the Main Menu, select **(S) System Maintenance**, **(W) Network Menu**, **(M) Network Maintenance**, and then **(Q) Modify Network Queueing**. Proceed to step 7.

2. Select **(T) Message Thresholds** and then select either **(B) Batch queue** or **(U) Urgent queue**.
3. To reset all threshold values to their default values, select **(W) Set to Default Values** and then enter **Y** to confirm. Otherwise, proceed to step 4.
4. Select **(M) Message Count Threshold** and enter the **number** of messages and receipt updates in a queue that, when reached, causes the queue to be sent.
5. Select **(S) Message Waiting Threshold (minutes)** and enter the **number** of minutes that a message waits before being sent.
6. Select **(T) Total Message Minutes** and enter the **number** of minutes that the total messages add up to before the queue is sent.
7. Exit from the Network Queueing menu. Repeat steps 2 through 7 for the other queue (batch or urgent).

### Set Queue Time Windows

1. Exit to the Modify Network Menu and select **(S) Start/Stop Times**.
2. Select the queue to modify: either **(B) Batch queue** or **(U) Urgent queue**
3. If you do not want any time limits on when the local node can originate NP Net connections, follow these steps. Otherwise, proceed to step 11.
  - Select **(U) Always Open Weekday Window**. The system displays the parameters of this option and prompts for confirmation.
  - Enter **Y** to set the window to always open; **N** to leave the times unchanged.
  - If you do not want any time limits on when the local node can originate NP Net connections on the **weekends**, select **(V) Always Open Weekend Window**. The system displays the parameters of this option and prompts for confirmation.
  - Enter **Y** to set the window to always open; **N** to leave the times unchanged.
4. To set time limits, select **(A) Weekday Start Time** and enter the **time** that NP Net starts sending the network queue on weekdays. The time must be between 01 00 am or pm and 12 00 am or pm in the format **hh mm am** or **hh mm pm**.
5. Select **(D) Weekday Stop Time** and enter the **time** that NP Net starts sending the network queue on weekdays. The time must be between 01 00 am or pm and 12 00 am or pm in the format **hh mm am** or **hh mm pm**.
6. Select **(E) Weekend Start Time** and enter the **time** that NP Net starts sending the network queue on weekends.
7. Select **(I) Weekend Stop Time** and enter the **time** that NP Net stops sending the network queue on weekends.
8. Exit from the Start/Stop Times menu.
9. Repeat steps 9 through 15 for the other queue type (batch or urgent).

## Set Network Limits

1. Exit to the Modify Network Queue menu and select **(L) Limits**.
2. To set parameters to their default values, select **(W) Set to Default Values** and then enter **Y** to confirm. Otherwise, proceed to step 19.
3. Select **(T) Message Block Use Threshold** and enter the **number** that indicates a percentage of buffers used for messages. When this percentage is reached, NP Net will send the queue with the greatest number of message. NP Net continues to send queues until the message storage falls below the threshold. This number can be from 80 to 100.
4. Select **(U) Maximum Call Setup Tries** and enter the **number** that indicates the number of times NP Net will try to send a network queue. Each try consists of three call setup attempts.
5. Select **(V) Call Setup Retry Interval** and enter the **number** of minutes between attempts to set up a connection to a remote node.
6. Exit the Modify Network Queue menu.

## 1.4.10.5 Configuring the Network Class of Service

### 1.4.10.5.1 Programming (Web Console)

#### 1.4.10.5.1.1 Managing NCOS

Network classes of services (NCOS) are similar to [FCOS](#), except that every network bit controls one of the twelve network options (see [NCOS Fields Description](#)). You can have a maximum of 64 NCOS on the system.

You can

- [List NCOS](#)
- [Add an NCOS](#)
- [Edit an NCOS](#)
- [Delete an NCOS](#)
- See a list of [NCOS Fields Description](#)

### Listing NCOS

To display a list of all NCOS in the system

- In the navigation tree, click Class of Service and then click Network COS.

## Add an NCOS

1. In the navigation tree, click Class of Service and then click Network COS. The Network COS list is displayed.
2. Click Add. The Add NCOS form is displayed.
3. Do one of the following:
  - Copy an existing NCOS by selecting one from the list and clicking the **Copy from** button. The parameters of that NCOS will be copied into your new NCOS, which you can then edit as required. The Next Available NCOS number is automatically applied.

OR

  - Chose to manually select all limits for the new NCOS
4. In the **Number** field, enter a **number** (1-64) for this NCOS, or click **Next Available** to automatically assign the next number.
5. In the **Name** field, enter a **name** (up to 15 alphanumeric characters) for this NCOS.
6. Select the check box beside each network bit that you want to enable for the NCOS. (Clear a check box to disable the selection.) For a list of network bits, see [NCOS Fields Description](#).
7. To save the NCOS and return to the Network COS list, click Save

## Edit an NCOS

Best practices dictate that you always keep your default NCOS intact. If you need to modify an NCOS, we suggest that you copy the default NCOS into a new NCOS (see "Add an NCOS" above) and modify it there. After you save the new NCOS, you need to assign it to the appropriate mailboxes. This way, if you have problems/conflicts with the new COS, you can always restore the default until you have finished troubleshooting.

## Delete an NCOS

Deleting an NCOS that is in use by mailboxes will cause all of those mailboxes to be assigned the default (1) NCOS. A warning message is displayed to allow you to cancel the operation. If you are deleting the default NCOS, the mailboxes assigned to it will be assigned to the next available NCOS. You cannot delete the last remaining NCOS in the system; therefore, you cannot select all NCOS for deletion.

To delete one or multiple NCOS

1. In the Network COS list, select one or multiple NCOS, and then click Delete. The system will prompt you to confirm the deletion.

2. To confirm the deletion, click Yes for a single deletion or Yes to all for a range.

OR

To reject the deletion, click No.

### NCOS Fields Description

| Field  | Description                                                                                                                                                                                                                                                                     | Values                                                                                                                                               |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number | <p>*Required field.</p> <p>Determines the number of the new NCOS. You can manually enter a number from 1-64 as long as it is not already assigned to an NCOS. You can also click the Next Available button to have the system assign the next available number to the NCOS.</p> | <p>Enter a number in the range of 1-64. The number must not be already used for an existing NCOS. Or click the "Use next available number" link.</p> |
| Name   | <p>*Required field.</p> <p>This is the name of the NCOS.</p> <p>(<b>Note:</b> You can create unnamed NCOS using the Text console but they are not supported in the Web console. If you encounter an unnamed NCOS, use the Text console to name it.)</p>                         | <p>Maximum 15 alphanumeric characters.</p>                                                                                                           |

| Field             | Description                                                                                                                                                                                                                                                        | Values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (Network options) | There are twelve network options on the system. They are listed here. You select any combination of the options to enable them for this NCOS. Mailboxes that are assigned this NCOS will have the selected network options enabled. Clear an option to disable it. | <p>Select any combination of the following twelve network options:</p> <ul style="list-style-type: none"> <li>• Enable GCOS check across network</li> <li>• Allow user to make network messages</li> <li>• Allow user to make urgent network messages</li> <li>• Allow user to give network messages</li> <li>• Allow user to give urgent network messages</li> <li>• Allow user to answer network messages</li> <li>• Allow user to answer urgent network messages</li> <li>• Automatic receipt on network messages</li> <li>• Set "Remote message" when playing network messages</li> <li>• Allow user to make fax messages over the network</li> <li>• Allow user to give fax messages over the network</li> <li>• Allow user to answer fax messages over the network</li> </ul> |

## 1.4.10.5.2 Programming (Text Console)

### 1.4.10.5.2.1 Configure a Network Class of Service

To create or modify an NCOS by adding and deleting network messaging features:



1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, and then  
**(N) Network COS**.
2. Select **(C) Current NCOS** and enter the **number**(1-64) of the NCOS that you want to create or modify.
3. Select **(N) Name NCOS** and enter a descriptive **name** for the NCOS, possibly one that describes the NCOS user group.
4. If you want to view the networking features that you can add to an NCOS, press **(H) Help NCOS**.
5. Select **(A) Add features**.
6. At the **Feature to add** prompt, enter the **numbers**(1-12) of the NCOS features that you want to add. You can enter an individual feature number, a comma-separated list, or a range, such as 2-4.
7. If you want, you can view the NCOS to verify your work. Press **(R) Report NCOS** and enter the number of the NCOS you created. The system displays the NCOS information.
8. If necessary, make further changes to the NCOS by adding or deleting features. When you are finished, exit to the System Configuration Menu to save your work.

## 1.4.10.6 Configuring Network Mailboxes

This section describes NP Net mailbox maintenance: creating network mailboxes, adding network mailboxes to distribution lists, and working with broadcast mailboxes over the network. The information here is an addition to the mailbox information in the [Mailboxes](#) section.

### Creating Network Mailboxes

There is very little difference between a regular mailbox and a network mailbox. A regular mailbox becomes a network mailbox when you associate it with a network class of service (NCOS) that allows messaging across the network. Network Class of Service is described in [Configuring the Network Class of Service](#).

Unless you specify otherwise, all mailboxes are assigned NCOS 1. To make administration easier, you should configure NCOS 1 to match the needs of the largest group of network users.

If you enabled GCOS checking across the network (NCOS feature 001), you must pay special attention to the GCOS that you assign to each mailbox so that the mailbox owner can communicate with the appropriate people.

## Modifying Existing Mailboxes for Networking

When you add NP Net software to a NuPoint Unified Messaging server that is already processing calls, the default NCOS that was assigned to all mailboxes becomes effective. To change mailbox NCOS assignments on one mailbox or on a range of mailboxes.

## Adding Network Mailboxes to Distribution Lists

If you maintain any distribution lists from the console, such as system-level distribution lists, you can add remote mailboxes to those lists. You add remote mailboxes from the console using the same letters as the dialing plan: N and P. When adding members to a distribution list, enter N and a remote mailbox number (just like a user would enter the number when addressing a message), or P and a prefix and mailbox number.

Any remote mailbox entries that you put in distribution lists must match the dialing plan and Node Access Table configuration.

## Broadcasting over the Network

A Broadcast mailbox (mailboxes with FCOS bit **122**) functions differently when broadcasting to remote mailboxes:

- FCOS bit **123**, which directs the system to announce the broadcast mailbox number/name to the recipient, rather than the sender's mailbox number/name, does not work when the message is sent to a remote node.
- Messages made for a broadcast mailbox are automatically sent to every member of distribution list 01 of that mailbox. Local and remote mailboxes can be included in this distribution list. Distribution lists are limited to 200 members, and each local or remote mailbox in the list counts toward that limit.
- The same system will not perform a "double broadcast," that is, if one of the child mailboxes is also a broadcast mailbox, the message will *not* be sent to the mailboxes in its distribution list 01.
- If a remote broadcast mailbox is included in distribution list 01 of the local broadcast mailbox, the message *will* be broadcast to the remote mailbox's distribution list 01, since each broadcast is done by a different system.

## Message Queues and the Mailbox Message Count

The mailbox Limits Class of Service limits the number of messages that can be stored in a mailbox. The maximum number of messages allowed is **200** (note that attachments to a message count toward this total). Network messages that are queued but have not been sent count toward this limit, and so do message receipts. You must take these additional demands on mailbox message storage into account when programming network queue configurations and when assigning Limits Classes of Service to network mailboxes.

## 1.4.10.7 Network Billing and Reports

### 1.4.10.7.1 Network Billing

This section describes the mailbox billing counters and the parts of the standard billing report that reflect NP Net usage. Refer to the Software Configuration section for instruction to adjust billing rates and run the billing report.

#### **Network Message Counters**

Network message counters tally the number of messages sent by a mailbox to remote nodes. Different counters measure the total number of network messages sent, the number of nodes to which a message is sent, number of remote recipients to which a message is sent, and the number of network messages received by the mailbox during the billing period. Separate totals are kept for urgent and batch messages that meet each of these criteria.

#### **Network messages sent**

This counter keeps track of the total number of batch messages recorded for remote mailboxes during the billing period. A "Give + comments" message is counted as one message, as is an original message that has an answer or answers attached.

Messages are billed on a "per message" basis, *not* a "per recipient" basis; when a batch message is made to a distribution list, or by using the "make multiple" feature, it counts as one network message sent.

#### **Network urgent messages sent**

This counter keeps track of the total number of urgent messages sent to remote nodes by the mailbox during the billing period. A "Give + comments" message is counted as one message, as is an original message that has an answer or answers attached.

Messages are billed on a "per message" basis, *not* a "per recipient" basis; when an urgent message is made to a distribution list, or by using the "make multiple" feature, it counts as one urgent network message sent.

#### **Number of network nodes sent to**

The Make Multiple and Broadcast features permit users to send a single message to more than one node. This counter allows the administrator to charge separately for each node to which a batch message is sent, since each destination node requires a separate transmission. The number of recipient mailboxes on each node does not matter. For example, a single message that is broadcast to five mailboxes on three different nodes increments this counter by 3.

A "Give + comments" message is equivalent to the single message in the previous paragraph, as is a "Give + message with an answer or answers attached."

### **Number of network nodes sent urgent to**

The Make Multiple and Broadcast features enable users to send a single message to more than one node. This counter allows the administrator to charge separately for each node to which an urgent message is sent, since each destination node requires a separate transmission. The number of recipient mailboxes on each node does not matter. For example, a single message that is marked urgent, then sent to five mailboxes on three different nodes increments this counter by three.

### **Number of network recipients sent to**

The Make Multiple and Broadcast features permit users to send a single message to more than one remote mailbox. This counter allows the administrator to charge separately for each remote mailbox to which a batch message is sent. The number of nodes is irrelevant. For example, a single batch message sent to five mailboxes on three different nodes, increments this counter by 5.

### **Number of network recipients sent urgent to**

The Make Multiple and Broadcast features enable users to send a single message to more than one remote mailbox. This counter allows the administrator to charge separately for each. For example, a single message that is marked urgent, and then sent to five mailboxes on three different nodes increments this counter by 5.

### **Network messages received**

This counter keeps track of the number of batch messages received from remote nodes by the mailbox during the billing period. A "Give + comments" message is counted as one message, as is an original message that has an answer or answers attached.

### **Network urgent messages received**

This counter keeps track of the number of urgent messages received from remote nodes by the mailbox during the billing period. A "Give + comments" message is counted as one message, as is a original message that has an answer or answers attached.

### **Network Message Length Counters**

Message length counters keep track of the total amount of recorded speech that fits certain criteria. Every mailbox has these counters, and all counters are incremented in tenths of a minute.

Among the reasons why an administrator would set rates based on message lengths are (1) messages use up disk storage when they wait in the queue, and (2) the longer the message, the longer the transmit time. While the cost of transmitting a single two minute

message may not be significantly higher than the cost of transmitting a single one minute message, the cost differences can be substantial when they are multiplied over many messages.

There are separate message length counters for Batch and Urgent messages. Batch messages usually stay in the queue longer than urgent messages, but urgent messages may be transmitted during time periods when transmission charges are highest. Take these factors into account when setting rates.

### **Message length for network messages sent**

The counter tallies the total amount of recorded speech in all batch messages sent to remote nodes by the mailbox during the current billing period.

### **Message length for network messages sent urgent**

The counter tallies the total amount of recorded speech in all urgent messages sent to remote nodes by the mailbox during the current billing period.

### **Message length for network messages received**

This counter totals the amount of recorded speech in all batch messages received from remote nodes during the current billing period.

### **Message length for urgent network messages received**

This counter totals the amount of recorded speech in all urgent messages received from remote nodes during the current billing period.

### **Message length for number of network nodes sent**

NP Net multiplies the amount of recorded speech in each batch message by the number of remote nodes to which the mailbox sends the message. The results are recorded by this counter.

### **Message length for number of network nodes sent urgent**

NP Net multiplies the amount of recorded speech in each urgent message by the number of remote nodes to which the mailbox sends the message. The results are recorded by this counter. The number of recipients on each node does not count here.

### **Message length for number of remote recipients sent**

NP Net multiplies the amount of recorded speech in each batch message by the number of remote mailboxes to which the mailbox sends the message. The results are recorded by this counter. The number of different remote nodes is irrelevant here; two messages for the same remote node are equivalent to one message for two different remote nodes.

## Message length for number of remote recipients sent urgent

NP Net multiplies the amount of recorded speech in each urgent message by the number of remote mailboxes to which the mailbox sends the message. The results are recorded by this counter. The number of different remote nodes is irrelevant here; two messages for the same remote node are equivalent to one message for two different remote nodes.

## Network Billing Report Entries

The billing report includes the charges accrued by network messaging. When no charges have accumulated for a counter, the entry does not appear on the billing report.

MAILBOX: 402 ID: A.G. Bell

GROUP: GCOS 1 FCOS 1: UNLIMITED base rate

\$ 5.00

\$ .40 40 user messages received

\$ 2.30 23 caller messages received

\$ .00 0 call placements sent

\$ .00 0 future deliveries sent

\$ 2.60 13 urgent messages sent

\$ .00 0 tas messages received

\$ 1.20 24 number of receipts requested

\$ 4.10 41 greetings played

\$ 3.50 72 times logged in

\$ 9.60 9.6 user connect time

\$ 1.70 3.4 caller connect time

\$ .00 0 call placement time

\$ 1.80 .09 disk usage

\$ 5.40 18 messages sent to nodes

\$ 6.00 6 urgent messages sent to nodes

\$ 3.21 32.1 .1 minutes sent network urgent

\$ 5.84 116.8 .1 minutes sent over network

\$ 1.40 14 messages received from nodes

\$ .50 1 urgent messages received

\$ 2.36 94.5 .1 minutes rcvd over network

\$ 1.26 6.3 .1 minutes rcvd network urgent

Total Charges = \$ 58.17

## 1.4.10.7.2 NP Net Reports

The **Text Console** of NuPoint UM servers can provide reports on all aspects of NP Net configuration for NP Net TCP/IP.

When you complete NP Net programming for the first time, or when you update the configuration, print the reports showing the configuration. Confirm the changes and communicate them to the customer, then leave a copy on site for technicians servicing NP Net in the future.

The available reports are:

- Digits Translation Report
- Node Access Table Report
- Network Queues
- TCP Network Status

Each time that you request one of these reports you are given the option to view these reports on the system console or your terminal connection, send them to a specific serial port, or put the information in a file.

## The Digits Translation Report

This report displays each node prefix and associated node number that has been programmed into the Digits Translation Table. The Digits Translation report has the following format:

```
>>>
Denver NuPoint Voice <<<
```

### PREFIX/NODE PAIR REPORT

Wed Mar 10 11:35:48 20XX

Prefix Node Absorb Cnt

700 700 3

801 801 3

802 802 3

803 803 3

804 804 3

805 805 3

807 807 3

7 Prefixes found

## The Node Access Table Report

The Network Node Table stores the access string and hardware type of each remote node on the system. This information enables the originate link of the local node to establish communications with the other nodes on the system.

The Node Table Report shows the node number, node name, access code (string), hardware type and access status (enabled or disabled) for every node that was entered into the Network Node Table.



```
>>> Denver NuPoint Voice <<<
NODE ACCESS TABLE REPORT
Wed Mar 10 11:32:36 20XX
NODE NAME PROTO STRING HARDWARE ACCESS ENCODING
700 davebell TCP 10.37.52.130 0 = ETHERNET Y NMS
801 grace TCP 10.39.37.110 0 = ETHERNET Y G.711
802 luna TCP 10.39.37.69 0 = ETHERNET Y G.711
803 ibm3250 TCP 10.39.37.4 0 = ETHERNET N G.711
804 toronto TCP 10.39.37.100 0 = ETHERNET Y NMS
805 mango TCP 10.39.37.68 0 = ETHERNET Y G.711
806 mstclust TCP 10.39.37.145 0 = ETHERNET Y G.711
807 Thomas TCP 10.39.37.121 0 = ETHERNET Y G.711
8 Nodes found
/usr/vm/log/tmp_ShL.0A1 (END)
```

### Network Queue Parameters Report

The Network Queue Menu, accessed from the reports menu, has two entries, Report Queue Parameters and Dump. "Dump" is a utility that is used only by service personnel. The Queue Parameters report shows the current network queue configuration. The report for the default configuration is as follows:

Batch Urgent

Weekday start time (hh:mm) 12:00 am 12:00 am

Weekday stop time (hh:mm) Never Never

Weekend start time (hh:mm) 12:00 am 12:00 am

Weekend stop time (hh:mm) Never Never

Message count threshold 1 0

Waiting time threshold (minutes) 5 0

Total message minutes threshold 0 0

Limits

Message blk use threshold (percent) 80

Max call setup tries 50

Call retry interval (minutes) 10

Max age for a message in queue No Limit

Press any key to continue....

### Network Queue Dump

This real-time dump report is valuable when debugging NP Net delivery problems. It lists all current messages in the network queue. Each remote node is displayed separately, and batch and urgent deliveries are separated.

BATCH QUEUE:

URGENT QUEUE:

QUEUE SUMMARY:

Total Nodes: 0 Total Msgs: 0 Total Frames: 0

Press any key to continue....

### 1.4.10.7.3 Network Statistics Reports

Two statistics reports give comprehensive pictures of network usage. These reports are available from the Network Usage Report Menu, which is a sub-menu of the Statistics Menu (*not* the Network Reports menu).

#### The Network Usage Report

The Network Usage Report gives 15 minute "snapshots" of network message activity for a specified reporting period. This reporting period can be any hour, or range of hours, from the current day or the previous 6 days.

>>> Denver NuPoint Voice <<<

NETWORK USAGE 15min REPORT

Mon Dec 4, 20xx 7:58 pm

12/04/XX 8hr-17hr --- minutes interval ---

MESSAGE DAY=01 HOUR=08 00-14 15-29 30-44 45-59 AVERAGE

BATCH IN QUEUE 0 0 0 0 0

URG IN QUEUE 0 0 0 0 0

BATCH MAX LENGTH 0 0 0 0 -

URG MAX LENGTH 0 0 0 0 -

BATCH LATENCY H:M:S 0:00:00 0:00:00 0:00:00 0:00:00 -

URG LATENCY 0:00:00 0:00:00 0:00:00 0:00:00 -

BATCH DELIVERED 0 0 0 0 0

URG DELIVERED 0 0 0 0 0

TOTAL UNDELIVERED 0 0 0 0 0

BATCH RECEIVED 0 0 0 0 0

URG RECEIVED 0 0 0 0 0

#### Reading the Network Usage Report

The report heading shows the node name, the report name, the date and the time that the report was run.

The first line of the report shows the date and time interval during which the data were gathered.

A hyphen (-) in any column means the system was not processing messages during the report period (there was a power failure, or the system was taken offline for maintenance, for example). A zero in any column means the system was operable, but there was no activity.

**MESSAGE DAY = 03, HOUR = 11** indicates that the data displayed immediately below were gathered on Wednesday, during the hour between 11 and 12 am. 00-14 indicates that data in that column were gathered during the first fifteen minutes of the hour; 15-29 refers to the second 15 minutes of the hour, etc.

**AVERAGE** is the average value of the four 15-minute samples. If a hyphen appears, in place of a numerical value, it means that the data have not yet been gathered. For example, if the report is run at 3:30 pm, and the report interval is for hours 12-15 (noon to 3 pm) of the same day, the entries for hour 15 (3 to 4 pm) will all be hyphens.

**BATCH IN QUEUE** is the total number of batch (non-urgent) messages and receipt updates present in the network queue during the time period.

**URG IN QUEUE** is the total number of urgent messages in the network queue during the time period.

**BATCH MAX LENGTH** is the total number of minutes of recorded speech in the network batch queue during the time period.

**URG MAX LENGTH** is the total number of minutes of recorded speech in the urgent network queue during the time period.

**BATCH LATENCY** is the maximum number of seconds that a message remained in the batch network queue during the time period.

**URG LATENCY** is the maximum number of seconds that a message remained in the urgent network queue during the time period.

**BATCH DELIVERED** is the total number of batch messages that were delivered to their destination nodes during the time period. (Receipt updates do not count here.)

**URG DELIVERED** is the total number of urgent messages that were delivered to their destination nodes during the time period.

**TOTAL UNDELIVERED** is the total number of messages (batch and urgent) that were rejected by their destination nodes during the time period. (Receipt updates do not count here.)

The Network Usage Summary Report

The Network Usage Summary Report gives peak (maximum) and total statistics for network message activity during a specified reporting period. This reporting period can be any hour, or range of hours, from the current day or from the previous 6 days.

```

                                >>>
Denver NuPoint Voice <<<

                                NETWORK
USAGE SUMMARY REPORT

                                Mon
Dec 4, 20XX  8:08 pm
12/04/XX  8hr -17hr

Day
1          <-----PEAKS-----><-----
TOTALS----->

NETWORKING:  IN
QUEUE      MINUTES  LATENCY
DELIVERED   UNDELIV  RECEIVED

BATCH:      0          0  0:00:00          0          0
            0

URGENT:      0          0  0:00:00          0          -

```

0

Reading the Network Usage Summary Report

The report heading shows the node name, the report name, the date and the time that the report was run.

Each section is preceded by the date and time during which the data were gathered.

**PEAKS** - Statistics are for maximum activity during the reporting period. Although separate statistics are kept for batch and urgent message queues, these statistics are not broken down by destination node; that is, urgent queue statistics refer to urgent messages accumulated for every node on the network.

A hyphen (-) in any column means the system was not processing messages during the report period (there was a power failure, or the system was taken offline for maintenance, for example). A zero in any column means the system was operable, but there was no activity.

**BATCH IN QUEUE** is the maximum number of batch (non-urgent) messages and receipt updates present in the network queue at any time during the time period.

**URGENT IN QUEUE** is the maximum number of messages, marked urgent by the sender, that were present in the network queue at any time during the time period.

**BATCH MINUTES** is the maximum number of minutes of recorded speech from batch messages and receipt updates present in the network queue during the time period.

**URGENT MINUTES** is the maximum number of minutes of recorded speech from urgent messages present in the network queue during the time period.

**BATCH LATENCY** is the maximum number of seconds that a single message remained in the batch network queue during the time period.

**URGENT LATENCY** is the maximum number of seconds that a single urgent message remained in the network queue during the time period.

**TOTALS** - Data is a summary of activity during the reporting period

**BATCH DELIVERED** is the total number of batch messages that were delivered to their destination nodes during the time period. (Receipt updates do not count here.)

**URGENT DELIVERED** is the total number of urgent messages that were delivered to their destination nodes during the time period.

**BATCH UNDELIVERED** is the total number of batch messages that were rejected by their destination nodes during the time period. (Urgent messages are always delivered.)

**BATCH RECEIVED** is the total number of batch messages that were received from other nodes during the time period. (Receipt updates do not count here.)

**URGENT RECEIVED** is the total number of urgent messages that were received from other nodes during the time period.

## 1.4.10.8 Worksheets

## 1.4.10.8.1 Worksheets - NP Net

### Network Node Table Worksheet

| NP Net<br>Network Node Table Worksheet   |                                           |
|------------------------------------------|-------------------------------------------|
| Node Entry                               |                                           |
| Node Number <input type="text"/>         | Node Name <input type="text"/>            |
| TCP/IP Connection Y N                    | IP Address <input type="text"/>           |
| Hardware Type <input type="text"/>       | String (access code) <input type="text"/> |
| Parallel Link Delay <input type="text"/> | Maximum Links <input type="text"/>        |
| Analog AMIS Connection Y N               | Access Y N                                |

| Node Entry                               |                                           |
|------------------------------------------|-------------------------------------------|
| Node Number <input type="text"/>         | Node Name <input type="text"/>            |
| TCP/IP Connection Y N                    | IP Address <input type="text"/>           |
| Hardware Type <input type="text"/>       | String (access code) <input type="text"/> |
| Parallel Link Delay <input type="text"/> | Maximum Links <input type="text"/>        |
| Analog AMIS Connection Y N               | Access Y N                                |

| Node Entry                               |                                           |
|------------------------------------------|-------------------------------------------|
| Node Number <input type="text"/>         | Node Name <input type="text"/>            |
| TCP/IP Connection Y N                    | IP Address <input type="text"/>           |
| Hardware Type <input type="text"/>       | String (access code) <input type="text"/> |
| Parallel Link Delay <input type="text"/> | Maximum Links <input type="text"/>        |
| Analog AMIS Connection Y N               | Access Y N                                |

NP0140

## 1.4.10.8.2 Network Addressing Planning Worksheet

**NP Net**  
**Planning Network Addressing Worksheet**

---

**Node Entry**

Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9  
 Node Name  Length of Mailbox Numbers

---

**Node Entry**

Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9  
 Node Name  Length of Mailbox Numbers

---

**Node Entry**

Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9  
 Node Name  Length of Mailbox Numbers

---

**Node Entry**

Node Number  Mailboxes Start With 1 2 3 4 5 6 7 8 9  
 Node Name  Length of Mailbox Numbers

NP0151

## 1.4.10.8.3 Network Queues Worksheet

The Network Queues Worksheet is designed to help you plan and record the settings of the network queues. The fields on the worksheet match the information that you must supply when configuring the queues. Study the sample worksheet and the definitions that follow, and then copy the [blank worksheet](#) and fill it in.

**NP Net**  
**Network Queues**

---

**Network Queue Limits**

Message Block Use Threshold (80-100%):   
 Maximum Call Setup Tries:   
 Call Setup Retry Interval (minutes):

---

**Network Queue Time Windows**

Always Open? ☒ Weekdays ☐ Weekends  
 Weekday Start Time (hour:min am/pm): Batch  Urgent   
 Weekday Stop Time (hour:min am/pm): Batch  Urgent   
 Weekend Start Time (hour:min am/pm): Batch  Urgent   
 Weekend Stop Time (hour:min am/pm): Batch  Urgent

---

**Network Queue Thresholds**

Message Count Threshold: Batch  Urgent   
 Message Waiting Threshold: Batch  Urgent   
 Total Message Minutes Threshold: Batch  Urgent

NP0152



## Worksheet Definitions: Network Queue Thresholds

Network queue thresholds allow you to control when messages are sent to another node. Cost is an important consideration when setting these parameters; the first minute of a call is tarified higher, so it is more economical to send a group of messages than to send each message separately

You can set different network queue thresholds and time windows for urgent and batch messages. (All messages not specifically marked urgent by the sender are considered batch.) With this two-tiered system, routine messages are sent at a time when the call is more economical, while more important messages are delivered promptly. (It is recommended that you set realistic batch limits or restrict the assignment of Network Classes of Service that allow the user to send urgent messages over the network to prevent users from marking all remote messages urgent.) The batch queues and remote queues of each remote node are monitored individually by NP Net.

**Message Count Threshold:** The number of messages, names, greetings, and receipt updates that must be waiting in a queue for a certain node before that queue becomes ready to send. This threshold is appropriate for sites where users tend to make frequent, short messages. The default message count threshold for batch messages is 5; for urgent messages, it is 0.

**Message Waiting Threshold:** The length of time, in minutes, that the oldest message will be kept waiting in the queue before the queue becomes ready to send. If the queue has a very restrictive time window (for example, if batch messages can be sent only between 12:00 am and 5:00 am), set this threshold to a low value to ensure that all network queues are ready to send when the window opens. The default message waiting threshold for batch messages is 10 minutes; for urgent messages, the default is 0 minutes (no waiting).

**Total Message Minutes:** The number of minutes of speech that must be waiting in a queue for a certain node before that queue becomes ready to send. This threshold is appropriate for systems where system storage tends to be high, but it is not triggered efficiently by frequent, short messages. If the node tends to process a high volume of short messages, the message count threshold is a better choice. The default Total Message Minutes threshold for batch messages is 5 minutes of speech; for urgent messages, the default is 0 minutes of speech.

## Worksheet Definitions: Network Queue Time Windows (Start/Stop Times)

The start and stop times create a limited time period during which messages can be sent to remote nodes. This time window overrides all message thresholds; queues that are ready to send will not trigger a call unless the window is open. Conversely, when the time window opens, queues that have not yet met any of the thresholds will not be sent. The time window and thresholds must be carefully set, to ensure that messages do not remain queued for an unacceptable period of time.

You set separate time windows for batch and urgent messages. Within these categories, you set time windows for weekdays and weekends. In the default configuration, network queue time windows for batch and urgent messages are always open.

**Always Open:** Circle Weekdays or Weekends for either urgent or batch queues if you do not want message sending to be restricted by time of day.

**Weekday Start Time:** Write in the time of day that you want the local node to start sending messages on weekdays, provided that at least one of the network queue thresholds has been met.

**Weekday Stop Time:** Write in the time of day that you want the local node to stop sending messages on weekdays.

**Weekend Start Time:** Write in the time of day that you want the local node to start sending messages on weekends, provided that at least one of the network queue thresholds has been met.

**Weekend Stop Time:** Write in the time of day that you want the local node to stop sending messages on weekends.

### Worksheet Definitions: Network Queue Limits

Network queue limits control network queue storage and determine how often, and at what interval, a node should attempt to send a network queue to another node before the queue is considered "undeliverable."

**Message Block Use Threshold:** The percentage of total queue storage that must be full to trigger an automatic connection. The Message Block Use Threshold is a "safety valve" that forces the node to empty queues when total network queue storage is almost full.

When the message block use threshold is reached, the system checks the network queues for the node with the greatest number of messages waiting and marks that queue as ready to send. The queue is sent immediately; the message block use threshold overrides all other thresholds, including network queue time windows. The system will continue to send queues until message storage falls below the threshold.

You can set the message block use threshold at any value between 80% and 100%. The default threshold is 80%.

**Maximum Call Setup Tries:** The maximum number of calls that an originating node will make to try to establish a connection with another node. The default value is 50.

**Call Setup Retry Interval:** The time, in minutes, between attempts to establish a connection. The default interval is 10 minutes.

An originate link executes the originate actions of the hardware type up to three times in immediate succession when attempting to call another node. These three calls constitute

one try; that is, the call setup tries counter is increased only after all three attempts have failed.

When a first attempt at originating a call fails (the node may be busy communicating with another node on the system, for example), the node waits the amount of time specified by the call setup retry interval before repeating the originating actions. This sequence will continue until communications are established or the maximum call setup tries threshold has been reached.

If all attempts to communicate with the destination node fail, all users who sent messages to that node are notified that these messages could not be delivered.

## 1.4.10.8.4 Network Class of Service Worksheet

**NP Net**  
**Network Class of Service Worksheet**

---

NCOS

NCOS Number  NCOS Name

Assign to Mailboxes:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

☐ 001 Enable GCOS check across network

☐ 002 Allow user to make network messages

☐ 003 Allow user to make urgent network messages

☐ 004 Allow user to give network messages

☐ 005 Allow user to give urgent network messages

☐ 006 Allow user to answer network messages

☐ 007 Allow user to answer urgent network messages

☐ 008 Automatic receipts on network messages

☐ 009 Say "Remote message" when playing network messages

☐ 010 Allow user to make fax message over the network

☐ 011 Allow user to give fax message over the network

☐ 012 Allow user to answer fax message over the network

NP0155

## 1.4.11 NP OnDemand

### 1.4.11.1 NP OnDemand - Description

**Note:**

NP OnDemand programming must be done using the **Text Console**.

NP OnDemand is an optional feature that offers carriers and organizations the opportunity to provide their customers or subscribers with temporary mailboxes created at the time there is a need for a caller to leave a message. Mailboxes created on demand can be deleted after an administrator-determined period of time.

Mailboxes on demand inherit the characteristics of a template mailbox that is used as a model. Although an NP OnDemand mailbox could have all the features of a permanent mailbox, the features available to a subscriber are usually limited to playing, keeping, and deleting messages, much like a hotel mailbox.

The following scenario illustrates a typical implementation of NP OnDemand:

Jay makes a telephone call to Celia at her cellular number. When Jay calls, Celia is not able to answer (she's on another call, has her phone turned off, or is out of the service area). Although Celia does not have a regular mailbox with RF Mobilenet, her cellular service, RF Mobilenet has taken a leap ahead of its competition by establishing NP OnDemand as a special benefit to its subscribers. When Celia doesn't answer, Jay hears a greeting that the system administrator has recorded in the template mailbox:

*The party you have called is not available. Please leave a message at the tone.*

NuPoint Voice instantaneously creates a mailbox for Celia identified by her cellular telephone number, and Jay leaves his message. If he does not terminate the message by hanging up, he hears

*Thank you.*

NP OnDemand then sets a message waiting indicator for Celia. Whether Celia calls in to NuPoint Voice or she is notified by message delivery, she hears

*You have one unplayed message.*

Celia then hears the message automatically if message auto-play is a feature assigned to the template mailbox, or she hears

*Press P to play the first message.*

If Celia receives no other messages during the day, Jay's message and her mailbox are deleted at the nightly purge. If Celia does not retrieve her message within the time limit specified in the LCOS for mailboxes on demand, both accumulated messages and the mailbox are similarly deleted at the next scheduled purge.

### 1.4.11.2 NP OnDemand - System Requirements

NP OnDemand makes no special hardware requirements on NuPoint Voice systems.

With respect to NuPoint Voice software:

- NP OnDemand works with all Mitel integrations. The mailbox number is the called number provided by the integration.
- NP OnDemand complements NuPoint Voice features defined by FCOS, and does not in any way alter their operation.
- A mailbox created on demand requires the same account space as a regular mailbox. If a large number of NP OnDemand mailboxes are allowed to persist, a system could run out of account sectors.
- NP OnDemand **cannot** be used with NP Forms or NP Net.

### 1.4.11.3 Billing and Statistics

Billing statistics are tabulated for existing mailboxes on demand by a gather, the same as for any regular mailbox. This characteristic of mailboxes on demand and gather with respect to regular billing procedures has two effects that you should be aware of:

- NP OnDemand mailboxes that are active when the gather is run are included in the billing report.
- NP OnDemand mailboxes that have been purged are not included in the billing report.

### 1.4.11.4 Configure Call Detail Recorder for NP OnDemand

**Note:**

Call Detail Recorder is enabled through the **Text Console** only.

Call Detail Recorder features that define an NP OnDemand mailbox are **Call Type 11** (Mailbox Purge) and **Access Type 40**. A CDR record is generated for mailboxes on demand for the following activities:

- Mailbox created, including time and date
- Message received, including time and date; shows the number of unplayed, played, and urgent messages
- Message played, including time and date; shows the number of unplayed, played, and urgent messages
- Mailbox deleted, *n* unplayed messages (could be zero) , including time and date
- Number of minutes a subscriber was logged in to an NP OnDemand mailbox

You must configure CDR in order for call information about NP OnDemand mailbox creation and deletion to appear in CDR reports.

- Enable modules and lines as required by your installation.
- Include **Call Type 11**.

A **Call Type 11** in CDR record field 13 indicates that an NP OnDemand mailbox has been deleted during the scheduled purge.

An **Access Type 40** in CDR field 14 indicates an NP OnDemand access.

## 1.4.11.5 Configuration

### 1.4.11.5.1 NP OnDemand - Configuration Requirements

#### Switch Configuration

The switch or PBX to which your NuPoint Voice system is connected must be programmed to forward the telephone number or extension for calls that will be handled by NP OnDemand to the NuPoint Voice system rather than treating them as RNA or busy.

#### Line Groups

NP OnDemand is configured on a line group basis. Define the line groups and assign the lines you want to use for NP OnDemand.

#### FCOS

**Note:** Because NP OnDemand is configured on a line-group basis, each line group must have its own template mailbox.

[Customize an FCOS](#) for the template mailbox that will be used as the model for mailboxes on demand.

#### Required FCOS Features

- 1. Feature bit 255:** Delete mailbox without unplayed messages. Mailboxes on demand are identified by this feature, which causes those mailboxes without unplayed messages to be deleted at the nightly purge. The FCOS you create for the NP OnDemand template **must** include feature bit 255.
- 2. Feature bit 001:** Login to mailbox. Without this feature, users will not be able to log into their NP OnDemand mailboxes and retrieve messages.
- 3. Feature bit 218:** Passcode not needed on direct calls. Because NP OnDemand assigns a random passcode when the mailbox is created, users will not be able to retrieve their messages unless this feature is included

**Note:**

Take care when assigning features to the NP OnDemand template. When an NP OnDemand mailbox is created, it cannot be differentiated from any other mailbox, and it will make available to its owner all features contained in the template.

The table below offers an example of other features that might be included for an NP OnDemand mailbox. The actual features granted to an NP OnDemand mailbox are left to your discretion.

| Feature No. | Feature Name                             |
|-------------|------------------------------------------|
| 001         | Login to mailbox                         |
| 010         | English Language prompts                 |
| 039         | Notification tone when new msg arrives   |
| 041         | Receive messages from outside callers    |
| 047         | Notification prompt when new msg arrives |
| 050         | Play messages                            |
| 052         | Auto-play unplayed messages              |
| 056         | Auto-Discard messages                    |
| 058         | Play unplayed messages in FIFO order     |
| 088         | Receive urgent messages                  |
| 218         | Passcode NOT needed on direct calls      |
| 255         | Delete mailbox without unplayed messages |

**LCOS**

[Create an LCOS](#) to be assigned to mailboxes on demand. In the Message Retention Limit Menu, set desired values for Played Message Retention and Unplayed Message Retention. The default value for Played Message Retention is 672 hours and for Unplayed Message Retention, 336 hours.

A value of zero in the Played Message Retention field causes an NP OnDemand mailbox that had no unplayed messages to be deleted at the next nightly purge. A value of 24 hours in the Unplayed Message Retention field would give the mailbox owner at least one full day to retrieve unplayed messages.

You must set values for length of message retention in order for NP OnDemand to be effective. If the default values for message retention are left unchanged, then an NP OnDemand mailbox is effectively permanent.

## Determine the Message Waiting Type

In order for NP OnDemand to be effective, users who are not accustomed to receiving messages must be notified when they have a message waiting. You must therefore decide which message waiting type is appropriate for your application of NP OnDemand.

### Same MWI as Regular Mailboxes

If subscribers who will be beneficiaries of mailboxes on demand can be informed about the new service and instructed how to respond to an MWI light or stutter dial tone, then you can use the same message waiting type as you do for your regular NuPoint Voice users.

NP OnDemand also has the capability to dial out to your subscribers and notify them of waiting messages by message delivery.

### Notification by Message Delivery

NP OnDemand makes use of the pager function to call a subscriber and tell the subscriber that a message is waiting. To enable this feature when you create the template mailbox:

1. Define either message waiting type #1 or message waiting type #2 as **5**, or Pager.
2. If you already have message delivery enabled on your system, then just enter the appropriate pager access type in the template mailbox.
3. If you do not have message delivery enabled, you must set up a line group for out-dialing and define a pager access type.

**Note:**

Leave the pager number field blank. NP OnDemand places the mailbox owner's number in this field.

4. Set message delivery attempts and interval as required.

## 1.4.11.5.2 Create a Template Mailbox

This section describes how to create a template mailbox, then set it up and prepare it for use. General considerations for creating and setting up the template mailbox are discussed first; detailed instructions follow the general considerations.

### Template Mailbox Security

In order to ensure security of the template mailbox, Mitel recommends that, once you have created a template mailbox, you change its number to one that is *not* in the dialing



plan so that callers cannot leave messages in it or inadvertently log into it. Further, you should assign a nontrivial passcode to the mailbox so that you can log into it to perform maintenance as needed.

## Setup and End User Introduction

You can record speech in the template mailbox if you wish; for example:

- A generic greeting that all callers will hear when they reach a person without a mailbox.
- A “name” that the NP OnDemand mailbox owner will hear when the owner logs into the mailbox to retrieve messages.
- From the administrator’s mailbox, a welcoming message or invitation to become a regular mailbox owner.

Mitel suggests that, if you wish to record speech in the template mailbox, you use the following procedure:

- Create a template mailbox *in* the dialing plan.
- Record name, greeting, and message as desired.
- Change the mailbox number to one *not* in the dialing plan.

## Creating and Setting up the Template Mailbox

1. Create a mailbox named “NP OnDemand Template” within the dialing plan.
2. Assign your custom [OnDemand FCOS and LCOS](#) to the NP OnDemand Template mailbox, and assign your selected Message Waiting Type.
3. Log into the NP OnDemand Template Mailbox and record a name (for example, “RF Mobilenet”) and a greeting that callers will hear when they leave a message for someone without a regular mailbox.
4. Log into the Administrator’s mailbox and record a message to the NP OnDemand Template mailbox. Do not play this message. It will be the first message NP OnDemand mailbox owners hear when they log in to retrieve their messages. (This message might be an introduction of NuPoint Voice or a promotional message urging your subscribers to get their own personalized mailboxes.)

If someone responds to this message by pressing A, that response will go to the Administrator’s mailbox, not to the NP OnDemand Template mailbox.

5. Change the NP OnDemand Template mailbox number to one that it is *not* in the dialing plan.

6. Configure NP OnDemand by modifying the active configuration from the on-line menu:

- in the Text console Main menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (E) Active Configuration**, and then **(B) NP on Demand Menu**.

If NP OnDemand is ON for callers, then forwarded calls are treated the same way as they are for a regular mailbox. If NP OnDemand is on for users, then they are treated the same way as the owner of a regular mailbox, except that they are logged in to the NP OnDemand mailbox automatically. When NP OnDemand is on for either callers or users, account space is required.

If NP OnDemand is OFF for either callers or users, then a call (from whichever category is OFF) is treated as if NP OnDemand were not installed.

| Who     | ON/OFF | Effect                                                                                                    |
|---------|--------|-----------------------------------------------------------------------------------------------------------|
| Callers | ON     | On call forward, callers hear the NP OnDemand greeting.                                                   |
|         | OFF    | On call forward; callers hear the general greeting.                                                       |
| Users   | ON     | On direct call to the pilot number, users are logged in to NP OnDemand and hear the NP OnDemand greeting. |
|         | OFF    | On direct call to the pilot number, users hear the general greeting.                                      |

- Select **(C)** and enter Y to turn on NP OnDemand for callers.
- Select **(U)** and enter Y to turn on NP OnDemand for users.
- Select **(M)** and enter the number of the NP OnDemand Template mailbox.
- Run a Configuration Report (from the Reports menu of the Text Console) to verify that the correct Template Mailbox number has been assigned to NP OnDemand, and that NP OnDemand is installed and turned on for callers and users.

## 1.4.12 NP RapidDial

### 1.4.12.1 NP RapidDial - Description

**Note:**

NP RapidDial must be configured using the **Text console**.

NP RapidDial is an optional feature that allows users to enter an abbreviated phone number to address mailboxes on a NuPoint Unified Messaging system.

NP RapidDial uses a table to map a subscriber group of abbreviated mailbox numbers to the complete mailbox numbers on the NuPoint Unified Messaging system. For example, mailbox numbers in a Subscriber Group might be seven digits long, but NP RapidDial allows you to use only part of each mailbox number to make and send a message or create a distribution list. Members of a Subscriber Group must use a complete phone number to address messages to mailboxes outside of their Subscriber Group.

To install NP RapidDial, follow the instructions for [Installing an Optional Feature](#).

## 1.4.12.2 Configuration

### 1.4.12.2.1 Configuration Requirements NP RapidDial

This section provides the information required to configure the NP RapidDial feature on a NuPoint Unified Messaging system.

After you install NP RapidDial, you must:

- Determine Subscriber Groups
- Configure a variable dialing plan for the Line Group
- Create a Features Class of Service (FCOS) for NP RapidDial
- Create the NP RapidDial Table
- Configure Mailboxes for NP RapidDial

#### Determine Subscriber Groups

NP RapidDial can only be used to address messages to mailboxes within a Subscriber Group. The NP RapidDial Table defines the groups of subscribers and lists the mailbox numbers in each group.

The NP RapidDial Table separates mailbox numbers into two parts, the prefix and the suffix. The prefix consists of the leading digits in the mailbox number. The suffix consists of the remaining digits in the mailbox number and becomes the NP RapidDial address for the mailbox. For example, the following parameters might appear in the NP RapidDial Table:

|                |       |
|----------------|-------|
| Prefix length: | 5     |
| Suffix length: | 2     |
| Prefix:        | 23422 |
| Suffix range:  | 10-99 |

In this example, mailbox numbers in the Subscriber Group use seven-digit numbers that begin with a five-digit prefix of 23422 and end with a two-digit suffix in the range of 10 through 99. With NP RapidDial, members of this Subscriber Group can address

messages to another mailbox in this group by entering only the last two digits of the mailbox number.

## Configuration Requirements for Prefixes and Suffixes

NP RapidDial mailbox numbers can include up to 11 digits. The prefix can include up to nine digits. In the preceding example, the Subscriber Group supports 90 phone numbers.

**Note:** When defining a Subscriber Group, make the suffix large enough to identify all phone numbers in the Subscriber Group.

You can add several prefixes and suffixes to a subscriber group, however, ranges of suffix numbers cannot overlap.

## Configure a Variable Dialing Plan for the Group

In order for the NP RapidDial feature to function, you must set the line group dialing plan for variable length mailboxes. For information about configuring the dialing plan, refer to [Configure a Dialing Plan](#).

With a variable length dialing plan, the voice mail system uses a timeout to determine when data entry is complete. With NP RapidDial, the user enters as few as two digits or as many as 11 digits. Then, the user either waits for the system to time out or presses the pound (#) key to indicate that data entry is complete.

## Create a Features Class of Service (FCOS) for NP RapidDial

To enable NP RapidDial, [customize an FCOS](#) that contains feature bit **265** (Enable NP RapidDial Features).

### 1.4.12.2.2 Create the NP RapidDial Table

#### 1.4.12.2.2.1 Create the NP RapidDial Table - Overview

The NP RapidDial Table (shown below) maps each NP RapidDial number to its complete mailbox number. This table shows the Subscriber Groups and the mailbox numbers associated with each Subscriber Group. All mailbox users in a Subscriber Group can dial a partial mailbox number to access another mailbox in that group. The same users must dial a complete phone number to reach any mailbox not included in their Subscriber Group.

| Subscriber Group | Prefix | Suffix Range Start | Suffix Range End |
|------------------|--------|--------------------|------------------|
| 1                | 23422  | 10                 | 99               |
| 4                | 621    | 3000               | 4999             |
| 10               | 12345  | 10                 | 99               |
| --- more ---     |        |                    |                  |

To create the NP RapidDial table:

1. From the Main menu, select **(M) Mailbox maintenance** and then **(T) NP RapidDial Table Utility Maintenance**.
2. In the RapidDial Table menu, use the configuration menus as described in each of the following sections:
3. **(A) Add new records**
4. **(C) Clear NP RapidDial table**
5. **(D) Delete existing records**
6. **(E) Export NP RapidDial table**
7. **(I) Import NP RapidDial table**
8. **(P) Purge Subscriber Group**
9. **(R) Report all Subscriber Groups**
10. **(V) View Subscriber Group**

#### 1.4.12.2.2 (A) Add New Records

To add a new record to the NP RapidDial Table, select **A** from the NP RapidDial Table menu. After you create or modify the NP RapidDial Table, save a copy of the table with the [Export NP RapidDial table](#) menu option.

The following table shows you how to add a new Subscriber Group record to the NP RapidDial Table (using Subscriber Group 10 as an example).

| Prompts                                                                   | Example of User Input | Comments                                                        |
|---------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------|
| Enter Subscriber Group (1-1000):                                          | 10                    | Assign a Subscriber Group ID of 10.                             |
| Subscriber Group 10 does not exist. Create new Subscriber Group 10? (Y/N) | Y                     | Begin creating Subscriber Group 10.                             |
| Enter prefix length:                                                      | 5                     | Sets the first five digits of the phone number as the prefix.   |
| Enter suffix length:                                                      | 2                     | Sets the last two digits of the phone number as the suffix.     |
| Enter prefix:                                                             | 12345                 | Sets all phone numbers in this group to begin with 12345.       |
| Enter suffix range (start-end):                                           | 10-99                 | Sets all phone numbers to end with a number from 10 through 99. |
| Enter prefix:                                                             | Enter                 | Enter another prefix or press Enter to end.                     |
| Enter Subscriber Group (1-1000):                                          | Enter                 | Enter a new Subscriber Group or press Enter to end.             |
| 1 record(s) added.                                                        | Enter                 | A notification appears that the group was created.              |

When creating a Subscriber Group, the following rules apply:

- Mailbox numbers in Subscriber Groups can be up to 11 digits.
- The prefix can be a maximum of nine digits.
- The suffix is the NP RapidDial number that group members will use to access mailboxes in their Subscriber Group.

In the example above, the mailbox numbers are set at seven digits with five digits in the prefix and two digits in the suffix. All mailboxes numbers have the prefix 12345. Members of Subscriber Group 10 can use the two-digit suffix to address messages to other mailboxes in the group. For example, the user for mailbox 1234510 can press 99 to address a message to mailbox 1234599.

### 1.4.12.2.2.3 (C) Clear NP RapidDial Table

To delete all data in the NP RapidDial Table, select **C** from the NP RapidDial Table menu. Do this only if the NP RapidDial Table is corrupt, recently entered data is not valid, or if you need to replace the table with another NP RapidDial Table. Clearing the NP RapidDial Table lets you restore a valid, previously saved version with the [Import NP RapidDial table](#) option, described later in this section.

The following table shows you how to clear all records from the NP RapidDial Table.

**Note:** Use the password “RdtUtil” for all functions that delete data from the NP RapidDial Table.

| Prompts                                                                 | Example of User Input | Comments                                       |
|-------------------------------------------------------------------------|-----------------------|------------------------------------------------|
| Please enter the passcode:                                              | RdtUtil               | RdtUtil is the passcode. It is case sensitive. |
| Do you really want to delete all entries in the rapid dial table? (Y/N) | Y or N                |                                                |
| NP RapidDial Table cleared.                                             |                       |                                                |

### 1.4.12.2.2.4 (E) Export NP RapidDial Table

To export and save a copy of the NP RapidDial Table, select **E** from the NP RapidDial Table menu. You can use the export option to back up the current NP RapidDial Table before you modify it. The following table shows you how to export the current NP RapidDial Table. The NP RapidDial Table is automatically saved when you back up the server, but you cannot selectively restore the NP RapidDial Table, only.

**Note:**

At the prompt, enter a file name. You can enter a full path and file name to store the file in any directory on the hard disk or storage media. The export option uses the .rdt extension.

| Prompts                           | Example of User Input | Comments                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enter export filename:            | <filename>            | Enter a name for the saved file. If you enter the name of an existing file, that file is overwritten and its contents are lost. To save the file to floppy disk, enter a full path name in the following format: /fd0/<path><filename> If you do not specify a path, the file is stored in this location: /usr/vm/config/<filename>.rdt |
| Export file <filename> is created |                       |                                                                                                                                                                                                                                                                                                                                         |

### 1.4.12.2.2.5 (I) Import NP RapidDial Table

To import an NP RapidDial Table from storage media or from another directory, select **I** from the NP RapidDial Table menu. When you import a file, the program searches for the specified file in the “/usr/vm/config” directory. To import a file from another directory or storage media, you must include a path in the file name. Do not specify an extension. NP RapidDial automatically appends .rdt as the extension.

Only new records are imported into the NP RapidDial Table. An existing record is not affected unless a command in the import file deletes that record in the current NP RapidDial Table. To import a completely new table, first clear [\[option \(C\)\]](#) the current NP RapidDial Table, then import the replacement table.

Import files are text files. You can edit these text files in a text editor and insert the following commands before importing the file:

- **add** inserts a record in the NP RapidDial Table. If a record overlaps or is redundant, the add command fails and an error message appears.
- **del** removes a record from the NP RapidDial Table. If the record does not exist, an error message appears. You can delete an existing record with the del command and then insert a replacement record with a subsequent add command.
- **end** stops the import process. It must appear at the end of the imported data.

For example, a text file for import might include:

| These commands: | ...cause these changes in the NP RapidDial table:          |
|-----------------|------------------------------------------------------------|
| add 5,622,2100  | Creates Subscriber Group 5 with prefix 622 and suffix 2100 |

| These commands:      | ...cause these changes in the NP RapidDial table:                               |
|----------------------|---------------------------------------------------------------------------------|
| add 25,345,5000-6999 | Creates Subscriber Group 25 with prefix 345 and suffixes from 5000 through 6999 |
| add 300,7954,100-550 | Creates Subscriber Group 300 with prefix 7954 and suffixes from 100 through 550 |
| del 4,621,3000-4999  | Removes Subscriber Group 4 with prefix 621 and suffixes from 3000 through 4999  |
| add 4,621,5000-5050  | Creates Subscriber Group 4 with prefix 621 and suffixes from 5000 through 5050  |
| end                  | Ends the import process                                                         |

The following table shows you how to import an NP RapidDial Table.

| Prompts                                       | Example of User Input | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enter import filename:                        | <file name>           | Enter the path and file name to import. Do not specify the default .rdt extension in the filename. Records with settings that overlap existing records in the current NP RapidDial Table are not imported. To import the file from another directory, specify a full path name in the following format: /fd0/<path><filename> If you do not specify a path, the program searches for the file in the default directory: /usr/vm/config/ |
| n records added, n records deleted, 1 failed. |                       | The number of imported records appears as n records added. If the import file includes redundant records, an error message appears. Each error increments the "failed" counter.                                                                                                                                                                                                                                                         |

#### 1.4.12.2.2.6 (P) Purge Subscriber Group

To remove a Subscriber Group from the NP RapidDial Table, select **P** from the NP RapidDial Table menu. The table below shows you how to purge a Subscriber Group (using Subscriber Group 10 as an example).

| Prompts                                                 | Example of User Input | Comments                                                    |
|---------------------------------------------------------|-----------------------|-------------------------------------------------------------|
| Enter Subscriber Group (1-1000):                        | 10                    | Purge Subscriber Group 10.                                  |
| Please enter the passcode:                              | RdtUtil               | The passcode is case sensitive.                             |
| Do you really want to remove Subscriber Group 10? (Y/N) | Y                     |                                                             |
| Subscriber Group nn with nn record(s) deleted.          |                       |                                                             |
| Enter Subscriber Group (1-1000):                        |                       | Enter a new Subscriber Group number or press Enter to exit. |



### 1.4.12.2.2.7 (R) Report on all Subscriber Groups

To obtain a report of the Subscriber Groups in the NP RapidDial Table, select **R** from the NP RapidDial Table menu. You can view the report on the console or save it to a file. The following table shows you how to obtain an NP RapidDial Table report.

| Prompts                                                                                       | Example of User Input | Comments                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DISPLAY RAPID DIAL TABLE ME<br>NU (C) Display to console (F) Output<br>to file (X) Exit       |                       | Option <b>C</b> sends the report<br>to the console screen.<br><br>Option <b>F</b> sends the report<br>to a file.<br><br>Option <b>X</b> exits this function.                                                         |
| Subscriber Suffix Suffix Group Pref<br>ix Range Start Range End =====<br>===== nn nn<br>nn nn | C                     | If you select C, a report appears on<br>the console. This display shows 24<br>lines at a time. To continue scrolling,<br>press the space bar or to scroll a s<br>ingle line, press Enter.                            |
| Enter filename:                                                                               | F <file name>         | If you select F, you must specify a<br>full <path> and <filename>. If you do<br>not specify a path, the program uses<br>the .rpt extension to save the report<br>to this location: /usr/vm/config/<filen<br>ame>.rpt |
| Total of nn tables and nn records s<br>tored to file /usr/vm/config/<filena<br>me>.rpt        |                       | After the file is saved, a message<br>similar to this appears on the conso<br>le.                                                                                                                                    |

### 1.4.12.2.2.8 (V) View Subscriber Group

To see a specific Subscriber Group in the NP-UM RapidDial Table, select **V** from the NP-UM RapidDial Table menu. You can view the prefix, suffix range start, and suffix range end for the selected Subscriber Group.

The following table shows you how to view a Subscriber Group (using Subscriber Group 10 as an example).

| Prompts                                                             | Example of User Input | Comments                                                                                                         |
|---------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------|
| Enter Subscriber Group (1-1000):                                    | 10                    | View Subscriber Group 10.                                                                                        |
| Prefix Suffix Suffix Range Start Ran<br>ge End =====<br>== nn nn nn |                       | The record for the Subscriber Group<br>appears on the console in a format s<br>imilar to that shown on the left. |
| Enter Subscriber Group (1-1000)                                     |                       | Enter a new Subscriber Group to<br>view or press Enter to exit.                                                  |

### 1.4.12.2.3 Configure Mailboxes for NP RapidDial

Before the NP RapidDial feature can be used, each mailbox must be assigned to a Subscriber Group.

To configure mailboxes to use the NP RapidDial feature:

1. [Modify a mailbox](#) (or range of mailboxes) with the following settings:

- an FCOS that contains feature bit **265** (Enable NP RapidDial Features)
- a Subscriber Group number (this prompt appears only if feature bit 265 is assigned to the mailbox FCOS)

## 1.4.13 NP Receptionist

### 1.4.13.1 NP Receptionist - Description

**Note:**

This feature must be configured using the **Text Console**.

NP Receptionist is a software product that functions as an automated attendant, typically within an integrated NuPoint Unified Messaging server and PBX system. NP Receptionist can perform the following tasks:

- Pick up an incoming call and greet the caller
- Allow the caller to dial an extension
- Screen a call
- Connect the caller to an intermediate attendant (a person to screen calls or take messages)
- Transfer a caller to a voice mailbox

When a call comes in, NP Receptionist takes the call, then transfers the call, as required. NP Receptionist can make blind, supervised, or screened transfers.

- **Blind transfer:** The system releases the call (“hangs up”) after dialing the extension; used for transferring to extensions that do not have a mailbox on the system.
- **Supervised transfer:** The system stays online until the caller gets through to the desired extension. If the extension is busy or rings but does not answer (referred to as Ring No Answer (RNA) in the rest of this guide), NP Receptionist pulls back the call and the caller can choose to leave a message in the called party's mailbox, or be transferred to another extension.

- **Screened transfer:** NP Receptionist asks for the caller's name, then notifies the called party about the call and the called party can choose to accept or reject the call. Again, if the call is rejected, the caller can leave a message in the called party's mailbox or be transferred to another extension. These options are configured by the system administrator.

## Operation

The system administrator configures the way NP Receptionist initially answers a call. The administrator then enters call processing instructions for individual mailboxes. NP Receptionist checks these instructions when directing a call to the mailbox and handles the call according to these instructions.

### 1.4.13.2 NP Receptionist Features

NP Receptionist has the following features:

#### Console Attendant Functions

NP Receptionist can answer incoming calls, screen them, dial an extension for the caller, or play menu options for the caller.

NP Receptionist can also allow direct access to an extension directly and/or call forwarding to a mailbox without NP Receptionist assistance.

#### Day/Night Greetings

You can record separate customized greetings for day answering and night answering. You can configure hours and days that comprise "Day" and "Night/Weekend" to suit the requirements of the individual installation. NP Receptionist can handle "day" calls differently from "night" calls.

#### Configurable Prompts Languages

System prompts are available in English (American, Australian, New Zealand, UK), French, German, Japanese, Korean, Mandarin, Spanish, Mexican Spanish, and Portuguese.

#### Automatic Outdialing to Trunks

When callers dial an internal extension number, NP Receptionist can automatically route the call to an outside number (for example, a modem number).

#### Call Screening/Automatic Announcement for Users

Mailbox users can choose to have all their calls screened. A mailbox user who calls another mailbox user can press the star (\*) key, plus his or her own mailbox number,

in reply to the prompt “Whom may I say is calling?” NP Receptionist automatically announces the name that is recorded in the mailbox. If the call is not answered (or is rejected by the user), any message that is left is recorded from the caller’s mailbox. This allows the recipient to answer the message simply by pressing the 2, or A (for answer), key.

### **Flexible Rerouting of Calls**

When a call does not go through, users can have their calls routed to a personal attendant’s number, to the Console Attendant, or to their personal mailboxes; or they can choose to have NP Receptionist play one of four redial menus. You can choose different routings for Busy, Ring No Answer, and Rejected calls (for calls to extensions), and call failure (for calls to trunks).

### **Customized Treatments for Individual Users**

You can group together call processing options to make up to 16 “treatment types,” or call processing instructions, that allow an administrator to provide users with the call processing options that they want. Treatments types are stored in the mailbox data file, and the administrator can easily change a treatment type.

### **Separate Day and Night/Weekend Call Treatments for Individual Users**

Each mailbox can store separate Day and Night/Weekend treatment types. NP Receptionist checks the user’s mailbox for the correct treatment type before processing an incoming call.

### **Directory/Menu Capabilities**

You can use mailboxes with “tree” class of service to build directories or menus which direct outside callers to the appropriate extension or mailbox within the system. The tree mailbox can allow the user to access a “chain” mailbox, which plays a mailbox greeting, then prompts the caller to enter an extension number.

### **Single-Digit Access**

You can configure this menu capability so that after the main greeting plays, NP Receptionist allows single-digit access to selected departments and specific extensions.

### **Dial-by-Name**

NP Receptionist can allow users to reach an extension by pressing keys that spell a person’s name. You can configure the feature so that the caller can dial by last name or first name dial by last name or first name.

## # Dial Around

The # dial around feature allows the caller to act as his/her own receptionist. For example, after leaving a message for one user, the caller can press # (the pound key), and then dial another number when prompted.

## Logging Into Your Mailbox

NP Receptionist is a layer of programming that functions on top of the NuPoint Voice application. If you call a number answered by NP Receptionist, you can dial an extension. In addition, you can reach the NuPoint Voice message center by pressing # (the pound key) to leave a message in a mailbox. You can also log into your mailbox from the NuPoint Voice message center by pressing # (the pound key) again, followed by your mailbox number; alternatively, you can dial your mailbox number, followed by # (the pound key) to log into the mailbox.

## 1.4.13.3 Call Flow and Call Processing

### Typical Call Transfer

A caller dials the company main number, Receptionist picks up the call and greets the caller, then asks the caller to dial an extension. The caller dials the extension. NP Receptionist then transfers the call. Typically NP Receptionist supervises the transfer - NP Receptionist stays on the line until the called party answers the phone, then releases the call (hangs up).

If the extension has no associated mailbox, NP Receptionist releases the call as soon as the caller dials the extension.

### Leaving a Message

NP Receptionist allows the user to dial an extension. If the called party is not available, NP Receptionist gives the caller an option to leave a message.

### Screened Transfer

NP Receptionist asks the caller for his/her name, then notifies the called party about the call and the called party can choose to accept or reject the call. Again, if the call is rejected, the caller can leave a message in the called party's mailbox or be transferred to another extension. The options available to a caller (transferring to another extension or leaving messages in mailboxes) are configured by the system administrator.

You can configure NP Receptionist to process a call through an intermediate attendant. NP Receptionist dials the intermediate attendant, who screens the call.

## Caller Waits or Dials “0”

If the system allows the caller to reach a person (for example, a console attendant) the caller reaches the person by dialing 0 or waiting, rather than dialing an extension.

## Converting an Extension Number to a Mailbox Number

When a caller dials an extension, NP Receptionist converts the extension number to the associated mailbox number, checks the mailbox for instructions, then dials the extension or trunk number that is stored in the mailbox.

If the mailbox numbers are the same as the extension numbers, then NP Receptionist can simply check whether the extension has an associated mailbox. However, a system might require NP Receptionist to convert an extension number-to-mailbox number using the following steps, in the order shown:

1. Delete leading digits, if applicable.
2. Add signed value in offset table, if applicable.

### Example

Extension: 3975

For all extensions starting with 3, delete 1 digit

Leading digit deleted: 975

For all extensions starting with “3,” the offset value is -100

Add signed offset value to 975:  $975 + (-100)$

Mailbox number is 875

For more detailed information on Delete Digit and Offset tables, see [Dialing Plan Options](#).

The flowchart below shows extension-to-mailbox number conversion:



## Dialing an Extension

After NP Receptionist validates an extension number and its associated mailbox, NP Receptionist dials the extension number. If screening is not in place, the caller will pick up the call or NP Receptionist will fail to connect the call because of one of the following situations:

- Reorder tone – fast busy tone indicating that switching paths are busy. Depending on the PBX specifications, NP Receptionist is configured to treat the reorder tone as one of the following situations:
  - Dead line
  - Busy
  - Ring No Answer

The administrator can configure the NP Receptionist response, which can take the caller to an attendant, allow the caller to dial another extension, leave a message, or select from a menu that lists the options just mentioned.

## Mailbox Call Processing

Each mailbox stores call processing instructions. To simplify mailbox programming, the administrator can enter up to 16 groups of call processing instructions, or treatment types, into the system configuration file. When creating a mailbox, an administrator can use these treatment types to configure separate day and night instructions that best match the choices of the mailbox owner.

## Single-Digit Access Menus

You can configure NP Receptionist to present the caller with a menu of options that the caller can access by pressing a single digit. For example, Receptionist II might greet the caller as follows: “Thank you for calling ABC company. Press 1 to dial an extension, press 2 to reach Technical Support, press 3 to reach the Job Hotline.”

### 1.4.13.4 NP Receptionist Configuration Overview

Typically, NP Receptionist functions as a layer of programming within an integrated system. This means that you assign a line group to the integration software and configure NP Receptionist parameters within the same line group. Occasionally, an integration might require that you configure Receptionist separately from the application. In this case, as in an in-band integration, the integration instructions direct you to assign NP Receptionist to a separate line group. In either case, the NP Receptionist configuration parameters are the same, whether you reach the Receptionist Menu through the integration software line group or through a line group specifically assigned to NP Receptionist.

## Parameter Groups

NP Receptionist instructions, or parameter values, fall into three main groups.

- **Line group assignment:** index number, name, and number of lines in the line group. (See [About Line Groups](#).)

- **Messaging functions**, or the **handling of greetings and messages** from callers. The line group uses the same information that is provided for the NuPoint Voice application, which is discussed in the [NuPoint Voice section](#).
- **Call processing functions**: The administrator sets call processing instructions for NP Receptionist. Configuration instructions are included in the Procedures folders of this section.

### NP Receptionist Configuration

## 1.4.13.5 NP Receptionist Call Processing Parameters

### 1.4.13.5.1 Dialing Plan Options

This section discusses the dialing plan for the automated attendant functions of NP Receptionist. If NP Receptionist is integrated with the PBX system, then this dialing plan must match the PBX dialing plan.

The mailbox dialing plan for messaging functions is discussed in [About Dialing Plans](#).

(P) Dialing Plan = [4,4,4,4,4,4,0,0]

(D) Delete Digits = [0,0,0,0,0,0,0,0]

(F) Offset Table

(T) Timeout for Receipt of First Digit (.1 seconds) = [0]

(Y) PBX Console Attendant Day Access Code = [0H]

(Z) PBX Console Attendant Night Access Code = [0H]

### PBX Dialing Plan

The dialing plan controls the extension numbers that an outside caller dials to reach a user. A caller reaching NP Receptionist hears the prompt, “Please enter an extension number, or wait for assistance.” When the caller enters a number, NP Receptionist checks the input against the PBX dialing plan.

If the number conforms to the PBX dialing plan, NP Receptionist proceeds to delete any leading digits and add any offsets that are specified (see “Delete Digits Table and Offset Table” later in this section). NP Receptionist then checks the mailbox dialing plan.

If the result is a valid mailbox number, NP Receptionist checks the mailbox data file, and dials the “Mailbox’s Extension Number” set up by the administrator. The call is then processed according to the instructions configured for that mailbox.

If the result is not a valid extension, NP Receptionist dials the number that was originally input by the caller, then hangs up.



The dialing plan is a string of nine numbers. The first number in the string shows the number of digits allowed for extensions that begin with 1. Each number that follows gives the number of digits allowed for extensions that begin with 2 through 9.

A “V” at any position indicates that the number of allowable digits (can have up to eleven) for that position is variable; NP Receptionist accepts any extension input with that particular leading digit. The system uses a three-second timeout to determine when input is finished.

### Dialing Plan Example

0,4,3,3,3,A,V,0,0

The values indicate the number of digits allowed for extensions starting with digits 1 through 9. The sample dialing plan is interpreted as follows, for extensions that begin with the numbers listed:

- 1—no extensions starting with “1”
- 2—must have four digits (for example, 2112)
- 3 through 5—must have three digits (for example, 303, 415, 504)
- 6—“A” makes “6” the dial-by-name access digit
- 7— the number of digits is variable (for example, 798, 7734, 765379)
- 8 and 9—no extensions start with 8 or 9

If the PBX dialing plan is 3,3,3,3,3,3,0,0, all extensions that begin with digits 1 through 7 must have three digits. No extensions start with the digits 8 or 9. This disallows pressing 8 or 9 to dial out from NP Receptionist; in addition, the Administrator mailbox number (default, 998) and Attendant mailbox number (default, 999) cannot be reached from NP Receptionist.

### Delete Digits Table and Offset Table

Ideally, extension numbers are identical to the mailbox numbers within a system. For instances where they do not match, NP Receptionist must convert extension numbers to mailbox numbers, using values contained the Delete Digits Table and the Offset Table.

#### Delete Digits Table

The delete digits table is a string of numbers that represent, from left to right, extension numbers that begin with 1 through 9. The number shown at each position indicates the number of digits that NP Receptionist must delete from an extension to convert it to a mailbox number.

The digits are deleted in the order received. For example, if the number in the Delete Digits table is 2, NP Receptionist deletes the first two digits that it receives.

#### Example

If the delete digits table is 0,0,0,1,0,0,0,3,0

- No leading digits are deleted from extensions that begin with 1, 2, or 3 (that is, they are unchanged)
- One leading digit is deleted from all extensions that begin with 4 (for example, 4657 becomes 657)
- Extensions that begin with 5, 6, or 7 are unchanged
- Three leading digits are deleted from extensions that begin with 8 (for example, 8657 becomes 7)
- Extensions that begin with 9 are unchanged

The default Delete Digits table is 0,0,0,0,0,0,0,0,0, which means that all extension numbers are passed through unchanged. If you need to make changes to this table, record the new table on NP Receptionist Worksheet 2 at the end of this section.

## Offset Table

To complete the conversion of an extension number to a mailbox number, NP Receptionist can add an offset after deleting any leading digits. The offset can be positive or negative. Offset tables are numbered 1 through 9. The default values for each offset table is 0, as shown below. The table number refers to the leading digit of the extension number before any digits are deleted. Table 1 shows the offset to be added to extensions that begin with 1. If the extension is 1678, the offset value read is the one in Table 1, even if during the conversion, the leading digit might be deleted); Table 2 specifies the offsets for extensions that begin with 2; and so on.

- OFFSET: s
- Table offset for #1 = [0]
- Table offset for #2 = [0]
- Table offset for #3 = [0]
- Table offset for #4 = [0]
- Table offset for #5 = [0]
- Table offset for #6 = [0]
- Table offset for #7 = [0]
- Table offset for #8 = [0]
- Table offset for #9 = [0]

Offset Table

## Example

For example, if the offset value for Table 5 is +25, the mailbox number for extension 560 (+25) is 585.

## How NP Receptionist Uses These Tables

The following examples shows the process of transforming extension numbers to mailbox numbers:

### Example 1

Assume

Delete Digits = 0,0,1,0,0,2,0,0,0

Table offset for #3 = -50

This means that NP Receptionist transforms an extension that begins with 3 to a mailbox number using the following procedure:

3275 (extension that was entered)

275 (delete one leading digit)

-50 (add signed offset from Table 3)

225 (mailbox number)

Under the same circumstances, extension “3276” is converted to mailbox number 226, “3280” is converted to mailbox number 230, etc.

### Example 2

Assume

Delete Digits = 0,0,0,0,0,0,0,0,0

Table offset for #1 = 200

This means that any extension number that begins with 1 maps as follows:

17 (extension that was entered)

- (do not delete any leading digits)

+200 (add signed offset from Table 1)

217 (mailbox number)

## Timeout for Receipt of First DTMF Digit

This is a timing parameter that the administrator can configure to allow a pause before NP Receptionist starts processing digits that a caller dials. The default timeout value is 0,

indicating that the feature is turned off. The timeout value is a number between 0 and 50 in tenths of a second.

### PBX Console Attendant Day/Night Access Code

The PBX console attendant day and night access codes usually contain a system attendant number to which a caller is transferred during the configured time period. NP Receptionist dials the appropriate string for the time period under the following circumstances:

- A caller waits for assistance before dialing an extension.
- A call fails to go through after the caller has entered an extension, assistance is required, and there is no attendant's extension number in the mailbox data file.

Console access codes are PBX-dependent, and can be determined by actually transferring a call to the operator from a station set. The following table shows the coding choices available for day/night access:

| Code        | Meaning                                          |
|-------------|--------------------------------------------------|
| 0-9, *, #   | Numbers and characters on a standard DTMF keypad |
| A through D | Fourth column DTMF keys                          |
| (           | Start pulse dialing                              |
| )           | Stop pulse dialing; resume tone dialing          |
| T           | Wait for dial tone                               |
| S           | Switch hook flash                                |
| F           | Switch hook flash and wait for dial tone         |
| +           | Pause one second                                 |
| H           | Hang up (go on-hook)                             |

**Note:** Do not program a G (wait for greeting) into a PBX Console Attendant Day or Night Access Code, or into the Pre-DN string or Post-DN string; internal NP Receptionist programming does not allow a successful transfer if a G appears in any of these strings.

The default dial string is "0H," for both the PBX Console Attendant Day Access Code and the PBX Console Attendant Night Access Code. This string means "issue DTMF zero, then hang up." For most PBXs, this is sufficient to transfer the call to the Attendant.

The NP Receptionist day or night dialing access code proceeds in the following sequence:

- Execute the Pre Directory Number (Pre-DN) dial string that is set under "PBX Dial String Definitions"; the Pre-DN string usually contains all the instructions for the transfer.
- Dial the appropriate PBX console attendant access code

- Execute the Post Directory Number (Post-DN) string, then wait for a greeting (NP Receptionist programming always appends a G to the end of the Post-DN string after a PBX Console Attendant Access Code has been dialed).

The default day and night console access codes are blind transfers, which are available only if the PBX allows a blind transfer to the operator. A blind transfer means NP Receptionist releases the call before the greeting starts. Instructing NP Receptionist to release the call after dialing the number ensures that the PBX does not continue the transfer when the caller has decided to hang up.

If there is no PBX console attendant during the day, or during night/weekend hours, entering a period deletes the access code for that time period. When there is no access code, the caller who “waits” (in response to the prompt, “Please enter a mailbox number or wait”) is prompted to leave a message in the attendant’s mailbox. (NP Receptionist thanks the caller and hangs up if the attendant’s mailbox has also been deleted.)

### 1.4.13.5.2 Flow Options

The Flow Options parameters contain information about how Receptionist should handle given calls.

#### **Mailbox Message Prompt Greeting/Name**

The Mailbox Message Prompt value determines what message the caller hears if the called party is not available. If the default value of G (for greeting) is chosen, the caller hears the mailbox owner’s personal greeting. If N (for Name) is chosen, the caller hears the prompt, “Please leave a message for [name recorded in mailbox].” (If no name was recorded for the mailbox, the caller hears, “Please leave a message for [mailbox number].”)

#### **PBX Console Operation**

PBX Console Operation provides the option to specify that the initial welcome greeting be replaced by a short dial tone to prompt the operator that NP Receptionist is ready to receive the extension number.

PBX Console Operation is set to the default value of **N** when normal NP Receptionist call processing is desired.

**CAUTION!** Do not change the default unless you specifically want to replace greetings with a short dial tone.

### 1.4.13.5.3 PBX Dial String Definitions

NP Receptionist simulates the actions of a human console attendant. Since different PBXs have different console operator protocols, certain coding must be entered into the

NP Receptionist configuration file to tell NP Receptionist how to process calls under all the possible conditions, using signals understood by the PBX.

Pre-programmed dial strings for several different PBXs can be selected from the Online Configuration Menu. If the PBX at the customer site is not shown on the menu, the dial strings must be programmed in the Default PBX Options Menu.

The easiest way to determine the proper coding for each dial string is to attach phone sets to three PBX extensions, one for the “caller,” one for the “called party,” and one for simulating the actions of the PBX console operator, then follow the steps that are given in the descriptions below.

### Pre-Directory/Post-Directory Number Dial String

The “directory number” in the Pre-Directory/Post-Directory Number Dial String refers to the extension number associated with a mailbox number. The Pre-Directory Number Dial String puts the caller on hold so NuPoint Voice can dial the PBX attendant. The Post-Directory Number Dial String is the number or letter code that NP Receptionist dials after the extension has been dialed. The following table shows Pre-Directory/Post-Directory Number coding choices.

| Code        | Meaning                                          |
|-------------|--------------------------------------------------|
| 0-9, *, #   | Numbers and characters on a standard DTMF keypad |
| A through D | Fourth column DTMF keys                          |
| (           | Start pulse dialing                              |
| )           | Stop pulse dialing; resume tone dialing          |
| T           | Wait for dial tone                               |
| S           | Switch hook flash                                |
| F           | Switch hook flash and wait for dial tone         |
| +           | Pause one second                                 |
| H           | Hang up (go on-hook)                             |

### Pre-Directory Number Dial String

The default Pre Directory Number (Pre-DN) dial string is “S+,” which tells the PBX to do a Switch hook flash, then wait one second before dialing the extension number (which may be a trunk number) that is in the mailbox. (Remember that NP Receptionist uses the Delete Digits table, and the Offset Table to transform the extension that is input by the caller into a mailbox number, and then dials the extension number that is stored in the mailbox’s data file.)

The Pre-DN string is also used with NP Receptionist Console Access Codes. **Before** the appropriate Console Access Code is dialed, NP Receptionist executes the Pre-DN string, then waits for the internally programmed greeting to be played.

**Note:**

- Do not program a **G** (wait for greeting) into the Pre-DN string; internal NP Receptionist programming does not allow a successful transfer to the console attendant if a G appears in this string.
- Do not program Feature Access Codes such as "Called Party Features - Override" into the Pre-DN string. To access this functionality, use the "Override" call flow action in [Call Director](#).

**Post Directory Number Dial String**

The default Post Directory Number (Post-DN) dial string is "+," which tells NP Receptionist to wait one second before taking any other action. This gives the PBX enough time to make the connection to the extension. If no Post -DN dial string is needed, enter a period.

The Post-DN string is also used with NP Receptionist Console Access Codes. After the appropriate Console Access Code has been dialed, NP Receptionist executes the Post-DN string, then waits for the internally programmed greeting to be played.

**Note:** Do not program a G (wait for greeting) or a T (wait for dial tone) into the Post-DN string; internal NP Receptionist programming does not allow a successful transfer to the console attendant if a G or T appears in this string.

When an H appears in the Post-DN string, every call that NP Receptionist makes is a blind transfer. NP Receptionist transfers the call without invoking treatment types, connect strings, or return strings.

**Connect Dial String on Called Party Accept**

NP Receptionist uses this dial string to connect a caller with the called party in the following situations:

- When call screening is not configured for the extension dialed
- When there is no mailbox associated with the extension dialed
- When a mailbox is configured for call screening, and the call is answered and accepted by the called party

There is no default for Connect Dial String on Called Party Accept, since the automatic release is usually sufficient to connect the caller with the called party. If a dial string is entered, but later it is necessary to reset the value to "no string," entering a period erases the dial string.

## Dial String for Return on Called Party Refused

This dial string is used to reconnect to the caller when call screening is in effect and NP Receptionist has successfully connected with the extension, but the called party has refused the call. The default Dial String for Return on Called Party Refused is “++,” which tells NP Receptionist to wait two seconds before doing anything else. The two second delay gives the called party time to hang up his/her phone. For most PBXs, this action is sufficient to reconnect the caller with NP Receptionist. If no dial string is needed, enter a period.

## Dial String for Return on Called Party, Busy, or RNA

When NP Receptionist dials an extension, and the call does not go through because a busy or reorder tone is encountered, or because there is no answer, or because silence on the line indicates that the extension number is not valid, the Dial String for Return on Called Party Busy or RNA is used to tell the PBX to reconnect NP Receptionist with the caller. The default dial string is “S+,” which means that NP Receptionist issues a switch hook flash, and then waits one second before doing anything else. If no dial string is needed, enter a period.

## Special Actions on Reorder Tone Encountered

This dial string tells NP Receptionist what to do when an extension is dialed, and a reorder tone is encountered.

- Some PBXs return a reorder tone when an extension is set to “Do Not Disturb.” If NP Receptionist is integrated with this type of PBX, enter “R” for the Special Actions on Reorder Tone Encountered dial string. When NP Receptionist receives a reorder tone, it returns to the caller, says “I’m sorry, [called party’s name] did not answer,” then follows the RNA treatment of the called party’s mailbox.
- A dial string can be entered to direct the call to an assistance number, or to a number where the caller can report that the extension is malfunctioning.
- If no string is found here, NP Receptionist treats the call like a dead line: the Dial String for Return on Failure to Connect is dialed and the caller is told, “That is not a valid extension number. Please enter another extension number.”

There is no default Special Actions on Reorder Tone Encountered dial string. If a dial string is entered, but later it is necessary to reset the value to “no string,” enter a period to erase the dial string.

## 1.4.13.5.4 NP Receptionist Treatment Types

### 1.4.13.5.4.1 What is a Treatment Type?

Treatment types tell NP Receptionist how the user wants calls handled under different situations. Different treatment types can be specified for day and night answering. Any



available treatment type may be chosen for either time period. If no treatment type is configured, the NP Receptionist default treatment is to play the mailbox greeting.

Individual treatment types belong to one of two categories: **extension** or **trunk**. NP Receptionist offers 16 extension and trunk treatment types, ten of which are defaults. The administrator can configure six additional treatments. The appropriate treatment type depends on the extension number of the mailbox.

- **Extension Treatment Types** are assigned to mailboxes when the mailbox's extension number is expected to be answered by a person (rather than a machine). Extension treatment types tell NP Receptionist whether to screen calls. They specify the actions to be taken when
  - the extension rings, but there is no answer.
  - the extension is busy.
  - a screened call is rejected by the called party.
- **Trunk Treatment Types** are usually assigned to mailboxes that outdial to numbers that are not answered by a person (for example, non-dial 1 long distance services). There is less flexibility in how calls are processed. When the number is dialed, NP Receptionist
  - receives a response indicating that the connect criteria have been met; or
  - considers the call a failure, and follows the specified failure treatment.

You must determine the appropriate treatment type (extension or trunk) for the mailbox and choose, from that category, the day and night treatment types that best meet the user's needs.

### 1.4.13.5.4.2 Extension Treatment Types

Extension treatment types consist of the following elements; all choices are determined by user preferences. Refer to [NP Receptionist Treatments Report](#).

#### Call Screening Is/Is Not in Effect

When call screening is in effect, NP Receptionist (a) asks the name of every caller and puts the caller on hold, (b) calls the desired extension, (c) announces the name of the caller, and (d) gives the called party the opportunity to accept or reject the call.

System users can press the \* key (star) and their mailbox numbers, when asked for their names; the system announces the names recorded in the mailboxes. If a message is left, it is made from the caller's mailbox (which enables the called party to answer it by pressing **A** while logged into his own mailbox).

## RNA (Ring/No Answer) Treatment

The RNA treatment tells NP Receptionist what to do when an extension rings but no one answers it. The treatment options are described below.

| RNA Treatment Options |                                                                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A                     | Caller is transferred to the attendant's extension number stored in the mailbox data file. If no attendant's extension number has been specified, caller is transferred to the Console Attendant. |
| M                     | Caller is prompted to leave a message in the called party's mailbox.                                                                                                                              |
| R                     | The redial menu that is selected under "Redial Menu to Use" (Table 3-3) is played, and NP Receptionist follows the caller's instructions.                                                         |

## Busy Treatment

The busy treatment tells NP Receptionist what to do with incoming calls when the extension is busy. Choices are the same as the RNA treatment.

## Reject Treatment

The reject treatment tells NP Receptionist what to do with screened calls that are rejected by the called party. Choices are the same as the RNA treatment.

## Redial Menu to Use

When R (redial) is selected as the treatment for any of the failure conditions (RNA, Busy, or Rejected), "Redial Menu to Use" selects the redial menu to play and the associated action to perform. The menus are named for the action taken if the caller does not do anything. Choices are R (retry), M (message), A (assistance), and D (disconnect); the default value is M. The text of each menu is given below.

| Redial Menu Options |                                                                                                                                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| R                   | Press zero for assistance; Press "*" to hold for <called party's name>; Enter another extension number; or Wait to leave a message.                |
| M                   | Enter another extension number; Press zero to return to the attendant; or Wait to leave a message.                                                 |
| A                   | Press "*" to leave a message; Enter another extension number; or Wait for assistance.                                                              |
| D                   | Press "*" to leave a message; Press zero to return to the attendant; or Enter another extension number. (Receptionist hangs up after three tries.) |

## Authorized Periods

Access to a mailbox (and to its associated extension number) may be restricted to daytime hours or night/weekend hours only by using the authorized period. Callers who try to access a number at a time that is not within the authorized period hear the message, "I'm sorry, that number is not available for access at this time."

## Authorization Codes

When a treatment type contains an authorization code, all callers must enter the code before NP Receptionist allows access to any extension or trunk with this treatment type. An authorization code is used under special circumstances (for example, to restrict access to a modem or to a WATS line).

## Default Treatment Types

Ten treatment types are pre-programmed in the NP Receptionist configuration. These are extension treatment types that do not require authorization codes and do not specify authorized times. The default features are shown in the following table.

No trunk treatment types are pre-programmed into the default configuration because they tend to be site-specific. These treatment types can be modified by the system technician.

| Default Treatment Types |                                      |                                      |                                      |                 |
|-------------------------|--------------------------------------|--------------------------------------|--------------------------------------|-----------------|
| Treatment Type          | Ring/No Answer                       | Extension is Busy                    | Call is Refused                      | Call Screening? |
| 1                       | Play Redial Menu D                   | Play Redial Menu D                   | Play Redial Menu D                   | Yes             |
| 2                       | Play Redial Menu D                   | Play Redial Menu D                   | Not Applicable                       | No              |
| 3                       | Play Redial Menu A                   | Play Redial Menu A                   | Play Redial Menu A                   | Yes             |
| 4                       | Play Redial Menu M                   | Play Redial Menu M                   | Play Redial Menu M                   | Yes             |
| 5                       | Prompt caller to leave a message     | Prompt caller to leave a message     | Not Applicable                       | No              |
| 6                       | Prompt caller to leave a message     | Prompt caller to leave a message     | Prompt caller to leave a message     | Yes             |
| 7                       | Prompt caller to leave a message     | Play Redial Menu R                   | Prompt caller to leave a message     | Yes             |
| 8                       | Play Redial Menu R                   | Play Redial Menu R                   | Prompt caller to leave a message     | Yes             |
| 9                       | Play Redial Menu R                   | Play Redial Menu R                   | Not Applicable                       | No              |
| 10                      | Transfer caller to assistance number | Transfer caller to assistance number | Transfer caller to assistance number | Yes             |

## Selecting a Treatment Type for a Mailbox

You can ask all users to choose from the pre-programmed default treatment types, or you can assign special treatment types that you or the technician create for your system. Run

a [Receptionist Treatment Types](#) Report (Text console only) to display the features of the treatment types on your system.

### 1.4.13.5.4.3 Trunk Treatment Types

The technician programs two features: the connect criteria and the failure treatment. These features are unique to trunk treatment. Default trunk treatment types do not exist.

#### Connect Criteria

Connect criteria are the conditions when a trunk call is considered to successfully connect with the called party. The default value is C (cut through), which means that all trunk calls outdialed are considered successful. Other choices are T (the call is successful if it is answered by a computer tone or a dial tone) and R (the system knows that the trunk call has gone through if the receiving telephone rings). When you enter a trunk number in the extension number field, ensure that you know what conditions are necessary for connection.

#### Failure Treatment

The failure treatment tells NP Receptionist what to do with a trunk call if the connect criteria are not met. The user is given the choices listed in [Extension Treatment Types](#).

### 1.4.13.5.4.4 Hidden ('Blind') Mailbox Extension Number Programming

Dial strings to transfer to the mailbox extension number are contained in the pre-DN and post-DN dial strings that are programmed into the configuration by the technician.

NP Receptionist programming adds certain characters to the end of the mailbox extension number. These "hidden" characters depend on the mailbox's treatment type:

- If the mailbox has an extension treatment type, NP Receptionist automatically appends a **G** (wait for a person or computer tone greeting) unless you insert an **H** (hang up) at the end of the dial string.
- If the mailbox has a trunk treatment type, the hidden character depends on the connect criteria chosen:
  - If the connect criteria is "Tone," a **T** (wait for dial tone) is appended.
  - If the connect criteria is "Ring," a special character that tells NP Receptionist to wait for a single ring is appended.
  - If the connect criteria is "Cut through," NP Receptionist checks whether the last character in the mailbox extension number is an **H**. If it is not, NP Receptionist automatically hangs up after it outdials the dial string.

# 1.4.13.5.4.5 Programming NP Receptionist to Dial an Outside Mailbox Extension Number

The "mailbox extension number" does not have to be a PBX extension number. Specific mailbox programming in NP Receptionist is used to allow callers to reach an outside number when they input an extension number.

**EXAMPLE:**A mailbox can be created to outdial to a Wide Area Telephone Service (WATS) line.

- Users who make long distance calls can access NP Receptionist and input the number of the mailbox.
- NP Receptionist automatically dials the number and connects the user to the WATS line.

This programming offers the caller the convenience of dialing a shorter number. Additionally, this technique gives the administrator the opportunity to choose treatment types that restrict access to the WATS line by requiring an authorization code and/or requiring calls to be made during an authorized time period (see [NP Receptionist Treatment Types](#)).

When you want NP Receptionist to dial an outside number, you must program the system to duplicate the steps that a caller uses to dial that number. Enter certain codes in the mailbox extension number field.

**EXAMPLE:** Characters such as T (wait for dial tone) must be included in the extension number dial string and in the number itself.

A maximum of 15 alphanumeric characters can be entered in the mailbox's extension number field. If your dial string exceeds this number, you must use one of the extension pre-dial indexes that are programmed by the technician during configuration. (You may use these indexes even when the number does not exceed 15 characters.)

When you want NP Receptionist to outdial a number (other than a simple extension) when a mailbox is accessed, use the following procedure to program the number into the mailbox.

## Step 1: Formulate a Coding String

The easiest way to formulate a coding string that directs NP Receptionist to outdial a number is to manually place a call to this number and note what steps were taken. Use codes from the following list to describe your actions:

|         |                                                                                                       |
|---------|-------------------------------------------------------------------------------------------------------|
| 0-9,#,* | Send out these DTMF tones (just as though they are being dialed from a standard touch-tone telephone) |
| A-D     | Outdial these fourth column DTMF tones (keys are found on special telephones)                         |

|   |                                                                                                  |
|---|--------------------------------------------------------------------------------------------------|
| T | Go offhook (equivalent to lifting the receiver on a standard telephone) and wait for a dial tone |
| ( | Send the digits that follow as pulses (10 pps)                                                   |
| ) | Stop pulsing digits; resume sending digits as DTMF tones                                         |
| + | Pause for one second                                                                             |
| G | Greet - wait for a person or pager to answer                                                     |
| F | Switchhook flash and wait for dial tone                                                          |
| S | Switchhook flash (no wait required)                                                              |

**EXAMPLE A:**

Company A has an account with a long-distance carrier that employees must use when placing long-distance calls. To outdial to this service, the administrator is instructed to set up a mailbox for each department. (Each department has a separate mailbox to enable billing counters to keep track of long-distance use by department.)

To program the mailbox extension number, the administrator places a call and notes the steps:

To access the long distance carrier, the administrator

1. Lifts the receiver and listens for a dial tone
2. Dials 9 to get an outside line
3. Dials the long-distance carrier number: **1-408-5556783**,
4. Waits for a computer tone greeting, then
5. Dials the company account number: **25439**.

The system follows this procedure with one exception: the "clicks and pops" of particularly noisy switching equipment may be mistaken for a greeting. Since you have no control over the telephone company's switching equipment, it is best to give the telephone connection a second or two to "settle" before giving the instruction *to listen for a greeting*. The coding for placing this call is:

|             |                                            |
|-------------|--------------------------------------------|
| T           | Wait for dial tone                         |
| 9           | Tell the PBX that you want an outside line |
| 14085556783 | Dial the long distance company's number    |
| ++          | Wait two seconds for the line to settle    |
| G           | Listen for a computer tone                 |
| 25439       | Dial Company A's account number            |

Thus, the coding string for outdialing this number is **T9T14085556783++G25439**.

## Step 2: Choose a Mailbox Extension Pre-Dial Index

When the technician configures the system, the pre-extension dial strings may be programmed. Each of these is represented by a number (the pre-dial index) to simplify programming for the administrator.

To obtain a printout of pre-dial indexes and their dial strings, enter "?" (to request help) in response to the "Mailbox's extension pre-dial index" prompt. The available indexes, dial strings, and pre-dial string descriptions are provided, as in the following display for Example A:

| Index | Pre-dial Strings | Description          |
|-------|------------------|----------------------|
| 1     | T9               | Outside line         |
| 2     | T914085556783    | Non-"Dial 1" Account |

Choose a mailbox extension pre-dial index that represents the coding string for the first part of the number to outdial, or enter "n" for none. In Example A, choose **Index 2**.

## Step 3: Enter the Mailbox Extension Number

The mailbox extension number consists of the balance of the dial string. Referring to Example A, Index 2 directs NP Receptionist to outdial "T9T14085556783." The balance of the string, "++G25439," must be entered as the mailbox's extension number.

### Note:

The system prompts for the mailbox's extension number and for the pre-dial index even though the string represented by the pre-dial index is outdialed first.

## 1.4.13.5.4.6 Programming an Outside Attendant's Extension Number

This procedure is used to program an attendant's extension number outside of the PBX network.

### Step 1: Formulate a Coding String

When the attendant's extension number exceeds 15 digits, you must formulate a coding string that directs the system to dial the number. The coding string must simulate the steps that a caller takes to place the call by using special characters to simulate certain actions. The following codes are allowed:

|         |                                                                                                       |
|---------|-------------------------------------------------------------------------------------------------------|
| 0-9,#,* | Send out these DTMF tones (just as though they are being dialed from a standard touch-tone telephone) |
|---------|-------------------------------------------------------------------------------------------------------|

|     |                                                                                                  |
|-----|--------------------------------------------------------------------------------------------------|
| A-D | Outdial these fourth column DTMF tones (keys are found on special telephones)                    |
| T   | Go offhook (equivalent to lifting the receiver on a standard telephone) and wait for a dial tone |
| (   | Send the digits that follow as pulses (10 pps)                                                   |
| )   | Stop pulsing digits; resume sending digits as DTMF tones                                         |
| +   | Pause for one second                                                                             |
| G   | Greet - wait for a person or pager to answer                                                     |
| F   | Switchhook flash and wait for dial tone                                                          |
| S   | Switchhook flash (no wait required)                                                              |

**EXAMPLE B:**

Company B is a large corporation with central assistance number 1-408-555-9867. To keep track of system use, the company issues department and personal account numbers to all employees.

To get assistance, this mailbox user must (1) lift the receiver and listen for a dial tone, (2) dial 9 to get an outside number, (3) listen for a dial tone to confirm that an outside line has been reached, (4) dial the main number, (5) wait for another dial tone, and (6) dial the department account number (0678787) and his or her personal account number (693201).

To duplicate and code this process, perform the following procedure:

|               |                                            |
|---------------|--------------------------------------------|
| T             | Wait for dial tone                         |
| 9             | Tell the PBX that you want an outside line |
| 14085559867   | Dial the toll number                       |
| T             | Listen for a dial tone                     |
| 0678587693201 | Dial the account numbers                   |

**Note:**

NP Receptionist always appends a **G** (wait for a greeting) to the end of the attendant's extension number. To make NP Receptionist perform a blind transfer (in other words, transfer the call by putting the called party on hold, dialing the number, and hanging up), put an **H** at the end of the dial string. (["Hidden \('Blind'\) Mailbox Extension Number Programming"](#).)

**Step 2: Choose an Attendant Pre-Dial Index**

Your system may be configured with pre-extension dial strings. To obtain a printout of pre-dial indexes and their dial strings, enter "?" (to request help) in response to the



"Attendant's extension pre-dial index" prompt. The available indexes, dial strings, and pre-dial string descriptions are provided, as in the following display for Example B:

| Index | Pre-dial Strings | Description          |
|-------|------------------|----------------------|
| 1     | T9               | Outside line         |
| 2     | T923759          | Non-"Dial 1" Account |
| 3     | T914085559867    | Central Assistance   |

Choose an attendant's pre-dial index that represents the coding string for the first part of the number to outdial. In Example B, choose **Index 3** because it will direct the system to outdial all numbers except the department account and employee's personal account numbers.

### Step 3: Enter the Attendant Extension Number

The balance of the dial string must be entered as the attendant's extension number. Using Example B, the department account number and user's personal number are not covered by the pre-dial string. Thus, the user's attendant extension number becomes **0678587693201**.

## 1.4.13.5.4.7 Attendant's Dialing Sequence

### NP Receptionist

When a caller requests assistance, NP Receptionist

- Executes the pre-DN string programmed into the system configuration.
- Dials the string represented by the attendant's extension pre-dial index (if one was selected).
- Dials the attendant extension number.
- Executes the post-DN string.

If the attendant's number is busy, the call is rejected. If the attendant does not answer, NP Receptionist follows the RNA (Ring/No Answer), Rejected call, or Busy treatment dictated by the *original* called party's treatment type.

### Applications Other Than NP Receptionist

When a caller requests assistance after leaving a message, or when a user presses 0 (zero) while logged into his or her mailbox, the system

- Executes the attendant's transfer string programmed into the system configuration.
- Dials the string represented by the attendant's extension pre-dial index (if one was selected).
- Dials the attendant extension number.

- Hangs up (that is, the internal programming automatically appends an **H** to the end of the attendant extension number).

## 1.4.13.6 Worksheets

### 1.4.13.6.1 About NP Receptionist Worksheets

This section provides information about using NP Receptionist worksheets.

**Worksheet 1:** If NP Receptionist is integrated with a PBX system, you may not have to assign a separate line group for NP Receptionist. To determine if you need to assign a line group to NP Receptionist, refer to the guide for your integration.

- If you assign a separate line group for NP Receptionist, complete both Offline Parameters and Online Parameters sections of NP Receptionist Worksheet 1.
- If the integration manual for the PBX switch at your installation site instructs you to configure Receptionist through the integration application menu, complete only the Online Parameters sections of NP Receptionist Worksheet 1.

The online parameters on Worksheet 1 are those that NP Receptionist shares with the [NuPoint Voice application](#).

**Worksheet 2:** Worksheet 2 contains parameters that are specific to NP Receptionist software. Complete the Default options section only if the PBX switch at your site is not listed in the preceding section, PBX Dial String options.

**Worksheet 3 and Worksheet 4:** Worksheets 3 is the Extension Treatment Type worksheet into which you enter frequently-used instructions for specific mailboxes. You might have one set of instructions for managers' mailboxes, another for customer support staff, and another for sales representatives. Putting these instructions in a Treatment Type allows you then to provide a customize mailboxes by using the Treatment Type, rather than by individually configuring each mailbox.

## 1.4.13.6.2 NP Receptionist Worksheets

## NP Receptionist Worksheet 1

| Offline Parameters      |                                                                                                                                                                                                                             |                                                                         |                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------|
| Define line groups      | Current group <input type="text"/>                                                                                                                                                                                          | Add lines to current group <input type="text"/>                         |                                                                     |
|                         | Name of current group <input type="text"/>                                                                                                                                                                                  | Drop lines from current group <input type="text"/>                      |                                                                     |
|                         | Line group only applications                                                                                                                                                                                                | Group selected <input type="text"/>                                     | Assign VoiceMemo <input type="radio"/> yes <input type="radio"/> no |
| Online Parameters       |                                                                                                                                                                                                                             |                                                                         |                                                                     |
| Dialing plan options    | Dialing plan <input type="text"/> 1 <input type="text"/> 2 <input type="text"/> 3 <input type="text"/> 4 <input type="text"/> 5 <input type="text"/> 6 <input type="text"/> 7 <input type="text"/> 8 <input type="text"/> 9 |                                                                         |                                                                     |
|                         | Delete digits table <input type="text"/>                                                                                                                                                                                    | Console day access code <input type="text"/>                            |                                                                     |
|                         | Offset table <input type="text"/>                                                                                                                                                                                           | Console night access code <input type="text"/>                          |                                                                     |
|                         | Flow options                                                                                                                                                                                                                | Message prompt? <input type="radio"/> yes <input type="radio"/> no      | Greeting <input type="text"/> Name <input type="text"/>             |
|                         | Console operation mode? <input type="radio"/> yes <input type="radio"/> no                                                                                                                                                  |                                                                         |                                                                     |
| PBX Dial String options | ROLM <input type="radio"/>                                                                                                                                                                                                  | Hitachi DX <input type="radio"/>                                        | 7585 <input type="radio"/>                                          |
|                         | SL-1 <input type="radio"/>                                                                                                                                                                                                  | Mitel Focus <input type="radio"/>                                       | Telex <input type="radio"/>                                         |
|                         | AT&T Dimension <input type="radio"/>                                                                                                                                                                                        | NEC <input type="radio"/>                                               | Siemens Saturn <input type="radio"/>                                |
|                         | Centrex <input type="radio"/>                                                                                                                                                                                               | AT&T System <input type="radio"/>                                       | Fujitsu <input type="radio"/>                                       |
|                         |                                                                                                                                                                                                                             |                                                                         |                                                                     |
| Default options         | Post-DN string <input type="text"/>                                                                                                                                                                                         | Dial string for return on called party refused <input type="text"/>     |                                                                     |
|                         | Pre-DN string <input type="text"/>                                                                                                                                                                                          | Dial string for return on called party busy or RNA <input type="text"/> |                                                                     |
|                         | Connect dial string on called party accept <input type="text"/>                                                                                                                                                             | Special actions on reorder tone encountered <input type="text"/>        |                                                                     |

NP0156

## NP Receptionist Worksheet 2

| Online Parameters            |                                                                                                                                                                                                                                                   |                                                                                                                                                                                  |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Day/Night                    | Start time of workday <input type="text"/> AM <input type="text"/> PM                                                                                                                                                                             | Weekend days <input type="text"/> M <input type="text"/> T <input type="text"/> W <input type="text"/> Th <input type="text"/> F <input type="text"/> Sa <input type="text"/> Su |
|                              | End time of workday <input type="text"/> AM <input type="text"/> PM                                                                                                                                                                               |                                                                                                                                                                                  |
| Dialing Plan Menu            | Dialing plan <input type="text"/> 1 <input type="text"/> 2 <input type="text"/> 3 <input type="text"/> 4 <input type="text"/> 5 <input type="text"/> 6 <input type="text"/> 7 <input type="text"/> 8 <input type="text"/> 9                       |                                                                                                                                                                                  |
|                              | Optional star* prefix dialing plan <input type="text"/> 1 <input type="text"/> 2 <input type="text"/> 3 <input type="text"/> 4 <input type="text"/> 5 <input type="text"/> 6 <input type="text"/> 7 <input type="text"/> 8 <input type="text"/> 9 |                                                                                                                                                                                  |
| Dial string and mailbox menu | System attendant's extension <input type="text"/>                                                                                                                                                                                                 | Attendant's transfer string or PBX predirectory # <input type="text"/>                                                                                                           |
|                              | Administrator's mailbox # <input type="text"/>                                                                                                                                                                                                    | Attendant's mailbox # <input type="text"/>                                                                                                                                       |
|                              | E-mail transfer string <input type="text"/>                                                                                                                                                                                                       | General greeting mailbox # <input type="text"/>                                                                                                                                  |
|                              | Pre-company name dial string <input type="text"/>                                                                                                                                                                                                 | Pre-mailbox greeting dial string <input type="text"/>                                                                                                                            |
| Dial-by-Name menu            | Last name first flag? <input type="radio"/> yes <input type="radio"/> no                                                                                                                                                                          | Single digit access? <input type="radio"/> yes <input type="radio"/> no                                                                                                          |
|                              | Exact match break? <input type="radio"/> yes <input type="radio"/> no                                                                                                                                                                             | Suppress mailbox number? <input type="radio"/> yes <input type="radio"/> no                                                                                                      |
| Allow Dial an Extension menu | Allow dial and extension for callers? <input type="radio"/> yes <input type="radio"/> no                                                                                                                                                          | Allow dial and extension for users? <input type="radio"/> yes <input type="radio"/> no                                                                                           |

NP0157

## NP Receptionist Worksheet 3

|                              |                    |                                   |                                       |                                    |                      |
|------------------------------|--------------------|-----------------------------------|---------------------------------------|------------------------------------|----------------------|
| Extension<br>Treatment Types | Index number       | <input type="text"/>              |                                       | Index name                         | <input type="text"/> |
|                              | Authorized period  | <input type="radio"/> all         | <input type="radio"/> day only        | <input type="radio"/> night only   |                      |
|                              | Authorization code | <input type="text"/>              |                                       |                                    |                      |
|                              |                    |                                   |                                       |                                    |                      |
| Extension type setup         | Screen calls?      | <input type="radio"/> yes         | <input type="radio"/> no              |                                    |                      |
|                              | RNA treatment      | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                              | Busy treatment     | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                              | Reject treatment   | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
| Extension<br>Treatment Types | Index number       | <input type="text"/>              |                                       | Index name                         | <input type="text"/> |
|                              | Authorized period  | <input type="radio"/> all         | <input type="radio"/> day only        | <input type="radio"/> night only   |                      |
|                              | Authorization code | <input type="text"/>              |                                       |                                    |                      |
|                              |                    |                                   |                                       |                                    |                      |
| Extension type setup         | Screen calls?      | <input type="radio"/> yes         | <input type="radio"/> no              |                                    |                      |
|                              | RNA treatment      | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                              | Busy treatment     | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                              | Reject treatment   | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |

NP0158

## NP Receptionist Worksheet 4

|                       |                    |                                   |                                       |                                    |                      |
|-----------------------|--------------------|-----------------------------------|---------------------------------------|------------------------------------|----------------------|
| Trunk Treatment Types | Index number       | <input type="text"/>              |                                       | Index name                         | <input type="text"/> |
|                       | Authorized period  | <input type="radio"/> all         | <input type="radio"/> day only        | <input type="radio"/> night only   |                      |
|                       | Authorization code | <input type="text"/>              |                                       |                                    |                      |
|                       |                    |                                   |                                       |                                    |                      |
| Trunk Type Setup      | Failure treatment  | <input type="radio"/> Cut through | <input type="radio"/> Tone            | <input type="radio"/> Ring         |                      |
|                       | Redial menu to use | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                       | Reject treatment   | <input type="radio"/> Redial      | <input type="radio"/> Assistance      | <input type="radio"/> Disconnect   |                      |
|                       |                    |                                   |                                       |                                    |                      |
| Trunk Treatment Types | Index number       | <input type="text"/>              |                                       | Index name                         | <input type="text"/> |
|                       | Authorized period  | <input type="radio"/> all         | <input type="radio"/> day only        | <input type="radio"/> night only   |                      |
|                       | Authorization code | <input type="text"/>              |                                       |                                    |                      |
|                       |                    |                                   |                                       |                                    |                      |
| Trunk Type Setup      | Failure treatment  | <input type="radio"/> Cut through | <input type="radio"/> Tone            | <input type="radio"/> Ring         |                      |
|                       | Redial menu to use | <input type="radio"/> Redial menu | <input type="radio"/> Assistance only | <input type="radio"/> Mailbox only |                      |
|                       | Reject treatment   | <input type="radio"/> Redial      | <input type="radio"/> Assistance      | <input type="radio"/> Disconnect   |                      |
|                       |                    |                                   |                                       |                                    |                      |

NP0159

## 1.4.13.7 Procedures (Text Console)

## 1.4.13.7.1 NP Receptionist Configuration

This procedure sets the values for parameters that NP Receptionist uses to process calls and to interact with mailboxes. Set the parameters by entering the values that you recorded on NP Receptionist Worksheets 2, 3, and 4 (see [NP Receptionist Worksheets](#)).

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System**.
2. Do one of the following:
  - Select **(F) Modify Inactive Configuration** if you just made a change through the Offline Menu without activating it
  - Otherwise, select **(E) Modify Active Configuration**.
3. Select **(G) Group Selected** and enter the **number** of the line group (1-24) for NP Receptionist.

### Set PBX Dialing Plan Options

1. Select **(M) Modify Application** and then select **(R) NP Receptionist Menu**.
2. Select **(D) Dialing Plan Options**.
3. To change the dialing plan, if required, select **(P) Dialing Plan** and then change the values to match Worksheet 2.
4. If the onsite PBX requires that digits be deleted for some numbers in the dialing plan, configure the Delete Digits table by selecting **(D) Delete Digits** and changing values to match those on Worksheet 2.
5. If the onsite PBX requires offsets in the dialing plan, define the offset table by:
  - a. selecting **(F) Offset Table** and then **(D) Define Table**.
  - b. at the **Define table number** prompt, enter the **first digit**(before any deletions) of the extensions to which the offset will be added.
  - c. at the **Table Offset =** prompt, enter the **offset value** for this table.
  - d. repeat this step as required. The Offset Table menu is displayed again each time you enter an offset value.
6. To change the Timeout for Receipt of first DTMF Digit value, if required, select **(T) Timeout for Receipt of First Digit** and enter the **newtimeoutvalue** from your worksheet.
7. To change the PBX Console Day Access Code, if required, select **(Y) PBX Console Attendant Day Access Code** and enter the **newaccess codevalue** from your worksheet.
8. To change the PBX Console Night Access Code, if required, select **(Z) PBX Console Attendant Night Access Code** and enter the **newaccess codevalue** from your worksheet.

## 9. Exit to the NP Receptionist menu.

To set flow options:

1. In the NP Receptionist Menu, select **(F) Flow Options**.
2. To change Mailbox Message Prompt from its current setting (Greeting or Name), select **(M) Mailbox Message Prompt Greeting/Name** and enter the option (G or N) you want.
3. To change the initial welcome greeting to a short dial tone to prompt the operator that the NP Receptionist is ready to receive the extension number, select **(P) PBX Console Operation**, and then select **Y** to enable, or **N** to disable.
4. Exit to the NP Receptionist menu.

To set PBX Dial String Definitions:

1. From the NP Receptionist menu, select **(P) PBX Dial String Definitions** and enter the **letter** that corresponds to the PBX at the installation site OR press **Z** for default PBX options.
2. At the **Initialize to Default Values** prompt, select **Y** to keep the default values, or **N** to change one or more values. You can change the values for any of the following parameters to the new values on your worksheet:
  - (A) Post Directory number dial string
  - (B) Pre Directory number dial string / Attendant xfer string
  - (C) Connect Dial string on Called Party Accept
  - (E) Dial string for Return on Called Party Refused
  - (F) Dial string for Return on Called Party Busy
  - (G) Special actions on Reorder Tone Encountered
  - (H) Dial string for Return on Called Party RNA
3. To change a value, enter the new value from your worksheet at the DEFAULT prompt.
4. Exit to the NP Receptionist Menu.

To set Extension Treatment Types

1. In the NP Receptionist menu, select **(T) Trunk/Extension Treatment Types**.
2. Select **(C) Current Index Number** and enter the **index number** of an extension treatment type on Worksheet 3.
3. Select **(N) Name of Current Index** and enter the **name** that corresponds to the index number you entered in the previous step.

4. To limit mailbox access to either days or nights/weekends, if required, select **(P) Authorized Periods** and enter **A** for any, **D** for day only, or **N** for night and weekend only.
5. To require users to have an authorization code to use mailboxes with the current treatment type, select **(A) Authorized Code** and then enter the **codes** shown on your worksheet.
6. Exit to the NP Receptionist menu and then select **(T) Trunk/Extension Treatment Types**.
7. To change values, select **(E) Extension Type Setup** and enter the **values** for any or all of the options that follow, as applicable.
  - Select **(S) Screen Calls?** and enter **Y** to announce the caller's name to the called party to accept or reject, or **N** to connect the call after greeting the called party.
  - Select **(R) RNA Treatment?** and then select **R** to go into the Redial Menu, **A** to call the attendant, or **M** to drop into NuPoint Voice to take a message.
  - Select **(B) Busy Treatment?** and then select **R** to go into the Redial Menu, **A** to call the attendant, or **M** to drop into NuPoint Voice to take a message.
  - Select **(J) Reject Treatment?** and then select **R** to go into the Redial Menu, **A** to call the attendant, or **M** to drop into NuPoint Voice to take a message.
8. Exit to the Trunk/Extension Treatment Types Menu to save the values.
9. You can specify where the caller is to be routed after a Busy or Ring-No-Answer condition, when the caller does not enter any new instruction by selecting **(D) Redial Menu to Use** and then selecting:
  - **M** to call extension's mailbox in 3 seconds
  - **A** to call the PBX attendant in 6 seconds
  - **D** to disconnect from receptionist after 6 seconds
  - **R** means to redial the call
10. Exit to the Receptionist Menu to save your changes.
11. Repeat steps 20 to 29 of this section until you have configured all the extension treatment types you need.
12. Exit to the Configuration Main Menu.
13. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

To set Trunk Treatment Types

1. In the NP Receptionist menu, select **(T) Trunk/Extension Treatment Types**.
2. Select **(C) Current Index Number** and enter the **index number** of a trunk treatment type on Worksheet 4.
3. Select **(N) Name of Current Index** and enter the **name** that corresponds to the index number you entered in the previous step.

4. To limit mailbox access to either days or nights/weekends, if required, select **(P) Authorized Periods** and then select **A** for any, **D** for day only, or **N** for night and weekend only.
5. To require users to have an authorization code to use mailboxes with the current treatment type, select **(A) Authorized Code** and then enter the **code** shown on your worksheet.
6. To change connect criteria or failure treatment values, if required,
  - select (T) Trunk Type Setup and enter Y to change the index number to trunk type.
  - select (C) Connect Criteria? and enter C to tell NuPoint Voice to assume that the connection is successful, T to expect a dial or modem tone, or R to expect a ring back tone.
  - select (F) Failure Treatment? and enter R to go into the Redial Menu, A to call the attendant, M to drop into NuPoint Voice to take a message.
7. Exit to the Trunk/Extension Treatment Types Menu to save the values.
8. If required, specify where the caller is to be routed after a Busy or Ring No Answer condition, when the caller does not enter any new instruction by selecting **(D) Redial Menu to Use** and then entering **M** to call extension's mailbox in 3 seconds, **A** to call the PBX attendant in 6 seconds, **D** to disconnect from Receptionist after 6 seconds, or **R** to redial the call.
9. Exit to the NP Receptionist menu to save values.
10. Repeat steps 33 to 41 until you have configured all the trunk treatment types you need.
11. Exit to the Configuration Main menu.
12. If you chose to modify the Inactive Configuration in step 2, you need to [Activate the Inactive Configuration](#) before your changes appear.

### 1.4.13.7.2 NuPoint Voice Configuration

This topic summarizes the steps necessary to configure the messaging functions of NP Receptionist:

| Procedure                                                                                                                                                                                                                           | Reference                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <p>Schedule company greetings. Use the Day/Night Menu to:</p> <ul style="list-style-type: none"> <li>• Designate the start of the work day</li> <li>• Designate the end of the work day</li> <li>• Designate the weekend</li> </ul> | Schedule Company Greetings |




| Procedure                                                                                                                                                                                                                                                                                                                                                                                | Reference                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <p>Establish a dialing plan. If no star prefix is desired, use the Dialing Plan Menu. If a star prefix is desired, use the Star Prefix Dplan Menu to:</p> <ul style="list-style-type: none"> <li>Specify the trigger digit if Dial-by-Name is desired</li> </ul> <p>OR</p> <ul style="list-style-type: none"> <li>Specify the signal digit if off-system messaging is desired</li> </ul> | Configure a Dialing Plan                     |
| If required, enable Call Placement                                                                                                                                                                                                                                                                                                                                                       | Enable Call Placement                        |
| If required, configure for transfer to a system attendant.                                                                                                                                                                                                                                                                                                                               | Transfer to a System Attendant               |
| Define an administrator mailbox if you require:                                                                                                                                                                                                                                                                                                                                          | Define an Admin Mailbox                      |
| <ul style="list-style-type: none"> <li>Master distribution lists</li> <li>Company greetings and alternate greeting</li> <li>Phone administration</li> </ul>                                                                                                                                                                                                                              |                                              |
| Define an attendant mailbox if you require:                                                                                                                                                                                                                                                                                                                                              | Define an Attendant Mailbox                  |
| <ul style="list-style-type: none"> <li>Collecting or preventing unaddressed messages</li> <li>Message of the day</li> <li>Site tutorial</li> </ul>                                                                                                                                                                                                                                       |                                              |
| If required, prevent unaddressed messages                                                                                                                                                                                                                                                                                                                                                | Prevent Unaddressed Messages                 |
| If required, enable multiple messages for outside callers.                                                                                                                                                                                                                                                                                                                               | Enable Multiple Messages for Outside Callers |
| Set a default language for prompts, if other than English.                                                                                                                                                                                                                                                                                                                               | Language Prompts                             |

| Procedure                                                                                                                                                                                                                                                                                                                                                   | Reference                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <p>If required, enable Dial-by-Name:</p> <ul style="list-style-type: none"> <li>• Code the dialing plan with an A in the digit position that triggers a prompt about spelling the name.</li> <li>• Set the Dial-by-Name parameters.</li> <li>• Include feature bit 92 (user will be in Dial-by-Name database) in the FCOS assigned to mailboxes.</li> </ul> | Enable the Dial-by-Name Function                    |
| Configure the mailbox passcode parameters.                                                                                                                                                                                                                                                                                                                  | Configure Mailbox Passcode Parameters by Line Group |
| Verify that the configuration is correct.                                                                                                                                                                                                                                                                                                                   | Verify Configuration Parameters                     |
| If you chose the inactive configuration at the beginning of this procedure, activate the inactive configuration to make the parameter settings take effect.                                                                                                                                                                                                 | Activate the Inactive Configuration                 |

### 1.4.13.7.3 Create a Single-Digit Access Menu

This procedure configures a single-digit access menu. Use this procedure to give callers quick access to frequently-called departments or persons.

1. Using the following tree structure, create the required mailboxes. See [Configure a Tree Mailbox](#).

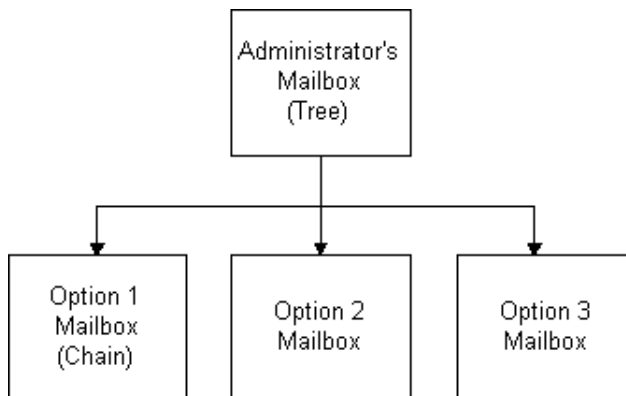

2. Assign FCOS **15** to the administrator's mailbox. Configure the other mailboxes as subordinate mailboxes in a tree configuration; if one of the options allows the user to dial an extension or dial by name, assign FCOS **8** to the mailbox.

Sample subordinate mailboxes:


- **Option 1**- Dial an extension or dial by name
- **Option 2**- Technical Support
- **Option 3**-Job Hotline

## 1.4.13.7.4 Set Up NP Receptionist Test Configuration

This topic summarizes the procedures for testing NP Receptionist configuration. The test setup uses three sets, designated as Station A, Station B, and Station C. The test Console Attendant is the actual Attendant (if any) who provides assistance to callers who “wait,” in response to the prompt, “Please enter an extension number, or wait for assistance.”

To set up telephone sets:

1. Set up three telephone sets, Station A, Station B, and Station C, as shown.
2. Record the **extension numbers** of Stations B and C. You will be associating mailboxes with these telephones.
3. If required, set up a Console Attendant phone.
4. Connect a PBX line to the NP Receptionist port.
5. Record the Reception **extension number**.

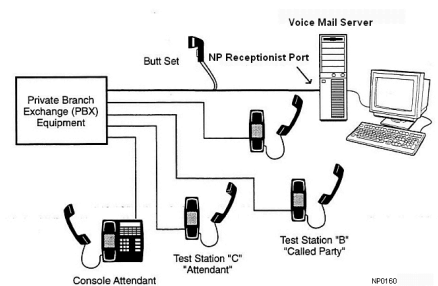

To create mailboxes for tests:

1. Test NP Receptionist setup: greetings and assistance call processing, dialing plan and mapping of mailboxes to extension, call screening, reorder tone (see [Test NP Receptionist Setup](#)).
2. [Test mailbox treatment types](#).
3. [Test intermediate attendant call processing](#).

## 1.4.13.7.5 Test Mailbox Treatment Types

Use the [test setup](#) and this test plan to verify that your extension and trunk treatment types process calls correctly in the following situations:

- Busy
- Ring No Answer (RNA)
- Call screening

The test plan also tests whether your trunk treatment types process calls correctly in the following situations:

- Successful connection
- Failure treatment on Busy

## Busy

1. Take Station B (the “Called Party”) off-hook.
2. Dial NP Receptionist from Station A (the “Calling Party”). Be sure that Receptionist-II answers with the appropriate greeting.
3. Enter the **mailbox number** of Station B. NP Receptionist says, “I will ring Called Party. Who may I say is calling? (if the treatment type has call screening) Please hold.”
4. Listen on the butt set for:
  - Pre-DN string dialing
  - Extension number dialing
  - Post-DN string dialing
  - A busy tone
  - Return string
  - NP Receptionist’s response to the failure condition

## Ring No Answer (RNA)

1. Dial NP Receptionist from Station A. Be sure that NP Receptionist answers with the appropriate greeting.
2. Enter the **mailbox number** of Station B. NP Receptionist says, “I will ring Called Party. Who may I say is calling? (if the treatment type has call screening) Please hold.”
3. Listen on the butt set for:
  - Pre-DN string dialing
  - Extension number dialing
  - Post-DN string dialing
  - Ringing - Count the number of rings!
  - Return string
  - NP Receptionist’s response to the failure condition
4. If the treatment type does not perform as expected (for example, the caller was forced to assistance when a redial menu was desired), go back into the configuration program and change the treatment type programming.

## Test Failure Test

**Note:** This test can only be done for trunk treatment types with connect criteria T (Tone) or R (Ringing).

1. Busy out Trunk B (the “Called Party”).
2. Note the proper connect criteria for the treatment type:
  - **C** = Cut through (All calls that are dialed are considered successful.)
  - **T** = Tone (A call is successful if NP Receptionist encounters a dial tone or computer tone after dialing the number)
  - **R** = Ringing (NP Receptionist considers the call successful only if it receives ringing in response to dialing the number)

Be sure the trunk number that you are dialing can answer with the response that matches the connect criteria.

3. Dial NP Receptionist Trunk A. Check that NP Receptionist answers with the appropriate greeting.
4. Enter the number of Mailbox B.
5. NP Receptionist says, “I will ring Called Party. Please hold.”
  - Listen on the butt set for:
    - a. Pre-DN string dialing
    - b. Mailbox’s extension number dialing
    - c. Post-DN string dialing
6. If the failure treatment does not perform as expected, go back into the configuration program and adjust the treatment type programming.

## 1.4.13.7.6 Test Intermediate Attendant Call Processing

Use the [test setup](#) and this procedure to determine if NP Receptionist processes calls to the Attendant’s extension number.

1. Take Station B (the “Called Party”) off-hook.
2. Dial NP Receptionist from Station A (the “Calling Party”). Be sure that NP Receptionist answers with the appropriate greeting.
3. Enter the **mailbox number** of Station B. NP Receptionist says, “I will ring Called Party. Whom may I say is calling? (if there is call screening) Please hold.”
4. When NP Receptionist returns to Station A, choose the assistance option.

**5.** Listen on the butt set for:

- Pre-DN string dialing, including the switch hook flash
- Attendant's extension number dialing
- Post-DN string dialing (Menu 8)
- Ringing

**6.** Answer station C. NP Receptionist should announce, "Hello. You have a call for Called Party."

- If Mailbox B's treatment type specifies call screening, NP Receptionist will issue the call screening prompts. Accept the call.

**Troubleshooting**

- Check switch hook flash timing. If the NuPoint Voice program does not put Station A on hold before dialing, the switch hook flash timing may be too short; if Station A is disconnected almost immediately, the switch hook flash timing is too long.
- If a dial string in step 6 fails, go back into the [configuration program](#) and adjust the dial string programming.
- If the treatment type does not perform as expected, go back into the [configuration program](#) and change the treatment type.

## 1.4.13.7.7 Test the NP Receptionist Setup

Use the [test setup](#) and the procedures in this section to test NP Receptionist setup for processing calls:

- Greetings and Assistance Call Processing
- Dialing plan and mapping of mailboxes to extensions
- Call screening
- Reorder tone

**Test Greetings and Assistance Call Processing**

1. Call into the NP Receptionist main number from Station A. Check that the proper greeting, Day or Night, is played for the time period.
2. Allow the call to time out (wait).

3. If a PBX Console Attendant's Access Code is configured for the time period, listen on the butt set for:
  - Pre-DN string dialing, including the switch hook flash
  - PBX Console Attendant Day Access Code dialing
  - Post-DN string dialing
  - Answer
4. If no PBX Console Attendant's Access Code is configured, but the line group does have an Attendant's Mailbox:
  - The wait prompt, if enabled, should say "Please enter an extension number or wait." (NP Receptionist should automatically eliminate the prompt for assistance).
  - Upon timeout, you should be prompted to "Please leave your name, the name of the person you are calling, and a message."
5. If neither a Console Attendant nor an Attendant's Mailbox is configured, be sure that the Wait Prompt is disabled.
6. Repeat steps 1 and 2 for the other time period, to be sure that greetings and assistance call processing are correct for both day and night/weekend hours.

## Test Dialing Plan

1. Refer to [NP Receptionist Worksheet 2](#).
2. For each leading digit that does not have a zero in the dialing plan, call at least one extension with the correct number of digits, and one extension that is incorrect, to be sure that NP Receptionist accepts the valid extension number, and rejects the invalid one.
3. When the dialing plan specifies "V," for variable length, test several lengths to be sure that they are accepted.
4. Enter one extension number for each group of extensions that show a zero in the dialing plan. NP Receptionist should reject all such extensions.
5. Repeat steps 2 through 4 for the other time period, to be sure that greetings and assistance call processing are correct for both day and night/weekend hours.

## Test Mapping

1. If delete digits or offsets are set for any group of extensions, enter the number of the "called party" test extension into the extension field of a mailbox that will be reached by this mapping. If the number is mapped correctly, the test extension will ring. Follow this procedure for each group of mailboxes with leading digits that specify mapping.
2. Repeat the procedure for the other time period.

## Test Call Screening: Call Accepted

1. Dial NP Receptionist from Station A. Be sure that NP Receptionist answers with the appropriate greeting.
2. Enter the mailbox number of Station B.
3. When NP Receptionist says, "I will ring [called party]. Whom may I say is calling?", say your name. NP Receptionist says, "Please hold."
4. Leave Station A off hook, and listen on the butt set for:
  - Pre-DN string dialing
  - Extension number dialing
  - Post-DN string dialing
  - Ringing - Count the number of rings!
5. Answer the call at Station B. Listen for "Hello, you have a call from [your name]. Press A to accept the call, R to refuse it."
6. Press A. Listen on the butt set while NP Receptionist dials the Connect dial string on called party accept (Menu 8), then releases the call. Adjust this string if Station A fails to connect with Station B.

## Test Call Screening: Call Rejected

1. Dial NP Receptionist from Station A. Be sure that NP Receptionist answers with the appropriate greeting.
2. Enter the mailbox number of Station B.
3. When NP Receptionist says, "I will ring Called Party. Whom may I say is calling?" say your name. NP Receptionist says, "Please hold.???"
4. Leave Station A off hook, and listen on the butt set for:
  - Pre-DN string dialing
  - Extension number dialing
  - Post-DN string dialing
  - Ringing - Count the number of rings!
5. Answer the call at Station B. Listen for "Hello, you have a call from [your name]. Press A to accept the call, R to refuse it."
6. Press R, then hang up the phone at Station B. Listen on the butt set while NP Receptionist dials the Dial string for return on called party refused. Adjust this string if NP Receptionist fails to return to Station A.
7. Listen at Station A as NP Receptionist says "I'm sorry [your name] did not answer."

The system then acts according to the Reject treatment type for Station B (play a redial menu, force to assistance, or force to the mailbox to leave a message).



8. If the treatment type does not perform as expected (for example, the caller was forced to assistance when a redial menu was desired), go back into the configuration program, and change the Reject treatment type programming.

### Test Reorder Tone

1. Call into NP Receptionist from Station A.
2. Dial an invalid extension number that conforms to the PBX dialing plan (or an extension that is set to “do not disturb,” if the PBX gives reorder tone on do not disturb).
3. Listen on the butt set to the reorder tone.
4. NP Receptionist should return to Station A, and play the prompt that is appropriate for the “Special actions on reorder tone encountered” dial string.

## 1.4.13.7.8 Add NP Receptionist Extensions

Under normal circumstances, we recommend that you leave the NP Receptionist table undefined, but, in unusual circumstances, you can set up the table to prevent NP Receptionist ports from calling each other.

This table will identify that the defined extension that is forwarding back in to the pilot is one of the Receptionist extension numbers. This will then activate the use of the Receptionist dial string, which sends a +#+ to the calling port. The call will then properly connect to the user's mailbox where they will hear the mailbox greeting within three seconds. The treatment type does not come into effect.

#### Note:

- If this table is not defined, then under the above conditions, the station will ring four times (this is switch dependent), and then forward to the pilot number. The caller is then held for 14 to 18 seconds until they hear the mailbox user's name and the treatment type that is defined for the mailbox.
- Defining a non-Receptionist extension in this table causes all calls to that extension to be dropped.

To configure NP Receptionist Extensions:

1. From the Main menu, select **(S) System Maintenance** and then **(B) NP Receptionist Extensions**.
2. You can add or delete extensions from here.

## 1.4.14 NP WakeUps

### 1.4.14.1 NP WakeUp - Description

**Note:** This feature must be configured using the **Text Console**.

The NP WakeUp optional feature provides automatic wakeup calls. These calls can be set either at the server or Text console by the system administrator or at a telephone by the user.

Wakeup call requests are stored in the mailbox and in the Wakeup Administrator. In the Wakeup Administrator, a timer checks every minute for wakeup requests for all mailboxes, then delivers all wakeup requests that have a time less than the current time. When a daily call is completed, the system increments the request by 24 hours and adds it to the end of the list.

Standard NP Wakeup, enabled by Feature Classes of Service (FCOS) feature bit 015, allows the user to set up multiple wakeup calls. These can be one-time only, or on a long-term basis every day, Monday through Friday, or Saturday and Sunday. Users can also cancel the calls at any time.

The standard NP Wakeup telephone user interface (TUI) is located in the User Options menu, choice A, Automatic wakeup.

Enhanced NP Wakeup, designed for hospitality settings and enabled by FCOS feature bit 287, allows the user to set up one daily call. The system administrator can configure a snooze function, as well as how many times and how often the server can repeat a call that is not answered. If the user chooses snooze (presses any key within 10 seconds) or the call is ring no answer or busy, the request will be retried at the configured interval for the configured number of times.

The enhanced NP Wakeup TUI is located at the Call Schedule Options menu, choice **W**, Wakeup.

### 1.4.14.2 Configuration (Text Console)

#### 1.4.14.2.1 Configuring NP WakeUp

When configuring NP WakeUp, remember that like paging, NP WakeUp requires dedicated outdial ports.

For both standard and enhanced wakeup, check that the value for the LCOS parameter, Maximum wakeups per billing, is large enough to accommodate the users' needs. Each time a user sets a wake up call, the billing counter is incremented, even if the user changes or cancels the call before the server places the call.

**Note:**

Standard NP WakeUp allows multiple calls on selected days in each mailbox.  
Enhanced Auto WakeUp allows one call scheduled for every day in each mailbox.

**Standard NP WakeUp**

1. Install the NP WakeUp [optional feature](#).
2. [Customize an FCOS](#) to include feature bit **015** (NP WakeUp).
3. [Define a pager](#) with a dial string for the PBX at the site. This dial string will be combined with the wake up number for the mailbox to make the complete dial string.
4. To configure NP WakeUp in a mailbox, [assign the FCOS](#) that includes NP WakeUp.

**Enhanced NP WakeUp**

Follow these steps at the server console:

1. Install the NP WakeUp optional feature.
2. Define an [administrative mailbox](#) that will receive notification of failed wake up calls.
3. A wake up call fails if it is not answered within the allowed number of retries. You cannot delete the administrative mailbox unless you first set the notification function to another mailbox.
4. Define an FCOS that includes feature bit 287, Enhanced Auto WakeUp.

**CAUTION:**

CAUTION: Do not use feature bit 015 with 287: they are not compatible.

5. Define a pager with a dial string for the PBX at the site. This dial string will be combined with the wake up number for the mailbox to make the complete dial string.
6. Set up the mailbox(es) for Enhanced Auto WakeUp:
  - Assign the FCOS that includes Enhanced Auto WakeUp.
  - At the **New wakeup Parameters?** prompt, enter **Y**.
  - At the **Define wakeup for this mailbox?** prompt, enter **Y**.
  - At the **New wakeup pager access type** prompt, enter the pager access **code** defined in step 3.
  - At the **New wakeup number** prompt, enter the phone **number** to dial for wake up calls, typically the extension for the mailbox.
7. From the Main menu, select **(S) System maintenance** and then **(A) NP WakeUp**.

8. In the Wakeup menu, select **(G) General wakeup parameters**, then enter values for these parameters:

- **Enter the number of wakeup attempts:** Set the **number** of times to try the wake up call; default is 5 tries.
- **Enter the number of minutes between wakeup attempts:** Set the **time** between wake up tries; default is 5 minutes.
- **Enter the number of snoozes:** Set the **number** of times the user can select snooze for a call; default is 3 snoozes.
- **Enter the number of minutes between snoozes:** Set the **time** between snoozes; default is 9 minutes.
- **Mailbox in which failure notification to be delivered:** Enter the mailbox **number** that the wake up administrator can check for failures; typically, this is the administrator's mailbox; no default.
- **Enter the number of seconds to pull back the call;** default is 60.

9. Exit to the System Maintenance menu.

To manage wake up calls from the server console:

1. From the Main menu, select **(S) System maintenance** and then **(A) NP WakeUp**.

2. In the Wakeup menu, select one of these options:

- **(S) Schedule a wakeup call:** At the prompts, enter the **number** of the mailbox to receive the call, then enter the **time** as hh:mm with am or pm.
- **(C) Cancel wakeup calls:** At the prompt, enter the **number** of the mailbox to cancel scheduled calls
- **(L) List wakeup calls:** At the prompt, enter the **number** of the mailbox to view scheduled calls.
- **(R) Review wakeup calls:** At the prompt, enter the **number** of the mailbox to view scheduled calls; you must choose to Keep or Delete each call.
- **(F) List future deliveries:** At the prompt, enter the **number** of the mailbox to view scheduled calls.

3. Exit to the System Maintenance menu.

### 1.4.14.3 NP WakeUp - User Interface

#### Standard TUI

1. At the telephone, log in to the mailbox and press the **U** key to reach the User Options menu.
2. At the User Options menu, press the **C** key to reach Call Schedule Options.
3. At the Call Schedule Options menu, press the **W** key to reach NP WakeUp.

4. At the NP WakeUp menu, schedule or cancel calls.
5. To schedule a call, press the **S** key, then at the Prompts, enter the time for a wakeup call: two digits for the hour, two digits for the minute, then press the **A** key for a.m. or the **P** key for p.m.
  - To make this a daily call, press the **D** key.
  - To cancel the call, press the **C** key.
  - To change the time, press the **R** key.
  - To cancel all calls, press the **C** key.
  - To schedule another call, repeat step a.
  - To exit to the User Options menu, press the **X** key.

## Enhanced TUI

1. At the telephone, log in to the mailbox and press the **A** key to reach NP WakeUp. If a call is already scheduled, a Prompt announces it.
2. To keep a scheduled call, press the **K** key.
3. To delete a scheduled call, press the **D** key.
4. To set a new call (this automatically replaces any scheduled call), press the **A** key.
5. Follow the Prompts to schedule a call. Enter the time for the call: two digits for the hour, two digits for the minute, then press the **A** key for am or the **P** key for pm.

The call will be made daily at this time until the user changes or deletes the call through the TUI or the administrator changes or cancels the call at the console.

### Note:

If the user does not set AM or PM, the server will call at the next occurrence of that time. For example, if the user sets a call for "8:00" at 9 PM, the server will call at 8:00 AM. If the user sets a call for "8:00" at 7 PM, the server will call at 8:00 PM.

- To exit the mailbox, press the **X** key.

## 1.4.14.4 Call Records

Wakeup calls will be entered in the Event Recorder for these reasons:

- The user answered the call.
- The user chose snooze.
- The user did not answer, but the system allows more retries.

If the call is not answered and all snoozes and retries are used, the system records the failure in the Error Log and sends a message to the WakeUp administrator's mailbox.

For more information about Event Recorder, see the Troubleshooting section of the *NuPoint Unified Messaging Technician's Handbook*.

## 1.4.15 PMS Integration

### 1.4.15.1 Overview of PMS Integrations

**Note:**

- The PMS feature is not supported for MiCollab NuPoint systems.
- Only one PMS system can integrate with NuPoint at one time.
- Direct physical serial connections to Virtual NuPoint (vNuPoint) systems are not supported.

Property Management Systems (PMS) are computerized systems used to manage guest bookings, online reservations, telephone systems and other amenities. PMS systems can integrate with NuPoint UM to provide automated telephone and voice mail services for hotel guests. Integrated PMS systems communicate with NuPoint UM using check-in and check-out messages to alter the state of NuPoint UM voice mail mailboxes. Default check-in/check-out state changes are configurable by the system administrator.

The PMS feature is installed with the **NPMHospitality** blade. This is an optional feature that needs to be added to the AMC record for the site before the blade can be installed. The option name on the AMC is "NuPoint Messaging: PMS - Hospitality Integration". PMS configuration must be performed using the Web Console.

PMS connects with the NuPoint system in one of two ways:

- **Serial connection:** The PMS connects to a physical serial port on a NuPoint UM system.
- **IP connection:** Internet connection. This can be accomplished directly, or by using a Serial-to-IP converter.

#### Using a Serial-to-IP Converter

If the PMS system only has a serial connection, it can still be connected to NuPoint UM via IP using the Precidia iPocket 232 converter. The iPocket converter is also used when the NuPoint UM hardware has no available serial ports.

To be compatible with NuPoint UM, your PMS must emulate one of the following PMS systems:

- EECO
- HIS
- Hyatt/Logistix/Encore
- Marriott

There are three basic steps required for installation of a PMS integration:

1. **Install** the PMS Integration [optional feature](#) on the NuPoint Voice server. Note that NuPoint Voice must be rebooted after the installation.
2. **Link** the NuPoint UM Voice server and the PMS. The PMS can be connected directly to an IP port or a serial port on the NuPoint UM server, or to the Precidia iPocket 232 serial-to-IP converter.
3. **Configure** the integration to meet the needs of the specific site. Configuration changes are done online and take effect within one minute, making the integrations very flexible.

## 1.4.15.2 Installation using Physical Serial Port

### 1.4.15.2.1 Installation Using a Physical Serial Port

If your server has two physical serial ports, we recommend that you connect the PMS system to **COM Port 2**. For systems with only one physical serial port, it is necessary to reprogram **COM Port 1** from its default assignment for the NuPoint UM PPP service (an external dial-up modem service).

#### Note:

- By default, the NuPoint UM server always displays two serial port choices. You must verify the actual existence of serial ports before programming.
- Virtual NuPoint (vNuPoint) systems do not support direct serial port connections.

To connect the PMS to a physical serial port on the single-node NuPoint UM system:

1. Connect a null modem serial cable between the PMS COM Port and a NuPoint UM COM Port. Make note of which NuPoint UM COM port you use.
2. Log in to the Web Console.
3. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.

4. When prompted to **Duplicate Active Configuration**, click **Yes**.
5. In the navigation tree, click **External Applications**.
6. Do one of the following:
  - **To connect to COM1:**
    - Click **Serial Port 1**. You are warned that the PPP service will be disabled.
    - Click **OK**.
    - In the **Application** list, select the appropriate application (**Hyatt,EECO, HIS, or Marriott**). This selection automatically sets the appropriate [serial port settings](#).
  - **To connect to COM2:**
    - Click **Serial Port 2**.
    - In the **Application** list, select the appropriate **PMS Integration** option for your system. This selection automatically sets the appropriate [serial port settings](#).
7. Click **Save**.
8. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.4.15.2.2 To Restore NuPoint UM PPP Service

If you disabled the NuPoint UM PPP service to use COM1 for a serial connection, and later, you decide to use COM1 for PPP again, you can restore the PPP service as follows:

1. Remove the null modem serial cable between the PMS serial port and the NuPoint UM COM1 port.
2. Connect a serial-based dial-up modem to the NuPoint UM COM1 port.
3. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
4. When prompted to **Duplicate Active Configuration**, click **Yes**.
5. In the navigation tree, click **External Applications** and then click **Serial Port 1**.
6. In the **Application** list, select **NP-UM PPP Service**.
7. Click **Save**.
8. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.4.15.2.3 Serial Port Settings

The following table lists the required Serial Port settings for PMS integrations:



| Setting  | Hyatt-Encore | HIS         | EECO | Marriott    |
|----------|--------------|-------------|------|-------------|
| Baud     | 1200 Asynch  | 2400 Asynch | 1200 | 1200 Asynch |
| Bits     | 10           | 10          | 10   | 11          |
| - Start  | 1            | 1           | 1    | 1           |
| - Data   | 7            | 7           | 8    | 7           |
| - Parity | 1            | 1           | 0    | 1           |
| - Stop   | 1            | 1           | 1    | 2           |
| Parity   | Even         | Even        | -    | Even        |

## 1.4.15.3 Installation Using IP Port

### 1.4.15.3.1 Configure IP Connectivity

Depending on your system setup, you configure NuPoint UM in one of the following modes:

- **Client mode:** configure the NuPoint UM system in this mode if your PMS system is set up to listen for incoming connections. (Use this mode when using Precidia serial-to-IP converter.)
- **Server mode:** configure the NuPoint UM system in this mode if your PMS system needs to connect to the voice mail system.

**Note:**

If you are using a serial-to-IP converter, you must configure PMS iPocket solutions with NuPoint UM in IP PMS Server Mode.

### Configuring Client Mode

Before you begin, ensure that:

- the PMS system has a valid IP address for the IP network, and is programmed to listen on a local PMS TCP port
- the Precidia iPocket (if required) is programmed with the correct IP address and port

To configure NuPoint UM in client mode:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **External Applications** and select the IP port (1,2,3, or 4) to configure.
4. In the **Application** list, select the appropriate PMS Integration type for your system.

5. In the **Connection Mode** list, select **Client**.
6. In the **IP Address** field, enter the IP address of the remote PMS system, OR the Precidia iPocket232 if used.
7. In the **Server Port Number** field, enter the remote PMS port number, OR the virtual port number you configured as the local and remote port number when configuring the Precidia iPocket232.
8. Click **Save**.
9. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).
10. The PMS administrator must program the PMS system to connect to the NuPoint system at the NuPoint UM IP Address on the PMS TCP port.
11. You can now configure PMS integration options that will change NuPoint Mailbox states when PMS check-in/check-out messages are received.

After the PMS system connects, messages are exchanged between NuPoint UM and the PMS system to perform PMS-related actions.

## Configuring Server Mode

Before you begin, ensure that:

- the PMS system has a valid IP address for the IP network, and is set up to connect to a remote IP address and port on the NuPoint UM system
- NuPoint UM is connected to the IP network and configured with a valid IP address in MSL
- all integration components are licensed and installed

To configure NuPoint UM in server mode:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**. The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **External Applications** and select the IP port (1,2,3, or 4) to configure.
4. In the **Application** list, select the appropriate integration type (**Hyatt,EECO**or**HIS**).
5. In the **Connection Mode** list, ensure that **Server** is selected.
6. In the **Server Port Number** field, enter the port number to use as the PMS TCP port.
7. Click **Save**.
8. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

9. The PMS administrator must program the PMS system to connect to the NuPoint system at the NuPoint UM IP Address on the PMS TCP port.
10. You can now configure PMS integration options that will change NuPoint Mailbox states when PMS check-in/check-out messages are received.

After the PMS system connects, messages are exchanged between NuPoint UM and the PMS system to perform PMS-related actions.

### 1.4.15.3.2 Installation Using a Serial-to-IP Converter

Follow this procedure if you are connecting the PMS to the NuPoint Unified Messaging server using a Precidia iPocket232:

1. [Install and configure the Precidia iPocket232.](#)
2. [Configure IP Connectivity between the NuPoint UM server and the iPocket232.](#)
3. Connect the Precidia iPocket232 to the PMS unit.

### 1.4.15.3.3 Install and Configure the Precidia iPocket232

The RS232-to-IP serial port converter, Precidia Technologies iPocket232 (provided by the distributor and its resellers), is required to connect the customer's PBX to the customer's Local Area Network (which, in turn, connects to the NuPoint UM server).

#### Installing the Precidia iPocket232 Converter

To install the Precidia iPocket232:

1. Connect the Ethernet cable between the Ethernet port on the Precidia iPocket232 and the network.
2. Connect one end of the RS-232 serial cable to the DB-9 serial connector on the Precidia iPocket232 and apply power.
3. Connect the other end of the serial cable to the PC COM port.

#### Configuring the Precidia iPocket232 Converter

1. Launch a terminal program on the PC (such as Hyperterminal).
2. Configure the following settings in the Hyperterminal window:
  - 8N1 (eight bits, no parity, one stop bit)
  - 9600 baud
3. Press and hold the **reset** button on the Precidia iPocket232 until the Configuration screen appears.

**4. Select 1) Ethernet Settings.**

- Select **A) IP Address** and enter the IP address of the Precidia iPocket 232.
- Select **B) Subnet Mask** and enter a subnet address to apply to the IP address of the Precidia iPocket 232.
- Select **C) Gateway** and enter the gateway address for the Precidia iPocket 232.

**5. Select 2) Serial Port Settings.**

- Select **A) Protocol**. A list of protocols will display. Enter **D1** for Transparent and tcp(tunnel).
- Select **B) PortSetting** and enter the [appropriate serial port settings](#).
- Select **D) Local Port Settings** and enter 5001, or the number you entered for your remote port.
- Select **E) Remote IP** and enter the IP address of the NuPoint server. If you are using the NuPoint 640 model, enter the cluster IP address.
- Select **F) Remote Port** and specify the PMS TCP Port to connect to on the NuPoint UM IP Address.
- Select \* to save the configuration parameters.

**6. Disconnect the RS-232 serial cable from the PC.****7. Connect the applicable RS-232 serial cable between the SMDI-compatible switch and the Precidia iPocket232.****Note:**

For any additional installation and configuration information for the Precidia iPocket232, refer to the Precidia iPocket232 User Guide, which is located on the Precidia website at [www.precidia.com](http://www.precidia.com).

**Verifying the iPocket Configuration**

Perform the following steps to test your Precidia iPocket232 configuration:

1. Verify that the Link lamp is lit.
2. Verify that the Status lamp is flashing.
3. Ping the IP address assigned to the Precidia iPocket232.

## 1.4.15.4 Configuration

## 1.4.15.4.1 Configuration for PMS Integrations

**Note:** This configuration is available in the **Text Console** only. LEAVE VISIBLE TO WEB CONSOLE!

### EECO, HIS, and Encore PMS Integration Set-Up

The PMS menu is accessed as follows:

1. From the Main menu, select **(S) System maintenance, (R) Reconfiguration**, and then **(E) Configure PMS integration**.
2. Answer the following questions to configure PMS:
  - **Clear passcode on Check-out = [Y]:** To have the mailbox passcode cleared on Check-out enter "Y" otherwise, enter "N"
  - **Clear messages on Check-out = [Y]:** To have the mailbox messages cleared on Check-out enter "Y" otherwise, enter "N"
  - **Clear name on Check-out = [Y]:** To have the mailbox name cleared on Check-out enter "Y" otherwise, enter "N"
  - **Clear greeting on Check-out = [Y]:** To have the mailbox greeting cleared on Check-out enter "Y" otherwise, enter "N"
  - **On Check-in set the mailbox FCOS = [0]:** Enter the Features Class of Service (FCOS) number between 1 and 64 OR enter 0 to prevent the number from being changed.
  - **On Check-out set the mailbox FCOS = [0]:** Enter the FCOS number between 1 and 64 or enter 0 to prevent the number from being changed.

### Marriott PMS Integration Set-Up

The PMS menu is accessed as follows:

1. From the Main menu, select **(S) System maintenance, (R) Reconfiguration**, and then **(P) Configure Marriott PMS integration**.

## 2. Answer the following questions to configure PMS:

- **Clear passcode on Check-out = [Y]:** To have the mailbox passcode cleared on Check-out enter "Y" otherwise, enter "N"
- **Clear messages on Check-out = [Y]:** To have the mailbox messages cleared on Check-out enter "Y" otherwise, enter "N"
- **Clear name on Check-out = [Y]:** To have the mailbox name cleared on Check-out enter "Y" otherwise, enter "N"
- **Clear greeting on Check-out = [Y]:** To have the mailbox greeting cleared on Check-out enter "Y" otherwise, enter "N"
- **On Check-in set mailbox FCOS = [2]:** Enter the Features Class of Service (FCOS) number between 1 and 64 OR enter 0 to prevent the number from being changed.
- **On Check-out set mailbox FCOS = [3]:** Enter the FCOS number between 1 and 64 or enter 0 to prevent the number from being changed.
- **On Check-in set mailbox LCOS = [1]:** Enter the Limits Class of Service (LCOS) number between 1 and 64 OR enter 0 to prevent the number from being changed.
- **On Check-out set mailbox LCOS = [1]:** Enter the LCOS number between 1 and 64 or enter 0 to prevent the number from being changed.

## Mailbox Set Up

### EECO Only:

Once the application has been set up, the user must create guest mailboxes with either the Check-out or the Check-in FCOS (it is important to match the existing room status since the integration does not handle a re-synchronization of the NuPoint and PMS databases when it first starts up).

### HIS Only:

Once the application has been set up, the user must create guest mailboxes with either the Check-out or the Check-in FCOS. (It is not critical to match the existing room status since the integration offers a System Maintenance menu choice to provide a re-synchronization of the databases when PMS first starts up). It is important to set the **MWI type** for the guest mailboxes to be type **16: HIS PMS**.

This is so that the guest room's message waiting light is controlled by the PMS system. (Note: this integration does NOT preclude the use of another integration running on a different serial port).

After both the configuration and the mailboxes have been set up, the integration updates the room status.

## Encore

Once the application has been setup, the user must create guest mailboxes with either the Check-Out or Check-In FCOS (it is not critical to match the existing room status since the integration handles a re-synchronization of the databases when it first starts up). It is important to set the **MWI type** for the guest mailboxes to be type **16: HIS PMS**

This is so that the guest room's message waiting light is controlled by the PMS system. (Note: this integration does NOT preclude the use of another integration running on a different serial port).

After both the configuration and the mailboxes have been set up, the integration will update the room status.

## 1.4.15.5 Troubleshoot

### 1.4.15.5.1 EECO Troubleshooting Guide

#### Implementation

The EECO PMS integration within NuPoint Voice polls the Property Management System once a minute in order to find out which rooms have been checked-in/checked-out since the last poll. This information is used to perform user configurable check-in/check-out procedures to mailboxes on the NuPoint Voice system. For more information on the NuPoint Voice Check-in/Check-out procedures, contact your distributor.

#### Protocol

1. After 60 seconds of no activity NuPoint Voice sends an ASCII "C" followed by an ETN (\$03).
2. The PMS replies with the character "C" within two seconds.
3. If no reply is received within the two second window up to two additional attempts will be made by the server. If there is still no response from the PMS, NuPoint Voice will return to sleep for 60 seconds and start over at 1.
4. Once the PMS replies it then has 6 seconds to start sending room info packets to NuPoint Voice for processing. These packets are as follows:
  - Start of record character \* (\$2A).
  - Room status character: A = newly checked-in; V = newly checked-out.
  - Room number followed by the delimiter character semicolon (\$3B). Room numbers are in ASCII readable. Only numeric room numbers are supported at this time.

Note, at this time the Room number is assumed to be the mailbox number and as such needs to conform to the dial plan. Eventually the ability to translate alphanumeric room numbers to mailbox numbers will be added.

- End of record character % (\$25).

These packets can be no longer than 80 characters including the start and end of record characters. When there is no more data to send to NuPoint Voice, the interface sends the single ASCII character "@" (\$40).

5. Upon receiving the packet from the PMS, NuPoint Voice will then process the information. If the packet is good, all check-in/check-out procedures are carried out and NuPoint Voice requests the next packet (if any) by sending an "M" followed by an ETN (\$03). If the packet is bad, NuPoint Voice re-requests it by sending an "L" followed by an ETX (\$03). If the PMS sent the empty reply ("@"), NuPoint Voice will go back to sleep for 60 seconds without responding to the PMS.

**Note:**

The PMS must first echo the "L" or "M" before sending any other information to NuPoint Voice.

6. When the PMS receives either the "L" ETX or "M" ETN requests from NuPoint Voice, it has six seconds to respond. NuPoint Voice will try either of these requests up to three times before giving up and sleeping for 60 seconds before starting at 1) again.

## Physical Characteristics

- RS-232 compatible signal.
- 1200 baud.
- 1 start bit, 1 stop bit, 8 bit data, and no parity.
- NuPoint Voice is configured to be a DCE device.
- No flow control is supported.
- Data signals required are transmit data, receive data, logic ground (pin 7), data terminal ready (should always be high).
- No control signals are used.

## Diagnostic Information

See the [Appendix](#) for detailed diagnostic information available through the error log file, the CDR file and the system console.



## 1.4.15.5.2 HIS Troubleshooting Guide

### Introduction

In order to integrate reliably between the HIS PMS system and the NuPoint Voice system, the following protocol has been developed. The protocol contains three layers; physical, link, and message. This protocol conforms to the "HIS Standard Communications Protocol for Full Duplex Operations" fully with the following stipulations:

### Physical Layer

Electrical Interface: EIA RS232C - Type D electrical standard compatibility. Connection is via a DB25-pin male connector.

Signal Form: EIA RS404.

Interface Distance: Maximum 50 feet. Interface unit to Interface Processing Unit direct connection. Distances exceeding 50 feet require a line driver.

Operation Mode: Full duplex.

### Link Layer

Appearance:

Data Rate: 2400 Baud Asynchronous

Byte Framing: 10 bits, (1 start, 7 data, 1 parity, 1 stop), even parity.

### Message Layer

There are six messages defined for the protocol as follows:

- Message number 1 is RESYNC.
- Message number 2 is ROOM OCCUPIED.
- Message number 3 is ROOM VACANT.
- Message number 4 is MESSAGE WAITING STATUS.
- Message number 5 is BAD MAILBOX ADDRESS.
- Message number 6 is SEND MESSAGE WAITING STATUS.

### Mailbox Re-synchronization

With the HIS PMS integration, an additional menu choice (G) has been added to the System Maintenance Menu to allow the system administrator to re-synchronize the state of all the mailboxes being supported by the PMS.

## Message Waiting

The HIS PMS Integration supports message waiting notification through the PMS system. A message waiting type has been added to the system called "HIS PMS." See [Assign Message Waiting Type to a Mailbox](#).

## 7.0 Diagnostic Information

See the [Appendix](#) for detailed diagnostic information available through the error log file, the CDR file and the system console.

# 1.4.15.5.3 Hyatt Encore Configuration and Troubleshooting

## Encore Configuration and Troubleshooting

### Introduction

The Hyatt Encore PMS is an optional feature enhancement that allows integration between NuPoint Voice and the Encore Property Management System.

Under this integration, it is possible to not only automatically assign vacant and occupied mailboxes to guests (checked in or out), but it also allows for room reassignment and text message waiting indication.

The NuPoint Voice to Hyatt Encore PMS Integration is designed to offer hotels a reliable and simple way of relaying communication between the voice messaging system (VMS) and the property management system (PMS).

It is designed to work with software release 5.00 and later.

This integration provides:

- Check In - Automatic check in of a guest mailbox upon arrival (PMS to VMS message)
- Text Message Notification - VMS notification of number of text messages in the PMS.
- Message Waiting Indication - Automatic voice message waiting indication (controlled by the PMS)
- Played Message Indication - Automatic signaling from the VMS to the PMS when a message is played.
- Multiple Classes of Service - Allows the automatic check in of guests with different classes of service which may include different language prompts.
- Check Out - Automatic check out of a mailbox, by disposing of any recorded messages, recorded name (if any), or recorded mailbox greeting (if any).
- Mailbox Modify - The Hotel should be able to modify the mailbox number of a particular guest without losing any of the recorded information in that mailbox.

## Text MWI

It is possible for a guest to find how many (if any) text messages are waiting at the front desk (in the PMS system). This is done both upon login and logout of the mailbox:

"Hello <name>, you have N unplayed messages, X messages total. Y text messages at the front desk. Press P to play the first message..."

"You have X messages remaining." (No prompting done when there are NO text messages.)

This announcement of text messages is controlled with FCOS feature bit **154** (Announce text (E-Mail) message count.)

## Communication Description

This integration is based on communication between the PMS and the NuPoint UM server via an RS-232 Full Duplex link.

Link Setup

Baud = 1200 Asynchronous,

Bits = 10, (Start = 1, Data = 7, Parity = 1, Stop = 1)

Parity = Even.

**Note:** A Null Modem adapter may be needed with an Encore PMS Integration. Test the RS-232 link without one, and if the data packets are not received correctly, install a Null Modem Adapter.

## Message Formats

Each fixed length record will contain:

|   |         |   |   |
|---|---------|---|---|
| S | Message | E | L |
| T | Text    | T | R |
| X |         | X | C |

All messages start with an STX, followed by the message text. All message text must be followed by ETX and the last byte LRC, to guarantee integrity.

ACK and NAK are sent by the receiver to the sender to indicate positive or negative acknowledgement to the transmitted message. A NAK should be used by the message sender as a request to retransmit the last message sent. ENQ is a sender request

for a repeat of the acknowledgement (ACK or NAK) as a reply to the last transmitted message.

The following is a summary table of the valid data transferred between the PMS and the VMS:

STX = 02H Start of data text

ETX = 03H End of data text

ENQ = 05H Request for retransmission of acknowledgement

ACK = 06H Positive acknowledgement

NAK = 15H Negative acknowledgement

SP = 20H ASCII space character (to padd fields)

LRC = Longitudinal redundancy check (XOR of all bytes after STX including the ETX character, with a 00H Null seed)

MBOX = A 6 digit (left justified and space filled) mailbox ASCII number

MSG = "1" RESYNCHRONIZE

"2" CHECK IN

"3" CHECK OUT

"4" MESSAGE WAITING STATUS

"5" BAD MAILBOX ADDRESS

"6" QUERY MESSAGE WAITING STATUS

"7" MOVE MAILBOX

"8" MODIFY LCOS

"9" TEXT MESSAGE MW

Where the message is sent in hex (ex: "4" is 34H). (See Message Format Table, below.)

FCOS = A 2 byte number (00-64) representing the Feature Class of Service to use when modifying the mailbox (set up via the console configuration menus)

UNP = A 2 byte number (00-99) representing the number of unplayed messages in the guest mailbox (valid ranges 30H to 39H)

URG = A 2 byte number (00-99) representing the number of all unplayed messages with URGENT priority found in the guest mailbox (valid ranges 30H to 39H)

UNR = A 2 byte number (00-99) representing the number of unread text messages in the PMS system (valid ranges 30H to 39H)

**Note:**

All messages are of a fixed length record (16 bytes), space padded.

## Diagnostic Information

See the [Appendix](#) for detailed diagnostic information available through the error log file, the CDR file and the system console.

## NuPoint Voice/Encore PMS Message Format

### Message Format Table

| Message Text |     |      |    |    |    |    |    |      |    |     |    |    |    |     |     |
|--------------|-----|------|----|----|----|----|----|------|----|-----|----|----|----|-----|-----|
| 0            | 1   | 2    | 3  | 4  | 5  | 6  | 7  | 8    | 9  | 10  | 11 | 12 | 13 | 14  | 15  |
| STX          | "1" | SP   | SP | SP | SP | SP | SP | SP   | SP | SP  | SP | SP | SP | ETX | LRC |
| STX          | "2" | MBOX |    |    |    |    |    | SP   | SP | SP  | SP | SP | SP | ETX | LRC |
| STX          | "3" | MBOX |    |    |    |    |    | SP   | SP | SP  | SP | SP | SP | ETX | LRC |
| STX          | "4" | MBOX |    |    |    |    |    | UNP  |    | URG |    | SP | SP | ETX | LRC |
| STX          | "5" | MBOX |    |    |    |    |    | SP   | SP | SP  | SP | SP | SP | ETX | LRC |
| STX          | "6" | MBOX |    |    |    |    |    | SP   | SP | SP  | SP | SP | SP | ETX | LRC |
| STX          | "7" | MBOX |    |    |    |    |    | MBOX |    |     |    |    |    | ETX | LRC |
| STX          | "8" | MBOX |    |    |    |    |    | LCOS |    | SP  | SP | SP | SP | ETX | LRC |
| STX          | "9" | MBOX |    |    |    |    |    | UNR  |    | SP  | SP | SP | SP | ETX | LRC |

## 1.4.15.5.4 Marriott Troubleshooting Guide

### Physical Communication Link

The interface shall be asynchronous and shall use an EIA RS-232 connection. The PMS will support transmit data, receive data, signal ground, and data terminal ready. The vendor must support transmit data, receive data, and signal ground.

Each data character shall contain 11 bits in the format consisting of:

- 1 start bit
- 7 data bits

- 1 even parity bit
- 2 stop bits

The possible serial asynchronous communication bit rates are 110, 300, 600, 1200, 2400, 4800, and 9600 bits per second. The preferred bit rate is 1200 bits per second or lower. The actual rate shall be defined by the application that implements this specification.

**Data Link Control**

The function of this communication specification is to effect the orderly transfer of data from one system to another. The data messages are comprised of text and data-link control characters. Data-link control characters are required in each message to act as delimiters and to control the transmission.

**Transmission Codes**

The data is transferred as binary-coded characters as defined by the ASCII character set.

**Data Link Control Characters**

All hexadecimal representations of the control characters are in a 7 bit ASCII format and do not contain any parity bits.

| Data Link Control Characters                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All hexadecimal representations of the control characters are in a 7 bit ASCII format and do not contain any parity bits. |                                                                                                                                                                                                                                                                                                                                                                                           |
| ENQ                                                                                                                       | A 0516 is the enquiry character. An ENQ is used to bid for the link when using a point-to-point link connection.                                                                                                                                                                                                                                                                          |
| ACK0                                                                                                                      | A 1016 0616 is the ready sequence. An ACK0 shall be sent in response to an ENQ to indicate the communication link is established and the receiving station is ready to receive a data block.                                                                                                                                                                                              |
| ACK1                                                                                                                      | A 1016 0816 is the acknowledge sequence. An ACK1 shall be sent in response to a data block transfer indicating successful reception of the data.                                                                                                                                                                                                                                          |
| NAK                                                                                                                       | A 1516 is the negative acknowledge character. A NAK shall be sent in response to an ENQ to indicate the receiving station is not ready to receive a data block. A NAK shall also be sent in response to a data block transfer, indicating unsuccessful reception of the data block (parity error, block check error, message framing error) and requests the data block be retransmitted. |
| STX                                                                                                                       | A 0216 is the start of text character. A STX is the first character in a data block. All data blocks must begin with an STX. The STX also triggers the start of the block check calculation. The STX character is followed immediately by the message text.                                                                                                                               |

|     |                                                                                                                                                                                                                                                                                                      |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ETX | A 0316 is the end of text character. An ETX is the last character in a data block. Each data block transfer must terminate with an ETX (followed by the BCC). The ETX triggers the end of the block check calculation. The ETX character is followed immediately by the block check character (BCC). |
| EOT | A 0416 is the end of transmission character. An EOT is used to signify the termination of a data message transmission. When this code is received, the communication link has been released by the controlling station.                                                                              |

Operation of the Data Link

The data link shall be designed to operate in a half duplex point-to-point mode. For half duplex operations, a contention situations exists, whereby both stations can attempt to use the communication link simultaneously. To account for this possibility, a station bids for the link using the ENQ (enquiry) control character. The ENQ sequence provides a clear and concise means for requesting control of the link, while leaving a maximum amount of time to monitor the link for bids by the other station. Once a station gains control (this station shall be known as the controlling station and the other station shall be known as the receiving station) of the link, message transmission can start.

To avoid the problem of simultaneous transmission requests, each station shall be assigned a priority, primary and secondary. If simultaneous bidding occurs, the primary station shall continue to bid the link until the secondary station responds or until the retry limit is reached. If the primary stations receives an ENQ and it has not initiated a request for the link, then it replies with an ACK0 if it is ready to receive, or a NAK if not. Thus the secondary station can gain control of the communication link for transmission only when the link is left free by the primary station. The vendor shall be considered the primary station, while the PMS shall be secondary.

Message transmission is terminated and the link is returned to the idle state upon transmission of an EOT by the controlling station. Once the controlling station transmits an EOT to release control of the link, it must wait a minimum of the T1 value before transmitting an ENQ to attempt to regain control of the link. This method gives each station a fair opportunity to obtain control of the link.

Timeout Timers

Since timing is very critical when competing for control of the line, several timers have been defined. The actual value of the timers shall be defined by the application that implements this specification. These timers are defined as:

|    |                                                                                                                                       |
|----|---------------------------------------------------------------------------------------------------------------------------------------|
| T1 | This timeout value represents the time interval the previous controlling station must wait before attempting to regain control of the |
|----|---------------------------------------------------------------------------------------------------------------------------------------|

|    |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| T2 | This timeout value represents the time interval the station attempting to gain control must wait for a response. (After sending ENQ, the time to wait for an ACK0 or NAK response). The receiving station must respond within this interval, or a timeout condition will exist.                                                                                                                                                          |
| T3 | This timeout value represents the time interval the controlling station must wait for a response to a data block. (After sending STX (text data) ETX BCC, the time to wait for an ACK1 or NAK response). The receiving station must respond within this interval, or a timeout condition will exist.                                                                                                                                     |
| T4 | This timeout value represents the time interval the receiving station must wait for a data block from the controlling station. (After sending ACK0 to an ENQ, the time to wait for STX (text data) ETX BCC). The controlling station must transmit the data block within this interval, or the line is assumed to be in an uncontrolled                                                                                                  |
| T5 | This timeout value represents the time interval the receiving station must wait for the controlling station to release control of the line or resend the data block. (After sending ACK1 or NAK to a data block, the time to wait for EOT or the retransmission of the data block, respectively). The controlling station must release control or resend the data block within this interval, or the line is assumed to be uncontrolled. |
| T6 | This timeout value represents the time interval the station attempting to gain control delays after being denied control of the line. (The time to delay after receiving a NAK response to an ENQ).                                                                                                                                                                                                                                      |

## Text Data

Text data is transmitted in complete units called data blocks. A data block is initiated by a start of text (STX) character, and concluded by an end of text (ETX) character. Text data is defined as all characters that occur in a data block between, the STX and the ETX. Text data shall be limited to the ASCII characters between 2016 and 5A16 inclusive.

The content of the text data shall be defined by the particular application that implements this specification.

## Error Detection

Each data block is checked for accuracy by the receiving station. This specification defines two types of error detection that will be used to verify data blocks.

## Parity

Parity checking (also referred to as a vertical redundancy checking) allows individual characters to be validated. When using the 7-bit ASCII character set, an 8th bit can be used as a parity bit. The 8th bit will be defined as the parity bit, using an even parity scheme. For even parity, the parity bit is set a "1" or "0" so the resulting 8 bit character will have an even number of "1" bits in it.



## Block Check Character (BCC)

The block check character (also called a longitudinal redundancy check) is a verification of the total data block. The BCC is accumulated at both the transmitting and receiving stations during the transmission of a data block. This BCC is transmitted immediately following the end of text (ETX) character. The receiving station compares the transmitted BCC with the calculated BCC and determines whether or not the data block was received free of errors.

The BCC is calculated by starting with a zero value and performing an exclusive or operation on each character in the data block beginning with the character immediately following the STX character and ending with, and including, the ETX character. As an example, the transmission STX+A+B+C+ETX would have a BCC of 4316 (not including parity). This would be the result of  $A \text{ XOR } B \text{ XOR } C \text{ XOR } \text{ETX}$ . In hexadecimal, this would be represented as  $4116 \text{ XOR } 4216 \text{ XOR } 4316 \text{ XOR } 0316$ .

## Line Control Protocol

The line control protocol is designed to give maximum flexibility in the transmission of data between the stations. This protocol is patterned after standard binary synchronous interface protocols. Each control sequence has one or more expected response sequences. The following descriptions identify those expected sequences.

**ENQ:** A station wishing to transfer a data block transmits an ENQ to gain control of the line. The station attempting to gain control should wait the T2 interval for a response. An ENQ control sequence has one of the following allowed responses:

**ACK0:** An ACK0 indicates the receiving station is ready to receive the data message at this time. The controlling station must begin transmission of the data block within the T4 interval. If the receiving station does not receive the transmission within the T4 interval, it should assume the line is in an uncontrolled state.

**NAK:** A NAK indicates the receiving station is not ready to receive the message at this time. The transmitting station should retry the ENQ procedure after a T2 interval delay.

**STX (text data) ETX BCC:** After a station has successfully obtained control of the line, it must transmit the data block within the T4 interval. After transmitting the data block, the controlling station should expect one of the following responses within the T3 interval:

**ACK1:** An ACK1 indicates the data was received correctly. Within the T5 interval, the controlling station shall transmit an EOT to release control of the line.

**NAK:** A NAK indicates the data was not received correctly. Within the T5 interval, the controlling station shall retransmit the data block a maximum of three times before aborting the transfer by sending EOT to release control of the line. The protocol will resume at the line contention level (ENQ).

## Protocol Examples

The following diagrams provide examples of how the PMS and vendor should use the protocol for data block transfer.

### Normal delivery of data blocks

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK0

(expect data block to begin within T4)

STX (text data) ETX BCC --->

(expect response within T3)

<----- ACK1

(expect line release within T5)

EOT ----->

(OK to ENQ immediately)

<----- ENQ

.  
.
   
.

The receiving station is ready to accept data and acknowledges the bid for the line and prepares to receive a data block. Upon receiving the data block and determining it is valid data, the receiving station acknowledges the data block. The controlling station then releases control of the line by transmitting the EOT. At that time, the line is considered uncontrolled and either station may attempt to gain control. However, the station that just released the line must wait the T interval before attempting to regain control.

Receiving station is busy

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

(receiver not ready)

<----- NAK

(must wait T6 before another attempt)

ENQ ----->

In this case, even though the receiving station is busy and cannot accept a data block at this time, it responds to the ENQ from the station attempting to gain control of the communication line. The station attempting to control the line should retransmit the ENQ after waiting the T6 interval. This process should continue until the receiving station gives permission to transmit the data message by responding with an ACK0.

No response from the receiving station

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

(nothing from receiver)

(ENQ after T2)

ENQ ----->

(expect response within T2)

(nothing from receiver)

(ENQ after T2)

ENQ ----->

(expect response within T2)

.

.

.

This condition most likely indicates either the receiving station is down (power off or in an off-line mode) or the communication line is down (communication hardware or cable problem). The station attempting to control the line should continue to retransmit the ENQ after the T2 interval has elapsed.

Negative response to a data block transfer

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK0

(expect data block to begin within T4)

STX (text data) ETX BCC --->

(expect response within T3)

(receiver detects error)

<----- NAK

(expect data block to begin within T5)

STX (text data) ETX BCC --->

(all is good this time)

<----- ACK1

(expect EOT within T5)

EOT ----->

In this example, the receiving station detects a receive error in the data block. The receiving stations NAK's the data block, and the controlling station sends the data block again. The receiving station then detects no error, and the data transfer continues in a normal fashion.

Continued negative responses to a data block

transfer

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK0

(expect data block to begin within T4)

(initial try)

STX (text data) ETX BCC --->

(expect response within T3)

(receiver detects error)

<----- NAK

(expect data block to begin within T5)

(1st retry)

STX (text data) ETX BCC --->

(expect response within T3)

(receiver detects error)

<----- NAK

(expect data block to begin within T5)

(2nd retry)

STX (text data) ETX BCC --->

(expect response within T3)

(receiver detects error)

<----- NAK

(expect data block to begin within T5)

(3rd retry)

STX (text data) ETX BCC --->

(expect response within T3)

(receiver detects error)

<----- NAK

(expect data block to begin within T5)

(sender gives up)

EOT ----->

In this example, the receiving stations detects an error in each successive attempt to transmit the data block. After the controlling station retries to send the message three times, it gives up, issuing an EOT to inform the receiving station that the control of the communication line is released.

No response to a data block transfer

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK0

(expect data block to begin within T4)

STX (text data) ETX BCC --->

(expect response within T3)

(nothing from receiver)

(release control)

EOT ----->

(wait for T1)

ENQ ----->

.

.

.

In the event of no response to the data block, the controlling station shall terminate the transfer by releasing control of the data link. The transfer should begin again from the line contention level (ENQ).

No data block transferred

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK0

(expect data block to begin within T4)

(nothing from sender)

If the station in control does not transmit the data block after receiving the ACK0, the line is assumed to be in an uncontrolled state, and data transfer must be restarted at the line contention level (ENQ).

No release of line control

(line has been idle for at least T1)

ENQ ----->

(expect response within T2)

<----- ACK

(expect data block to begin within T4)

STX (text data) ETX BCC --->

(expect response within T3)

<----- ACK

(expect line release within T5)

(nothing from sender)

If the station in control does not release the line (transmit EOT), the transfer is complete and the line is assumed to be in an uncontrolled state.

### 1.4.15.5.5 Reconnecting PMS to NuPoint

If the property management system becomes disconnected from NuPoint due to a network disruption or other service problem, you must use the following procedure to manually reconnect the two systems and restore communication.

To manually reconnect PMS to NuPoint:

1. Launch an SSH client such as PuTTY.
2. Enter <NuPoint IP address> and press **Enter** to access the text console.
3. Log in as "root" and type the root password.
4. Exit to the Linux prompt.
5. Use the following script to restart the system:

```
sh /usr/vm/bin/restartPMS.sh
```

The system will be restarted and the connection between PMS and NuPoint will be restored. Communication will recommence.

## 1.4.15.5.6 Appendix - Diagnostic Specification

### HIS/Encore PMS Integration

Reference: Document Part No. 2750-0009-00 "NuPoint Voice/Encore PMS Integration ENGINEERING SPECIFICATION"

#### Definitions

|           |                                                                                                                                                                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACK       | An ASCII control character used in the RS232C serial protocol for positive acknowledgement of a single character or full message packet.                                                                                                              |
| CDR       | A group of routines, data and files that allow the NuPoint Voice system to do call detailed recording of selected information for diagnostics.                                                                                                        |
| cdrmenu   | A NuPoint Voice routine that runs only when the system administrator requests to inspect or modify the CDR log file and/or configuration.                                                                                                             |
| EEOO      | An OAA record that stores the configured data set up by eecomenu.                                                                                                                                                                                     |
| ENQ       | An ASCII control character used in the RS232C serial protocol. It is used to request retransmission of the last character or full message packet.                                                                                                     |
| eecomenu  | A NuPoint Voice routine that runs only when the system administrator requests to inspect or modify the EEOO OAA record for the HIS/Encore PMS integration.                                                                                            |
| hisinit   | A NuPoint Voice routine that is started by hissnd to read though all mailboxes on the system and update message waiting for any with message waiting type 16.                                                                                         |
| hismwi    | A NuPoint Voice routine that receives message waiting update requests from the mwla, reformats the data and requests hissnd to transmit the message across the serial link to the PMS system. Upon completion it reports the status back to the mwla. |
| hisrcv    | A NuPoint Voice routine that receives the serial link data from the PMS system.                                                                                                                                                                       |
| hisresync | A NuPoint Voice routine that is started by hisrcv if it receives a resync message from the PMS system. It sends a message to hissnd to start hisinit and then dies.                                                                                   |
| hissnd    | A NuPoint Voice routine that sends data across the serial link to the PMS system.                                                                                                                                                                     |
| mwla      | A NuPoint Voice routine that oversees message waiting updates for all the message waiting integrations.                                                                                                                                               |
| NAK       | An ASCII control character used in the RS232C serial protocol for negative acknowledgement of a single character or full message packet.                                                                                                              |



|     |                                                                                                             |
|-----|-------------------------------------------------------------------------------------------------------------|
| OAA | Open Account Administrator. The method to store NuPoint Voice mailbox and configuration data in 4K records. |
| PMS | Property Management System.                                                                                 |
| TTY | Tele-typewriter.                                                                                            |

The purpose of this document is to explain the available diagnostic information for the HIS/Encore PMS Integration. The information is located in three areas: the log file, the CDR file and the system console. Any messages that are displayed on the system console are from the running tasks hissnd, hisrcv, hismwi or hisinit showing that they aborted and why.

## Log File

When NuPoint Voice is running, there are two possibilities: the link is up or the link is down. When NuPoint Voice is booted, the PMS system integration software starts with the assumption the link is up. If the NuPoint Voice system sends any data over the link to the HIS/Encore PMS system and it is not acknowledged within two seconds, the data is resent for a maximum of four times. If still no acknowledgement, the NuPoint Voice system considers the link down and logs it. At any future time if the HIS/Encore PMS system sends valid data to the NuPoint Voice system, it is acknowledged and the link is considered up and it is logged.

At any time while NuPoint Voice is running, if a message waiting notification sent to the HIS/Encore PMS system fails due to an internal error, the mailbox number and message waiting state lost is logged.

If the NuPoint Voice system is requested to do a move message command (swap) and for any reason the event fails, it is logged with both the source and destination mailbox numbers. It is also possible during a swap that the source mailbox is deleted and can not be recreated. If this event occurs, it is logged with the mailbox number that is deleted.

To check the log file for information including HIS/Encore PMS integration:

1. From the console Main menu enter **(R) Report generation**.
2. Select **(L) Log file** and then select **(S) Show logfile**.

## Log File Entries

"HIS PMS Link is up"

"HIS PMS Link is down"

"Unable to update MWI (ON/off) for mailbox (x)"

"Failed to swap mailbox (x) with (y)"

"Deleted mailbox (x), unable to re-create"

## CDR File

While the NuPoint Voice system is running, **cdmenu** provides an interface to cause selected information to be written to a CDR log file. For the HIS/Encore PMS system interface, the CDR level is 23, HIS/EECO/Encore PMS. It is useful to have this level active for short periods of time for full diagnostic monitoring of the integration. Listed below are methods to operate CDR.

The **cdmenu** is accessed via menu options S-V from the main menu.

The data logged is from one of three active tasks and two short lived spanned tasks that make up the running programs of the HIS/Encore PMS system interface. The names of the tasks are hissnd, hisrcv, hismwi, hisinit and hisresync where hisinit and hisresync are the short lived spanned tasks. Each of these tasks when enabled with CDR level 23 logs data to the CDR file for specific events. Data logged by hissnd starts with "hissnd:" in the CDR file. Data logged by hisrcv starts with "HISRCV:" in the CDR file. Data logged by hismwi starts with "HISMWI:" in the CDR file. Data logged by hisinit starts with "hisinit:" in the CDR file. Data logged by hisresync starts with "HISRESYNC:" in the CDR file.

## Level 22, HIS/EECO/Encore PMS

Messages logged at this level are logged for link and program level diagnostics. This level of diagnostics should not run on an unmonitored system. The CDR data logged is of a large quantity and may cause problems with disk utilization.

Some of the error messages logged are followed by task aborts. These messages are identified below by an additional comment line bracketed with asterisks. Any of the tasks below may abort, either during a system boot or while the system is in full operation. Only the tasks hissnd, hisrcv and hismwi will be restarted. It may be that the task immediately aborts again for the same or another error condition. After five aborts of a task, the system will auto reboot to try and solve the problem by re-initialization. The reason for the task abort is reported to the console and if CDR logging is enabled also to the CDR log file.

### hissnd:

**"hissnd: Link is up"**

This data is logged at the same time and for the same reason as it is defined in the log file section above.

(Link failure recovery) **"hissnd: Link is down"**

(Link failure)

**"hissnd: Link down condition, timeout"**

This data is logged if after sending any form of message across the link, the PMS system does not reply even after four attempts. At this point the link is logged as down.

(Link failure)

**"hissnd: Configuration change"**

(Normal operation)

This data is logged after a message from eecomenu reports that the system administrator has changed the check-in or check-out mailbox configuration data. This information is passed on to hisrcv so it will reread the information from the disk file. It is this communication that allows changes to check-in and check-out handling without a system reboot.

**"hissnd: Got send resync message"**

(Normal operation)

This data is logged when hissnd is redirected a message from hisresync via hisrcv. NuPoint Voice sends a resync message out on the RS232C serial link to the PMS system.

**"hissnd: Got send MWI"**

(Normal operation)

This data is logged when hissnd is redirected a message from hismwi via hisrcv to update a mailboxes message waiting. NuPoint Voice sends a MW status message with the requested mailbox number, number of urgent and number of unplayed messages out on the RS232C serial link to the PMS system.

**"hissnd: Got send bad mailbox"**

(Mailbox undefined in database)

This data is logged when hissnd is told by hisrcv to report the bad mailbox number. NuPoint Voice sends a bad mailbox message out on the RS232C serial link to the PMS system.

**"hissnd: Store MWI command"**

(Normal operation)

This data is logged when hissnd is actively sending or hisrcv is actively receiving a message from the PMS system when a got send MWI command is delivered. The message can not be directly sent out over the link and is saved until the link becomes idle. Once idle, the MW status command is sent out and the entry is removed from the saved message state. At most one MW update can be held at any one time. This is because the mwla is not replied to until the MW status message is sent out, whether it was temporarily held on an active link state or not.

**"hissnd: Add to bad mailbox queue"**

(Normal operation)

This data is logged when hissnd is actively sending or hisrcv is actively receiving a message from the PMS system when a got send bad mailbox is delivered. The message can not be directly sent out over the link and is saved until the link becomes idle. Once idle, the MW status command is sent out and the entry is removed from the saved message state. The entries are queued up and sent out in order as the link idle state permits. If the queue is full, any new bad mailbox messages are lost.

**"hissnd: Send ACK"**

(Normal operation)

This data is logged immediately after one character is transmitted over the RS232C serial link. The character sent is an <ACK>, hex 06.

**"hissnd: Send NAK"**

(Normal operation)

This data is logged immediately after one character is transmitted over the RS232C serial link. The character sent is a <NAK>, hex 15

**"hissnd: Send ENQ"**

(Normal operation)

This data is logged immediately after one character is transmitted over the RS232C serial link. The character sent is an <ENQ>, hex 05.

**"hissnd: Send (h)"**

(Internal error, report condition)

This data is logged immediately after one character is transmitted over the RS232C serial link. The character sent is in error and its value in hex is shown.

**"hissnd: (m)"**

(Normal operation)

This data is logged immediately after one data packet is transmitted over the RS232C serial link. The packet sent should be of the form: <STX>message<ETX>LRC=I.

**"hissnd: Received a bad request"**

(Internal error, report condition)

This data is logged when hissnd receives an unknown request from another task on the NuPoint Voice system. The task hissnd tries to get that task to be reset in an attempt to keep the condition from reoccurring.

**"hissnd: Use hissnd \$port [+hyatt]"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started without a port first parameter. The +hyatt is the optional setting that tells the software to interface to an Encore PMS system at 1200 baud. Without the setting, the software assumes to interface to a HIS PMS system at 2400 baud.

**"hissnd: Bad RS-232 port name"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started with an undefined port parameter.

**"hissnd: Unable to attach port"**

(Internal error or configuration error, check configuration and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started with a port number that can not be attached by this task. Check the configuration of all CPU serial ports of the system for conflicts. If the configuration is altered to repair the problem, reboot the system and monitor for recurrence.

**"hissnd: Unable to attach name"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started and is not able to attach a task name for its use.

**"hissnd: Unable to open serial port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started and it is not able to open the serial port that it just attached to this task.

**"hissnd: Unable to get stty on RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started and it is not able to get the current TTY options of the serial port.

**"hissnd: Unable to SET stty on RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started and it is not able to set the desired TTY options of the serial port. This includes baud rate, parity, data and stop bit settings.

**"hissnd: Unable to SET device attributes for RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hissnd is started and it is not able to set the desired device attributes for the serial port. This includes disabling break, X-on/X-off, escape and other features.

**hisrcv:****"HISRCV: Checked in mailbox (x)"**

(Normal operation)

This data is logged when the PMS system sends valid data to change the configuration of mailbox (x). The changes to the mailbox are configured for FCOS. The changes to the mailbox are complete.

**"HISRCV: Checked out mailbox (x)"**

(Normal operation)

This data is logged when the PMS system sends valid data to change the configuration of mailbox (x). The changes to the mailbox are FCOS, password, name recording, greeting #1 and messages. The changes to the mailbox are complete

**"HISRCV: Swapped mailbox (x) with (y)"**

(Normal operation)

This data is logged when the PMS system sends valid move mailbox data to move source mailbox (x) to destination mailbox (y). Destination mailbox (y) is also swapped to source mailbox (x). The fields that are swapped are FCOS, password, text message count, all four mailbox greetings, name recording and all messages and message data.

- Note:** Because all message data is swapped, if messages in the mailbox are from other mailbox users (as apposed to outside callers), the source of the message may play as the wrong user name. This will happen if mailbox 100 sends a user message to mailbox 200 and then swaps to 101. At this time, the name recording for room 101 is now in 100 and so if user 200 listens to the source of the message it will say the name now associated with 100 (the old 101), the wrong name recording. This is not a problem when a message is left by an outside caller or with integrations that do not supply the calling number.

**"HISRCV: Modified FCOS (f), MBOX (x)"**

(Normal operation)

This data is logged when the PMS system sends valid modify FCOS data packet. The FCOS number of the mailbox is updated to the requested value.

**"HISRCV: Text update COUNT (c), MBOX (x)"**

(Normal operation)

This data is logged when the PMS system sends valid text message data packet. The text message count of the mailbox is updated to the requested value.

**"HISRCV: Received a BAD MAILBOX (x)"**

(Mailbox undefined in database)

This data is logged if the PMS system sends any message packet that includes an undefined source mailbox number. It is invalid because the mailbox passed could not be found in the NuPoint Voice database. This message is discarded. No change to the mailbox database is made. The NuPoint Voice system responds by sending a bad mailbox packet to the PMS system.

**"HISRCV: Received a BAD NEW MAILBOX (x)"**

(Mailbox undefined in database)

This data is logged if the PMS system sends a move mailbox message packet that includes an undefined destination mailbox number. It is invalid because the mailbox passed could not be found in the NuPoint Voice database. This message is discarded. No change to the mailbox database is made. The NuPoint Voice system responds by sending a bad mailbox packet to the PMS system.

**"HISRCV: Received a BAD NEW MAILBOX (same number)"**

(Error in PMS system)

This data is logged if the PMS system sends a move mailbox message packet that includes the same source and destination mailbox number. This message is discarded. No change to the mailbox database is made. The NuPoint Voice system responds by sending a bad mailbox packet to the PMS system.

"HISRCV: No check in FCOS configured" (Check NuPoint Voice system configuration, configure PMS integration)

This data is logged if NuPoint Voice reads nonconfigured or invalid data configured for the PMS integration in the EECO OAA record.

**"HISRCV: No check out or bad configuration"**

(Check NuPoint Voice system configuration, configure PMS integration)

This data is logged if NuPoint Voice reads nonconfigured or invalid data configured for the PMS integration in the EECO OAA record.

**"HISRCV: Unable to lock source mailbox (x)"**

(Internal error, report condition)

This data is logged when hisrcv is unable to lock the source mailbox record as part of the move mailbox message sent by the PMS system.

**"HISRCV: Unable to open source mailbox (x)"**

(Internal error, report condition)

This data is logged when hisrcv is unable to open the source mailbox record as part of the move mailbox message sent by the PMS system.

**"HISRCV: Unable to delete source mailbox (x)"**

(Internal error, report condition)

This data is logged when hisrcv is unable to delete the source mailbox record as part of the move mailbox message sent by the PMS system.

**"HISRCV: Unable to lock destination mailbox (x)"**

(Internal error, report condition)

This data is logged when hisrcv is unable to lock the destination mailbox record as part of the move mailbox message sent by the PMS system.



**"HISRCV: Unable to open destination mailbox (x)"**

(Internal error, report condition)

**"HISRCV: Unable to close destination mailbox (x)"****"HISRCV: Unable to create swapped source mailbox (x)"**

(Internal error, report condition)

**"HISRCV: Unable to re-create original source mailbox (x)"**

(Internal error, report condition)

**"HISRCV: Failed to swap mailbox (x) with mailbox (y)"**

(Internal error, report condition)

**"HISRCV: Invalid FCOS request (f)"**

(PMS system error)

**"HISRCV: Received an <ENQ> = send <NAK>"**

(Link failure, test link protocol using data scope)

**"HISRCV: Received an <ENQ> = send last msg"**

(Link failure, test link protocol using data scope)

**"HISRCV: Received an <ACK>"**

(Normal operation)

This data is logged when hisrcv is unable to open the destination mailbox record as part of the move mailbox message sent by the PMS system.

This data is logged when hisrcv is unable to close the destination mailbox record as part of the move mailbox message sent by the PMS system.

This data is logged when hisrcv is unable to create the swapped source mailbox record as part of the move mailbox message sent by the PMS system.

This data is logged when hisrcv is unable to re-create original source mailbox record as part of the move mailbox message sent by the PMS system.

This data is logged when hisrcv is unable to swap the source and the destination mailbox records during a move mailbox. This message follows the specific reason listed above listing the level of the failure in the swap.

This data is logged when hisrcv receives an invalid FCOS value in a modify FCOS message sent by the PMS system.

This data is logged when hisrcv reads a first character from the RS232C serial port and it is an <ENQ>. This choice to send out a <NAK> is made if NuPoint Voice has already sent a message four times and the PMS system continues to reply with an <ENQ> rather than the expected positive result <ACK>. The information is sent by hisrcv to hissnd.

This data is logged when hisrcv reads a first character from the RS232C serial port and it is an <ENQ>. This choice to send out the last message is made if NuPoint Voice has not sent this message four times with the PMS system continuing to reply with an <ENQ> rather than the expected positive result <ACK>. The information is sent by hisrcv to hissnd.

This data is logged when hisrcv reads a first character from the RS232C serial port and it is an <ACK>. The information is sent by hisrcv to hissnd.

**"HISRCV: Received a <NAK>"**

(Link failure, test link protocol using data scope. If error is not consistent, suspect PMS system overload or stressed RS232C data connection)

This data is logged when hisrcv reads a first character from the RS232C serial port and it is a <NAK>. The information is sent by hisrcv to hissnd.

**"HISRCV: (data packet)"**

(Normal operation)

This data is logged when hisrcv reads in any packet that begins with an <STX>. This message is displayed if it is a good or bad packet. The packet is shown in the format <STX>message<ETX>LRC=(h).

**"HISRCV: BAD LRC"**

(Link failure, test link protocol using data scope)

This data is logged when hisrcv reads a packet from the RS232C serial port and the LRC passed in the packet does not match hisrcv's calculated LRC. LRC is defined as longitudinal redundancy check (XOR of all bytes after <STX> including the <ETX> character, with a 00Hex null seed).

**"HISRCV: Received a Resynchronize"**

(Normal operation)

This data is logged when hisrcv reads a good resynchronize packet from the RS232C serial port.

**"HISRCV: Received a Check-in or Check-out"**

(Normal operation)

This data is logged when hisrcv reads a good check-in or check-out packet from the RS232C serial port.

**"HISRCV: Received a Message Waiting Status"**

(Normal operation)

This data is logged when hisrcv reads a good message waiting status packet from the RS232C serial port.

**"HISRCV: Received a Move Mailbox"**

(Normal operation)

This data is logged when hisrcv reads a good move mailbox packet from the RS232C serial port.

**"HISRCV: Received a Modify FCOS"**

(Normal operation)

This data is logged when hisrcv reads a good modify FCOS packet from the RS232C serial port.

**"HISRCV: Received a Text Message MW"**

(Normal operation)

This data is logged when hisrcv reads a good text message MW packet from the RS232C serial port.

**"HISRCV: Received a bad packet"**

(Link failure, test link protocol using data scope)

This data is logged when hisrcv reads a bad packet from the RS232C serial port. The information is sent by hisrcv to hissnd. The partial packet is displayed in a preceding message showing what data has been received, complete or incomplete.

**"HISRCV: Received <STX> and then a timeout"**

(Link failure, test link protocol using data scope. If error is not consistent, suspect PMS system overload or stressed RS232C data connection)

This data is logged when hisrcv gets a two second timeout while trying to read the full packet length from the RS232C serial port. The data is thrown away and hisrcv resets to look for a first character.

**"HISRCV: Received a good mailbox"**

(Normal operation)

This data is logged when hisrcv reads a good mailbox number in a check-in or check-out packet. The mailbox was able to be found in the open account database.

**"HISRCV: Check in packet (x)"**

(Normal operation)

This data is logged when hisrcv reads a good check-in packet. The extension number (x) in the packet is used to read in the mailbox and change the state of the mailbox depending on the hismenu configuration. If hissnd has sent hisrcv a configuration change message, the data stored on disk by hismenu is reread before the changes to the mailbox are made. This allows the system manager to change how check-in and check-out of effect mailboxes without a NuPoint Voice system reboot.

**"HISRCV: Check out packet (x)"**

(Normal operation)

This data is logged when hisrcv reads a good check-out packet. The extension number (x) in the packet is used to read in the mailbox and change the state of the mailbox depending on the hismenu configuration. If hissnd has sent hisrcv a configuration change message, the data stored on disk by hismenu is reread before the changes to the mailbox are made. This allows the system manager to change how check-in and check-out of effect mailboxes without a NuPoint Voice system reboot.

**"HISRCV: Request MW for mailbox (x)"**

(Normal operation)

This data is logged if a valid check-out packet with an extension number that lead to a good mailbox was received. And if the current configuration in hismenu for the check-out packet is configured to delete all messages in the mailbox. A message is sent to the mwla to eventually return to hissnd turn off this station numbers message waiting.

**"HISRCV: Ignored bad start character, HEX (h)"**

(Link failure, test link protocol using data scope)

This data is logged if hisrcv is looking for a start character and the character read in from the RS232C serial port is unknown. Valid start characters are <ENQ>, <ACK>, <NAK> and <STX>. The received unknown start character is displayed in hex and the packet is labeled bad.

**"HISRCV: Incomplete packet"**

(Link failure, test link protocol using data scope)

This data is logged when the first characters of the packet (<STX>) has been read in successfully, but the two second packet timer expires before the full number of characters for a packet are read. The packet is labeled bad. The partial packet is displayed in a preceding message showing what data has been received, complete or incomplete.

**"HISRCV: Unable to locate hissnd"**

(Internal error, may locate next transmission, else report condition)

This data is logged when hisrcv needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. Each time data is received over the data link from the PMS system, hisrcv retries to locate hissnd. If it is again unsuccessful, this message is again logged. At this point, the PMS system sees the link as down. When hissnd successfully restarts and attaches its name, hisrcv and hismwi can locate it and link communication will proceed as expected.

**"HISRCV: Unable to locate hissnd, data lost"**

(Internal error, message lost, report condition)

This data is logged when hisrcv needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. The data is lost and hisrcv continues to run looking for further link data. The PMS system is probably not getting any data from hissnd and so it will consider the link down. When hissnd successfully restarts and attaches its name, hisrcv and hismwi can locate it and link communication will proceed as expected.

**"HISRCV: Unable to send to hissnd, data lost"**

(Internal error, message lost, report condition)

This data is logged when hisrcv needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. The data is lost and hisrcv continues to run looking for further link data. The PMS system is probably not getting any data from hissnd and so it will consider the link down. When hissnd successfully restarts and attaches its name, hisrcv and hismwi can locate it and link communication will proceed as expected.

**"HISRCV: Unable to re-send to hissnd, data lost"**

(Internal error, message lost, report condition)

This data is logged when hisrcv needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. It tries to send once to hissnd and fails, then it is temporarily able to attach by name to hissnd again, tries to send a second time and fails. The data is lost and hisrcv continues to run looking for further link data. The PMS system is probably not getting any data from hissnd and so it will consider the link down. When hissnd successfully restarts and attaches its name, hisrcv and hismwi can locate it and link communication will proceed as expected.

**"HISRCV: Unable to read eeco OAA record"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started and it is not able to read from disk the configuration data set by hismenu.

**"HISRCV: Use hissnd \$port [+hyatt]"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started without a port first parameter. The +hyatt is the optional setting that tells the software to interface to an Encore PMS system at 1200 baud. Without the setting, the software assumes to interface to a HIS PMS system at 2400 baud.

**"HISRCV: Bad RS-232 port name"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started with an undefined port parameter.

**"HISRCV: Unable to open serial port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started and it is not able to open the serial port that it just attached to this task.

**"HISRCV: Unable to get stty on RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started and it is not able to get the current TTY options of the serial port.

**"HISRCV: Unable to SET stty on RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started and it is not able to set the desired TTY options of the serial port. This includes baud rate, parity, data and stop bit settings.

**"HISRCV: Unable to SET device attributes for RS-232 port"**

(Internal error or serial port error, check serial port and report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisrcv is started and it is not able to set the desired device attributes for the serial port. This includes disabling break, X-on/X-off, escape and other features.

**hismwi:****"HISMWI: MWI ON for station number (x)"**

(Normal operation)

This data is logged after the following task communication completes. The task mwla requests himswi to send a message waiting request for station number (x). The task himswi in turn requests hissnd to send out the specific message waiting packet. The task hissnd completes the packet transfer and replies to himswi. At this time the CDR message is logged and himswi replies to mwla.

**"HISMWI: MWI off for station number (x)"**

(Normal operation)

This data is logged after the following task communication completes. The task mwla requests himswi to send a message waiting request for station number (x). The task himswi in turn requests hissnd to send out the specific message waiting packet. The task hissnd completes the packet transfer and replies to himswi. At this time the CDR message is logged and himswi replies to mwla.

**"HISMWI: Unable to locate hissnd"**

(Internal error, may locate next transmission, else report condition)

This data is logged when himswi needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. Each time data is received over the data link from the PMS system, himswi retries to locate hissnd. If it is again unsuccessful, this message is again logged. When hissnd successfully restarts and attaches its name, hisrcv and himswi can locate it and link communication will proceed as expected.

**HISMWI: Unable to send to hissnd, data lost at level (x)" "HISMWI: Unable to turn MWI (ON/off) for mailbox (x)"**

(Internal error, message lost, report condition)

This data is logged when hismwi needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. The data is lost and hismwi continues to run looking for further link data. The PMS system is probably not getting any data from hissnd and so it will consider the link down. When hissnd successfully restarts and attaches it's name, hisrcv and hismwi can locate it and link communication will proceed as expected. The level number is for engineering use to determine which one of three levels of sending the failure occurred. The second half of the message informs what mailbox was involved and if message waiting failed for an on or off attempt.

**"HISMWI: Unable to locate mwla"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hismwi starts and it tries to locate the mwla task and fails.

**"HISMWI: Unable to locate mwla in loop"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hismwi tries to send a response to the mwla at any time and fails.

**hisresync:****"HISRESYNC: Resync message sent"**

(Normal operation)

This data is logged when hisrcsync sends a resync message to the PMS system.

**"HISRESYNC: Resync message failed"**

(Internal error, report condition)

This data is logged when hisresync fails to send a resync message to the PMS system.

**"HISRESYNC: Unable to locate hissnd"**

(Internal error, report condition)

This data is logged when hisrcsync needs hissnd to send a resync message to the PMS system. The task hisresync returns to hisrcv without completing the command.

**"HISRESYNC: Unable to send to hissnd, data lost"**

(Internal error, message lost, report condition)

This data is logged when hisresync needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. The data is lost and hisresync returns to hisrcv without completing the command.

**"HISRESYNC: Unable to re-send to hissnd, data lost"**

(Internal error, message lost, report condition)

This data is logged when hisresync needs hissnd to send data allowing the link to stay active but the task hissnd can not be found by name. It tries to send once to hissnd and fails, then it is temporarily able to attach by name to hissnd again, tries to send a second time and fails. The data is lost and hisresync returns to hisrcv without completing the command.

**hisinit:****"hisinit: Mailbox (x) MWI update"**

(Normal operation)

This data is logged for each mailbox in the system that has a message waiting type #16 (HIS PMS). This is the result of a resync command sent from the PMS system.

**"hisinit: Exit mailbox resynchronize loop"**

(Normal operation)

This data is logged after all the mailboxes in the system have been scanned for the ones that have a message waiting type #16 (HIS PMS).

**"hisinit: Unable to attach to HISINIT port"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisinit is started with a port number that can not be attached by this task.

**"hisinit: Unable to locate mwla"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisinit tries to send a response to the mwla at any time and fails.



**"hisinit: Unable to locate oaa"**

(Internal error, report condition)

\*Error condition causes abort, error displayed on console and task restart\*

This data is logged when hisinit tries to send a response to the oaa at any time and fails.

## 1.4.16 Record A Call

### 1.4.16.1 Description

Record-A-Call (RAC) is an optional feature that allows mailbox subscribers to record both ends of a two-party external call in progress at their phone. Recorded conversations are delivered to the user's voice mailbox. Unlike regular voice mail messages, Record-A-Call messages are stored immediately as saved messages, so they do not trigger Message Waiting Indicators on the user's telephone.

Record-A-Call users require the Record-A-Call feature option enabled on their telephones and mailboxes.

**Note:**

Record-A-Call on Mitel MiVoice Business systems depends on softkey integration with the MiVoice Business systems via MiNET, so Record-A-Call does not work with integrations using Digital Media Gateways (formerly PIMGs). Record-A-Call does not depend on softkey integration with the 5000 CP. Also, Record-A-Call only works on the following ICP/Release combinations:

| MiVoice Business ICP Software |                | Mitel MiVoice Office 250 |                |
|-------------------------------|----------------|--------------------------|----------------|
| ICP Software                  | NP-UM Software | ICP Software             | NP-UM Software |
| 5.1 UR2 or later              | 9.0 or later   | 3.2 or later             | 4.0 or later   |

Record-A-Call interacts with Unified Messaging for both Standard UM and Advanced UM users. Record-A-Call messages will appear in the user's Web View. For Advanced UM users, a copy of the message is sent to the e-mail client.

### 1.4.16.2 Conditions

The following are conditions for the Record-A-Call (RAC) feature on the NuPoint Unified Messaging system when using a MiVoice Business or a [MiVoice Office 250](#):

**Note:**

Record-A-Call should only be used in conjunction with the laws of the jurisdiction where the call is placed from, and/or the laws of the jurisdiction of the place being called. Mitel is not liable for use of this feature in a manner that does not conform with the applicable law (for example, laws involving wiretapping, eavesdropping, electronic surveillance, call recording, etc.). Dealers should warn customers in writing that they are responsible for the use of this feature in accordance with the law and that in many jurisdictions, both parties must be made aware that the call is being recorded in order.

**Conditions for Record-A-Call on a MiVoice Business System**

- Tones are not given to either party to indicate that the call is being recorded.
- Record-A-Call does not work with PIMG integrations.
- For best performance, Record-A-Call requires softkey event capability. However, if Record-A-Call is purchased without the Superset Softkey feature option, and is implemented on a MiVoice Business Release 5.1.3 or later, Record-A-Call is fully supported.
- Record-A-Call is limited to calls involving one trunk party and one RAC-enabled desk telephone. Record-A-Call softkeys are only functional when the telephone is connected to a trunk.
- The voice mailbox and telephone must be on the same network node.
- In order to receive Record-A-Call softkey events, NuPoint must register its telephones as 5240 devices, **except** the lines that are used for MWI, which must always be registered as 5020 devices. However, if the Record-A-Call feature is not installed, all telephones must remain registered as 5020 devices.
- In order for Record-A-Call to function, the COV/ONS/E&M Voice Mail Port feature must not be enabled in the Class of Service on incoming trunks. If the COV/ONS/E&M Voice Mail Port feature is enabled on the trunk of incoming calls, Record-A-Call will not work.
- Unlike regular voice mail sessions, Record-A-Call sessions do not time out after five seconds of silence in the conversation. In RAC sessions, 60 seconds of silence will cause automatic saving and termination of the Record-A-Call session.
- If the system goes out of service while a message is being recorded (that is, before the user saves the message), the message will not be available once the system is rebooted.
- A backup of voice mail messages will back up RAC messages just as it backs up regular voice mail messages. A backup and restore of the database will back up and restore the RAC option as well as any RAC FCOSs previously assigned to mailboxes. However, in an upgrade scenario where the previous software version is pre-release 9.0, the RAC licensable option is set to disabled by default. In this scenario, the RAC FCOS is also unassigned to any mailbox by default.

- If the Start Recording Automatically COS option is set to YES and the Record-A-Call user wishes to save the recording, the user must manually save by pressing the Save softkey before hanging up. If the Save Recording on Hang-up COS option is set to YES by the system administrator, the user's recording is saved automatically when the user hangs up. To avoid filling up the user's mailbox, the system administrator should use the Save Recording on Hang-up COS option with discretion.
- During the recording, if the Record-A-Call user presses the pause softkey, the recording stops. The recording can be paused for a maximum of ten minutes. At any time during this ten minute period, the user can resume the recording of the conversation.
- During the recording, if the Record-A-Call user places the call on hold, the recording stops. The recording does not automatically continue when the user retrieves the call from hold. If the user wishes to continue recording, the user must manually re-start the recording. Note that retrieving a call from hold, and restarting the recording generates two recordings for the call.
- During the recording, if the called party places the Record-A-Call user on hold, the recording continues.
- Record-A-Call has a 60-minute recording limit. When the recorded conversation reaches this limit, NuPoint saves the conversation and hangs up the call. The Record-A-Call softkeys disappear on the telephone (if the telephone supports softkeys) of the user who activated the recording session; however, the user remains in a two-way call with the called party. The user may start another Record-A-Call session, which is saved as another message, not appended to the previous message.
- If disk space runs out during a Record-A-Call session, NuPoint will stop the recording and save the message. If a Record-A-Call user's mailbox is full, the user will not be able to initiate a Record-A-Call session.
- Each Record-A-Call session requires three conference resources of the available 64 on the MiVoice Business ICP.

### Conditions for Record-A-Call on a MiVoice Office 250 System

- Record-A-Call on the MiVoice Office 250 requires MiVoice Office 250 Release 3.2 or higher and NuPoint Unified Messaging 4.0 or higher.
- MiVoice Office 250 users are automatically assigned the MiCollab FCOS (14) which does not have the required feature bits. [Add the following feature bits](#) to the MiCollab FCOS:
  - **007** Pause in record or play
  - **022** Make to multiple destinations
  - **023** Make and mark confidential
  - **027** Give and mark confidential

## 1.4.16.3 Configuration

The Record-A-Call (RAC) feature requires programming on both the ICP and the NuPoint Unified Messaging server. The tasks for enabling the Record-A-Call feature for licensed users can be divided into the two following task groups:

- Configuration required for MiVoice Business or MiVoice Office 250 systems
- Configuration required for NuPoint UM

### Configuration Required to Enable Record-A-Call on a MiVoice Business System

To enable the Record-A-Call feature for licensed users on the MiVoice Business , you must:

- Upgrade to MiVoice Business Release 5.1.3 or higher (includes MiVoice Business **Note:** Mitel has separate brands for its range of hardware and software-only solutions for the IP communications market. MiVoice Business is the brand name of the call-processing software that runs on hardware platforms such as the MiVoice Business ICP. The MiVoice Business ICP name continues as the brand for Mitel hardware platforms that run MiVoice Business software. MiVoice Business ICP Release 9.0 is the last software release under the old branding scheme; its successor is MiVoice Business 4.0. Release 4.0 or later)
- Purchase and enable the Advanced Voice Mail feature license.
- Configure voice mail integration ports that are representing NuPoint ports (other than MWI ports) as 5240 phone types. After configuring the phones to be 5240 types, reboot NuPoint so that it can re-register its sets. Note that telephones other than 5240 devices do not have sufficient softkey functionality and require additional feature key programming in order to support the Record-A-Call feature.
- Configure voice mail integration ports that are representing NuPoint ports (other than MWI ports) as 5240. **Note:** The MWI ports must remain as type 5020.
- Set the Record-A-Call Class of Service (COS) to "RAC Active - Yes" for the COS number applied to the user's telephone to enable Record A Call functionality on the user's telephone. Enable the other RAC COS options as required.
- Set the Recorder Hunt Group and add the appropriate voice mail ports as Recorder Hunt Group members.

For additional information or detailed procedures for enabling Record-A-Call on a MiVoice Business ICP system, refer to the *MiVoice Business System Administration Tool Help*.

### Configuration Required to Enable Record-A-Call on a MiVoice Office 250 System

For configuration instructions for the MiVoice Office 250 system, refer to the *Mitel MiVoice Office 250 and NuPoint Integration Guide*.

## Configuration Required to Enable Record-A-Call on the NuPoint UM Server

To enable the Record-A-Call feature for licensed users, you must

- Upgrade to NuPoint Messenger Release 9.0 or higher.
- Purchase the Record-A-Call Option.
- Reboot or re-activate the NuPoint system.
- [Customize an FCOS](#) to include the Record-A-Call feature bit **291**. For [MiCollab deployments](#), add the Record-A-Call feature bit to FCOS 14. Do *not* include feature bit 122 (Define Broadcast Mailbox) in the FCOS.
- Assign the Record-A-Call FCOS to all mailboxes that will use the Record-A-Call feature.

### Note:

Each Record-A-Call user's telephone and mailbox must have a Record-A-Call-enabled COS (PBX programming) and FCOS (NuPoint UM programming) assigned to it in order to be activated with the Record-A-Call feature.

## 1.4.17 Recorded Announcement Device (RAD)

### Description

One application of [Call Director](#) is to create a Recorded Announcement Device (RAD) for a line group. Recorded Announcement Device (RAD) functionality eliminates the need for external tape machines or other audio-playing devices. RADs are commonly employed in ACD environments to automatically answer lines and deliver pre-recorded messages such as, "All of our representatives are busy helping other callers, please continue to hold to maintain your call priority." When the RAD message finishes playing, the caller usually hears music-on-hold while waiting for an agent to become available. RAD messages may also give the caller information that answers their questions, thus resulting in a 'good' abandoned call. They may also provide advertising or promotional information to callers while they're waiting for someone to take their call.

To configure RAD functionality, create a call flow containing any number of Message actions and assign it to a Line Group.

### Conditions

The following conditions apply to the Recorded Announcement Device (RAD) feature:

- Use Call Director to create a call flow for line groups.

- When integrating NuPoint UM with a MiVoice Business ICP System, configure the NuPoint UM ports on the MiVoice Business ICP as 5240 IP devices if Record-A-Call is installed, and as 5020 IP devices if Record-A-Call is not installed.
- There cannot be more than one RAD per line group.
- To enable callers to press non-numeric DTMF keys such as # and \* during playback of the RAD message, ensure that the ACD group interflow paths are configured correctly on the ICP.

## Programming

To program a RAD using Call Director, see the Call Director online help topic *Voice Mail RADs*.

To access Call Director online help:

1. Open your browser, and enter **<IP address or host name of the NuPoint UM server> /npm-admin** and sign in with the administrator user name and password.
2. In the Web Console window, click the **Help** link in the upper right corner.

## 1.4.18 Softkeys

### 1.4.18.1 Softkeys - Description

The Voice Mail Softkeys feature allows users to control voice mail functions through context-sensitive keys on the telephone. This feature is available to NuPoint Unified Messaging systems that are integrated to:

- the MiVoice Business ICP (Release 5.1 UR 2 or later) using an IP integration
- the 5000 CP (Release 3.2 or later) using a SIP integration

#### Note:

The Softkeys feature is not supported for Digital Media Gateway (formerly PIMG) integrations.

### 1.4.18.2 Softkeys - Conditions

The following conditions apply to the Softkeys feature:

- Configuring Softkeys integration on the NuPoint UM server must be done using the **Text Console**.

- The Softkey feature option is available only to NuPoint UM systems that are integrated:
  - via IP to a MiVoice Business ICP, Release 5.1 UR 2 or later, or
  - via SIP to a MiVoice Office 250 , Release 3.2 or later
- Releases of the MiVoice Business ICP software prior to 5.1 UR2 have softkey functionality via the embedded voice mail feature; however, the NuPoint Softkeys feature can not be integrated with these earlier releases.
- All extension numbers enabled with the Softkey feature must be registered as 5020 or 5240 IP telephones on a MiVoice Business ICP system. Note that if you are configuring the Softkey feature for use with Record-A-Call optional feature, you may need to re-register the 5240 IP telephones accordingly. Refer to the [Record A Call](#) section for more information.

### 1.4.18.3 Configuring Softkeys on a MiVoice Business ICP System

For additional information or detailed procedures for enabling Softkeys on a MiVoice Business ICP system, refer to the *MiVoice Business System Administration Tool Help*.

To enable the Softkey feature on the MiVoice Business ICP:

1. Upgrade to MiVoice Business ICP Release 5.1 UR 2 or later. Releases of the MiVoice Business ICP prior to 5.1 UR 2 have softkey functionality via the embedded voice mail feature, however, the NuPoint Softkeys feature can not be integrated with these earlier releases.
2. Ensure that all the IP telephones representing NuPoint ports are registered as 5240 IP devices if Record-A-Call is installed or 5020 IP devices if Record-A-Call is not installed. If you need to re-configure the telephones, reboot NuPoint so that it can re-register its devices.
3. Note that you must add as many phones of type 5020 or 5240 as are programmed on the NuPoint Unified Messaging server. See [Mapping New NuPoint Extensions and Voice Mail Ports to the MiVoice Business ICP](#).
4. Set the set registration access code to match the access code entered in the NuPoint Unified Messaging server during configuration of the softkey MiVoice Business ICP integration. See [Configuring the MiVoice Business ICP Softkey Integration](#) for more information.



5. In the MiVoice Business System Administration Tool, enable the following Softkey Class of Service (COS) fields in the COS assignment form that applies to the NuPoint Unified Messaging ports (i.e. the phones used as ports):

- Voice Mail Softkey set to "Yes".
- COV/ONS/E&M Voice Mail Port
- HCI/CTI/TAPI Call Control Allowed
- HCI/CTI/TAPI Monitor Allowed.

6. Set **Voice Mail Softkey** to "Yes" in the COS assignment form that modifies the user's IP phone. This enables softkey functionality on the phones that can support it.

## 1.4.19 SMS Notification (UK Only)

### 1.4.19.1 SMS Notification (UK Only) - Description

NuPoint Unified Messaging can also use Short Message Service (SMS) Notification to send text messages to mobile phones using the RS-232 interface. The NuPoint Unified Messaging system sends call information via the RS-232 interface to a PC running the SMS Notification application. This application sends an SMS notification to a GSM device (Global System for Mobile Communications), which calls the mobile phone and transmits a text message.

**Note:**

SMS Notification is available in the UK only. Beginning with NuPoint UM Release 4.1 and later, SMS programming must be done using the **Web Console**.

### 1.4.19.2 Configuration (Web Console)

#### 1.4.19.2.1 Configure SMS

To configure the programmable External Applications interface for SMS Notification:

**Note:**

You will need to configure the SMS Notifier server before SMS Notification will work. Refer to the SMS Notifier documentation for instructions to configure the SMS Notifier server.



1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **External Applications** and select the Serial Port to use for SMS.
4. In the **Application** list, select **Programmable** and enter the following values:
  - In **Delay between requests**, enter **2**
  - In **Pre-DN ON string**, enter **ON** followed by a **space**
  - In **Pre-DN OFF string**, enter **OFF** followed by a **space**
  - In **Post-DN ON string**, enter **\R**
  - In **Post-DN OFF string**, enter **\R**
  - Set **Dept Code as DN ?** to **N**
  - Set **Unplayed number sent?** to **Y**
  - Set **Delay after Post-DN string** to **3**
  - Set **Suppress updates to MWL (y/n)** to **N**
5. Click **Save**.
6. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

To complete the RS-232 configuration for SMS Notification, you must now assign the correct message waiting type to the mailboxes that will be using it:

1. Assign message waiting type **7** (programmable interface) through the first or second message waiting type prompt in mailboxes that are to receive message waiting indicator requests. See [Assigning Message Waiting Indicators to a Mailbox](#).

You have now configured the NuPoint Unified Messaging system for SMS Notification to send text messages to mobile phones using the RS-232 interface.

## 1.4.19.2.2 External Application (RS232) Programmable Application Parameters

| Parameter               | Description                                                                                                                                | Value           |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Programmable Parameters |                                                                                                                                            |                 |
| Initialization String   | Enter the ASCII string required by the PBX. To create the string, consult the PBX operating manual or the PBX vendor for the correct code. | 0-30 characters |
| Reply String            | Enter the ASCII string sent by the PBX.                                                                                                    | 0-30 characters |

| Parameter                               | Description                                                                                                                                                                                                                                                                                                                                                                                                          | Value           |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Delay between requests                  | Enter the time to wait between requests.                                                                                                                                                                                                                                                                                                                                                                             | 0 - 255 seconds |
| Pre-DN ON string<br>Pre-DN OFF string   | <p>If the PBX requires the string <b>before</b> the directory number (sometimes called extension number), create an ASCII string .</p> <p>If the PBX sends the string <b>after</b> the directory number:</p> <ul style="list-style-type: none"> <li>- enter a period (.) to delete an existing string, if necessary.</li> <li>- enter values for the Post-DN ON String and Post-DN OFF String parameters.</li> </ul> | 0-30 characters |
| Post-DN ON string<br>Post-DN OFF string | <p>If the PBX requires the string <b>before</b> the directory number (sometimes called extension number), create an ASCII string .</p> <p>If the PBX sends the string <b>after</b> the directory number:</p> <ul style="list-style-type: none"> <li>- enter a period (.) to delete an existing string, if necessary.</li> <li>- enter values for the Post-DN ON String and Post-DN OFF String parameters.</li> </ul> | 0-30 characters |
| Department Code as DN                   | Select this check box to use the department code instead of the mailbox extension as the DN to turn lights on/off.                                                                                                                                                                                                                                                                                                   |                 |
| Unplayed Number Sent                    | Select this check box to send the number of unplayed messages currently in a mailbox to be included after the mail-box number.                                                                                                                                                                                                                                                                                       |                 |
| Delay after Post-DN String              | Enter the time to wait between Post-DN and Trailing String.                                                                                                                                                                                                                                                                                                                                                          | 0 - 255 seconds |

| Parameter               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Value                                    |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Ending Trailing String  | <p>If the PBX requires this string, create an ASCII string</p> <p>If the PBX does not require this string, enter a period (.) to delete an existing string.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0-30 characters                          |
| Suppress Updates to MWL | Select this check box to suppress updates of MWL after a user accesses the mailbox without changing status.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |
| Modem Result Code       | <p>This modem result code will be used to compare against the actual result code returned from the modem after it has finished outdialing the MWI string. If they are not matched, NuPoint Voice will retry the MWI request again later on.</p> <p><b>Recommendation:</b> For *better display* of CDR events, please turn OFF the Local Echo mode of the modem, ie. if the modem has dialed a MWI string like "ATDT*13658", it should not echo back this same string prior to returning the result code. If event messages for modem dial result are desired, enable "Pager" CDR in the Event Recorder menu.</p> | See Valid String Characters table below. |
| Connection Settings     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                          |
| IP Address              | Enter the IP address of the remote system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | (Used for PMS configuration)             |
| Server Port Number      | Enter the port that the remote device/system is listening on.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                          |

### Valid String Characters

| Character | Explanation |
|-----------|-------------|
|-----------|-------------|

|    |                 |
|----|-----------------|
| \b | Backspace       |
| \f | Form Feed       |
| \n | New Line        |
| \r | Carriage Return |
| \t | Tab             |
| \\ | Backslash       |
| \" | Double Quotes   |
| \? | Question Mark   |

## 1.4.20 Speech Auto Attendant

### 1.4.20.1 Description

#### 1.4.20.1.1 Speech Auto Attendant - Description

**Note:**

You configure SAA using Web Console.

Speech Auto Attendant (SAA) is a speech-enabled application that allows users to place calls to people quickly and efficiently by speaking their names. In addition to placing calls by name, users can say a department name or telephone number. A tutorial introduces users to the system features, and voice-based help is available to answer questions.

The SAA feature uses an automated attendant to route incoming calls based on spoken commands. Typically, you say the name of the person you want to speak to and the system transfers your call to the requested party.

SAA also supports up to 15 departments. When a callers states the word " Department " (to select a department), the caller hears, "The departments are..." followed by a list of department names. Upon hearing the list, the caller states the department name and is transferred to the department. If the Barge In command has been enabled, the caller can state the department name without having to listen to the list and be transferred directly. If no department names have been configured in the Speech Auto Attendant, the system states "there are no departments".

**Note:**

When callers say “Department”, NuPoint UM uses the Text To Speech (TTS) option to list the departments even though you may have recorded the department names. Callers can also ask for a particular department (for example, “Sales”). In this case, NuPoint confirms the department name using the recorded name, if available.

SAA can be installed as a standalone application (without any of the voice mail features included in NuPoint UM), or it can be installed along with NuPoint UM. When installed with NuPoint UM, SAA stores up to 4 telephone numbers per person and provides the user-configurable option of selecting which number will be called. When installed as a standalone application, SAA stores 1 number per person, and this number is configurable only by the domain administrator.

**SAA and Digital Media Gateway (formerly PIMG)**

If you are planning to use the Speech Auto Attendant feature with the DMG integration, then you need to set the "Voice Activity Detection" option to **OFF** to ensure that the Speech Auto Attendant functions properly. See the *NuPoint Unified Messaging Technician's Handbook* for information about configuring DMGs.

**SAA Users**

There are three types of users for the Speech Auto Attendant feature: the system administrator, registered users, and unregistered users. Each of these users can perform a specific set of SAA tasks. See [Users](#) for more information.

**User Data Source**

SAA can connect and interact with Microsoft Active Directory, the MiCollab , or with the NuPoint system mailboxes. For systems that are installed with NuPoint UM, the default data source is NuPoint UM, and all user mailboxes with FCOS bit 92 assigned are included in the data source. NuPoint UM administrators may also select Active Directory as the data source. For MiCollab systems, the data source is always MiCollab . For standalone systems, the default source is Active Directory.

**SAA Languages**

The supported [prompt languages](#) for Speech Auto Attendant are North-American (NA) English, British (UK) English, Canadian French, and European French. The bilingual option allows you to combine any two of the four languages, setting one as Primary language and one as Secondary. Callers are prompted first in the Primary language and then in the Secondary. When properly configured, the Bilingual option allows callers who speak a language name (or an extension number) in the secondary language to be automatically prompted in that same language. Callers may also select a language using the dial pad.

**Note:**

For MiCollab installations, supported languages are North-American (NA) English and British (UK) English only.

For system and department prompts, you can use the default greetings, import customized greetings, or you can record your own prompts.

**Note:**

Names that include accents (especially the French *accent grave*) may not be pronounced correctly by the Speech-to-Text engine before you record your own name. See [Name Pronunciation During Playback](#) for more information.

## SAA Licensing

SAA is an optional feature that must be licensed in order for the configuration fields to be enabled. SAA licensing includes the required number of telephony channels and the Text-to-Speech (TTS) core license that is required for all speech-enabled applications. (Note: The TTS core licensing is shared with the Advanced UM feature.) Licensing is performed on a per-user basis. When the maximum number of licensed users is reached, the administrator receives a warning message that indicates the number of users who are excluded. All licensing is done through the Mitel Applications Management Center (AMC). For more information about the AMC, see [Planning and Licensing](#) and the *NuPoint UM Technician's Handbook*. When you add additional licenses to the system, you must restart the server.

## Line Group Configuration

The speech-enabled channels are configured through Line Group assignment. A new type of Line Group is added to indicate that all the channels inside the line group are speech-enabled channels. The licensing of the total number of speech telephony channels is cross-checked when you configure the speech-enabled channels.

## SAA System


The diagram below illustrates the high-level system layout. The following table lists components and their relationships to SAA:

| Speech Auto Attendant |                            | Outside Speech Auto Attendant |                                     |
|-----------------------|----------------------------|-------------------------------|-------------------------------------|
| Admin Web Console     | Speech-Recognition service | Microsoft Active Directory    | Mitel Unified Communications Server |
| Web View interface    | Update Server              | Microsoft LCS 2005 Server     | Mitel Application Suite             |

| Speech Auto Attendant |                  | Outside Speech Auto Attendant |                                              |
|-----------------------|------------------|-------------------------------|----------------------------------------------|
| VoiceXML Browser      | NuPoint database | Microsoft OCS 2007 S<br>erver | telephony network and us<br>ers web browsers |
| Text-to-Speech engine | Grammar files    | Lotus Sametime Server         | third-party VoiceXML app<br>lications        |

**Note:**

Microsoft OCS R2 (formerly Office Communications Server 2007 Release 2) is not supported for Release 4.0 of NuPoint UM.

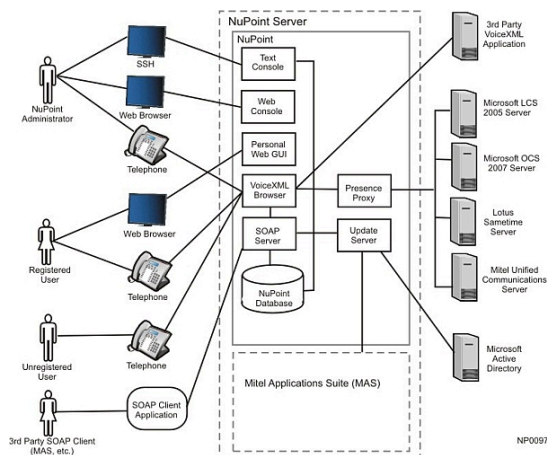

## 1.4.20.1.2 Speech Auto Attendant Users

The Speech Auto Attendant feature has the following user types:

- NuPoint UM Administrator
- Registered User
- Unregistered User

Each of these users can perform a specific set of Speech Auto Attendant tasks. The sections below describe the applicable tasks for each user.

### NuPoint UM Administrator

The NuPoint UM Administrator performs the following Speech Auto Attendant tasks:

- Installs, upgrades and uninstalls NuPoint and the Speech Auto Attendant;
- Backs up and restores the Speech Auto Attendant configuration and prompts;
- Configures the user data source;
- Manages departments that can be reached by name;
- Manages system and department prompts for the Speech Auto Attendant;

- Manages the Speech Auto Attendant dialling policies;
- Configures the Speech Auto Attendant and speech recognition engine parameters;
- Configures speech recognition line groups, ports and MiVoice Business ICP integration;
- Changes the default telephone number where a registered user will be reached from the Speech Auto Attendant;
- Configures the default extension of the live operator.

While using the Admin Web Console to manage system or department greetings and prompts, please note the following:

- Upon successful installation of SAA of the language of your choice, 3 standard system prompts are already available;
- Upon successful addition of new departments, TTS generated department prompts will also be available;
- The system and department prompts should be managed by using both the Admin Web Console and login to SAA by means of an internal trusted telephony;
- To play, import, silence or restore to default, please first hang up from the telephony session and use the Admin Web Console (Auto-Attendant/Prompts Recording);
- To play or to record, please log on using an internal trusted phone with the administrator PIN and ensure that you are logged out of the Admin Web Console. After successfully recording the prompts using an internal trusted phone, please re-login to the Admin Web Console to verify the status of each of the prompts.

## Registered User

A registered user is a licensed user whose name can be recognized by the Speech Auto Attendant.

A Speech Auto Attendant registered user performs the following tasks:

- Uses a spoken name, spoken digits, or DTMF keys to call someone;
- Performs the first-time caller dialog;
- Records the user name;
- Changes the default telephone number to be reached at from the Speech Auto Attendant.

## Unregistered User

An unregistered user is an unlicensed user whose name is not recognizable by the Speech Auto Attendant.

A Speech Auto Attendant unregistered user can only perform the following task:

- Uses a spoken name, spoken digits, or DTMF keys to call someone.



## 1.4.20.1.3 Speech Auto Attendant Features

This topic describes the following SAA features:

- [Input Options](#)
- [Calling Line Identification](#)
- [Confidence Thresholds](#)
- [Barge-In](#)
- [Tutorial](#)
- [Presence](#)
- [Disambiguation](#)
- [Custom Pronunciation](#)
- [Error Handling](#)
- [Time-out](#)

### Input Options

SAA supports the following input options:

- **Spoken name:** a caller simply says the name
- **Keypad DTMF:** using the keypad to enter digits
- **Spoken DTMF:** speaking the DTMF digits

Some users may use mixed input throughout the call. Input variations include the use of universal commands (such as "help" or "operator"), retry, no input, re-prompt and barge-in.

Refer to the *NuPoint Unified Messaging User Guide* for more information about input options.

### Caller Line Identification

The Speech Auto Attendant can distinguish the origin of a call based on the Caller Line Identification (CLID) of the caller and then play the appropriate greeting for that call.

1. **Note:** Three types of system greetings (prompts) can be recorded for the Speech Auto Attendant: Internal Greeting, External Greeting, and Expert Greeting. Refer to [Prompts](#) for instructions to record these greetings.

There are four types of callers:

- **Internal trusted caller:** This type of caller places a call from inside the company's telephony network and the caller ID is recognized as an Auto-Attendant user. The system then plays the trusted greeting (the "bingbing" earcon prompt).

- **External trusted caller:** This type of caller places a call from outside the company's telephony network and the caller ID is recognized as an Auto-Attendant user. The system then plays the trusted greeting (the "bingbing" earcon prompt).
- **Internal non-trusted caller:** This type of caller places a call from inside the company's telephony network and the caller ID cannot be recognized as an Auto-Attendant user. The system then plays the internal non-trusted greeting ("Who would you like to call?").
- **External non-trusted caller:** This type of caller places a call from outside the company's telephony network and the caller ID cannot be recognized as an Auto-Attendant user. The system plays the external non-trusted greeting ("Welcome. You are speaking to the auto attendant which uses your voice to direct your call. Say the name of the person or department with whom you would like to speak.")

**Note:** Barge-In is enabled by default for all three greetings.

All numbers that are configured in the administration web console are trusted. All of the user's desktop directory numbers (extensions) are internal-trusted. All of the alternative numbers under that user (e.g. cell phone, home phone) are also trusted.

All directory numbers (extensions) that do not have a user associated with them (e.g. a phone in a conference room) are all internal non-trusted.

## Confidence Thresholds

The system recognizes speech at two confidence levels: low and high.

A low confidence level results when the system does not recognize a requested name, number, or department and instructs the caller to repeat the call request.

A high confidence level results when the system recognizes a requested name, number, or department and thus transfers the call to the appropriate destination.

Confidence thresholds are used to determine whether explicit or implicit confirmation is required. These thresholds are determined by the configurable low/high confidence levels. Refer to [Basic Speech Recognition Parameters](#) for confidence level threshold configuration. For troubleshooting help, see [Confidence Threshold Recommendations](#).

## Barge-In

This feature allows users to interrupt a system prompt with a speech or keystroke command. The Speech Auto Attendant stops playing the prompt and responds to the command. Barge-in allows experienced system users to skip quickly through the prompts.

Barge-in uses the standard universal commands such as "cancel", "help", and "operator". Experienced users can barge in with voice or DTMF at greetings and questions. Barge-in applies to all three [input options](#).

The system administrator can enable or disable barge-in on a system-wide basis. Refer to [Basic Speech Recognition Parameters](#) for configuration.

This single system-wide barge-in configuration is applicable for the following four scenarios:

- During initial greetings (any of the three greetings);
- During the two levels of re-prompt in cases of no input and recognized result below low confidence;
- During the confirmation question of explicit confirmation;
- During the prompting of the implicit confirmation.

Refer to the *Messaging User Guide* for more information about the barge-in feature.

## Tutorial

SAA provides a tutorial for new users that allows them to record their name when the Speech Auto Attendant application is configured with a NuPoint Unified Messaging system.

The tutorial is only available to registered internal and external trusted callers. Barge-in will be turned off for first-time callers throughout the tutorial. Trusted callers will be forced to record their name the first time that they call the system. First-time callers are forced to listen to the tutorial to its completion before making any calls.

SAA detects a first-time user only by the CLID of the user's registered desktop phone.

## Presence

SAA provides the ability to determine, and optionally play back, the current presence state of the matched person prior to transferring the caller.

**Note:** The Presence feature is only supported when SAA is configured to use Microsoft Active Directory as its user data source.

The Release 4.0 Presence feature supports the Microsoft Live Communication server (LCS 2005 SP2), Office Communications server 2007, Lotus Sametime 8.0, and Mitel Unified Communications Server.

The caller is prompted with the current presence status of the person called. The presence information is for reference only, and calls are transferred regardless of the presence status of the called party. Standard universal barge-in commands such as "cancel" and "help" during a call transfer are supported.

Presence status information is optional. It is enabled by default for both internal and external callers, and is independent of whether the caller is trusted or non-trusted. It can be turned off using the **Presence for Internal Callers** and **Presence for External Callers** check boxes in the Web Console. For more information, see the [Presence section](#).

## Disambiguation

The Speech Auto Attendant provides the ability for calls to be automatically transferred to the operator for multiple directory matches (for example, two people named "John Doe" in the same directory). Callers will only be notified of duplicate names but not prompted to choose a specific one. Callers will be immediately transferred to the operator and will be asked for more details in order to transfer the call to the right person.

If two or more people have names that sound the same, or are the same, the system transfers the caller to the operator, who can then resolve the ambiguity by asking for the department or location of the person being called.

## Custom Pronunciation

The custom pronunciation tool allows administrators to customize name pronunciation. For example, if you want to have a user named Mickey Mouse also recognized as Mickey Rodent, you can add a pronunciation of "rodent" for the word "mouse". When a user calls and says either "mouse" or "rodent", Mickey Mouse will be recognized. Multiple pronunciations can be added for each user. Bilingual pronunciations can also be customized (for example, you can also add a pronunciation of "souris" for "mouse".)

You can add nicknames, such as equating "Bill" or "Will" with the name "William".

You can also add phonetic representations of a user's name. For example, an English SAA system will have a higher match rate for the name "Benoit" when you add a phonetic pronunciation (like "benwah") to its dictionary. See [Custom Pronunciations](#) for configuration instructions.

## Error Handling

SAA responds to an error by instructing the user to retry the command. After two recognition errors, the system transfers the caller to the operator.

Callers are directed back to the main menu or to the operator as governed by the confidence level of recognition and system errors.

## Timeout

SAA times out when it detects no speech or DTMF input, and triggers help prompts to be played to the user. The length of the timeout period is configurable in the [Basic Speech Recognition Parameters](#) section.

## 1.4.20.2 Installation and Configuration

### 1.4.20.2.1 Speech Auto Attendant Installation

The Speech Auto Attendant can be installed along with NuPoint Unified Messaging or as a standalone application, without any of the voice mail features included in the NuPoint UM product.

The following blades are required to install the Speech Auto Attendant feature:

| Option                                       | SAA with NuPoint UM                                                                                                                                                                                                          | Standalone SAA                                                                                                                                                                                                               |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Base SAA                                     | NPUM Speech Attendant                                                                                                                                                                                                        | NPUM Speech Attendant                                                                                                                                                                                                        |
| Speech Recognition<br>(Default is bilingual) | Up to two of the following:<br><br>- NPUM Speech Recognition American English<br><br>- NPUM Speech Recognition British English<br><br>- NPUM Speech Recognition Canadian French<br><br>- NPUM Speech Recognition Euro French | Up to two of the following:<br><br>- NPUM Speech Recognition American English<br><br>- NPUM Speech Recognition British English<br><br>- NPUM Speech Recognition Canadian French<br><br>- NPUM Speech Recognition Euro French |
| Text-to-Speech                               | Select up to two blades that match the selected Speech Recognition blades:<br><br>- NPUM TTS American English<br><br>- NPUM TTS British English<br><br>- NPUM TTS Canadian French<br><br>- NPUM TTS Euro French              | Select up to two blades that match the selected Speech Recognition blades:<br><br>- NPUM TTS American English<br><br>- NPUM TTS British English<br><br>- NPUM TTS Canadian French<br><br>- NPUM TTS Euro French              |
| Full Set Prompts                             | - Extended set of prompts as required for NuPoint operation                                                                                                                                                                  | - not required. (Standalone SAA prompts are included in the Speech Recognition blade.)                                                                                                                                       |

## Installing SAA with NuPoint UM

Speech Auto Attendant software installation is automatic when NuPoint Unified Messaging software is being installed. See the *NuPoint Unified Messaging Technician's Handbook* for NuPoint UM software installation instructions.

## Installing SAA as a Standalone Application

You can install the Speech Auto Attendant as a standalone application in one of two ways:

- by clicking the "NPM Master Installer" blade link in the server manager Blades panel, which installs only the packages for which the system is licensed.
- by clicking the "NPM Speech Attendant" blade install link in the server manager Blades panel, which installs the Auto Attendant (including the English recognition package).

To complete the installation, install the appropriate Speech Recognition blades and Text-to-Speech blades.

See [Installing an Optional Feature](#) for software blade installation instructions.

## Installing SAA Text-to-Speech Package

SAA has a dependency on the Text-to-Speech (TTS) language. The TTS language you install must match the installed Speech Recognition language. TTS is an optional feature that requires licensing. You must purchase at least one TTS license for SAA functionality.

See [Installing an Optional Feature](#) for software blade installation instructions.

## Installing Additional Speech Recognition Applications

In this release, only the Auto Attendant application is bundled with the system. You can also install other speech recognition applications through the MSL Blades panel. Once a speech recognition application blade is installed, the application will be displayed as an option in the list of speech recognition applications, along with the Auto Attendant.

In order to install an extra speech recognition application on the NuPoint UM system, you must first buy or license it (some applications may also be available for free). You then need to navigate to the MSL Blades panel, find the application in the list and click the "Install" link.

When the installation is completed, the new speech recognition application will be available in the line group form. See [Configure a Speech Recognition Line Group](#).

**Note:**

Some speech recognition applications have special requirements to configure some parameters or restart services in order to be fully functional. Refer to the documentation provided with the speech recognition application for this information.

## Upgrading from a Previous Release of NuPoint UM

Speech Auto Attendant was introduced in NuPoint Unified Messenger Release 12.0. If you are upgrading from Release 11.0 or earlier, you need to perform the following steps to upgrade the system and install the Speech Auto Attendant feature:

1. Acquire the proper licenses to upgrade to the latest NuPoint UM release and to install the Speech Auto Attendant feature.
2. Upgrade the operating system.
3. Upgrade the NuPoint UM system. The software upgrade will install the new NPM Base Speech Auto-Attendant blade automatically if the system is properly licensed.
4. Install the appropriate NPM Speech Auto-Attendant English Text-to-Speech package.

See the *NuPoint Unified Messaging Technician's Handbook* for full instructions.

### 1.4.20.2.2 Configuration Overview

Speech Auto Attendant configuration consists of the following tasks:

| Task:                                             | Reference:                                |
|---------------------------------------------------|-------------------------------------------|
| 1. Set SAA Language and basic speech parameters   | Basic Speech Recognition Parameters       |
| 2. Set up an administrator password               | Administration Parameters                 |
| 3. Create a speech recognition line group         | Configure a Speech Recognition Line Group |
| 4. Define a User Data Source                      | About User Data Source                    |
| 5. Configure the User Data Source update schedule | User Data Source Parameters               |
| 6. (Optional) Add departments                     | About Departments                         |
| 7. (Optional) Add prompts                         | About Prompts                             |
| 8. (Optional) Add a dialing policy                | About Dialing Policies                    |
| 9. (Optional) Configure presence                  | Presence                                  |
| 10. (Optional) Add custom pronunciations          | Custom Pronunciations                     |
| 11. (Optional) Install Active Directory Snap-in   | Install AD Snap-in                        |

### 1.4.20.2.3 Planning and Licensing

When a Speech Auto Attendant (SAA) license is purchased and assigned to a user, that user can be configured as one of the following:

- internal trusted
- private internal trusted

Note that licenses are required for both [users](#) *and* departments; SAA can support up to fifteen departments.



| Type of user /caller/mail box | SAA License Required? | Recognizable by SAA? | FCOS Mailbox | Name Field | Typical Use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------|-----------------------|----------------------|--------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Administrator                 | N                     | Y                    | N/A          | N/A        | <p>The SAA administrator role is installed by default and cannot be removed. Its purpose is to execute administrative functions.</p> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>To access administrative functionality, call into the system from any internal trusted phone and say "administrative functions," then enter the Administrator PIN.</li> <li>The administrator does require a mailbox by the name "Administrator."</li> <li>"Administration" is also a common department name.</li> </ul> |

| Type of user /caller/mail box           | SAA License Required? | Recognizable by SAA? | FCOS Mailbox        | Name Field                                                                                                              | Typical Use                                                                                                             |
|-----------------------------------------|-----------------------|----------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Internal trusted user/caller            | Y                     | Y                    | FCOS bit 92         | Proper format                                                                                                           | Typical users in the organization whose name should be recognizable by SAA.                                             |
| Internal trusted users/caller (private) | Y                     | N                    | Without FCOS bit 92 | Proper format                                                                                                           | Public figures in the organization (such as the CEO or executives) who want to use SAA but do not want to be reachable. |
| Internal non-trusted user/caller        | N                     | N                    | Without FCOS bit 92 | N/A<br><br>(No mailbox assigned)                                                                                        | Conference rooms or the lobby.                                                                                          |
| External caller                         | N                     | N                    | Without FCOS bit 92 | N/A<br><br>(no mailbox assigned)                                                                                        | Callers from the public network.                                                                                        |
| Non-SAA licensed mailbox                | N                     | N                    | N/A                 | To assign a name to the mailbox without consuming an SAA license, insert an underscore between the first and last name. | Mailboxes whose owners do not want to consume SAA license.                                                              |

### Mailbox Name Format

When completing the SAA mailbox name field, use the following format:

- the field should *not* be blank (please note that although the name field is optional for mailboxes, it is mandatory for SAA)
- the field should contain, as a minimum, a first and last name

- the name should be pronounceable in the choice of language installed (primary and secondary: en-US, en-UK, fr-CA, fr-FR)
- if a title is included, it should be in long form (Mister, not Mr.)
- the following special characters/spacing can be used:
  - firstname[sp]lastname (Donald Duck)
  - lastname[, ]firstname (Pan,Peter)
  - firstname[sp]middlename[sp]lastname (Winnie the Pooh)
- hypens, dots and honorifics are permitted; however, if an honorific is included, it should be in long form (Mister, not Mr.)
- initials are permitted but not desirable (J R is recognized as "J R")

**Note:**

- Even with FCOS bit 92, if an SAA name field is improperly configured, its mailbox will not use an SAA license and will not be recognized by SAA. To avoid this common error, enter a properly formatted SAA mailbox name.
- If only the first name is programmed (no last name), the mailbox will not become an internal trusted and will not be recognized by SAA, even with FCOS bit 92.
- If the number of departments exceed 15, each additional department can be assigned a mailbox as a "internal trusted user" in order to have its department name made recognizable by SAA. In essence, this enables the system to treat the departments as people. Note that:
  - a license is still consumed for the extra department
  - when callers say "department," any departments not listed in the departments configuration page will not be played back.
  - the department names field does not follow the same format as the name field of mailboxes. Single-word names (such as Sales or Payroll) are allowed.

## 1.4.20.2.4 Mailbox Names and SAA Recognition

If you are using NuPoint UM as your data source, when you configure mailbox settings you must add a name to the mailbox Name field. If the field is blank, the mailbox cannot be used for the SAA user.

**Note:**

In order for SAA to ring the extension of the recognized called party, you must configure both the phone number and a pronounceable name.

Enter mailbox names according to the following specifications:

- As a minimum, specify a First name followed by a Last name separated by a space. Both names are required as a name cannot be recognized by SAA if only one word exists in the mailbox Name field.
- The maximum combined characters for the First name, Last name, and middle name (separated by commas) is 31.
- The maximum number of characters for the First name, Last name, and Middle name are 29, 29 and 27 respectively.
- The minimum number of characters for the First name, Last name, and Middle name is 1.
- You cannot enter digits 0-9.
- Letters are not case sensitive.
- Common names and special characters, such as apostrophes, hyphens, and periods, are permitted (for example, St.).
- The name should be pronounceable in the language selected ( en-US, en-GB, fr-CA, fr-FR).
- Single letters are permitted for First names and Last names.
- The first word, if it is not followed by a coma, is the First name.
- The last word, if it is proceeded by coma, is the First name.

After you manually update the information

- Under "Current Users" verify the names are recognizable.
- Verify the licensing of users and departments to confirm they are included.
- Verify the names by calling into SAA before deployment. (Due to the varying format of user names in the world (different origin, country, translation and language issues), and the source of data (typically from a company database or spreadsheet), you must pay special to non-typical names.)

## Examples

| Examples of Acceptable Mailbox Name Entries                                                             |               |                      |
|---------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Case                                                                                                    | Example       | Recognized by saying |
| Case 1:<br><br>First name followed by a spaces then Last name                                           | Donald White  | "Donald White"       |
| Case 2:<br><br>First name of one character only followed by a space then Last name                      | W Smith       | " W Smith"           |
| Case 3:<br><br>First name one character in length followed by a period and a space then Last name       | W. Smith      | " W Smith"           |
| Case 4:<br><br>Last name followed by a comma and space then First name                                  | Smith, Harold | "Harold Smith"       |
| Case 5:<br><br>First name followed by a space then Middle name(s) followed by a space(s) then Last name | W G Smith     | "W G Smith"          |

## Special Considerations for Department Names

SAA supports a maximum of 15 departments within its Department List. SAA can support additional departments if they are defined as Mailbox Users. In that case, the additional departments would not appear in the Department List playback, but would be available for speech recognition, similar to system users. Since the department would be defined using a mailbox, the mailbox name would need to consist of two words to be recognized by SAA.

## 1.4.20.2.5 Configure a Speech Recognition Line Group

To add a speech recognition line group to your system configuration:

1. From the navigation tree, click **Offline Configuration > Edit Offline Configuration**.  
The Offline Configuration navigation tree opens.
2. When prompted to **Duplicate Active Configuration**, click **Yes**.
3. In the navigation tree, click **Line Groups** and then click **Add**.
4. Configure the following parameters:
  - **Number:** Add a number for the line group or click on the Next Available button to add an unused list number.
  - **Name:** Enter a name for the line group.
  - **Application:** Select "Speech Recognition" from the list of available applications. The Speech Recognition Application field appears. Note: This line group option is not available if the system is not licensed for speech recognition.
5. On the Speech Recognition tab,
  - **Speech Recognition Application:** Select the application that corresponds to this line group. This list will be populated according to the speech recognition applications that are currently available on the NuPoint Unified Messaging system. If you select the "VoiceXML Application", then the VoiceXML Start URL field will appear. Enter the URL of the VoiceXML application in this field.
  - **Attendant's Extension:** Enter the extension number that callers can dial to contact an operator.
6. On the Lines tab, click **Add**.
7. Configure the following additional parameters:
  - **Line Triplet:** Enter a line number for the line group or click on the Next Available button to add an unused line number.
  - **Number of Lines:** Enter the number of lines in this line group.
  - **PBX:** Select the PBX to use for this line group.
  - **Mapping:** In a multi-node system, enter the module number, line card number, or port designator to add to the line group.

**Note:**

Support for multiple-module servers (e.g. NPM UM 640) was discontinued with NuPoint Release 6.0.

8. Click **Add** to save the configuration data.
9. Click **Save** to add the new line group to the list of existing line groups. A confirmation message regarding the configuration changes appears.

10. In the navigation tree, select **Commit Changes and Exit**. Confirm the **commit**. Your changes are now saved to the duplicate (inactive) configuration. Configuration changes will not take effect until you have [activated the inactive configuration](#).

## 1.4.20.2.6 User Data Source

### 1.4.20.2.6.1 About User Data Source

The user data source is the system from which Speech Auto Attendant retrieves its list of users. The available sources are:

- **NuPoint UM**: this is the default user data source when installing a new NuPoint Unified Messenger system with the Speech Auto Attendant feature. All NuPoint UM mailboxes on the local server that have an FCOS with feature bit **92** assigned are included in the NuPoint UM data source.
- **Microsoft Active Directory**: use this LDAP data source for NuPoint UM or standalone systems if you are planning to use the Presence feature of SAA.
- **Lotus Domino**: use this LDAP data source when the NuPoint UM system is integrated with Lotus Notes.
- **MiCollab**: this is the user data source for SAA when installed with the MiCollab version of NuPoint UM.

You must specify only one user data source.

When a system has been configured for a particular user data source, modifying that data source configuration affects multiple users on the system. For that reason, the user data source fields are disabled in order to prevent accidental changes. User data source configuration can be specifically modified using the Modify the User Data Source procedure.

**Note:**

Changing data source configuration causes all users of the system to be initialized.

Some user data sources do not provide a mechanism for SAA to detect changes and refresh its user list. After adding, modifying, or deleting users, the changes may not be effective until the next scheduled automatic refresh (as configured in the Speech Auto Attendant parameters). You can force a manual refresh of the system in order to update the SAA user list before the next scheduled automatic refresh. See Update the User Data Source for more information.

**Note:**

The Speech Auto Attendant feature requires that you enter the accented character for proper recognition of the spoken name. Ensure that your data source contains the accented characters. See Mailbox Names with Accented Characters for more information.

### 1.4.20.2.6.2 Define a NuPoint User Data Source

The current NuPoint UM system is the default user data source when you install a new NuPoint UM system with the Speech Auto Attendant feature.

When the Speech Auto Attendant user data source is configured for the current NuPoint Unified Messaging system, then you can specify the default Speech Auto Attendant number using the Web console. A field entitled "Auto-Attendant Default Extension" appears in the [General tab](#) when you edit a mailbox in the Advanced mode. You can select the default number from the list of configured phone numbers.

**Note:**

- Speech Auto Attendant can only fetch users from the NuPoint UM system on which it resides. It cannot retrieve users from a remote NuPoint Unified Messaging system.
- The "Auto-Attendant Default Extension" field will not appear in the administration web console if Speech Auto Attendant is not installed, or if the user data source is not configured to fetch information from the current NuPoint UM system.

To configure the user data source for the current NuPoint UM system:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Data Source**. The User Data Source window appears.
3. In the **Source Type** field, select **NuPoint** from the drop-down menu.
4. Click **Save**.

The system automatically selects every mailbox that is enabled with FCOS bit **92** (Dial-by-Name database) and a properly formatted display name for the Speech Auto Attendant user data source.



### 1.4.20.2.6.3 Define an Active Directory User Data Source

You can also choose to retrieve users from an existing Microsoft Active Directory server for the Speech Auto Attendant user data source. Both technologies use the LDAP protocol to look up/retrieve information.

To configure the user data source for Active Directory:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Data Source**. The User Data Source window appears.
3. In the **Source Type** field, select **Active Directory** from the drop-down menu. The data source configuration fields for the LDAP server appear.
4. In the **LDAP Server Address** field, enter the fully qualified domain name (FQDN) of the LDAP server OR its IP address, OR the root Directory Server Entries (DSE).

**Note:**

To use the FQDN of the data source server or a root DSE, the NuPoint UM system must be configured to communicate with a DNS server that can resolve the FQDN of the LDAP server or root DSE.

5. In the **LDAP Search Base** field, enter the location in the Active Directory data structure from which the list of users should be fetched. **Note:** You can select the **Recursive** check box to tell the Auto-Attendant to browse sub-directories of that location (context) in the data structure.
6. In the **LDAP Object Classes** field, enter the LDAP entities that will be retrieved and used in the Auto-Attendant. You can specify alternate object classes if the LDAP server is configured to use the sub-class of the user. You can enter multiple object classes in this field, separated by commas.
7. In the **LDAP SAA Private User Attribute** field, enter the LDAP server Extended Attribute used to identify users as Private. (For example, the LDAP database might use an attribute called "extensionAttribute10" to hold the True or False flag for Private User? In this case, you would enter **extensionAttribute10** in this field.)
8. In the **LDAP SAA User Attribute** field, enter the LDAP server Extended Attribute used to identify SAA enabled users. (For example, the LDAP database might use an attribute called "extensionAttribute11" to hold the True or False flag for SAA User? In this case, you would enter **extensionAttribute11** in this field.)
9. In the **LDAP SAA Default User Extension Attribute** field, enter the LDAP server Extended Attribute used to identify the extension or telephone number to direct SAA calls to. (For example, "extensionAttribute12" may contain a reference to "homeTelephone" or "mobile". These are variables that are associated with telephone numbers in the LDAP database.

10. In the **LDAP Administrator DN** field, enter the administrator user credentials in order to retrieve data from the LDAP server.
11. In the **LDAP Login Password** field, enter the administrator password in order to retrieve data from the LDAP server.
12. Click **Save**.

The system automatically selects every mailbox that is in the specified LDAP server data structure for the Speech Auto Attendant user data source. All users matching the configuration parameters will be picked up for the user data source.

You can exclude specific users from the Speech Auto Attendant user data source through the optional [Active Directory Snap-In](#).

You can click the **Test Connection** button to test the connection for the current configuration. This test can take a few minutes to execute depending on various parameters (network latency, LDAP server performance, etc.). A dialog shows the progress and reports validity of the connection. In the case of an invalid connection, a message indicating the source of the connection problem is displayed.

#### *1.4.20.2.6.4 Define a MiCollab User Data Source*

You can also choose to retrieve users from an existing MiCollab server for the Speech Auto Attendant user data source. **Note:** Only users from the local MiCollab server can be retrieved. The Auto-Attendant cannot retrieve users from a remote MiCollab server.

To configure the user data source for the MiCollab server:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Data Source**. The User Data Source window will appear.
3. In the **Source Type** field, select **MiCollab** from the drop-down menu.
4. Click **Save**.

The system picks up every public user of MiCollab configured on this server for the Speech Auto Attendant user data source.

#### **Note:**

The “ MiCollab ” user data source item is not available if MiCollab has not been installed on the server.

## 1.4.20.2.6.5 Modify the User Data Source

You can modify the user data source configuration for the Speech Auto Attendant using the Edit button.

**Note:**

- Changing the data source configuration will cause all users of the system to be re-initialized.

- The **Force Update** button will be disabled while editing the user data source.

To modify the user data source:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Data Source**. The User Data Source window appears.
3. Click **Edit**. The User Data Source fields become enabled.
4. Modify the data source type or configuration parameters as required.
5. Click **Save**. A confirmation dialog appears.
6. Click **OK** to confirm the changes.

The Speech Auto Attendant user data source is refreshed upon saving the modifications. The users from the new data source are available after a few minutes.

## 1.4.20.2.6.6 Update the User Data Source

Some user data sources do not provide a mechanism for Speech Auto Attendant to detect changes and refresh its user list. After adding, modifying, or deleting users on the system, the changes may not be effective until the next scheduled automatic refresh (as configured in the Speech Auto Attendant [user data source parameters](#)). You can force a manual refresh of the system in order to update the Speech Auto Attendant user list before the next scheduled automatic refresh.

To force a manual refresh of the system, follow the steps below:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Data Source**. The User Data Source window will appear.
3. Click **Force Update**. The system refresh will begin and a progress window will appear.

The system refresh may take a few minutes to complete. When the refresh is complete, the date and time of the update will appear in the right-hand corner of the User Data Source window.

## 1.4.20.2.7 Current Users

### 1.4.20.2.7.1 About Current Users

Current users are those users who have been configured for the Speech Auto Attendant [user data source](#). You can view all current users, search for particular users, or export the list of users to a .CSV file.

The Speech Auto Attendant feature is licensed on a per-user basis. When the maximum number of users allowed by the license is reached, a warning message is displayed indicating the number of users that are being excluded from the user list.

[Departments](#) count toward the maximum number of users allowed by the system. They are given higher priority than individual users when determining which entries to exclude from the user list. If the maximum number of licensed users has been reached, the system allows you to continue to add departments to a maximum of 15. When you do a [forced update](#), users who originally had SAA functionality may be excluded from SAA to make room for the newly-added (higher priority) departments.

The user data source allows private users to be defined. Private users are usually public figures, owners or directors of a company, who do not want people to reach them directly. People marked as "private" in the user data sources are not included in the Speech Auto Attendant user list for privacy purposes, but are considered as trusted users when calling the system. Private users count toward the maximum number of users allowed by the license.

### Re-using an SAA Mailbox Number

When you use NuPoint as your data source, SAA-recorded information for mailboxes is maintained until the mailbox is deleted and the user data source is updated. If a forced update is not performed, a mailbox number that is being re-used may continue to play the original recorded greeting.

To delete a mailbox and the associated recording, you must perform the following steps:

1. Delete the mailbox.
2. Perform a forced update.
3. Add the new user information to the old mailbox number.
4. Perform a forced update.
5. Have the new user run the SAA tutorial and record the new SAA name.

## 1.4.20.2.7.2 Find Current Users

You can view a list of users currently configured for the Speech Auto Attendant feature, or you can search for specific users.

### Note:

- The user data displayed will vary according to the configured data source type. On a system configured with NuPoint Unified Messaging as the user data source, the user name and extension number will be displayed. For Active Directory systems, the user's work extensions will be displayed. For MiCollab systems, the user's main telephone number will be displayed.
- Private users are identified with a padlock icon next to their name.

To view a list of configured users:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Current Users**. The Auto Attendant Current Users window appears displaying the list of users configured for the Speech Auto Attendant feature. The users will be displayed in a read-only list, which will be sorted alphabetically.

To search for specific users in the Speech Auto Attendant user data source:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Current Users**. The Auto Attendant Current Users window appears.
3. In the **Find** field, enter the name or extension of the person you want to locate.
4. Click **Search**. The information for that user will appear if the user resides in the Speech Auto Attendant user data source. If the user is not in the user data source, then a "No users found matching this criteria" message will appear.

## 1.4.20.2.7.3 Export Current Users

You can export the list of currently-configured SAA users to a .CSV file.

To export the user list:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu appears.
2. Click **Current Users**. The Auto Attendant Current Users window appears displaying the list of users configured for SAA.

3. Click **Export**. The File Download window appears.
4. Click **Save** and select a location for the file. Rename the file if you want.
5. Click **Save**. The file is saved to the specified location in .CSV format.

**Note:**

The export function always exports the full list of users, no matter what search may have been performed before. The exported user list is sorted alphabetically.

## 1.4.20.2.8 Departments

### 1.4.20.2.8.1 About Departments

Speech Auto Attendant can support up to 15 departments in the user data source. Departments are defined by a name and a telephone number, and are sorted alphabetically in the department list window. Departments can be added, edited, or deleted from the user data source.

**Note:**

Departments count toward the maximum number of users allowed by the system. They are given higher priority than individual users when determining which entries to exclude from the user list. If the maximum number of licensed users has been reached, the system allows you to continue to add departments to a maximum of 15. When you do a force update, users who did have SAA functionality may be excluded from SAA in order to make room for newly-added (higher priority) departments.

### 1.4.20.2.8.2 Add a Department

You can add up to 15 departments to the Speech Auto Attendant user data source.

Departments count toward the maximum number of users allowed by the system. They are given higher priority than individual users when determining which entries to exclude from the user list. If the maximum number of licensed users has been reached, the system allows you to continue to add departments to a maximum of 15. When you do a forced update, users who originally had SAA functionality may be excluded to make room for newly-added (higher priority) departments.

To add a department to the user data source:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.

2. Click **Departments**. The Departments window appears.
3. Click **Add**.
4. In the **Name** field, enter the department name (mandatory). If your system is configured for a Bilingual language, enter the department name as spelled in both the Primary and Secondary languages.

**Note:**

You can also enter the name of a greeting, but you are limited to characters that can be handled by the speech recognition software. These are the letters from A to Z and spaces. No other characters are allowed.

5. In the **Number** field, enter the telephone number of the department (mandatory).
6. Click **Save**. The new department is added to the list.

**Note:**

Modifications to the departments do not take effect on the system until the next scheduled automatic update. You can force a manual update by clicking the **Force Update** button. A dialog appears to inform you that the update is in progress. The date and time of the update appear in the right-hand corner of the window and are refreshed as the department information is updated. The **Force Update** button is disabled if no changes were made to the departments since the last update.

### 1.4.20.2.8.3 Edit a Department

You can edit the name or telephone number of an existing department, one at a time.

To edit department information:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
1. Click **Departments**. The Departments list appears.
2. Select a department from the list and click **Edit**.
3. Edit the department information as required.
4. Click **Save**. The department information is updated in the list of departments.

**Note:**

Modifications to the departments do not take effect on the system until the next scheduled automatic update. You can force a manual update by clicking the **Force Update** button. A dialog appears to inform you that the update is in progress. The date and time of the update appear in the right-hand corner of the window and are refreshed as the department information is updated. The **Force Update** button is disabled if no changes were made to the departments since the last update.

## 1.4.20.2.8.4 Delete a Department

You can delete a department from the existing list of departments, singly, or all departments at one time.

To delete a department from the department list:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Departments**. The Departments list appears.
3. Select a department or departments from the list and click **Delete**. A confirmation dialog for the deletion appears.
4. Click **OK** to confirm the deletion. The department is deleted from the list.

**Note:**

Modifications to the departments do not take effect on the system until the next scheduled automatic update. You can force a manual update by clicking the **Force Update** button. A dialog appears to inform you that the update is in progress. The date and time of the update appear in the right-hand corner of the window and are refreshed as the department information is updated. The **Force Update** button is disabled if no changes were made to the departments since the last update.

## 1.4.20.2.9 Prompts

### 1.4.20.2.9.1 About Prompts

Speech Auto Attendant prompts are customized greetings that can be recorded or imported so that a specific greeting will be played to callers.

There are two types of prompts:

- **System prompts:** standard auto attendant greetings (Internal Greeting, External Greeting, or Expert Greeting) that are played when a call comes into the system.



- **Department prompts:** specific auto attendant greetings that are played when a caller chooses to call a specific department.

You can import prompts that are shipped with the SAA feature or you can record your own. You can also play and silence (delete) greeting prompts.

### 1.4.20.2.9.2 Prompt Languages

Speech Auto Attendant supports the following languages:

- North American English (NA)
- UK English (UK)
- Canadian French
- European French

The **bilingual** option of SAA allows you to combine any two of the four languages, setting one as Primary language and one as Secondary. Callers are prompted first in the Primary language and then in the Secondary. Callers have the option of speaking the name of their preferred language, or saying an extension number in their preferred language. The system then returns prompts in the caller's preferred language.

Notes:

- Internal callers are not given a language option. They are prompted in the primary language only.
- Mailbox settings always override Line Group settings. For example, if you configure a Line Group to be bilingual and then assign a custom LCOS with an alternate language to a mailbox, callers will receive prompts in the mailbox's language, irrespective of which of language they selected when they first reached the system.
- SAA cannot control the language of prompts outside the SAA call flow (for example, in a line group or the user's mailbox).
- If you change primary and secondary languages, you must perform a reactivation.

For more information about configuring bilingual languages, see [Basic Speech Recognition Parameters](#).

### 1.4.20.2.9.3 Record a Prompt

Speech Auto Attendant prompts can be recorded so that callers hear customized greetings. You can record either system prompts or department prompts.

**Note:**

If no prompts are recorded, then the system plays the default prompts.

To record a prompt:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Prompts Recording**. The Speech Auto Attendant Prompt window appears.
3. In the **Category** field, select the type of greeting prompt to record (System prompt or Department prompt).
4. In the list of system prompt or department prompt greetings, select a greeting to record.
5. Click **Record**. A window with recording instructions appears.
6. Following the onscreen instructions, call into the system on a speech recognition port and say "Administrative functions".
7. Enter the administrator pass code using DTMF keys (as set in the Administrator PIN field of [Administration Parameters](#)).
8. Record the system greeting or department greeting. The maximum recording length of a greeting is 2 minutes.
9. Click **Save**. The status for the greeting will change to "Recorded" in the list of greetings and the greeting will be effective immediately.

**Note:**

- All greeting prompts recorded into Speech Auto Attendant are normalized and trimmed to ensure good cohesion with the rest of the Auto Attendant prompts. Prompts are normalized to the RMS value of 2200. Trimming drops any silence (signal below a power of 300) at the beginning and end of prompts.
- You can revert back to the default prompts (factory settings) by clicking **Restore Default** if you are not satisfied with your recording. This action discards your recording and resets the greeting prompt to the default setting.
- If callers are consistently being transferred to the Attendant for help, check the [No Speech Time-out value](#) programmed on the Basic Speech Recognition Parameters page. It should be at least 5 seconds longer than the recorded greeting.

### 1.4.20.2.9.4 Import a Prompt

You can import a prompt instead of recording one manually. You can import either system prompts or department prompts.

**Note:**

The supported audio file formats are 8 kHz A-Law and m-Law WAV files (as with Call Director).

To import a prompt:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Prompts Recording**. The Speech Auto Attendant Prompt window appears.
3. In the **Category** field, select the type of greeting prompt to import (System prompt or Department prompt).
4. In the list of system prompt greetings or departments, select a prompt for which to import the greeting.
5. Click **Import**. The Import Template window appears.
6. Browse to the location of the audio file of the greeting template to import and enter the path in the template filename field.
7. Click **OK**. A progress dialog will appear to display the status of the audio file upload. Once the file upload is complete, the status for the greeting will change to "Recorded" in the list of greetings and the greeting will be effective immediately.

**Note:**

- All greeting prompts recorded into the Speech Auto Attendant are normalized and trimmed to ensure good cohesion with the rest of the Auto Attendant prompts. Prompts are normalized to the RMS value of 2200. Trimming drops any silence (signal below a power of 300) at the beginning and end of prompts.
- You can revert back to the default prompts (factory settings) by clicking **Restore Default** if you are not satisfied with your recording. This action discards your recording and resets the greeting prompt to the default setting.
- If you are unable to import a prompt file, verify that your web browser security settings are correct. To do this, click the **Start** button and type **Internet Options** in the search box. Select the **Security** tab and click the **Custom Level** button. In the **Miscellaneous** section, ensure that **Display mixed content** is set to **Prompt**. If **Display mixed content** is disabled, the import process will fail.

### 1.4.20.2.9.5 Play a Prompt

You can play the recorded prompt for a system or department greeting over a media player. (The default media player for Microsoft Windows is the Windows Media Player.)

To play a prompt, follow the steps below:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Prompts Recording**. The Speech Auto Attendant Prompt window appears.
3. In the **Category** field, select the type of greeting prompt to play (system prompt or department prompt).
4. In the list of system prompt or department prompt greetings, select a greeting to play.
5. Click **Play**. The prompt will be downloaded and played over your media player.

### 1.4.20.2.9.6 Silence a Prompt

You can silence a recorded or default system or department prompt. This means that no greeting plays for that prompt.

**Note:**

Silencing a prompt deletes the recording for that prompt.

To silence a prompt:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
1. Click **Prompts Recording**. The Speech Auto Attendant Prompt window appears.
2. In the Category field, select the type of greeting prompt to silence (system prompt or department prompt).
3. In the list of system prompt or department prompt greetings, select a greeting prompt to silence.
4. Click **Silence**. A confirmation dialog will appear.
5. Click **OK** to silence (delete) the greeting for that prompt. The greeting prompt is now deleted and the status for the greeting will change to "Silence" in the list of greetings. The silenced greeting is effective immediately.

### 1.4.20.2.10 Dialing Policies

#### 1.4.20.2.10.1 About Dialing Policies

**Note:**

For MiCollab NuPoint UM systems, the Dialing Policies menu is not present in the Web Console interface. **Dialing policies must be configured through the MiCollab interface.**

For standalone NuPoint UM systems:

To prevent users from treating the Auto Attendant feature as a long distance call proxy, dialing policies can be used to program rules and determine what numbers can be dialed from the Auto Attendant. The dialing policy also allows numbers to be rewritten before the system places the call.

When making a telephone call, the phone number selected by the user is evaluated against a set of dialing policies to determine whether it is an extension, a local phone number, a long distance number or an international number. The phone number is evaluated against the dialing policies one at a time, from top to bottom. The first dialing policy that matches the phone number determines the call type.

In order for the phone number to match a dialing policy, the phone number being evaluated must start with the same numbers as the ones entered in the “Prefix” column. These numbers must then be followed by the quantity of digits (N), as determined by the “Quantity to Follow” column.

When a phone number matches a dialing policy, the following logic is applied to determine the phone number that will be dialed by the system. First, N numbers are removed at the front of the phone number. The “Prefix to Inject” is then inserted in front of the phone number. The resulting number is what will be dialed if the user policies allow for that type of call.

The table below lists the default dialing policies:

| Prefix | Quantity to Follow | Quantity to Remove | Prefix to Inject | Type          |
|--------|--------------------|--------------------|------------------|---------------|
| 1800   | 7                  | 0                  | 9                | Local         |
| 800    | 7                  | 0                  | 91               | Local         |
| 1888   | 7                  | 0                  | 9                | Local         |
| 888    | 7                  | 0                  | 91               | Local         |
|        | 10                 | 0                  | 91               | Long Distance |
|        | 12                 | 0                  | 91               | Long Distance |
|        | 7                  | 0                  | 9                | Local         |
|        | 3                  | 0                  |                  | Extension     |
|        | 4                  | 0                  |                  | Extension     |
|        | 5                  | 0                  |                  | Extension     |
|        | 6                  | 0                  |                  | Extension     |

You can add, edit, delete, move, and test a dialing policy.

### 1.4.20.2.10.2 Add a Dialing Policy

**Note:**

Dialing policies for MiCollab NuPoint UM must be configured through the MiCollab interface.

To add a dialing policy:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Dialing Policies**. The Auto Attendant Dialing Policies window appears.
3. Click **Add**. The Adding an Auto-Attendant Dialing Policy window appears.
4. In the **Prefix** field, enter the character(s) that must exactly match the characters at the beginning of the dialed phone number (from zero to eleven characters; valid characters are “0” to “9”).
5. In the **Quantity to Follow** field, enter the number of characters that must follow the prefix (an integer from 0 to 11).
6. In the **Quantity to Remove** field, enter the number of characters to be removed from the front of the dialed phone number (an integer from 0 to 11).
7. In the **Prefix to Inject** field, enter the character(s) to insert at the beginning of the dialed phone number (from zero to eleven characters; valid characters are “0” to “9”).
8. In the **Type** field, select the type of call to which this dialing policy applies.
9. Click **Add**. Clicking the Add button adds the new policy at the end of the list.

**Note:**

The added policy does not become effective until you click the **Save** button. This allows you to test the policy before enabling the changes. See [Test a Dialing Policy](#).

### 1.4.20.2.10.3 Edit a Dialing Policy

You can edit configured dialing policies one at a time.

To edit a dialing policy:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.

2. Click **Dialing Policies**. The Auto Attendant Dialing Policies window appears with a list of the configured dialing policies.
3. Select a dialing policy to edit.
4. Click **Edit**. The Edit an Auto-Attendant Dialing Policy window appears with the existing parameters for the selected dialing policy.
5. Edit the parameter configuration as required.
6. Click **Save**. The new parameters will be applied to the dialing policy.

**Note:**

The configuration changes will not be effective until you click the **Save** button. This allows you to perform some tests before enabling the changes. See [Test a Dialing Policy](#).

### 1.4.20.2.10.4 Delete a Dialing Policy

You can delete configured dialing policies, singly, or all at once.

To delete a dialing policy:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Dialing Policies**. The Auto Attendant Dialing Policies window appears with a list of the configured dialing policies.
3. Select a dialing policy to delete. (You can select multiple or all dialing policies.)
4. Click **Delete**. A confirmation dialog for the deletion appears.
5. Click **OK** to confirm the deletion.

**Note:**

The deletion does not take effect until you click **Save**.

### 1.4.20.2.10.5 Move a Dialing Policy

You can order the dialing policies in the sequence against which you want the dialed telephone number to be matched. Several dialing policies can be moved up or down within the list at one time.

To move a dialing policy:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Dialing Policies**. The Auto Attendant Dialing Policies window appears with a list of the configured dialing policies.
3. Select a dialing policy to move. You can select several dialing policies to move up or down within the list at one time. The order of the selected dialing policies will be maintained when moving multiple policies at a time.
4. Click either **Move Up** or **Move Down** to move the dialing policies in the desired manner. The selected policies will then move up or down by one line in the list.

**Note:**

The change in the dialing policy order does not take effect until you click **Save**.

## 1.4.20.2.10.6 Test a Dialing Policy

It is recommended that you test the dialing policies you have configured before making them effective.

To test the configured dialing policies:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Dialing Policies**. The Auto Attendant Dialing Policies window appears with a list of the configured dialing policies.
3. In the **Enter a Phone No to test** field, enter a test telephone number to dial.
4. Click **Simulate**. The telephone number is matched against the configured dialing policies and the result (the call type and the resulting number that would be dialed) is displayed in the Results field.

**Note:**

When you are satisfied with the configured dialing policies, click **Save** to enable them on the system. A confirmation dialog appears to confirm the changes.

## 1.4.20.2.11 Miscellaneous Parameters

### 1.4.20.2.11.1 About Miscellaneous Parameters

Speech Auto Attendant configuration also includes the setting of various system-wide parameters. These parameters are used to configure and optimize the Speech Auto Attendant settings.



The following categories of miscellaneous parameters can be configured:

| To configure these items:                                                                                                                 | Refer to this Category:                     |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <ul style="list-style-type: none"> <li>Prompt language</li> <li>Confidence thresholds</li> <li>Barge-in</li> <li>Output volume</li> </ul> | Basic Speech Recognition Parameters         |
| Determine which users can make which calls                                                                                                | Dialing Policy Parameters                   |
| Set up scheduled data source user list updates                                                                                            | User Data Source Parameters                 |
| Enable presence for internal/external callers; presence integration                                                                       | <a href="#">Presence Feature Parameters</a> |
| Admin password configuration                                                                                                              | Administration Parameters                   |

### 1.4.20.2.11.2 Basic Speech Recognition Parameters

The basic speech recognition parameters are used system-wide and are shared by all speech recognition applications hosted on the NuPoint UM system.

**Note:**

Some applications may overwrite these parameters and may, or may not, allow overwritten parameters to be configured. Refer to the documentation for the speech recognition application installed on your system for specific configuration details.

To configure basic speech recognition parameters:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Misc. Parameters**. The Auto Attendant Parameters window appears.
3. In the **Category** field, select **Basic Speech Recognition** from the drop-down menu.
4. Configure the following parameters (or click [Use Default Value](#) to apply the default.)
5. **Primary Language:** By default, this value is set to the System Language. For Bilingual language systems, prompts are presented in this language first and then in the secondary language. You can switch primary and secondary languages to change the order of presentation.

**Note:**

NOTE: If you change Primary and Secondary language, you must perform activation.

- **Secondary Language:** For Bilingual language systems, select the secondary language, or select **Disable** to configure a unilingual system.
- **Low Recognition Confidence Level:** This value specifies the relative confidence level below which speech recognition results are rejected. The minimum value is 0 and the maximum value is 1, with a two-digit precision. The default value is 0.5.
- **High Recognition Confidence Level:** This value specifies the relative confidence level above which speech recognition results are implicitly confirmed. The minimum value is 0 and the maximum value is 1, with a two-digit precision. The default value is 0.8.
- **No Speech Timeout (in milliseconds):** This value specifies the length of silence that will trigger a help prompt to be played to the user. The minimum value is 0 and the maximum value is 60,000 milliseconds (60 seconds). The default value is 20,000 milliseconds (20 seconds).

**Note:**

You may need to change the default No Speech Timeout value to a higher value if external callers are consistently slow to respond. As a rule of thumb, the No Speech Timeout value should be about 5 to 8 seconds longer than the recorded external greeting.

- **Post-Speech Silence (in milliseconds):** This value specifies the length of silence that must follow an utterance before the speech recognition engine begins to process it as a complete sentence. The bigger this value is, the longer the pauses are allowed from the users. The minimum value is 0 and the maximum value is 60,000 milliseconds (60 seconds). The default value is 1000 milliseconds.
- **Output Volume:** This value specifies the linear volume that is applied to the output signal before prompts are played back to the users. You can use this parameter to adjust the volume when the signal played to the users is too weak or too loud. The minimum value is 0.0 and the maximum value is 100.0. The default value is 100.0.
- **Speech vs. Accuracy:** This value specifies the relative priority of speech vs. accuracy. Using high accuracy algorithms requires more CPU resources and thus limits the number of concurrent speech recognition sessions. The minimum value is 0.0 and the maximum value is 1.0. Entering "0.0" places the emphasis on speed, while entering "1.0" places the emphasis on accuracy. The default value is 0.5.
- **Sensitivity:** This value allows you to configure the level between background noise and speech, and thus it controls the sensitivity of the speech detector. The minimum value is 0.00 and the maximum value is 1.00. Values approaching 1.00 improve

the detection of speech but also increase the detection of background noise and thus utterances need to be spoken with a strong voice so as not to be mistaken with background noise. The default value is 0.5.

- **Barge-In:** This field allows you to enable or disable barge-in for the entire speech recognition engine (that is, the Speech Auto Attendant and every other installed speech recognition application). Barge-in is enabled by default.
- **Note:** Even if barge-in is enabled, speech recognition applications can choose to disable barge-in during portions of their dialogs. If barge-in is disabled, no application can use barge-in.
- **Prompt Normalization:** All greeting prompts recorded into the Speech Auto Attendant will be normalized to ensure good cohesion with the rest of the Auto Attendant prompts. Prompts will be normalized to the RMS value of 2200.
- **Prompt Trimming:** All greeting prompts recorded into the Speech Auto Attendant will be trimmed to ensure good cohesion with the rest of the Auto Attendant prompts. Prompt trimming will drop silence (signal below a power of 300) at the beginning and end of the prompts.

6. Click **Save**. The configured parameters will now be set to the selected values.

### 1.4.20.2.11.3 Confidence Thresholds

The system categorizes speech recognition with two confidence levels: low and high. Each utterance is analyzed and assigned a confidence value between 0.0 and 1.0, according to how well the system was able to match it with a word or name in its vocabulary.

When a confidence value meets or exceeds the "high" confidence level, the system recognizes the requested name, number, or department unambiguously and transfers the call to the appropriate destination.

When an utterance receives a confidence value below the "low" confidence level, the system does not recognize the requested name, number, or department and instructs the caller to repeat the call request.

When a confidence value falls between these levels, the system will seek explicit confirmation of its best match with the user before transferring the call.

The confidence thresholds can be adjusted using the configurable low/high confidence levels. **The default values are appropriate for most installations.** The following table outlines observed behavior and lists recommended actions:

| Observation                                                                                                                          | Recommendation                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Many calls result in confirmation requests with the expected name match.<br><br>(Attendant says, "I heard <name>. Is that correct?") | Decreasing the high confidence level will allow more calls to be processed without explicit confirmation.                               |
| Many calls result in transfers to incorrect matches.                                                                                 | Increasing the high confidence level will ensure that more calls receive explicit confirmation before being transferred.                |
| Many calls that are for valid names result in no match.<br><br>(Attendant says, "I don't understand.")                               | Decreasing the low confidence level will allow more calls to be recognized, and receive explicit confirmation before being transferred. |
| Many calls result in confirmation requests with incorrect name matches.<br><br>(Attendant says, "I heard <name>. Is that correct?")  | Increasing the low confidence level will filter out more calls, requesting the caller to try again.                                     |

For confidence threshold configuration, refer to [Basic Speech Recognition Parameters](#).

There are other adjustable parameters that affect speech recognition; we recommend that you leave these settings at their default values unless changes are requested by Mitel Product Support.

### 1.4.20.2.11.4 Dialing Policy Parameters

Dialing policy parameters allow you to determine which types of users are allowed to perform what types of calls.

To configure the dialing policy parameters:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Misc. Parameters**. The Auto Attendant Parameters window appears.
3. In the **Category** field, select **Dialing Policy** from the drop-down menu.
4. For each caller type field, you can choose one of the following four dialing permission options from the drop-down menu: "Extensions only", "Extensions and local numbers",

“Extensions, local and long distance” and “Extensions, local, long distance and international calls”

OR

You can apply the default value for each of the parameters by clicking **Use Default Value**.

**5. Configure the following parameters:**

- **Unknown (non-trusted) callers, external:** This field sets the dialing permissions for callers who place calls from outside the company’s telephony network and the caller ID cannot be recognized as an Auto-Attendant user. The default value is “Extensions only.”
- **Unknown (non-trusted) callers, internal:** This field sets the dialing permissions for callers who place calls from inside the company’s telephony network and the caller ID cannot be recognized as an Auto-Attendant user. The default value is “Extensions and local numbers.”
- **Known (trusted) callers, external:** This field sets the dialing permissions for callers who place calls from outside the company’s telephony network and the caller ID is recognized as an Auto-Attendant user. The default value is “Extensions and local numbers.”
- **Known (trusted) callers, internal:** This field sets the dialing permissions for callers who place calls from inside the company’s telephony network and the caller ID is recognized as an Auto-Attendant user. The default value is “Extensions and local numbers.”
- **Minimum Internal Number Length:** This field sets the minimum value for the length of the internal number that can be dialed by the user. The shortest value is 1 digit and the longest value is 11 digits. The default value for the minimum internal number length is 3 digits.

**6. Maximum Internal Number Length:** This field sets the maximum value for the length of the internal number that can be dialed by the user. The shortest value is 1 digit and the longest value is 11 digits. The default value for the maximum internal number length is 6 digits.

**Note:**

The maximum internal number length must be greater than or equal to the minimum internal number length.

**7. Click **Save** to set the configured parameters to the selected values.**

## 1.4.20.2.11.5 User Data Source Schedule Parameters

The user data source parameters allow you to schedule a specific time for the corporate list update. When these parameters are configured, the list of SAA users is automatically updated daily at the specified time.

To configure the user data source parameters:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Misc. Parameters**. The Auto Attendant Parameters window appears.
3. In the **Category** field, select **User Data Source** from the drop-down menu.
4. Configure the specific time for the corporate list update or click Use Default Value to apply the default. The value must be in the range of “0:00 AM” to “11:59 PM”. The default value is “1:00 AM”.
5. Click **Save**. The corporate user list will be updated daily at the configured time.

## 1.4.20.2.11.6 Presence Feature Parameters

Presence Feature parameters allow you to globally enable or disable the Presence feature for internal and external callers.

To configure the Presence feature parameters:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Misc. Parameters**. The Auto Attendant Parameters window appears.
3. In the **Category** field, select **Presence Feature** from the drop-down menu.
4. Configure the following parameters (or click Use Default Value to apply the default :
5. **Presence for Internal Callers:** This check box allows you to globally enable or disable the Presence feature for internal callers. The default value is “enabled”.
  - **Presence for External Callers:** This check box allows you to globally enable or disable the Presence feature for external callers. The default value is “enabled”.
  - **Presence Integration:** Select the type of server being used to provide Presence information.

For Lotus Sametime servers, in the Default Server Domain Name field, enter the FQDN of the Sametime server (must contain the '.' character to be valid). Leave the Sametime Server Name Attribute field blank (default value).

6. Click **Save**. The Presence feature will now be set to the configured parameters for both internal and external callers.

## 1.4.20.2.11.7 Administration Parameters

The administration parameters allow you to specify the PIN number for the administrator in order to perform configuration and administration tasks.

To configure the administration parameters:

1. In the navigation tree, click **Auto-Attendant**. The Auto-Attendant menu items appear.
2. Click **Misc. Parameters**. The Auto Attendant Parameters window appears.
3. In the Category field, select **Administration** from the drop-down menu.
4. In the **Administrator PIN** field, enter the digits that you would like to use for the administrator PIN. The PIN can contain from 4 to 10 digits only; any other characters are invalid, including star (\*) and pound (#). The default value for the administrator PIN is "123456".
5. Click **Save**. The administrator PIN is now saved and must be used to perform configuration and administration tasks.

## 1.4.20.2.12 Custom Pronunciations

### Overview

The Custom Pronunciations tool allows administrators to add nicknames and to customize name pronunciation. For example, if a user named Michael also wants to be recognized as "Mick" or "Mickey" you can add these nicknames to the word "Michael". When a caller says either "Mick" or "Mickey", users named Michael are recognized. You can add multiple pronunciations for each SAA-registered user.

You can also add a phonetic representation of the user's name. For example, an English SAA system will have a better chance of matching the name "Benoit" when you add a phonetic pronunciation (like "benwah").

For systems that use a bilingual language configuration, you can also configure a pronunciation in the secondary language (for example, if French is configured as your secondary language, you can configure a secondary language entry of "maison" to be a pronunciation of the English "house"). **Note:** If multiple SAA-registered users have a name that includes the word "house", they will also be recognized by the programmed pronunciation.

### Conditions and Limitations

- There is no relationship between Custom Pronunciations and SAA names recorded by licensed users when they complete the SAA tutorial. As such, re-recording the SAA names has no impact on the recognition success rate for the Custom Pronunciations.

- Custom Pronunciations take effect immediately (without the need to click the Force Update button). For this reason, exercise care when adding or editing entries.
- It is recommended that a maximum of three Custom Pronunciation entries be added for any one user name.
- The Custom Pronunciation tool is available only to the SAA administrator, *not* to licensed users.
- The Custom Pronunciation tool does *not* replace the default system pronunciation engine.
- When implementing this feature, the SAA administrator should:
  - experiment with a single entry (e.g. a user's last name) to confirm that it can be recognized. If unsuccessful, re-do the entry. If successful, add more entries.
  - use default settings for the [miscellaneous SAA parameters](#). Alternatively, contact Mitel product support before modifying the miscellaneous parameters.

## Programming

### Note:

If you change the SAA language at any time, your Custom Pronunciations may be inappropriate, and may even have a detrimental impact on recognition performance. We recommend that you delete your existing pronunciations when changing SAA language. (You may also want to keep a record of them for future use.)

To add a Custom Pronunciation:

1. In the navigation tree, click **Auto Attendant**. The Auto Attendant menu appears.
2. Click **Custom Pronunciation**.
3. In the **Word** field, type the name for which you want to add a pronunciation (for example, "mouse").
4. In the **Pronunciations** field, type one or more pronunciations that you want to be recognized as synonyms for "mouse", entering each pronunciation on a new line.
5. Click **Add**.

To edit a Custom Pronunciation:

1. In the navigation tree, click **System Maintenance** and then click **Auto Attendant**. The Auto Attendant menu appears.
2. Click **Custom Pronunciation**.



3. Click the link of the word you want to edit.

**Note:** If the word list is long, you can use the alphabet toolbar to click the first letter of the word and display only those words that begin with the same letter.

4. Make the required changes and then click **Save**.

To delete a Custom Pronunciation:

1. In the navigation tree, click **System Maintenance** and then click **Auto Attendant**. The Auto Attendant menu appears.
2. Click **Custom Pronunciation**.
3. Select the check box beside the word you want to delete and then click **Delete**. Click **OK** to confirm the deletion.

## 1.4.20.2.13 Troubleshooting SAA Name Recognition Problems

This topic provides instructions for troubleshooting problems encountered with the SAA name recognition engine. If you are unable to resolve a problem after following the guidelines below, contact your distributor or Mitel product support.

| Cause of Name Recognition Problem                                                                                                                                                                                                                                                                                                                                                                                                                                | Corrective Action                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Missing or inaccurate name entries.                                                                                                                                                                                                                                                                                                                                                                                                                              | Ensure that the spoken name is entered in the Speech Auto Attendant database and that callers are saying the exact name. For example, if the name is entered in the database as Ted Smith, ensure that callers aren't saying Edward Smith.                                                                          |
| Background noise, hands-free operation, echo, and speakerphone quality.                                                                                                                                                                                                                                                                                                                                                                                          | If the caller is experiencing name recognition problems when calling from a speakerphone, get the caller to try the name from a handset.                                                                                                                                                                            |
| Mispronunciation, poor enunciation and accents.                                                                                                                                                                                                                                                                                                                                                                                                                  | Determine if the caller's pronunciation is causing the recognition problem by checking if the system recognizes the name when other callers try it.                                                                                                                                                                 |
| High noise levels, high audio levels, or echo.                                                                                                                                                                                                                                                                                                                                                                                                                   | Determine if the problem is specific to the phone, that is, if the caller is not recognized when dialing in remotely, get them to try locally.                                                                                                                                                                      |
| Cell and internet calls sometimes introduce propagation delays. A bad trunk could exhibit noise, including cross talk, popping, static or audio level problems, which, in turn, could contribute to echo. If the remote caller experiences intermittent cases where low confidence forces the caller to repeat the spoken name, check the audio quality of the trunks or isolate whether only certain types of calls (for example, overseas calls) are affected. | If trunk audio quality is at fault, contact your carrier or service provider. If the source of the problem cannot be determined, advise the caller to use DTMF as an input to Speech Auto Attendant until it can be determined whether other remote callers are also experiencing remote access recognition issues. |

| Cause of Name Recognition Problem                                                                                                                     | Corrective Action                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| The dictionary contains most of the common North American English names. A pronunciation for an unusual name may not be programmed in the dictionary. | If multiple callers are speaking a specific name that is not recognized, use the pronounce tool.                      |
| Speech recognition is poor.                                                                                                                           | For individual names, use the pronounce tool to instruct the Speech Auto Attendant how to pronounce individual words. |

## 1.4.20.2.14 Active Directory Snap-In

### 1.4.20.2.14.1 Install Active Directory (AD) Snap-in

The optional AD Snap-In allows the NuPoint UM server to import user configuration from an Active Directory server. The AD Snap-In also adds a user property sheet to the AD User Interface for NuPoint attributes. NuPoint user properties can be modified and saved with this interface. When the properties are saved, the Snap-In pushes the changes to the NuPoint database.

The AD Snap-In comprises two components:

1. The snap-in configurator, which appears as an installed executable program on the Windows PC. Administrators use the configurator for the following functions:
  - Associate Active Directory with a NuPoint system for the purpose of managing users on the NuPoint system.
  - Where licensing allows, specify the data source for the NuPoint Speech Auto Attendant. The possible data sources are the associated NuPoint system, the Active Directory users, or the MiCollab . If the data source is Active Directory, then several additional settings are required.
1. The snap-in itself, which appears as an additional property tab for users in Active Directory.

Administrators can add and delete NuPoint users from the snap-in and change some basic settings (for example, class of service, Unified Messaging settings, Speech Auto Attendant settings). In addition, the snap-in allows the administrator to associate Active Directory user accounts to NuPoint user accounts.

The AD Snap-in functions with Active Directory Services on Windows Server 2008 and 2012 R2. It is supported on 32-bit systems and can be used on 64-bit systems by running Active Directory Users And Computers in 32-bit mode (that is, starting the program with the /32 option). This is done with the following command or shortcut:

```
%SystemRoot%\system32\dsa.msc /32
```

**Note:**

- The AD Snap-In does not extend the schema on the server but the user does need schema rights.
- The AD Snap-In is not supported for Lotus or Google implementations.

The AD Snap-In is provided in the form of a Windows installer that you can run on any PC that has access to AD Users and Computers with schema rights. The executable will install the Snap-In and provide an icon on the desktop that will allow you to configure the Snap-In at a later time or re-configure it if there are changes to be made.

To install the AD Snap-In:

1. Insert the NuPoint UM DVD1 and navigate to the **ADSnapInSetUp.exe** file. Double-click to open.
2. At the Welcome screen, click **Next**.
3. Select a destination for the installation or click **Next** to accept the default. The software installs.
4. At the **Would you like to configure and register?** prompt, click **Yes**. The End User License Agreement appears.
5. Read the end user license and then, if you agree, select **I accept the terms in the license agreement**. The configuration screen appears.
6. Enter the following information:

NuPoint Section:

- **NPM Server FQDN or IP Address:** Enter the fully qualified domain name of the NuPoint Unified Messaging server. This information is necessary for the AD Snap-In

to connect to the NuPoint Unified Messaging server. When using a NuPoint UM 640 platform, specify the Cluster Name in this field.

- **NPM Admin Login Name:** Enter the account that the AD Snap-In will use to connect to the NuPoint Unified Messaging server. Use the "root" account.
- **NPM Admin Password:** Enter the password for the root account.
- Active Directory Section
- **AD FQDN or IP Address:** Enter the fully qualified domain name of the Active Directory server. This information is necessary for the AD Snap-In to connect to the NuPoint Unified Messaging server.
- **AD Admin Login:** Enter the account used to connect to the AD/LDAP repository. The account needs root privileges.
- **Admin Container:** Enter a fully qualified container name where the "AD Admin Name" account is located in the AD hierarchy.
- **AD Password:** Enter the password for the AD/LDAP account.
- **AD Attribute:** Skip this setting.

7. Click **Next**.

8. If Speech Auto Attendant licenses are present, a Speech Data Source configuration screen appears. The attributes that you [configured](#) for Privacy, Auto-Attendant User, and Default Telephone Number are displayed. Click **Next**. AD Configuration is complete.

The AD Snap-In adds a customized NuPoint tab under the properties of a user. This tab allows you to add a new NuPoint mailbox to the repository, or to edit an existing NuPoint mailbox. You can also launch the Web Console (by clicking the "View Web Profile" button) to modify additional fields that are not present in the NuPoint tab. The Snap-In establishes a connection to the NuPoint Unified Messaging server using a secure SOAP connection.

**Note:**

NuPoint properties on this screen are disabled when SAA is installed as a standalone application.

You need to enable the **NuPoint User** check box on a property page in order to make the fields and the drop-down menus active. The drop-down menus will be populated with the actual FCOS and LCOS information from the NuPoint Unified Messaging server. Configuring the parameters on the NuPoint tab links the AD user with the NP-UM mailbox.

After the AD user and the mailbox have been linked, the **Advanced UM Email Alias** for the linked mailbox is also updated with the mailbox nickname. System users see the populated Advanced UM Email User Name field in the Web Console, in Web View and in the Text Console.

**Note:**

Only those FCOS that contain LCOS values that have names will be populated. All other FCOS, and any unnamed LCOS, cannot be populated to the AD Snap-In. If you encounter an unnamed COS, use the Text console to name it.

## 1.4.20.3 Presence

### 1.4.20.3.1 Presence Overview

The Speech Auto Attendant feature provides the ability to optionally play back the current presence state of the matched person prior to transferring the caller. A caller hears the user's current presence state, spoken by the Speech Auto Attendant, before being transferred to the user's phone. For example, SAA might say, "Alice Brown is currently Away." before transferring the call to Alice Brown's phone.

**Note:** The Presence feature is only supported with installations that use Active Directory as their user repository. See User Data Sources for more information.

Presence status information is for reference only, so a call will be transferred regardless of presence status. Standard universal [barge-in](#) commands such as "cancel" and "help" during a call transfer are supported.

The presence status information is optional. It is enabled by default for both internal and external callers, and is independent of whether the caller is trusted or non-trusted. It can be turned off using the **Presence for Internal Callers** and **Presence for External Callers** check boxes in the [Miscellaneous Parameters](#) menu of the Web Console.

### Server Support

The presence feature in Release 4.0 and later supports the Microsoft Live Communication server (LCS 2005 SP2), Office Communications server 2007, Lotus Sametime 8.0, and Mitel MiCollab Client Service .

### Licensing

This feature is licensed as a single license, "NuPoint Messenger: Enable Presence (Speech AA)", which enables Presence on the system. The license can be activated at any time and becomes available within one minute of activation. No reboot or restart is necessary.

### Installation

Presence information is supplied to the Speech Auto Attendant by the Presence Proxy service. The Presence Proxy is part of the NuPoint Unified Messaging system,

and is installed using the “NPMPresence” blade. See [Presence Installation](#) for more information.

### 1.4.20.3.2 Presence Installation

The Presence Proxy is packaged as an MSL Blade called **NPMPresence**. It provides basic presence information to the Speech Auto Attendant and is installed as part of the NuPoint UM system. The Presence proxy service remains dormant until a Presence license is purchased. Once licensed, the Presence proxy service becomes fully functional within minutes of being activated on the NuPoint UM server.

See [Optional Feature Installation](#) for blade installation instructions.

The Presence Proxy itself requires no configuration, however, configuration is required on the presence server, in Active Directory, and possibly to DNS. See the following topics for detailed configuration instructions:

- [LCS Configuration](#)
- [OCS Configuration](#)
- [Sametime Configuration](#)
- [Mitel MiCollab Client Service Configuration](#)

### 1.4.20.3.3 LCS Configuration

The configuration steps required to set up the Presence Proxy for the Speech Auto Attendant (SAA) with LCS 2005 are as follows:

**Note:**

The Speech Auto Attendant must be installed and configured to use Active Directory as the user data source before the Presence Proxy can be configured. (See step 6 below.)

1. [Create the Active Directory/LCS accounts for the NP-UM Presence Proxy](#)
2. [Add all NP-UM Presence Proxy accounts to the Allow list of every SAA user](#)
3. [Trust the NP-UM Server in LCS 2005](#)
4. [Verify that the LCS service entry exists in the Corporate DNS server](#)
5. [Configure DNS on the NP-UM server so that it can find the LCS service SRV record](#)
6. [Install and configure SAA on the NP-UM server](#)
7. [Purchase the SAA Presence license for the NP-UM server](#)
8. [Verify the installation](#)

## 1 - Create the Active Directory/LCS accounts for the NP-UM Presence Proxy

For every 145 Speech Auto Attendant users that have their presence state monitored, it is necessary to create one account for use by the Presence Proxy. For example, to monitor 2000 SAA users, you need to create 14 Presence Proxy user accounts in the LCS Server. For the maximum supported 5000 presence users, it is necessary to create 35 Presence Proxy user accounts in LCS.

Create the Active Directory user accounts using the following names and SIP URIs in the same domain as the other LCS users (in particular, the domain used by the SAA users in NP-UM):

| First Name | Last Name | Account                 | SIP URI                     |
|------------|-----------|-------------------------|-----------------------------|
| Mitel      | Presence  | mitelpresence@xyz.com   | sip:mitelpresence@xyz.com   |
| Mitel      | Presence  | mitelpresence2@xyz.com  | sip:mitelpresence2@xyz.com  |
| Mitel      | Presence  | mitelpresence3@xyz.com  | sip:mitelpresence3@xyz.com  |
| Mitel      | Presence  | mitelpresence4@xyz.com  | sip:mitelpresence4@xyz.com  |
| Mitel      | Presence  | mitelpresence5@xyz.com  | sip:mitelpresence5@xyz.com  |
| Mitel      | Presence  | mitelpresence6@xyz.com  | sip:mitelpresence6@xyz.com  |
| Mitel      | Presence  | mitelpresence7@xyz.com  | sip:mitelpresence7@xyz.com  |
| Mitel      | Presence  | mitelpresence8@xyz.com  | sip:mitelpresence8@xyz.com  |
| Mitel      | Presence  | mitelpresence9@xyz.com  | sip:mitelpresence9@xyz.com  |
| Mitel      | Presence  | mitelpresence10@xyz.com | sip:mitelpresence10@xyz.com |
| etc.       | etc.      | etc.                    | etc.                        |

To create a user in the "Active Directory Users and Computers" management console on the Domain Controller:

1. Expand the domain holding the LCS users.
2. Right-click on **Users**, and then select **New->Users**.
3. Enter 'Mitel' for the **First name**, 'Presence' for the **Last name**, and 'mitelpresence99' for the **User logon name**, where 99 is blank for the first user, '2' is entered for the second user, '3' is entered for the third user, and so on for the remaining users (see table above).
4. Click **Next**.

5. Enter a password. For increased security, make the password as long as possible (at least 7 characters) and use a mix of numbers and letters in upper and lowercase.
6. Select the **Password never expires** check box. Leave all other check boxes empty.
7. Click **Next**.
8. Review the values entered for accuracy, and then click **Finish**.

The 'mitelpresence' user will appear in the list of users in the right pane. Add as many 'mitelpresence' users as is necessary based on the number of SAA users to have presence.

Next, enable the mitelpresence users for LCS by doing the following steps for every 'mitelpresence' user in the right pane:

1. Right-click on the 'mitelpresence' user, and select **Properties**.
2. In the **Properties** window, select the **Live Communications** tab.
3. Select the **Enable Live Communications for this user** checkbox.
4. In the **SIP URI** box, enter 'sip:mitelpresence99@xyz.com' where xyz.com is replaced with the proper domain and 99 is replaced with the number matching this mitelpresence user (refer to the table above).
5. Select the LCS server from the **Server or pool** list.
6. Click **OK**.
7. Repeat the steps above for all other 'mitelpresence' users.

**Note:**

- It will take several minutes for these Active Directory changes to propagate and come into effect.
- Scripting (e.g., VB Script) can be used to automate the creation of accounts.

## 2 - Add all NP-UM Presence Proxy accounts to the Allow list of every SAA user in LCS

To allow the Presence Proxy to monitor the presence state of SAA users without becoming a member of each user's Contact or Buddy list, it is necessary to add all Presence Proxy user accounts to the Allow list of every SAA user.

In the LCS management console:

1. Right-click on an SAA LCS user, and then select **Properties**.



2. In the **Live Communications** tab, click the **View/Edit** button beside the **Allow and block list:** label.
3. In the **User Allow and Block List** window, click **Add**.
4. In the **Type** list, select **User**.
5. In the **Mask** box, enter the SIP URI of a Presence Proxy's account—for example, 'sip:mitelpresence99@xyz.com' where 'xyz.com' is the LCS domain name and 99 is replaced with the number of the 'mitelpresence' user.
6. Select **Allow subscriptions and invitations**.
7. Click **OK** for each window that appears to save the changes.
8. Repeat the steps above for every 'mitelpresence' user account.

The Presence Proxy user accounts can also be added to the Allow list of every SAA user through Microsoft Office Communicator when logged in as an SAA user:

1. Select **Actions > Options**.
2. Select the **Permissions** tab.
3. Click **New**.
4. In the **Type** list, select **User**.
5. In the **Account name** box, enter the SIP URI of the Presence Proxy's account—for example, 'sip:mitelpresence99@xyz.com' where 'xyz.com' is the LCS domain name and 99 is replaced with the number of the 'mitelpresence' user.
6. In the **Permission** list, select **Allow**.
7. Click **OK**.

If the Presence Proxy user is missing from a user's Allow list, attempts by the Presence Proxy to subscribe to that user's presence may fail. The SAA user will be prompted by Office Communicator to add the Presence Proxy to their buddy list. Unless the Presence Proxy is in the user's buddy list, it will not be able to receive the user's presence status.

**Note:** The above procedure is practical for a small number of users. For larger numbers, scripting (for example, VB Script) can be used instead. The Microsoft LCS 2005 Resource Kit provides sample scripts that you can use as a starting point. To obtain the scripts, download the kit from the Microsoft website and install it on the LCS 2005 server.

### 3 - Trust the NP-UM Server in LCS 2005

In the LCS Management Console, add the NP-UM server as an Authorized Host:

**Note:** For NuPoint UM 640, trust the cluster IP address and all the server IP addresses.

1. Right-click the server under **Live Communications servers and pools**.
2. Select **Properties**.
3. Select the **Host Authorization** tab.

4. Click **Add...**
5. Enter the **IP address** of the NP-UM server.
6. Select the **Treat as Authenticated** check box.
7. Click **OK**.

#### 4 - Verify that the LCS service entry exists in the Corporate DNS server

Ensure that the corporate DNS server (it may be running on the Windows Domain Controller or other Windows server) has been configured following the recommendations in the LCS Deployment Guide. This means there must be an SRV record for '\_sip.\_tcp.xyz.com' where 'xyz.com' is the domain that LCS is in.

One way to verify the setup is to view the corporate DNS configuration directly. Another way is by using the Microsoft Office Communicator client. If it works using 'Automatic configuration', then DNS is correctly set up, assuming that the DNS servicing the Communicator Client PC is the same DNS in effect for the NP-UM Server that the Presence Proxy is running on.

In a working Office Communicator application:

1. Select **Actions->Options**.
2. Select the **Accounts** tab.
3. Click the **Advanced** button beside the **Sign-in name** box.

If **Automatic configuration** is selected, then the Communicator client is using DNS to locate the OCS server in the same way that the NP-UM Presence Proxy does. This means that DNS is already configured for OCS.

If **Manual configuration** is selected, try changing it to **Automatic configuration** as described below:

1. Select **Automatic configuration**.
2. Click **OK** to save the change.
3. Click **OK** again to exit the **Options** window.
4. Log out of Office Communicator (select **Connect > Sign Out**), and then log in again.
5. Click **Sign In**.
6. If prompted, log in as the same user.

If the login succeeds, DNS is correctly set up.

## 5 - Configure DNS on the NP-UM server so that it can find the LCS service SRV record

Ensure that the NP-UM server has its DNS set up so that DNS queries are forwarded to the Windows DNS server, often on the Domain Controller.

Many working DNS configurations are possible. The requirement is that the Presence Proxy running on the NP-UM server is able to use DNS to resolve the '\_sip.\_tcp.xyz.com' service name (where xyz.com is the domain that LCS is in).

To test this, from a command line on the NP-UM system, enter the following command and verify that it returns the information for the LCS server:

```
dig _sip._tcp.xyz.com SRV +short
```

where "xyz . com" is replaced with the domain of LCS. The result should look similar to this:

```
0 0 5060 mylcs.xyz.com
```

where mylcs . xyz . com is the hostname of the LCS server and 5060 is the port used to connect to LCS. If the result is nothing or a blank line, DNS is incorrectly configured, or DNS on the NP-UM server is not configured correctly to use the corporate DNS server(s).

## 6 - Install and configure SAA on the NP-UM server

See [Speech Auto Attendant Installation](#) and [Configuration](#) for installation instructions. The Speech Auto Attendant must be set up to use Active Directory as the user repository. See [Define an Active Directory Data Source](#).

## 7 - Purchase the Presence license for the NP-UM server

The "NuPoint Messenger: Enable Presence (Speech AA)" license must be purchased. Once that license becomes effective for the NP-UM server, no further actions are required. The Presence Proxy is always running when NP-UM is running and it will detect that the license has been purchased and will automatically start up within a minute of enabling the license.

## 8 - Verify installation

To verify the installation, check that the Speech Auto Attendant can retrieve the presence state of a user. Call the SAA main number and speak the name of an SAA user who is also an LCS-enabled user. SAA should speak the current presence state of the user before forwarding the call. Change the presence state of the SAA user (e.g., from Online to Busy or Be Right Back) and make another call through SAA to that user. The presence state spoken by SAA should be the new state.

## 1.4.20.3.4 OCS Configuration

The configuration steps required to set up the Presence Proxy for the Speech Auto Attendant (SAA) with OCS 2007 are as follows:

**Note:**

The Speech Auto Attendant must be installed and configured to use Active Directory as the user data source before the Presence Proxy can be configured. (See step 7 below.)

1. Create the Active Directory/OCS accounts for the NP-UM Presence Proxy
2. Add all NP-UM Presence Proxy accounts to the Allow list of every SAA user
3. Add all NP-UM Presence Proxy accounts as a PromptedSubscriber for every SAA user in the OCS database
4. Trust the NP-UM Server in OCS 2007
5. Verify that the OCS service entry exists in the Corporate DNS server
6. Configure DNS on the NP-UM server so that it can find the OCS service SRV record
7. Install and configure SAA on the NP-UM server
8. Purchase the SAA Presence license for the NP-UM server
9. Verify the installation

### 1 - Create the Active Directory/OCS accounts for the NP-UM Presence Proxy

For every 145 Speech Auto Attendant users that have their presence state monitored, it is necessary to create one account for use by the Presence Proxy. For example, to monitor 2000 SAA users, you need to create 14 Presence Proxy user accounts in the OCS Server. For the maximum supported 5000 presence users, it is necessary to create 35 Presence Proxy user accounts in OCS.

Create the Active Directory user accounts using the following names and SIP URIs in the same domain as the other OCS users (in particular, the domain used by the SAA users in NP-UM):

| First Name | Last Name | Account                | SIP URI                    |
|------------|-----------|------------------------|----------------------------|
| Mitel      | Presence  | mitelpresence@xyz.com  | sip:mitelpresence@xyz.com  |
| Mitel      | Presence  | mitelpresence2@xyz.com | sip:mitelpresence2@xyz.com |
| Mitel      | Presence  | mitelpresence3@xyz.com | sip:mitelpresence3@xyz.com |

| First Name | Last Name | Account                 | SIP URI                     |
|------------|-----------|-------------------------|-----------------------------|
| Mitel      | Presence  | mitelpresence4@xyz.com  | sip:mitelpresence4@xyz.com  |
| Mitel      | Presence  | mitelpresence5@xyz.com  | sip:mitelpresence5@xyz.com  |
| Mitel      | Presence  | mitelpresence6@xyz.com  | sip:mitelpresence6@xyz.com  |
| Mitel      | Presence  | mitelpresence7@xyz.com  | sip:mitelpresence7@xyz.com  |
| Mitel      | Presence  | mitelpresence8@xyz.com  | sip:mitelpresence8@xyz.com  |
| Mitel      | Presence  | mitelpresence9@xyz.com  | sip:mitelpresence9@xyz.com  |
| Mitel      | Presence  | mitelpresence10@xyz.com | sip:mitelpresence10@xyz.com |
| etc.       | etc.      | etc.                    | etc.                        |

To create a user in the "Active Directory Users and Computers" management console on the Domain Controller:

1. Expand the domain holding the OCS users.
2. Right-click on **Users**, and then select **New->Users**.
3. Enter 'Mitel' for the **First name**, 'Presence' for the **Last name**, and 'mitelpresence99' for the **User logon name**, where 99 is blank for the first user, '2' is entered for the second user, '3' is entered for the third user, and so on for the remaining users (see table above).
4. Click **Next**.
5. Enter a password. For increased security, make the password as long as possible (at least 7 characters) and use a mix of numbers and letters in upper and lowercase.
6. Select the **Password never expires** check box. Leave all other check boxes empty.
7. Click **Next**.
8. Review the values entered for accuracy, and then click **Finish**.
9. The 'mitelpresence' user will appear in the list of users in the right pane. Add as many 'mitelpresence' users as is necessary based on the number of SAA users to have presence.

Next, enable the mitelpresence users for OCS by doing the following for every 'mitelpresence' user in the right pane:

1. Right-click on the 'mitelpresence' user, and then select **Properties**.
2. In the Properties window, select the **Communications** tab.
3. Select the **Enable user for Office Communications Server** checkbox.

4. In the **Sign in Name** field, enter 'sip:mitelpresence99' and select @xyz.com from the drop-down list, where xyz.com is replaced with the proper domain and 99 is replaced with the number matching this mitelpresence user (refer to the table above).
5. Select the OCS server from the **Server or pool** list.
6. Click **OK**.
7. Repeat the steps above for all other 'mitelpresence' users.

**Note:**

- It will take several minutes for these Active Directory changes to propagate and come into effect.
- Scripting (e.g., VB Script) can be used to automate the creation of accounts.

## 2 - Add all NP-UM Presence Proxy accounts to the Allow list of every SAA user in OCS

To add the mitelpresence as "Allowed" to each SAA user in OCS 2007, it is necessary to use a script. The user interface for modifying a user's Allow list that existed in LCS 2005 has been removed from OCS 2007 for both the OCS 2007 server and the Office Communicator client.

Sample scripts are included in the Microsoft Office Communications Server 2007 Resource Kit Tools. The Resource Kits are free and available for download from the Microsoft website. The resource kit is installed on the OCS 2007 server, default location C:\Program Files\Microsoft Office Communications Server 2007\ResKit\WMI Samples. The sample script of interest is LCSAddACEs.wsf. Instructions for using the script can be found in the included document OCS\_ResourceKitTools\_ReadMe.doc in the ResKit directory.

If the Presence Proxy user is missing from a user's Allow list, attempts by the Presence Proxy to subscribe to that user's presence may fail. The SAA user will be prompted by Office Communicator to add the Presence Proxy to their buddy list. Unless the Presence Proxy is in the user's allow list, it will not be able to receive the user's presence status. If the Presence Proxy is added to their allow list properly, there will be no popup for the user and the Presence Proxy will never appear in their Buddy list in Communicator.

## 3 - Add all NP-UM Presence Proxy accounts as a PromptedSubscriber for every SAA user in the OCS database

This step is required to prevent every SAA OCS user from seeing popup windows in Office Communicator 2007 notifying them that a mitelpresence user has added them as

a contact. The only way to prevent the popups is to modify the OCS database directly. The OCS server does not need to be stopped while performing this modification.

Follow the steps below to modify the OCS database:

1. Log into the OCS Server using an account with Administrative privileges.
2. Create a file named PresProxySub.sql containing the following text:

```
USE [rtc]
```

```
GO
```

```
delete dbo.PromptedSubscriber
```

```
from dbo.PromptedSubscriber ps
```

```
inner join dbo.Resource r
```

```
on ps.SubscriberId = r.ResourceId
```

```
where r.UserAtHost like 'mitelpresence%'
```

```
GO
```

```
insert into dbo.PromptedSubscriber
```

```
select distinct c.PublisherId,
```

```
r.ResourceId,
```

```
'True',
```

```
1,
```

```
'True',
```

```
0,
```

```
NULL,
```

```
NULL
```

```
from dbo.Container c, dbo.Resource r
```

```
where r.UserAtHost Like 'mitelpresence%'
```

```
order by c.PublisherId, r.ResourceId
```

```
GO
```

1. Then run the following command at the command prompt (cmd.exe):

```
sqlcmd -S (local)\rtc -d rtc -E -i PresProxySub.sql
```

This command can be run more than once as it first cleans up the PresenceProxy-related records already in the database (it will not create duplicate records).

In fact, this command should be re-run each time new OCS users (who are also SAA users) are added to prevent those new users from seeing the client contact list notification popup window.

#### 4 - Trust the NP-UM Server in OCS 2007

In the OCS Management Console, add the NP-UM server as an Authorized Host:

**Note:** For NuPoint UM 640, trust the cluster IP address and all the server IP addresses.

1. Right-click on the server under **Standard Edition Servers**.
2. Select **Properties -> Front End Properties**
3. Select the **Host Authorization** tab.
4. Click **Add...**
5. Enter the NP-UM server's IP address or FQDN (select the appropriate radio button)
6. Select the **Treat as Authenticated** check box.
7. Click **OK**.
8. Click the next **OK** button.

#### 5 - Verify that the OCS service entry exists in the Corporate DNS server

Ensure that the corporate DNS server (it may be running on the Windows Domain Controller or other Windows server) has been configured following the recommendations in the OCS Deployment Guide. This means there must be an SRV record for '\_sip.\_tcp.xyz.com' where 'xyz.com' is the domain that OCS is in.

One way to verify the setup is to view the corporate DNS configuration directly. Another way is by using the Microsoft Office Communicator client. If it works using 'Automatic configuration', then DNS is correctly set up, assuming that the DNS servicing the Communicator Client PC is the same DNS in effect for the NP-UM Server that the Presence Proxy is running on.

In a working Office Communicator application:

1. Select **Actions->Options**.
2. Select the **Accounts** tab.
3. Click the **Advanced** button beside the **Sign-in name** box.



If **Automatic configuration** is selected, then the Communicator client is using DNS to locate the OCS server in the same way that the NP-UM Presence Proxy does. This means that DNS is already configured for OCS.

If **Manual configuration** is selected, try changing it to **Automatic configuration** as described below:

1. Select **Automatic configuration**.
2. Click **OK** to save the change.
3. Click **OK** again to exit the **Options** window.
4. Log out of Office Communicator (select **Connect->Sign Out**), and then log in again.
5. Click **Sign In**.
6. If prompted, log in as the same user.

If the login succeeds, DNS is correctly set up.

## 6 - Configure DNS on the NP-UM server so that it can find the OCS service SRV record

Ensure that the NP-UM server has its DNS set up so that DNS queries are forwarded to the Windows DNS server, often on the Domain Controller.

Many working DNS configurations are possible. The requirement is that the Presence Proxy running on the NP-UM server is able to use DNS to resolve the '\_sip.\_tcp.xyz.com' service name (where xyz.com is the domain that OCS is in).

To test this, from a command line on the NP-UM system, enter the following command and verify that it returns the information for the OCS server:

```
dig _sip._tcp.xyz.com SRV +short
```

where "xyz.com" is replaced with the domain of OCS. The result should look similar to this:

```
0 0 5060 mylcs.xyz.com
```

where mylcs.xyz.com is the hostname of the OCS server and 5060 is the port used to connect to OCS. If the result is nothing or a blank line, DNS is incorrectly configured, or DNS on the NP-UM server is not configured correctly to use the corporate DNS server(s).

## 7 - Install and configure SAA on the NP-UM server

See [Speech Auto Attendant Installation](#) and [Configuration](#) for installation instructions. The Speech Auto Attendant must be set up to use Active Directory as the user repository. See [Define an Active Directory Data Source](#).

## 8 - Purchase the Presence license for the NP-UM server

The "NuPoint Messenger: Enable Presence (Speech AA)" license must be purchased. Once that license becomes effective for the NP-UM server, no further actions are required. The Presence Proxy is always running when NP-UM is running and it will detect that the license has been purchased and will automatically start up within a minute of enabling the license.

## 9 - Verify installation

To verify the installation, check that the Speech Auto Attendant can retrieve the presence state of a user. Call the SAA main number and speak the name of an SAA user who is also an OCS-enabled user. SAA should speak the current presence state of the user before forwarding the call. Change the presence state of the SAA user (e.g., from Online to Busy or Be Right Back) and make another call through SAA to that user. The presence state spoken by SAA should be the new state.

### 1.4.20.3.5 Lotus Sametime Configuration

#### Conditions

The Speech Auto Attendant must be installed and configured to use Active Directory as the user data source before the Presence Proxy can be configured. (See step 2 below.)

An IBM Technote specifies that when using AD as the user repository for Sametime, it is necessary to configure Sametime to use the **DistinguishedName** Active Directory attribute of the user by entering it in the "Attribute of a person entry that defines the internal ID of the Sametime user" field of the Sametime configuration. Refer to this web page above for more information: <http://www-1.ibm.com/support/docview.wss?rs=203&uid=swg21161658>

#### Procedure

The configuration steps required to set up the Presence Proxy for the Speech Auto Attendant (SAA) with Lotus Sametime are as follows:

1. [Trust the Presence Proxy server in Sametime](#)
2. [Install and configure SAA on the NP-UM server](#)
3. [Purchase the SAA Presence license for the NP-UM server](#)
4. [Verify the installation](#)

#### 1 - Trust the Presence Proxy server in Sametime

By default Sametime restricts what IP addresses are allowed to connect to it as a server. To allow the Presence Proxy to connect it is necessary to perform the following actions:

1. Determine the IP address of the system the Presence Proxy is running on. It must be the IP address, not the server hostname.
2. On the Lotus Sametime server, use a Lotus Notes client to open the `Stconfig.nsf` database. This can be accomplished from a system with Lotus Notes installed by navigating to the Lotus Domino data directory on the Lotus Sametime server (for example, `C:\Program Files\Lotus\Domino\data`) using File Explorer and open the file `stconfig.nsf`.
3. Edit the **CommunityConnectivity** document.
4. In the **CommunityTrustedIPS** field, enter the IP address of the NP-UM (Presence Proxy) server. If there are multiple IP addresses they must be separated by either a comma or a semicolon.
5. Save the document and restart the Lotus Sametime server.

## 2 - Install and configure SAA on the NP-UM server

See [Speech Auto Attendant Installation](#) and [Configuration](#) for installation instructions. The Speech Auto Attendant must be set up to use Active Directory as the user repository. See [Define an Active Directory Data Source](#).

## 3 - Purchase the Presence license for the NP-UM server

The "NuPoint Messenger: Enable Presence (Speech AA)" license must be purchased. Once that license becomes effective for the NP-UM server, no further actions are required. The Presence Proxy is always running when NP-UM is running and it will detect that the license has been purchased and will automatically start up within a minute of enabling the license.

## 4 - Verify installation

To verify the installation, check that the Speech Auto Attendant can retrieve the presence state of a user. Call the SAA main number and speak the name of an SAA user who is also a Sametime-enabled user. SAA should speak the current presence state of the user before forwarding the call. Change the presence state of the SAA user (e.g., from Online to Busy or Be Right Back) and make another call through the SAA to that user. The presence state spoken by the SAA should be the new state.

### 1.4.20.3.6 Unified Communications Server Configuration

The configuration steps required to set up the Presence Proxy for the Speech Auto Attendant (SAA) with the Mitel MiCollab Client Service are as follows:

1. [Trust the NP-UM Server in the Mitel MiCollab Client Service](#)
2. [Verify that the Mitel MiCollab Client Service service entry exists](#) in the Corporate DNS server

3. [Configure DNS on the NP-UM server](#) so that it can find the Mitel MiCollab Client Service service SRV record
4. [Install and configure SAA](#) on the NP-UM server
5. [Purchase the SAA Presence license](#) for the NP-UM server
6. [Verify the installation](#)

## Trust the NP-UM Server in the Mitel MiCollab Client Service

### Note:

For NuPoint UM 640, trust the cluster IP address and all the server IP addresses.

1. In the MSL admin web interface, under **Applications**, select **Unified Communications Server**.
2. Click the **Configure Mitel UC Server** button.
3. Select the **Enterprise** tab, if it is not the active tab.
4. Click **Trusted Presence Proxies** to expand the section.
5. Click **Add Proxy**.
6. In the new line just added, double click **Add description** to add a meaningful description, for example the hostname of the NP-UM server.
7. In the new line, double click **Add IP address** to enter the IP address to be trusted.
8. Click **Apply** at the bottom of the web page.

## Verify that the Mitel MiCollab Client Service service entry exists in the Corporate DNS server

Ensure that the corporate DNS server (it may be running on the Windows Domain Controller or other Windows server) has been configured with an SRV record for '\_sip.\_udp.xyz.com' where 'xyz.com' is the domain that the Mitel MiCollab Client Service is in. The SRV record should point to the Mitel UC Server hostname and port (typically 18100).

## Configure DNS on the NP-UM server so that it can find the Mitel MiCollab Client Service service SRV record

Ensure that the NP-UM server has its DNS set up so that DNS queries are forwarded to the Windows DNS server, often on the Domain Controller.

Many working DNS configurations are possible. The requirement is that the Presence Proxy running on the NP-UM server is able to use DNS to resolve the '\_sip.\_udp.xyz.com' service name (where xyz.com is the domain that Mitel MiCollab Client Service is in).

To test this, from a command line on the NP-UM system, enter the following command and verify that it returns the information for the Mitel MiCollab Client Service :

```
dig _sip._udp.xyz.com SRV +short
```

where "xyz.com" is replaced with the domain of OCS.

The result should look similar to this:

```
0 0 18100 myucserver.xyz.com
```

where "myucserver.xyz.com" is the hostname of the Mitel UC Server and 18100 is the port used to connect to the Mitel MiCollab Client Service . If the result is nothing or a blank line, DNS is incorrectly configured, or DNS on the NP-UM server is not configured correctly to use the corporate DNS server(s).

### **Install and configure SAA on the NP-UM server**

See [Speech Auto Attendant Installation](#) and [Configuration](#) for installation instructions.

### **Purchase the Presence license for the NP-UM server**

The "NuPoint Messenger: Enable Presence (Speech AA)" license must be purchased. Once that license becomes effective for the NP-UM server, no further actions are required. The Presence Proxy is always running when NP-UM is running and it will detect that the license has been purchased and will automatically start up within a minute of enabling the license.

### **Verify installation**

To verify the installation, check that the Speech Auto Attendant can retrieve the presence state of a user. Call the SAA main number and speak the name of an SAA user who is also a user of the Mitel MiCollab Client Service . SAA should speak the current presence state of the user before forwarding the call. Change the presence state of the SAA user (for example, from Available to Unavailable or Gone Home) and make another call through SAA to that user. The presence state spoken by SAA should be the new state.

## **1.4.20.3.7 Troubleshooting**

### **Common Problems**

#### **SAA is not stating any SAA user's presence**

This is the end result of most configuration errors. To isolate the cause, check the Presence Proxy logs on the NuPoint server.

If there is no log indicating the cause of the problem, the entire configuration will need to be checked. Below is the suggested order. For details on how to perform these checks, refer to the [Presence configuration](#) instructions.

1. Confirm that the NPM Presence license is purchased on the NuPoint server.
2. On the NuPoint UM server, check the DNS configuration using the `dig` command detailed in the Setup instructions. If the `dig` command does not provide the correct response, the DNS setup for the NuPoint system and the corporate DNS server must be corrected.
3. On the LCS or OCS Server, verify that the correct IP address of the NuPoint server has been added as an authorized host.
4. In Active Directory for the domain that the LCS/OCS/SAA users belong to, verify that the "mitelpresence" users have been created.
5. In Active Directory, verify that the "mitelpresence" users have been enabled as LCS/OCS users.
6. In Active Directory, verify that the "mitelpresence" users have the **Password never expires** checkbox selected.
7. In LCS/OCS, check the **Allow and block list** of the SAA users to ensure that all the "mitelpresence" users have been added as Allowed.

### SAA is not stating the presence state of some users

If the presence status is supplied in SAA for some users and not for others, it is likely that the **Allow and block list** of the users was incorrectly modified.

Check the users and make sure that all the "mitelpresence" users have been added as "Allowed".

Also check that all the "mitelpresence" users have **Password never expires** selected in Active Directory. If not selected, the password may have expired and the account could be suspended, which means the Presence Proxy will fail to get presence updates for some users.

### An SAA user's presence state is incorrect

The SAA user in question may be logged in to more than one session. In LCS /OCS, a user can be logged into more than one session at the same time, for instance using Office Communicator on more than one PC. The server aggregates the presence state from all active sessions, and it is this aggregate presence state that is used by the Presence Proxy. If the user is online in one session and offline in the other, the Presence Proxy will reflect the online state.

Try logging in as a different user who has the problem user as a buddy, and see if the state shown there matches the one that is provided by SAA Presence.

## An SAA user is being notified in Office Communicator 2007 that a mitelpresence user has added them as a contact

This means that the user's allow list was not properly modified by the script that was run in step 2 of [OCS Configuration](#). Try running the script again.

### 1.4.20.4 SAA Backup and Restore

Speech Auto Attendant user data source configuration, departments, dialing policies, miscellaneous parameters, and line group configuration are backed up automatically by the current NuPoint UM backup procedures.

On Standalone SAA systems, you can perform backups using the instructions in the Backup section of the *NuPoint Unified Messaging Technician's Handbook*.

#### Note:

- When SAA is configured to use Active Directory or MiCollab as its user data source, the backup function will not back up (or restore) information stored in Active Directory. **Failure to back up Active Directory properly could result in data being lost.**
- Options to back up/restore messages and fax cover pages are not available on standalone SAA systems.
- If you choose to back up or restore "Names and Greetings" in any of the backup menus, then every prompt recorded for SAA (recorded names, departments, as well as customized auto-attendant system prompts) will be backed up (or restored).

## 1.4.21 Speech to Text

### 1.4.21.1 Speech to Text - Description

Speech to Text is an optional, licensed feature of NuPoint UM that converts voice mail messages to text, allowing users to discreetly access voice messages in a text format. This feature uses a third-party transcription service that requires Internet connectivity. Your DNS configuration must allow for transcription requests being sent to the Speech to Text provider, Nuance Communications.

Speech to Text service allows you to:

- **Discretely check voice messages**

When in meetings or in social settings, it is simply awkward to listen to voice messages. This situation is especially frustrating if an important message is expected. The STT feature allows you to "read" new voice messages virtually anywhere.

- **Quickly find important voice messages**

In most cases, you can scan a transcribed message faster than you can listen to the original voice message. After performing this quick review, you can listen to the voice message to catch nuances of expressions and confirm key details.

- **Easily respond to voice message with an email**

After reading a transcribed message, you can "reply" to it by forwarding it to email. This eliminates the need to "re-cap" the voice message by typing it into the email message.

**Note:**

- Administrators and users must agree to the terms of the transcription service provider's licensing agreement. Part of this agreement specifies that the transcription process may involve human beings listening to your recorded audio messages.
- The Speech to Text feature must be configured using the **Web Console**. (Exception: The Text Console can be used to configure STT for UM Standard.)

## Conditions and Limitations

### Speech to Text Provider (Nuance)

1. Although the transcription process is fully automated, voice messages are kept for 24 hours during which random spot checks are performed to assess quality. All data (voice message and transcriptions) are then electronically "shredded" and retained in a library for research purposes. This is analogous to a physical paper shredding process—audio and transcriptions from all sources are "cut up" and mixed up together so that a message cannot be pieced together again.
2. If an account balance lapses, transcription requests are denied and alarms are raised. NuPoint UM disables the Speech to Text feature until the administrator corrects the account balance and activates the feature again.
3. There may be limitations on the type and/or length of messages being transcribed. If transcription cannot be performed, an alternative email is sent to notify the user.



4. There may be a limit on the number of concurrent requests that can be sent at any given time, and on the number of transcriptions performed in a specific time period. Volumes higher than this limit may be queued.
5. Nuance does not provide language detection and/or translation services. For this release, messages received in languages other than North American English will not be transcribed.
6. The maximum message length is 60 seconds. For longer messages, users can dial in and listen to the entire original voice mail. (If necessary, your Mitel reseller can contact the transcription service provider to extend the maximum message length for your account.)
7. The Speech to Text service uses a complex computer model to transcribe spoken words into text. While transcription accuracy can be very good, there may be instances when the transcription does not accurately represent the spoken message. If in doubt, please listen to the original voice message.
8. If the system cannot understand the message, it will not transcribe it. Instead, the user will receive an email notification. Typically, about 15% of messages are deemed "untranscribable" due to non-English accents or language, jargon, background noise or other issues.

## NuPoint UM

1. When Speech to Text is enabled, users receive a text transcription email for each of their voice mail messages. You can add a copy of the audio file by enabling "Include audio attachments with email messages" in the system-wide settings.
2. For Advanced UM, only email messages containing audio attachments are synchronized with the user's voice mailbox. Emails containing text transcriptions are not synchronized and do not affect the status of the original voice mail or MWI.
3. A message number (ID) is contained within the body of email messages. When two emails are generated for a single voice mail, they will have the same message number.
4. Speech to Text is supported in International English only, and in North America only.
5. Confidential, Record-a-Call, and Fax messages are not transcribed.
6. Text transcription emails can be handled like other emails (mark as read, forward, reply, etc.) but operations performed on them are not synchronized with the user's NuPoint voice mailbox.
7. Users must accept the Speech to Text license agreement in Web View before the feature can be used. Administrators cannot accept the license on the user's behalf.

## About Nuance Transcription

The transcription service provider is Nuance Communications, Incorporated.

You must contact your Authorized Mitel Reseller in order to set up an account and purchase conversion credits from Nuance. When the credits run low or are depleted,

NuPoint UM will begin generating alarm messages. You must then purchase more conversion credits from your reseller.

## Transcription Performance

Because it takes time for the system to transcribe voice messages to text, email with text transcriptions will arrive after emails with audio attachments. Delays of 10 minutes or more can be encountered depending on the length of the voice messages and the number of transcription requests the system is currently processing. Internal corporate mail routing delays may also affect delivery time. The transcription process rarely takes less than two minutes.

## Transcription Message Contents

### Standard Messages

A typical transcribed message looks like this:

"Hi there. I was just returning your call about dinner at the weekend. Not very sure. I'll let you know by tomorrow what it's looking like. Bye."

Spoken through Nuance.

The quotation marks delineate the contents of the original voice mail message.

### Messages with Special Characters

Special characters contained in the body of the message indicate the following:

- **Question Mark:** Indicates that the service cannot understand the complete word. It therefore spells the word phonetically. For example, "Hi Ashby(?), are you still working? Bye."
- **Underscore:** Indicates that the service cannot understand any part of the word. It therefore replaces the word with an underscore. for example, "Hi \_ . My number is 777777777. I repeat 777777777. Thank you."

### Unconverted Messages

The transcription service will not convert messages for the following reasons:

- Too much background noise
- Speaker's accent not understood
- Message was recorded in a language other than English
- Message spoken too fast
- Message contains too many special characters indicating that text has been replaced or spelled phonetically
- Message is a fax

- Message is marked "confidential"

If any of these conditions occur, NuPoint UM users will receive an email instructing them to call the voicemail system to check the original message.

## 1.4.21.2 Speech to Text - Installation

### NuPoint UM

The Speech to Text feature requires a single system-wide license and an AMC synchronization. The feature does not require installation as it is bundled with the NuPoint UM base software and is automatically installed by the Master Installer blade.

**Note:** If you are installing the STT feature after the initial NuPoint UM installation, you must install the STT blade. See [Installing an Optional Feature](#).

### Speech to Text Provider (Nuance)

Administrators are required to contact their Authorized Mitel Reseller in order to set up an account and purchase conversion credits from the transcription service provider, Nuance Communications. When your credits run low, you will be alerted through the NuPoint alarm mechanism. You must then purchase additional credits through your reseller in order to retain the service.

## 1.4.21.3 Speech to Text Configuration

Configuration of the Speech to Text feature consists of the following steps, detailed below:

- Obtain a Nuance speech transcription account and conversion credits
- Configure system-wide Speech to Text settings
- Enable the Speech to Text feature
- Configure Speech to Text for users

### Obtaining a Nuance Account and Conversion Credits

Nuance Communications is responsible for transcribing voice messages to text. To access this service, you require a user account and conversion credits, which you can obtain through your Authorized Mitel Reseller.

#### **Note:**

Purchase the NuPoint UM Speech to Text "enablement" license before you set up your Nuance account and obtain conversion credits.

1. Contact your Authorized Mitel Reseller and provide the following:
  - **User Name:** Name of your NuPoint UM system.
  - **System ID:** Application Record ID, or ARID, of the NuPoint UM system.
  - **Conversion credit quantity:** Mitel sells conversion credits in prepackaged quantities.
  - **Confirmation email addressess:** Nuance sends a confirmation email to these addresses when conversion credits are purchased.
2. The information is sent to Nuance, which sets up your user account, assigns conversion credits, and sends you an email containing the following:
  - **User Name:** Same as above.
  - **Password:** Your unique account password, provided by Nuance.
  - **Account ID:** Your unique account ID number, provided by Nuance.
  - **Application ID:** Your unique application ID name, provided by Nuance.
3. Complete the next procedure, [Configuring System-wide Speech to Text Settings](#).

These same credentials are used for account renewals. NuPoint UM does not know or report the state of your Nuance subscription. If your account is running low, Nuance notifies the NuPoint UM server, which in turn issues warning alarm messages. If your account is empty, the Speech to Text transcription service is terminated. You will need to purchase additional credits through your Authorized Mitel Reseller and then [Activate Text to Speech](#).

## Configuring the System-wide Settings

In the NuPoint UM Web Console:

1. From the navigation tree, click **Unified Messaging > STT Configuration**. If properly licensed, the Speech to Text configuration page is displayed.
2. Enter the following:
  - **Username:** Name of your NuPoint UM system.
  - **Password:** Your unique account password, provided by Nuance.
  - **Account ID:** Your unique account ID number, provided by Nuance.
  - **Application ID:** Your unique application ID name, provided by Nuance.
3. To include the original audio attachment of the voice message in the transcription emails for all users, select **Include audio attachments with email messages**.
4. Click **Save**.

## Customizing the Class of Service

1. [Customize an FCOS](#) to include the following feature bits:

- **285** (Enable Speech to Text) and assign it to mailboxes that will use this feature.
- **295** (and an Advanced UM license) OR **304** (and a UM Standard license) OR **289** (and a UM-SMTP license).
- **290** to view and/or save a text transcription of a voice mail message in the Web View.

2. [Customize an LCOS](#) with a [Minimum Message Length](#) greater than zero (0).

### Note:

If you fail to set a minimum message length, brief messages (such as when a caller immediately hangs up) will be transcribed and cause a conversion credit to be consumed.

3. Apply FCOS and LCOS to the STT mailboxes.

## Configuring Users

### Note:

- To include the original audio attachment of the voice message with the text transcription email for all users, enable the [Include Audio Attachments](#) system-wide settings.
- All users must accept the End User License Agreement before they can use the Speech to Text feature. (Administrators cannot accept on behalf of users.)
- The appropriate feature bits must be assigned to the [FCOS](#) of the user's mailbox before the Speech to Text configuration fields are displayed in the Web Console.
- Users should record a voice mail greeting to encourage callers to speak clearly. For example: "Please speak clearly as your voice message will be transcribed and sent to me in an email."

To configure STT for users:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.

3. Select a mailbox in the list, and then click Edit > Selected. The Mailbox data view is displayed (Basic view), populated with data for the selected mailbox.

- For UM-SMTP Users:
  - Enter a valid email address in the **UM-SMTP Email Address** field.
  - From the delivery option list beside the Email Address field, select **Speech-to-Text**. All incoming voice mail messages (except Confidential, Record-a-Call, and Fax messages) are transcribed into text and sent as email messages to the specified email address.
  - Click **Save**.
- For UM Standard Users:
  - Enter a valid email address in at least one of the **Standard UM Email Address** fields.
  - From the delivery option list beside the appropriate Email Address field, select **Speech-to-Text**. All incoming voice mail messages (except Confidential, Record-a-Call, and Fax messages) are transcribed into text and sent as separate email messages to the specified email address.
  - Click **Save**.

**Note:**

For UM Standard Users, it is possible to configure Speech to Text using the Text Console (see the *NuPoint Unified Messaging System Administration* online help, available at Mitel OnLine).

- For UM Advanced Users:

**Note:**

Prior to using STT for UM Advanced users, you must program the smart host in the MSL Server Manager on the E-Mail settings screen. The smart host can be entered as IP address or a FQDN.

- Enter a valid **Advanced UM Email Alias / Full Name / Address and Advanced UM Email Password**.
- Select the **Enable Speech-to-Text Transcription** check box. All incoming voice messages are automatically transcribed and sent as email messages to the user's account. **Note:** The transcriptions are sent as separate emails and are not synchronized. (Only the original voice message with audio attachment is synchronized with the user's Inbox and/or MWI.)
- Click **Save**.

**Note:**

To take advantage of Secure IMAP, you must enter the correct authentication settings in the Exchange Server.

**Alert Users of the Following:**

- The STT feature is *not* a dictation service. While transcription accuracy can be very good, there may be instances when the transcription does not accurately represent the spoken message. If in doubt, listen to the original voice message.
- Most callers do not speak in full and complete sentences; the transcription service will attempt to reflect this with spaces and punctuation.
- Transcription quality depends on the clarity of the original voice message. For example, if the person has a heavy accent or does not speak clearly, or is speaking from a noisy from a noisy environment, then the message will not be transcribed correctly.
- If the system cannot understand a voice message, it will not transcribe it. Instead, the user will receive an email notification. Typically, about 15% of messages are deemed "untranscribable."
- The system is "tuned" to transcribe typical English conversation. In many businesses however, messages may contain jargon, phrases and acronyms that are difficult to transcribe.
- The service is available in North American English only. For this reason, users who receive a significant number of voice messages in a different language should not be enabled for STT.
- The maximum message length is 60 seconds. For longer messages, users can dial in and listen to the entire original voice mail.

## 1.4.21.4 Activating or Terminating Speech to Text

**Activate the Speech to Text Feature After Account Renewal**

If your Nuance account credits become depleted, no further transcription is done. NuPoint UM disables the Speech to Text feature until you have corrected the account balance and re-activated the feature.

**Note:** Voice messages that are left while the Speech to Text feature is disabled will not be transcribed.

To re-activate Speech to Text:

1. From the navigation tree, click **Unified Messaging > STT Configuration**.
2. Click **Activate**.

**Note:**

The Activate button only appears when the feature has been disabled due to Nuance credit depletion. If you click Activate without correcting your account balance, NuPoint UM will disable the feature again.

**Terminate the Contract and Disable Speech to Text**

- Contact the your Authorized Reseller and cancel your Nuance account. NuPoint UM disables the service and displays alarms.

To clear the alarms:

1. From the navigation tree, click **Unified Messaging > STT Configuration**.
2. Clear the **User name**, **Password**, **Account ID**, and **Application ID** fields and then click **Save**.
3. Remove the Speech to Text feature bit (285) from the FCOS of all user mailboxes.

## 1.4.21.5 Speech to Text Alarms

**NuPoint UM**

When an error is detected in the process of transcribing a voice message, an alarm is raised. You can view alarms using the Web Console, Text Console, or email and SNMP clients. See [Alarm Manager](#) for more information about handling/clearing alarms.

**Speech to Text Provider (Nuance)**

The following types of error may arise as part of the interaction with the Nuance Speech to text service:

- Problem with the Speech to Text account (invalid username or password, limited or disabled account, etc.)
- Conversion credits nearing depletion.
- Conversion credits depleted.

**Conversion Credit Alarms**

Nuance informs NuPoint UM concerning the status of the conversion credits, which in turn result in alarms. It is the responsibility of the administrator to configure NuPoint to issue email notifications of these alarms. See [Alarm Manager](#) for more information.

The alarm behavior is as follows:



- When only 20% of the conversion credits are remaining, a Warning-level alarm is issued with the following message: "Your system currently has XXX credits remaining. Please buy additional credits."
- After seven daily Warning alarms are issued, the alarm level is raised to Minor.
- After seven daily Minor alarms are issued, the alarm level is raised to Major with the following message: "Your system currently has XXX credits remaining. Please buy additional credits. The Speech to Text service will stop working if your system runs out of credits."
- If the credits run out completely a final alarm will be provided indicating that Speech to Text is no longer working and NuPoint will disable the feature. The alarm message is: "Your NuPoint System has run out of speech to text credits. Transcriptions will no longer be provided to users. Please contact Mitel to purchase more credits."

If you purchase additional credits before running out, the alarms will cease and no further action is necessary. If, however, you purchase credits after allowing them to run out, you must then reactivate the Speech to Text feature in order to communicate with Nuance again. For details, see [Activating the STT Feature after Account Renewal](#).

## 1.4.22 Speech Navigation

### 1.4.22.1 Speech Navigation - Description

Speech Navigation is an optional, licensed feature of NuPoint UM that enables users to manage their mailboxes using voice commands. Instead of struggling to find and press a button on their telephone dial, they can simply "say the command." This is particularly helpful for drivers who wish to use their cell phones in hands-free mode.

#### Features

Speech Navigation offers the following features:

- **Tutorial**

A brief tutorial explaining the basic operation of Speech Navigation is played when a user logs in for the first time. The tutorial explains the available commands as well as the submenus that are not fully voice-enabled.

- **Help**

When a user asks for help, the system will list the commands that are available with Speech Navigation and with the telephone user interface.

- **Multiple Command Options**

Speech navigation supports the concept of aliases so that up to two different phrases can be used to accomplish the same task. For example, users can say, "Delete Message" or "Discard Message" to delete a voice message.

- Barge-In

This feature allows users to interrupt a system prompt with a speech or keystroke command. The system stops playing the prompt and responds to the command. Barge-in allows experienced system users to skip quickly through the prompts.

- Error Handling

Speech Navigation responds to an error by instructing the user to retry the command. After three recognition errors, the system will play the prompt, "I do not understand that command. Please call again," and then disconnect the call.

- Mailbox Extensions

When Speech Navigation is enabled for a mailbox, it applies all of the user's extensions, including alternate extensions such as teleworker and cell phones. The enables users to call the message center from remote locations and immediately begin using Speech Navigation commands.

- Commands

The following commands can be invoked with Speech Navigation: Play Message, Keep/Save Message, Delete/Discard Message, Answer/Reply To Message, Forward/Give Message, Next Message, Make Message, User Options, Operator, and the digits zero to nine. In addition, users can leave the system by saying one of the following commands: Bye, Goodbye, Hang-up, or Quit. For detailed usage instructions, see the *NuPoint Unified Messaging User Guide*.

## Conditions and Limitations

- You must purchase a license that specifies the total number of mailboxes that may use the Speech Navigation feature. Individual licenses are allocated to mailboxes on a per-user basis from this amount.
- Individual user licenses are assigned in numerical order. For example, if you purchase a Speech Navigation license for forty users and then activate the feature on fifty mailboxes (by assigning feature bit 99 to them), only the first forty mailboxes owners will be able use the feature.
- Speech Navigation users can be issue commands in North American English only. In a later release, users will be able to issue commands in either of two different languages from a selection of up to 50 languages.
- Some Speech Navigation commands, such as Make Message and Answer/Reply to Message, take the user to a menu that requires keystroke inputs on the telephone user interface.
- Up to 120 users (on a 120 port system) can simultaneously use speech navigation.
- Speech Navigation commands are not supported with the [Competitive Telephone User Interface \(TUI\)](#).

## 1.4.22.2 Speech Navigation Installation

The Speech Navigation feature requires a single system-wide license and an AMC synchronization. The basic software components (NuPoint UM Speech Recognition Prerequisites and NuPoint UM Speech Navigation) are bundled with the NuPoint UM base software and are automatically installed by the Master Installer blade.

To complete the installation, the administrator must manually install the following:

- NuPoint UM Speech Recognition American English prompts (DVD 2)

See [Installing an Optional Feature](#) for software blade installation instructions.

## 1.4.22.3 Speech Navigation Configuration

Configuration of the Speech Navigation feature consists of the following steps, detailed below:

- Assign the Speech Navigation Feature Bit to Mailboxes
- Manage Speech Navigation Licenses
- Configure Speech Navigation for Users (Administrative and User procedures)

### Assigning the Speech Navigation Feature Bit to Mailboxes

Use this procedure to create a customized FCOS containing the Speech Navigation feature bit (99), and then assign that FCOS to mailboxes.

Provided that the number of mailboxes your program does not exceed the user license count, then all of the mailboxes can use the feature. However, if the number of mailboxes your program exceeds the user license count, then the license limit is applied to the mailboxes in numerical order. For example, if you assign feature bit 99 to five mailboxes but have only two user licenses, then the first two mailboxes (1111 and 1112) will be able to use the feature while the last three mailboxes (1113, 1114 and 1115) will be prevented from using it. If you then purchase two more user licenses, two more mailboxes (1113 and 1114) will be able to use the feature.

To assign the Speech Navigation feature bit to mailboxes:

1. [Customize an FCOS](#) to include [feature bit 99](#) (Speech Navigation).
2. [Apply the custom FCOS](#) to the mailboxes you wish to make eligible for Speech Navigation.

## Managing Speech Navigation Licensing

Use this procedure to determine the number of Speech Navigation licenses purchased, used and available, check whether a particular user is licensed, and export the list of licensed users.

### Viewing the Speech Navigation License Counts

To view the Speech Navigation license totals:

1. Click **Speech Navigation > Licensing**.
2. View the license counts at the bottom of the screen:
  - **Total Licenses** - the number of licenses that have been purchased.
  - **Used Licenses** - the number of licenses that have feature bit 99 and have been assigned a license by the system.
  - **Unused Licenses** - the number of licenses that remain available to be assigned to mailboxes.

**Note:** The number of used licenses will always be equal to or less than the Speech Navigation license limit. The number of unused licenses will decrease when you assign feature bit 99 to new mailboxes.

### Searching for a Licensed User

To search for a licensed user:

1. Click **Speech Navigation > Licensing**.
2. In the **Find** field, enter a user's mailbox number or first/last name. If entering a name, a partial string is acceptable.
3. Click **Search**.
4. If you are unable to locate the user, click **Show All** and page through the complete user list by clicking **Next**.

### Searching for a Licensed User File

To export for a licensed user file:

1. Click **Speech Navigation > Licensing**.
2. Click **Export**. The File Download window appears.
3. Click **Save** and select a location for the file. Rename the file if you want.
4. Click **Save**. The file is saved to the specified location in .CSV format.

**Note:** 1. The export function always exports the full list of licensed users, no matter what search may have been performed before. The exported user list is sorted alphabetically.

2. By default, Microsoft Excel does not display UTF-8 characters properly. To export a file with UTF-8 characters successfully, open the file in Notepad, click Save As and save the file without any changes.

## Configuring Users

### Administrator

The administrator is responsible to enable Speech Navigation for each user's mailbox. If the user has alternate extensions, such as cell phones, they may be configured at this time.

To enable Speech Navigation for the extensions on a user mailbox:

1. From the navigation tree, click Mailbox Maintenance, and then click Mailboxes.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Select a mailbox in the list, and then click Edit > Selected. The Mailbox data view is displayed, populated with data for the selected mailbox.
4. Optionally, click **Advanced** and enter up to four [Alternate Extension](#) numbers for internal or external phones (such teleworker or cell phones) that will share this mailbox.
5. On the **Misc** tab, select **Enable Speech Navigation**.
6. Click **Save**.

Speech Navigation is enabled for all configured extensions of the mailbox.

### Mailbox Owner

The mailbox owner is responsible to enable Speech Navigation on the mailbox itself. This "turns on" the feature.

1. Open the Web View interface in a web browser.
2. Enter your Mailbox number and Passcode, and then click **Submit**.
3. Select the **Speech Navigation** tab.
4. Click **Enable Speech Navigation**.

Speech Navigation is "turned on" for the mailbox.

**Alert Users of the Following:**

- When Speech Navigation users call the message center, the system will prompt them to "say" their password in order to access their mailboxes.
- Users must say commands in North American English only.
- If a NuPoint system has foreign-language prompts installed, users must set their voice mailbox language to "English" in order to use Speech Navigation.
- The responsiveness of the system depends on the clarity and accuracy of the spoken command. For example, if the user has a heavy accent or does not speak clearly, or is speaking from a noisy environment, then the system will not understand the command and prompt the user to repeat it. After a total three failed attempts, the system will play the prompt, "I do not understand that command. Please call again." The system will then disconnect the call.
- Users can "barge in" and say a command before the system finishes playing a prompt or message. For example, while the system is in the midst of playing a voice mail message, the user can say, "Next," and the system will skip to the next message. Or while the system is listing menu options, the user can say one of the options and the system will respond immediately.
- When a Speech Navigation user calls the message center from one of her extensions, she will receive a prompt asking her to "say" her mailbox password. When a Speech Navigation user calls the message center from an external number (not from one of her extensions), she will be prompted to log in by entering keystrokes for mailbox number and password. After logging in, she will be able to use Speech Navigation commands.
- If Speech Navigation is enabled for mailbox, the mailbox owner will receive prompts only in North American English, even if the mailbox is configured to use non-English prompts.
- The following commands can be invoked with Speech Navigation: Play Message, Keep/Save Message, Delete/Discard Message, Answer/Reply To Message, Forward/Give Message, Next Message, Make Message, User Options, Operator, and the digits zero to nine. For detailed usage instructions, see the *NuPoint Unified Messaging User Guide*.
- Users can exit the system by saying any of the following commands: Bye, Goodbye, Hang up, Quit.
- Users can go up one menu in the menu structure by saying, "Exit."
- If users are employing the Competitive TUI emulation feature, Speech Navigation commands are not supported.
- Users can hear help information about the Speech Navigation feature by saying "Help." The command causes the system to enumerate the commands the user can say using Speech Navigation and the keys the user may press using the TUI.
- If you enable Speech Navigation, the soft keys for the user's primary extension will be disabled.

## 1.4.23 Unified Messaging

## 1.4.23.1 Unified Messaging - Description

Unified Messaging (UM) allows you to integrate your NuPoint Unified Messaging voice mail system with your e-mail client for increased access to messages.

The following features are available with Unified Messaging:

- [Basic Unified Messaging Features](#) (SMTP Forwarding and Web View)
- [Optional Unified Messaging Features](#) (Standard UM and Advanced UM)

## 1.4.23.2 Basic Unified Messaging Features

The following Unified Messaging features are installed without charge as part of the "base package" in every NuPoint UM system.

### SMTP Forwarding

The SMTP Forwarding (or "UM-SMTP") is enabled on a system-wide basis and can be deployed to all system users. It facilitates forwarding of voice mail and fax messages from NuPoint to e-mail addresses. Communication occurs in one direction, from NuPoint to the email server. Since there is no communication from the email server back to NuPoint, message waiting indication (MWI) synchronization is not supported.

To set up SMTP Forwarding, the system administrator configures each user's mailbox with an email address. Whenever a user receives a voice or fax message, a copy is forwarded to the specified email address. For voice messages, the email message includes an audio file (.wav) attachment that the user can listen to on a PC or smartphone.

A copy of the original voice or fax message is retained on the NuPoint UM system. As a result, the MWI on the user's telephone will remain even after the user has deleted the message from an email client. The MWI is extinguished only when the message is accessed via the telephone user interface (TUI). To minimize confusion, the system administrator may choose to disable MWI for users who prefer using an email client rather than a telephone to access their messages.

### Web View

Web View is available to users on a system-wide basis. It enables them to access a visual representation of their NuPoint mailboxes through a URL and to manage their NuPoint mailboxes through a GUI instead of the TUI. It supports MWI synchronization. In other words, when a user listens to a message in Web View, the MWI lamp will turn off, just as it would after listening to the message through the TUI.

Web View allows users to perform actions that blur the boundary between voice, fax, and email messaging:

- Access voice and fax messages from Web View.
- Access voice, fax, and Record-A-Call (RAC) messages from the telephone user interface (TUI).
- Reply to voice or fax messages by email to other Web View users; forward voice or fax messages via email by entering the recipient's email address
- Save voice or fax messages to an email mailbox for archiving as a .WAV file.

In addition, all Unified Messaging users can configure the encoding format for their audio files on the Settings tab of the Web View interface.

Web View supports the following number of simultaneous sessions:

- NuPoint 60: 50 simultaneous sessions
- NuPoint 120: 60 simultaneous sessions
- Virtual NuPoint: 60 simultaneous sessions

See the *Web View Online Help* for information about Web View settings.

### 1.4.23.3 Optional Unified Messaging Features

In addition to the base features, SMTP Forwarding and Web View, NuPoint UM offers two other Unified Messaging features:

- [Standard UM](#)
- [Advanced UM](#)

Standard UM and Advanced UM are optional applications that require extra licensing and software blade installation. They provide the following benefits:

- Easier and faster message management. NuPoint UM displays voice and fax messages visually in the users' e-mail clients, enabling them to see the following at a glance:
  - A listing of voice and fax messages.
  - Message caller ID information. This enables smart phone users to return the call simply by clicking on the number contained in the message.
  - Message date and time.
  - Status. Urgent messages are flagged with an exclamation point, confidential messages with a lock (if the email client supports these indicators).
  - Users can click on the message to hear it through a media player on their device.
  - Users can save messages. For users accessing their voice messages using Standard UM, the Save function automatically copies selected messages to their default email address. These messages then appear in the user's email inbox as an email message with a WAV file attachment. The messages can be moved to a folder, archived, or sent via e-mail to users outside the NuPoint system.



## Standard Unified Messaging

Standard UM provides users with numerous options to manage their messages. Using the Settings tab in Web View, users can set parameters associated with the consolidation of their voice, fax, and email messages.

When a voice mail is received, NuPoint sends a message to the mailbox owner's email account via the SMTP service. The subject of the message includes the original sender's telephone number, a time/date stamp and a subject line that adheres to this format:

"Voice Message from <Name/CLID/Mailbox Number/Unknown Caller> MB:<To Mailbox Number>".

The body of the message can include:

- A simple text notification that a new voice message has arrived. The voice message is stored only in NuPoint.
- An audio attachment (.wav or .mp3 file). Listening to the attachment does not update the MWI. The voice message is stored in NuPoint and the email server.
- A hyperlink to Web View. The user can log into Web View and manage the message from the Web View messages tab. Actions taken within Web View will update the MWI. The voice message is stored only in NuPoint.

**Note:**

Record-A-Call messages appear in the Web View screen but are not sent to the user's e-mail inbox.

- An Audio Link to the specific message. The user can listen to the (new) message by clicking on the hyperlink. This will update the MWI. The voice message is stored only on NuPoint.

In most situations, there is no synchronization between the voice mails stored on NuPoint Unified Messaging system and the voice mails in the users' e-mail account or with the message waiting indicator (MWI) on their phone. The only exception occurs when the e-mail includes a link to the voice mail as an audio file. Listening to the file will mark the message as played in the NuPoint voice mail box; however, playing a message in the voice mail box will not mark the e-mail as read on the e-mail server.

Standard UM supports connections to SMTP email servers, including relay servers such as Microsoft 365 and Google.

**Note:**

- The "link to the message in Web View" option requires that your server translate the FQDN. If you have a corporate DNS server, ensure that the FQDN is associated with the appropriate IP address. If you do not have a DNS server, you need to use a text editor (like Notepad) to make an IP/FQDN equivalency entry in the system HOSTS file of the client PC (C:\WINDOWS\SYSTEM32\DRIVERS\ETC).
- For voice mail that is received as "Confidential" (forwarding not allowed) the NuPoint Unified Messaging system creates an e-mail message without a voice attachment and sends it to the user. In the body of the e-mail message, the user is directed to listen to the message over the phone.
- For NuPoint deployments that are configured with the Web Proxy service of the MiVoice Border Gateway, the audio file links are valid both inside and outside the corporate network provided that DNS is configured correctly. An external DNS server should resolve your Virtual Host name (for example, "MAS1.mitel.com") to the corporate firewall, and your internal DNS server should resolve the LAN host name (also "MAS1.mitel.com") to the actual server on the LAN.

**Advanced Unified Messaging**

With Advanced Unified Messaging, users can receive all their voice, fax, and emails through a single interface—whether it's the TUI or the email client. Actions taken on one interface are reflected on the other.

Advanced UM provides the following features:

- Voicemail and fax messages are duplicated in the user's email account—and therefore on the email server.
- Users can manage all voicemail, fax, and email messages from within a supported email client.
- NuPoint and the email server are synchronized so that actions taken on one system are reflected on the other. An email message (with audio attachment) is created for each voice message. For example:
  - When a user listens to a voice message through the TUI, the matching email message will be marked as "read" in the user's email inbox.
  - When a user clicks on an email message containing a voice or fax message using an email client, the message will be marked as "read" and the message waiting

indicator (MWI) will turn off on the user's telephone. Note that the user may not have listened to the voice message in the attachment.

- When a user deletes an email message containing an audio file using an email client, the matching voice message will be permanently deleted from the user's voice mailbox.
- When a user deletes a voice or fax message using the TUI or Web View, the matching email message will be deleted in the user's email inbox. On most email systems, the email will be moved to the "deleted" folder (and, if necessary, may be recovered from there).

Advanced UM can be implemented on a NuPoint 60 platform with support for 1200 mailboxes, or a NuPoint 120 with 2500 mailboxes. One Advanced UM license is required per mailbox that employs the feature.

Advanced UM supports IMAP connections to Microsoft Exchange servers, or to hosted email services such as Microsoft Office 365 or Google Apps. For a list of supported configurations, see [Mail Server Adapter Types](#).

### Microsoft Exchange and Outlook Integration with NuPoint Voice

This option is based on an integration between the Microsoft Exchange server (e-mail server) and the NuPoint UM server (voice mail server). Emails on the Exchange server can be accessed by the NuPoint UM server so that voice mails and emails are accessible through both the Outlook client email and the NuPoint UM voice mailbox. The optional **Active Directory plug-in** provides LDAP-like directory services.

Also optional, users can install the **Outlook Client plug-in**, which provides a greater level of integration by installing:

- the Mitel Networks QuickPlayer in each Outlook client, which provides the ability to play voice messages over the PC speakers or using a Call Me/Meet Me session
- the Unified Messaging toolbar in the Outlook client so that users can reply to, create, and forward voice messages. The UM toolbar also enables users to launch Web View from Outlook.

Users who do not install the Outlook Client Plug-in:

- Will not have access to the UM toolbar (can use the default Windows media player to play voice messages)
- Will have voice mail messages displayed in Outlook with an email icon (rather than a speaker icon)

Microsoft Exchange integrations support [IMAP](#) protocol.

## Google Apps with NuPoint Voice

This option is based on an integration between the Google Apps for Business hosted email server and the NuPoint UM server (voice mail server). The Google Apps integration uses [IMAP](#) (only) to synchronize with NuPoint Unified Messaging. The OAuth protocol is employed to provide access to email accounts in Google Apps, and eliminates the need for users to enter their email passwords on the NuPoint UM system.

### 1.4.23.4 Basic and Standard UM

#### 1.4.23.4.1 Procedures (Web Console)

##### 1.4.23.4.1.1 Configuring UM-SMTP, UM-Web View and Standard UM

### Overview

Configuring Standard UM consists of the following tasks:

- Ensure that you have purchased enough UM licenses and assigned them to the mailboxes you want to enable for UM
- [Configure Standard UM parameters](#)
- [Configure Outbound SMTP Server \(Smart Host\) settings](#)
- [Configure the user mailbox](#)
- [Force a license update](#)

These procedures can be performed using the Web Console (instructions below) or the Text Console (see the *NuPoint Unified Messaging System Administration* online help, available at Mitel OnLine).

### Configure Parameters for UM-SMTP

1. From the navigation tree, click **Unified Messaging**, and then click **UM-SMTP**.
2. The **UM-SMTP Configuration** screen appears.
3. Enter the following configuration information:
  - In the **Queue Size** field, enter the size of the queue for messages sent using Reply and Forward in Web View. The default value is 200. Maximum value is 1000. Do not modify this value unless you are experiencing problems with lost messages or the queue becoming full.
  - In the **Corporate Callback Number** field, enter the callback number to be included in the body of Standard and Advanced email notifications. Enter the callback number in a format that can be recognized by mobile devices (valid characters are 0-9, +, -, #, \*, space, parentheses, period, and comma).

**Note:**

The **Smart Host Domain Name** field contains the IP address or Fully Qualified Domain Name ( FQDN) of the e-mail server, which you can configure in the MSL Server Manager on the E-Mail settings screen. If you use an FQDN, configure it with an MX record in the corporate DNS.

4. Click **Save**.

## Configure Parameters for UM-Web View and UM Standard

**Note:** All Web View user's messages are transferred via HTTPS.

1. From the navigation tree, click **Unified Messaging**, and then click **UM-Web View**.
2. The **UM-Web View Configuration** screen appears.
3. Enter the following configuration information:
  - The **Add UM Web View Sessions** field shows the maximum number of Web View sessions allowed by your license. This field is read-only.
  - In the **Queue Size** field, enter the size of the queue for messages sent using Reply and Forward in Web View. The default value is 200. Maximum value is 1000. Do not modify this value unless you are experiencing problems with lost messages or the queue becoming full.
  - In the **Refresh Speed** field, enter the frequency, in minutes, at which the Web View GUI should refresh. **Note:** The smaller the number in this field (the more frequently the Web View GUI refreshes) the higher the network traffic the Web View GUI will generate.
  - In the **Session Timeout** field, enter the length of time, in minutes, a session should remain active without any user activity. This field also determines how long the session will remain locked if a user closes the web browser without logging out.
  - Select the **Transfer Media Files Over Secure HTTP** if you want Web View users' messages to be transferred over secure HTTP ( HTTPS).

**Note:**

The **Smart Host Domain Name** field contains the IP address or Fully Qualified Domain Name ( FQDN) of the e-mail server, which you can configure in the MSL Server Manager on the E-Mail settings screen. If you use an FQDN, configure it correctly in the corporate DNS.

4. Click **Save**.

## Configure Outbound SMTP Server Settings

NuPoint UM can communicate with an outbound SMTP server using one of the following connections:

- Port 25 (standard SMTP)
- Port 465 (secure SSL SMTP)
- Port 587 (secure TLS SMTP)

If you employ a secure port (465 or 587) to connect with an outbound SMTP mail server, you will be required to enter authentication details (User ID and Password) and your account may be subject to usage limitations.

**Note:**

You must use the MSL Server Manager to configure the SMTP server settings. Once setup is complete, you can review the settings in the NuPoint Web Console (in the Offline Configuration under Unified TCP/IP) or in MSL.

To configure the outgoing SMTP relay server settings:

1. Log in to the MSL Server Manager as "admin."
2. From the navigation tree, click **Configuration**, and then click **E-Mail Settings**.
3. Click the **Change** button beside the setting you want to change.
4. Configure the settings as required and then click **Save**.

**Note:**

The Admin should always restart the NuPoint UM after changing the SMTP server.

| Setting                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Server to use for outbound SMTP | <p>The server can deliver outgoing messages via a corporate or Internet service provider's SMTP server, or can deliver messages directly to their destination (by looking up mail exchanger records in DNS).</p> <p>If using a specific SMTP server, specify its hostname or IP address. Otherwise leave this field blank. The server hostname is limited to 16 characters, maximum.</p> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>If you are connecting directly to Google Apps, enter smtp.gmail.com as the outbound SMTP server hostname. Also, you must update the Google security settings as follows: <ol style="list-style-type: none"> <li>1. Open a web browser and navigate to the administrative console for your Gmail domain: admin.google.com</li> <li>2. Navigate to <b>Security &gt; Basic security settings &gt; Less secure Apps</b>.</li> <li>3. Select the <b>Enforce access to Less secure apps for all users</b> option.</li> <li>4. Click <b>Save</b>.</li> </ol> </li> <li>If you are connecting directly to Microsoft Exchange Online (Office 365), program the outbound SMTP server hostname as follows: <ol style="list-style-type: none"> <li>1. Log in to the Microsoft Online Services Portal ( <a href="https://login.microsoftonline.com">https://login.microsoftonline.com</a> )</li> <li>2. Access the account that is being used to send mail.</li> <li>3. Under Outlook, click <b>Options</b>.</li> <li>4. On the Account &gt; My Account tab select <b>Settings for POP, IMAP, and SMTP access</b>.</li> <li>5. Under SMTP access, locate the server name (for example, pod51010.outlook.com) and enter it as the SMTP server hostname.</li> </ol> </li> </ul> |

| Setting                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Destination port for outbound SMTP | <p>If you have specified a server to use for outbound SMTP, select the destination port for outbound SMTP messaging:</p> <ul style="list-style-type: none"> <li>• <b>Port 25</b> (use cleartext; default)</li> <li>• <b>Port 465</b> (SSL encryption)</li> <li>• <b>Port 587</b> (TLS encryption)</li> </ul>                                                                                                                                                                                                                                                               |
| Mail Server User ID                | <p>If the SMTP server is using is using secure port 465 or 587, or port 25 with Google Gmail, enter the required user ID. This ID must be configured and licensed in the SMTP server.</p>                                                                                                                                                                                                                                                                                                                                                                                  |
| Mail Server Password               | <p>If the SMTP server is using is using secure port 465 or 587, or port 25 with Google Gmail, enter the required password. This password must be configured and licensed in the SMTP server.</p> <p><b>Note:</b> Some SMTP relay servers that employ secure SMTP, such as Microsoft 365 and Yahoo, may require that messages contain a "From" address that matches the authorized account ID. See <a href="#">From Address Specification</a> for configuration instructions.</p>                                                                                           |
| SMTP e-mail injection restrictions | <p>Controls which networks will be allowed to send mail through this server via SMTP. Choose from one of the following three settings:</p> <ul style="list-style-type: none"> <li>• <b>Localhost only</b> – accept e-mail only from applications installed on the server (default setting).</li> <li>• <b>Accept only from local networks</b> – accept e-mail from local networks that are directly connected to the LAN. (These networks are on the same subnet as the server's private interface.)</li> <li>• <b>Accept from anywhere</b> - accept all e-mail</li> </ul> |



| Setting                                      | Description                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forwarding address for administrative e-mail | <p>By default, e-mail to the administrator is sent to the user " admin" at the domain name configured on the server. You can override the default by entering an e-mail address in this field.</p> <p><b>Note:</b> RAID array event notifications are sent to this e-mail address. We recommend that you configure a valid address here.</p> |
| E-mail sent for events:                      | <p>Select the system events for which you want to receive e-mail notifications — Cleared, Indeterminate, Warning, Minor, Major, Critical. By default, Major and Critical are preselected. The e-mails are sent to the " admin" mailbox. To turn off e-mail notifications clear all the event boxes.</p>                                      |

## From Address Specification

By default, NuPoint includes the user's calling line ID (CLID) in the "From" address of email messages (e.g. CLID\_6135922122@domain\_name.com). However, SMTP relay servers such as Microsoft 365 and Google and some SPAM filters will not accept this format and instead require that all messages contain a "From" address that matches an authorized account ID. If your enterprise requires use of an authorized account ID, you must configure it in MSL as the [Mail Server User ID](#) (the user ID must be in the format of an email address), add it to your SMTP server or SPAM filter, and then employ the following procedure to select it for use.

To specify the "From" address format for NuPoint email messages:

1. From the navigation tree, click Unified Messaging > Smarthost Configuration.
2. In the **"From" address for all sent emails:** field, select one of the following options:
  - **Use the Mail Server User ID configured in the MSL server-manager** - NuPoint inserts the [Mail Server User ID](#) in all sent emails. Select this option if your environment includes an SMTP server that uses secure port 465 or 587, or a SPAM filter that requires a single authorized account ID. To complete the configuration, add the user ID to your SMTP server and/or SPAM filter. **Note:** In Standard UM emails, the administrator email ID (the [Mail Server User ID](#)) will be displayed in the "from" field irrespective of whether the mailbox user's email address is configured.
  - **Let NuPoint determine the "From" address** - (default) NuPoint inserts each user's CLID or name in all sent emails. Select this option if your environment does not include an SMTP server that uses secure port 465 or 587, or a SPAM filter that requires a single authorized account ID.

**Note:**

For Google Apps implementations, when NuPoint receives a call from an external source, the system will insert the [Mail Server User ID](#), in addition to the user's CLID or name, in the From header of sent emails. For more information on this limitation, see [Google Apps Configuration Requirements and Usage Limits](#).

**3. Click Save.**

**Note:** The **Smart Host Domain Name** field contains the IP address or Fully Qualified Domain Name ( FQDN) of the e-mail server, which you can configure in the MSL Server Manager on the E-Mail settings screen. If you use an FQDN, configure it correctly in the corporate DNS.

**Configuration Requirements if Connected Directly to Outbound SMTP Server**

If NuPoint UM connects directly to a hosted SMTP mail server such as Google Apps or Microsoft Exchange Online (Office 365), it may be subject to particular configuration requirements and usage limitations.

**Google Apps Configuration Requirements and Usage Limits**

- The corporate DNS settings on the local server must be able to resolve to the Google Apps outgoing SMTP server hostname (smtp.gmail.com). DNS settings can be configured under "Domains" on the MSL Server Manager.
- Direct connections to the Google Apps SMTP server must be made through a secure SMTP Port (465 or 587) using a single, authenticated user account. As a result of this setup, Google's SMTP server delivers all email messages with the same "Reply To" email address. For example, if someone from extension 1120 leaves an email message for mailbox 4009, the message's From field will contain a unique name such as John Smith but a common email address such as admin@company.com. To alleviate this limitation, configure a Google Apps account that indicates the messages are originating from a NuPoint voicemail server. For example, use nupoint.voicemail@mitel.com rather than admin@mitel.com. Also enter this address in MSL as the [Mail Server User ID](#).
- If you connect directly to the SMTP server using a single, authenticated user account, the account will be subject to sending limitations to prevent email spamming. For example, Google Apps has a sending limit of 2,000 email messages per day. Once that limit is reached, the account will be locked for 1 to 24 hours, preventing further emails from being sent. In addition, the account will also be locked if too many emails are sent during a short period of time. While the account is locked, Google rejects new email with a "Daily sending quota exceeded" error and the event is logged in / var/log/ gmail. (Note that Google controls the account lockout triggers and time periods, and does not publish the exact limits.) We strongly recommend that only customers with a

small number of users (fewer than 80 mailboxes) use Google Apps directly instead of an SMTP relay server.

- Because sending limitations apply to all SMTP emails sent from your system (including emails generated by the alarm manager, and fax confirmation), direct connections to Google Apps should be implemented only by smaller organizations. A safe limit is 80 user mailboxes, based on typical call/port usage patterns.
- In some cases, Google Apps may treat email from NuPoint UM as spam. To correct this problem, you must add the NuPoint server to the email whitelist on the Google Apps domain as follows:

1. Log in to the Google Apps administrator control panel: [https:// www.google.com/a/cpanel/ yourdomainname](https://www.google.com/a/cpanel/yourdomainname)
2. Click the **Settings** tab and select **Email**.
3. Locate the Email Whitelist section and enter the external IP address(es) of the NuPoint UM server.
4. Click **Save**.

### Microsoft Exchange Online (Office 365) Configuration Requirements and Usage Limits

The limits on messages, mailboxes, recipients, and e-mail clients can be found online at this address: <http://help.outlook.com/en-US/140/dd630704.aspx>.

These limits are intended to protect Microsoft's servers from being used as a source for spam generation. Of note are the message rate limit of 30 messages per minute and the recipient rate limit of 1,500 recipients per day. Since the NuPoint is configured to send mail from a single authenticated user account, these limits apply system-wide.

Once a limit is exceeded, Microsoft's mail server will bounce any mail sent from the account until the time limit has expired. The Microsoft mail server will return one of two types of failures—temporary or permanent. In the case of a temporary failure, the message is resent by NuPoint. In the case of a permanent failure an alarm will be raised to the NuPoint system administrator indicating that a voice mail message has been returned with an error. Also, an email sending error will be logged in the /var/log/qmail logfiles directory.

Since the MSL outbound SMTP server setting applies to all SMTP mail sent from MSL, all applications running on MSL will then contribute towards the daily limit. This means alarm manager emails, fax confirmations, and any other application which sends SMTP email from MSL will contribute to the daily limit.

Accordingly, you should connect directly to the Microsoft Exchange Online (Office 365) only if you have small number of users (e.g. 60 mailboxes based on typical use patterns). If you have a large number of users, you should employ an outbound SMTP server without restrictive usage limits such one located in your enterprise network.

In its role as an SMTP relay server (smart host), Office 365 will only process messages containing a "From" address that matches the authorized account ID. To ensure that NuPoint provides this ID rather than unique CLIDs, program the [From Address Specification](#).

## Configure User Mailbox

1. From the navigation tree, click Mailbox Maintenance >Mailboxes.
2. Click **Add** to [create a new mailbox](#), or [search](#) for an existing mailbox and click a mailbox number to [edit](#) it.
3. Select the **Class of Service** tab.
4. From the **Feature Class of Service** drop-down menu, select a Features class of service that includes the appropriate feature bits:

| For this User:    | Add these Feature Bits: |
|-------------------|-------------------------|
| Standard-SMTP     | 289                     |
| Standard-Web View | 250, 251, 252, and 290  |
| Standard          | 304                     |

5. Select the **General** tab and update parameters in the **Personal Information** and **Unified Messaging** sections.

### Note:

- Enter the user's e-mail address, or addresses, in the **UM Email Address** fields. Users can add or change their e-mail addresses using Web View. For the UM-SMTP user type, no other Web View functions are available.
- For **UM Audio Encoding**, select **ADPCM**, **GSM 6.10**, or **MP3**. Since MP3 uses more processing resources, select it only if ADPCM and GSM 6.10 cannot be played on the user device or if the user is employing a hosted/ webmail web service such as Gmail.

6. Click **Save**.

## Configure Unified Messaging Limits

Using Web Console, you can limit the use of hard drive space by specifying that voice mail messages be forwarded to email clients in text format only. To do so, you configure the Unified Messaging Limits feature using LCOS.

To specify voice mail messages be forwarded to email clients in text format only:

1. From the navigation tree, click **Class of Service** > Limits COS.
2. In the right pane, select **Default** ( LCOS 1).
3. Select **Unified Messaging Limits** from the drop-down menu.
4. After **Allow All SMTP Delivery Formats**, select **No**.

Selecting "No":

- Limits all users to text notifications only. It limits both UM-SMTP and Standard UM, overriding all FCOS settings that relate to SMTP forwarding.
- Completely disables FCOS bit 289
- Overrides FCOS bit 304 and prevents notifications for email addresses for which a notification method other than Text Notification was selected
- Limits FCOS bit 304 to Text Notification only for email addresses for which Text Notification was selected

**Note:**

- If you apply the Unified Messaging Limits LOCS, we recommend you do NOT use FCOS with bit "261 - Allow NP PWG View WEB access to messages".
- To prevent audio file leaks, you can limit user access to messages in Web View by removing FCOS 290.

**Force a license update (not required for UM-SMTP or UM-Web View)**

1. From the navigation tree, click **Unified Messaging**, and then click **UM User Licensing**.
2. Click **Update UM User Licensing**. Confirm the update. The Standard UM feature is now activated.

**Note:**

- For MiCollab deployments of Standard UM, you cannot force a license update by selecting the **Update UM User Licensing button**. Instead, you must access the MiCollab Users and Services application and enable **Standard Unified Messaging**.
- Updating UM User Licensing causes a scan of mailboxes that may take some time to complete and may place an extra load on the system.

## 1.4.23.4.2 Procedures (Text Console)

### 1.4.23.4.2.1 Configuring UM-SMTP, UM-Web View and Standard UM

#### Overview

Configuring Standard UM consists of the following tasks:

- Ensure that you have purchased enough UM licenses and assigned them to the mailboxes that you want to enable for UM
- [Configure Standard UM parameters](#)
- [Configure Smart Host settings](#)
- [Configure the user mailbox](#) and force a license update

#### Configure parameters for UM-SMTP

1. Log in to the admin console as "root".
2. From the main menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging**.
3. In the Unified Messaging menu, select **(B) Standard UM-SMTP**.
4. To configure a **Corporate Callback Number** to be included in the body of Standard and Advanced email notifications, select **(C) Corporate Callback Number**. Enter the callback number in a format that can be recognized by mobile devices. Note: If your system does not have Speech Auto Attendant, you can [configure a Line Group Call Flow](#) to act as attendant.
5. Configure the queue size if required. (Do not modify this value unless you are experiencing problems with lost messages or the queue becoming full.)
6. Exit from the Text Console.

#### Configure parameters for UM-Web View

##### Note:

All Web View user's messages are transferred via HTTPS.

1. From the main menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging**.
2. In the Unified Messaging menu, select **(C) Standard UM – Web View**.

### 3. Configure the following parameters: [defaults are shown in brackets]

- **(A)** Add UM Standard Web view Sessions [5]
- **(R)** Refresh Speed [4]
- **(T)** Session Timeout [5]
- **(Q)** Queue Size [200] (Do not modify this value unless you are experiencing problems with lost messages or the queue becoming full.)
- **(H)** Transfer Media Files Over Secure HTTP [n]. (Change this option to Y if you want Web View users' messages to be transferred via HTTPS.)

### 4. Exit from the text console.

## Configure Standard UM Parameters

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging**.
2. In the Unified Messaging menu, select **(E) Standard UM**.
3. Configure the queue size if required. (Do not modify this value unless you are experiencing problems with lost messages or the queue becoming full.)
4. Select **(U) Update Standard UM User License** to apply licenses to configured mailboxes.

## Configure Outbound SMTP Server Settings

NuPoint UM can communicate with an outbound SMTP server using one of the following connections:

- Port 25 (standard SMTP)
- Port 465 (secure SSL SMTP)
- Port 587 (secure TLS SMTP)

Complete the configuration in the MSL Server Manager. For details, see [Configure Outbound SMTP Server Settings](#).

### Note:

You must use the MSL Server Manager to configure the SMTP server settings. Once setup is complete, you can review the settings in NuPoint or MSL.

## Configure From Address Format

By default, NuPoint includes the user's calling line ID (CLID) in the "From" address of email messages (e.g. CLID\_6135922122@domain\_name.com). However, SMTP relay

servers such as Microsoft 365 and Google and some SPAM filters will not accept this format and instead require that all messages contain a "From" address that matches an authorized account ID. If your enterprise requires use of an authorized account ID, you must configure it in MSL as the [Mail Server User ID](#), add it to your SMTP server or SPAM filter, and then select it for use in the following procedure.

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging**.
2. In the Unified Messaging menu, select **(S) Smarthost Configuration**.
3. For the **Email from address must match account name** parameter, select **(Y) Yes** or **(N) No**.
4. Exit from the text console.

### Configure Smart Host Settings

To support the forwarding of emails to users who are not Advanced UM users, through the Outlook Client Plug-in you must configure the Smart Host. Emails are sent using SMTP forwarding through the NuPoint UM system, not the Outlook client.

To configure Smart Host settings for NuPoint UM:

1. From the Main menu, select **(S) System Maintenance, (R) Reconfiguration, (G) Offline Menu, (B) Duplicate Active Configuration**, and **(U) Unified TCP/IP**.
2. In the Unified TCP/IP menu, select **(M) Configure a Module**.
3. In the Ethernet Card Configuration menu, select **(V) Smart Host Domain Name**. You are prompted to enter the fully qualified domain name (FQDN) of the smart host.
4. Enter the **FQDN or IP address** of the mail server (for example, mailserver.company.com).
5. [Activate the configuration](#) .



## Configure User Mailbox

### 1. Program an FCOS for UM users:

- Log in to the admin console as "root".
- From the main menu, select **(S) System Maintenance, (R) Reconfiguration**, and then **(F) Feature COS**.
- Select **(C) Current FCOS** to modify and enter a number for this FCOS.
- Select **(N) Name FCOS** and enter a name for this FCOS (for example, StdWebView).
- Select **(A) Add Features** and add the following feature bits for each type of user:

| For this User:    | Add these Feature Bits: |
|-------------------|-------------------------|
| Standard-SMTP     | 289                     |
| Standard-Web View | 250, 251, 252, and 290  |
| Standard          | 304                     |

### 2. Modify the user's mailbox:

- Assign the FCOS you programmed to the mailbox.
- Enter the user's e-mail addresses in the **New UM Standard E-mail address** fields and select the delivery option for each. **Note:** If Audio Link is selected, messages that are played using a link in the email client will be marked as "Read" in the voice mailbox.
- Select a **UM audio encoding** method:

| Encoding Method                                                                                                                                                                                                                                                                             | Description                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADPCM (default)                                                                                                                                                                                                                                                                             | Microsoft audio encoding.                                                                                                                                     |
| GSM 6.10                                                                                                                                                                                                                                                                                    | Audio encoding with wider support for mobile devices                                                                                                          |
| MP3                                                                                                                                                                                                                                                                                         | Use MP3 only if ADPCM and GSM 6.10 cannot be played on the user device, or if the user is employing a hosted/webmail web service such as Gmail or Yahoo Mail. |
| <b>Notes:</b> <ul style="list-style-type: none"> <li>• MP3 may result in poorer sound quality than the other audio encoding methods.</li> <li>• If your implementation includes the BlackBerry Enterprise Service 10 (BES 10), you may use MP3 or GSM 6.10 but <i>not</i> ADPCM.</li> </ul> |                                                                                                                                                               |

### 3. To update the User list for Standard UM after adding bit 304 to ensure user is added:

- In the Unified Messaging menu, select **(E) Standard UM** and then select **(L) List Standard UM** User mailboxes.

**Note:**

Users can modify their email addresses from Web View.

**Force Manual License Update**

To force a manual license update: (not required for UM-SMTP or UM-Web View)

- From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging, and (E) Standard UM**.
- In the Standard UM menu, select **(U) Update Standard UM User License**.

**Note:**

- For MiCollab deployments of Standard UM, you cannot force a license update by selecting the **Update Standard UM User License** option. Instead, you must access the MiCollab Users and Services application and enable **Standard Unified Messaging**.
- Updating UM User Licensing causes a scan of mailboxes that may take some time to complete and may place an extra load on the system.

**Configure Unified Messaging Limits**

Using Web Console, you can limit the use of hard drive space by specifying that voice mail messages be forwarded to email clients in text format only. To do so, you configure the Unified Messaging Limits feature using LCOS.

To specify voice mail messages be forwarded to email clients in text format only:

1. Access Web Console.
2. From the navigation tree, click **Class of Service >Limits COS**.
3. In the right pane, select **Default** (LCOS 1).
4. Select **Unified Messaging Limits** from the drop-down menu.

**5. After Allow All SMTP Delivery Formats, select No.**

Selecting "No":

- Limits all users to text notifications only. It limits both UM-SMTP and Standard UM, overriding all FCOS settings that relate to SMTP forwarding.
- Completely disables FCOS bit 289
- Overrides FCOS bit 304 and prevents notifications for email addresses for which a notification method other than Text Notification was selected
- Limits FCOS bit 304 to Text Notification only for email addresses for which Text Notification was selected

**Note:**

If you apply the Unified Messaging Limits LOCS, we recommend you do NOT use FCOS with bits "285 - Enable Speech-to-Text" or "261 - Allow NP PWG View WEB access to messages". It is important to prevent the Speech to Text option from being used and prevent users from saving voice mail messages to their PCs.

**Note:**

To prevent audio file leaks, you can limit user access to messages in Web View by removing FCOS 290.

## Using Corporate Callback on Systems without Speech Auto Attendant

If Speech Auto Attendant is not enabled on your system, you can use Call Director to create a Line Group Call Flow to act as an attendant.

To create a Line Group Call Flow:

1. [Create a Line Group](#) for Call Director.

2. In the Call Director interface, create a call flow for Dial-back:

- From the Call Flow list, select **Line Group** and enter the line group number.
- Select the default action for New Call.
- In the New Actions menu, select **Menu**.
- In Menu Properties, enter a **name** for the call flow (for example, Call-back) and enter the **Max DTMF length** (extension number length).
- In the Destination Action list, select the default action beside **Multi-key** and then select **Blind Transfer**.
- In Blind Transfer Properties, in the **Transfer To** list, select **Gathered Digits**.

## 1.4.23.5 Advanced UM

### 1.4.23.5.1 Mail Server Adapter Types

NuPoint Unified Messaging supports the IMAP messaging protocol as adapter types for connecting to email servers for voice mail synchronization and Text-to-Speech ( TTS).

#### IMAP

The IMAP connector, which is deployed by default on NuPoint Unified Messaging, supports Microsoft Exchange Server 2013 and 2016, Microsoft Office 365 and Google Apps. The IMAP connector only supports one email server so it is targeted for small and medium-sized companies with one email server. Up to 1500 Advanced UM users are supported with Exchange and up to 750 Advanced UM users are supported with Office 365, and up to 2500 users are supported with Google Apps (Gmail).

To set up the email server for IMAP, see the following procedures:

- [Configure IMAP for Exchange/Office 365](#)
- [Configure IMAP for Google Apps](#)

#### Note:

In most cases, voice mail messages are sent immediately to the email server and then forwarded to the Advanced UM users. However, hosted email configurations such as Google Apps may experience slight delays due to virus scanning, anti-spam software, or routing delays caused by traffic volume. As a result, the timestamps of the original voice mail message and email audio attachment may not match.

When using IMAP with MS Exchange Server, you can create a superuser account ( NPUMAdmin) for Advanced UM. Because *NPUMAdmin* has more privileges than the administrator account, it can access user accounts and inboxes in order to synchronize their voicemail and email messages.

## 1.4.23.5.2 Configuration

### 1.4.23.5.2.1 Configuring Advanced UM



#### Task List

Configuring Advanced UM consists of the following tasks:

|    | Task List                                                                                                          | Web Console Reference                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Text Console Reference           |
|----|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| 1. | Verify that your NuPoint AMC license includes Advanced UM and a sufficient number of Advanced UM Mailbox licenses. | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -                                |
| 2. | Print the Advanced Parameters worksheet and gather the required information.                                       | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -                                |
| 3. | Configure the mail server:                                                                                         | <p>If you are using an MS Exchange or MS Office 365 <a href="#">IMAP</a> mail server, do the following:</p> <ul style="list-style-type: none"> <li>• <a href="#">configure IMAP</a></li> <li>• (optional) create a superuser account (for Exchange 2013/2016/2019)</li> </ul> <p>If you are using Google Apps <a href="#">IMAP</a> mail server, do the following:</p> <ul style="list-style-type: none"> <li>• <a href="#">enable IMAP access</a></li> <li>• <a href="#">configure OAuth</a></li> </ul> |                                  |
| 4. | Configure Advanced UM Parameters                                                                                   | Configure Advanced UM Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Configure Advanced UM Parameters |
| 5. | Enable Advanced UM for User Mailboxes (includes adding FCOS bits and forcing a license update)                     | Enable Advanced UM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Enable Advanced UM               |
| 6. | Configure Text-to-Speech and User dictionary as required                                                           | Configure Text-to-Speech                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                  |

The following optional steps are for Microsoft integrations only:

1. (Optional) [Install Outlook Client Plug-in.](#)
2. (Optional) [Install Active Directory snap-in.](#)

### 1.4.23.5.2.2 Advanced Parameters Worksheet

This worksheet provides parameters for both the Text Console and Web Console:

| Web Console Tab | Parameter                         | Description                                                                                                                                                                                                                                                                                                    | Your Value |
|-----------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| NuPoint         | (L) Administrator Login           | The MSL administrator account needed to access NP-UM and examine mailboxes enabled for Advanced UM. Enter a string between 1 and 64 characters, without spaces.                                                                                                                                                |            |
|                 | (P) Administrator Password        | Specify the password for the authoritative login name.                                                                                                                                                                                                                                                         |            |
|                 | (I) Mailbox Poll Interval         | <p>The interval (in minutes or hours) when the system should poll for changes to the number of licensed users. The default setting is 60 minutes. Enter a value between one hour (60 minutes) and 24 hours (1440 minutes).</p> <p>Note: You must type the word "hours" or "minutes" as part of your input.</p> |            |
|                 | (K) Permanent Delete (True/False) | Specify "true" to permanently delete replicated messages from the mail server when users delete messages using the TUI. Specify "false" to move replicated messages to the Deleted Items folder on the mail server when users delete messages using the TUI.                                                   |            |

| Web Console Tab | Parameter                          | Description                                                                                                                                                                                                                        | Your Value |
|-----------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Mail Servers    | (V) Sender Domain [ nupo int.com]: | The domain appended to the sender of Advanced UM e-mails. Enter a valid domain name that is between 1 and 64 characters.                                                                                                           |            |
|                 | (U) Unread Mail Poll Interval      | Specify the interval (in seconds) when the system should poll the mail server for unread messages in the inbox to see if they have been read or deleted. The default setting is 5 seconds. Enter a value between 5 and 60 seconds. |            |
|                 | (R) Read Mail Poll Interval        | Specify the interval (in seconds) when the system should poll the mail server for any read messages in the inbox to see if they have been deleted. The default setting is 60 seconds. Enter a value between 10 and 60 seconds.     |            |
|                 | (E) Mail Server Timeout:           | Specify the length of time (in seconds) to wait for a response from the mail server. Default is 30 seconds. Enter a value between 30 and 120 seconds.                                                                              |            |
|                 | (T) Maximum Concurrent Connections | Specify the maximum number of concurrent connections (CPU threads) available to connect to Mail servers and poll Advanced UM e-mail accounts. The default setting is 40 threads. Enter a value between 1 and 200.                  |            |
|                 | (R) Mail Server Type               | Specify Microsoft Exchange, Office 365, or Google Apps.                                                                                                                                                                            |            |
|                 | (T) Adapter type:                  | Specify the protocol to be used for message exchange (i for IMAP Gateway). The default setting is IMAP.                                                                                                                            |            |

| Web Console Tab | Parameter                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Your Value |
|-----------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                 | (C) Secure IMAP (True/False) | <p>Specify "true" to enable a secure IMAP connection to a Microsoft Exchange Server (2013 or 2016). If the Server Type is Google Apps or Office 365, this setting is enabled by default.</p> <p>The connection uses SSL to encrypt the entire communication session, including passwords. The default setting is "false."</p> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• SSL requires a digital certificate on the mail server. For ease of setup, use the self-signed certificate provided with Microsoft Exchange. For enhanced security, generate a certificate signing request (CSR) on the mail server and provide it to a certificate authority (CA), which will then issue a third-party certificate. For details on managing SSL on Microsoft Exchange</li> </ul> |            |



| Web Console Tab | Parameter                                                      | Description                                                                                                                                                                                                                                                                                                                                                                                       | Your Value |
|-----------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                 | (L) Superuser account name                                     | Specify the IMAP superuser account name. If the Server Type is Google Apps, this setting is not available.                                                                                                                                                                                                                                                                                        |            |
|                 | (P) Superuser password                                         | Specify the IMAP superuser account password. If the Server Type is Google Apps, this setting is not available.                                                                                                                                                                                                                                                                                    |            |
|                 | IP Address                                                     | <ul style="list-style-type: none"> <li>For IMAP, specify the IP address or hostname of the IMAP mail server. This field defaults to "imap.gmail.com" if the Mail Server Type is Google Apps, and "outlook.office365.com" if the Mail Server Type is Office 365. Note that all hostnames, including pre-configured ones, must be resolvable by the corporate DNS server defined in MSL.</li> </ul> |            |
|                 | <ul style="list-style-type: none"> <li>(S) for IMAP</li> </ul> | <p><b>Note:</b> If an IMAP connection is being made to a Client Access Server (CAS), enter the address of the CAS in place of the mail server address. A load balancer or Exchange server can function as a CAS.</p>                                                                                                                                                                              |            |

| Web Console Tab | Parameter                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Your Value |
|-----------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                 | Port No. / Hosted Exchange | <p>If your implementation has a Microsoft Exchange server in a hosted environment, you can specify a non-default IMAP inbound connector port:</p> <ol style="list-style-type: none"> <li>1. Select the <b>Hosted Exchange</b> box.</li> <li>2. Enter a free, unreserved port number up to five digits in length as the <b>Port No.</b></li> <li>3. Configure the same port number on the MS Exchange server.</li> </ol> <p><b>Note:</b> Google and Office 365 must use their default IMAP ports (993 or 143).</p> <p>To configure an IMAP port number in MS Exchange:</p> <ol style="list-style-type: none"> <li>1. Access the Exchange server and log in as an administrator.</li> <li>2. Launch the management shell.</li> <li>3. Set the port number:</li> </ol> <p>• For SSL, enter:</p> |            |

| Web Console Tab | Parameter                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Your Value |
|-----------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| LDAP Server     | (V) Verify Connection         | Select to perform connection tests on all defined IP addresses/hostnames. Note that this Verify function detects only one error at a time.                                                                                                                                                                                                                                                                                                                                                                  |            |
|                 | (A) LDAP Server Address       | Specify the IP address of the LDAP server (i.e. Active Directory server). LDAP is not available for Google Apps.                                                                                                                                                                                                                                                                                                                                                                                            |            |
|                 | (D) LDAP Administrator DN []: | <p>An account for Active Directory specified in LDAP DN syntax.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• This account does <u>not</u> require administrative privileges.</li> <li>• This account is used to perform queries, not updates. As such, it only requires "read" access to the database. It does not require administrative rights with "read/write" access.</li> <li>• Get this value for from the Active Director administrator to ensure syntax compliance.</li> </ul> |            |
|                 | (P) LDAP Login Password []:   | Specify the password for the LDAP administrator DN.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |

| Web Console Tab | Parameter                | Description                                                                                                                                                                            | Your Value |
|-----------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                 | (B) LDAP Search Base []: | Specify the path to users in Active Directory with Advanced UM mailboxes, in LDAP DN syntax. Note: Get this value from the Active Directory administrator to ensure syntax compliance. |            |
|                 | (V) Verify Connection    | Select to perform connection tests on Active Directory server based on all LDAP parameters. Note that this Verify function detects only one error at a time.                           |            |

### 1.4.23.5.2.3 IMAP

#### 1.4.23.5.2.3.1 IMAP for Exchange or Office 365

##### 1.4.23.5.2.3.1.1 Configure IMAP Server Settings for Exchange or Office 365

The use of IMAP protocol and Microsoft Graph API protocol is as follows:

- Use IMAP protocol to connect the Microsoft Exchange and the NuPoint Unified Messaging server.
- Use IMAP protocol to connect the Office 365 email server and the NuPoint Unified Messaging server using basic authentication.
- Use Microsoft Graph API to connect the Office 365 email server and the NuPoint Unified Messaging server using OAuth 2.0 authentication.

Instructions are provided on this page to set up IMAP for:

- [MS Exchange Server](#)
- [MS Office 365](#)

**Note:**

- If you need to change your current authentication configuration from "Encrypted" to "Basic authentication" (password sent in clear text), or vice versa, then you must stop and restart the IMAP service for the change to take effect.
- If you need to change your current authentication configuration, then you must stop and restart the IMAP service for the change to take effect.
- For IMAP configurations of Microsoft servers, the Active Directory mail nickname attribute must be the same as the user logon name attribute.
- For Advanced UM with IMAP integration, no superuser account is required; however, NP-UM requires one account in Active Directory to query the Advanced UM user list. It is necessary to query to find each user's email address info and display name to deliver the voice mail to email.
- If your enterprise is using a Microsoft Exchange 2013 server in secure IMAP mode, your Advanced UM users may experience a delay of up to ten minutes between the time they delete their voicemail messages in Outlook and the time the NuPoint database is updated. This occurs because of a known synchronization issue with Exchange 2013 and is described in the Microsoft technical forums.

**Configuration Options**

Advanced UM with IMAP can be configured in either of two ways, depending on whether you want users to access their mailboxes individually or using a superuser account:

- **Individual User Access:** With this setup, which is available for all server types, individual users must update their Advanced UM Email Passwords whenever they change their email client passwords. No superuser is required; however, NP-UM requires one account in Microsoft Active Directory.
- **Superuser Access:** With this setup, which is available for Exchange Server, a superuser account (NPUMAdmin) is used to access the individual user accounts and deliver the voice mail to email. This frees users from having to update their Advanced UM Email Passwords when they change their email client passwords.

**Note:**

If the IMAP service (Microsoft Exchange IMAP4) is already started, then you must restart the service after performing the configuration steps below in order for IMAP to function correctly. To restart the IMAP service, from the Services Console, select **Microsoft Exchange IMAP** and right-click to restart.

## IMAP4 Setup for Exchange Server 2013 or 2016

The following procedure provides the basic steps. For additional information, refer to the Microsoft documentation at the links provided.

**Note:** If your enterprise is using a Microsoft Exchange Server 2013 in a secure IMAP mode, your Advanced UM users may experience a delay of up to ten minutes between the time they delete their voicemail messages in OCP and the time the NuPoint database is updated. This occurs because of a known synchronization issue with Exchange 2013 and is described in the Microsoft technical forums.

1. Enable IMAP4 service on MS Exchange Server with Exchange Management Shell by entering the following commands:

```
Set-service
msExchangeIMAP4 -startuptype automatic
```

```
Start-service msExchangeIMAP4
```

See the following link for more details: [http://technet.microsoft.com/en-us/library/bb124489\(EXCHG.80\).aspx](http://technet.microsoft.com/en-us/library/bb124489(EXCHG.80).aspx)

2. Enable IMAP4 access for a user with Exchange Management Shell:

```
Set-CASMailbox
-Identity CAS01 -ImapEnabled $true
```

**Note:**

The value "CAS01" in the command line above is only an example. You need to enter a valid exchange account that is specific to your system.

See the following link for more details: [http://technet.microsoft.com/en-us/library/bb124783\(EXCHG.80\).aspx](http://technet.microsoft.com/en-us/library/bb124783(EXCHG.80).aspx)

3. Configure authentication for IMAP4 with Exchange Management Shell by entering one of the following commands:

```
Set-ImapSettings
-LoginType SecureLogin
```

(Secure IMAP enabled; encryption occurs before authentication)

```
Set-ImapSettings
```

```
-LoginType PlainTextAuthentication
```

([Secure IMAP](#) enabled; encryption occurs after authentication)

```
Set-ImapSettings  
-LoginType PlainTextLogin
```

([Secure IMAP](#) disabled)

See the following link for more details: [http://technet.microsoft.com/en-us/library/aa997188\(EXCHG.80\).aspx](http://technet.microsoft.com/en-us/library/aa997188(EXCHG.80).aspx)

4. Through **Administrative tools > Services**, right-click **Microsoft Exchange IMAP4** and select **Restart** (or **"Start"** if the service is not running.)
5. If you are using a Microsoft Exchange Server 2013, start the IMAP4 service and the IMAP4 Backend service. (These services are disabled by default on Exchange 2013.)
6. Proceed to the next step in the [Configuring Advanced UM - Task List](#) (Configure Advanced UM Parameters).

## IMAP Setup for Office 365

If your enterprise is employing Microsoft Office 365 as its hosted mail server, you can use the following summary instructions to configure NuPoint UM and confirm that the connection between the systems is operational.

### Configuring the Connection to Office 365

To configure the connection to the Office 365 mail server:

1. From the Web View navigation tree, click **Unified Messaging**, and then click **Advanced UM**.
2. Select the Mail Servers tab and program the following:
3. Select **Office 365** for the **Mail Server Type**.
4. Enter **outlook.office365.com** for the **IP Address**.
5. Select Authentication Type as **OAuth 2.0** or **Basic**.

#### Note:

When the Authentication mode is selected as OAuth 2.0, the authentication is done with Microsoft Graph API, which is a recommended method. In the case of Basic Authentication mode, the authentication is done with IMAP secure.

6. To check connectivity with the Office 365 server, click the **Verify Mail Server IP Address** button.

**Note:**

For details concerning the mail server settings, see [Configure Advanced UM Parameters](#).

## Configuring Advanced UM Users

To configure an Advanced UM user mailbox:

1. From the navigation tree, click **Mailbox Maintenance**, and then click **Mailboxes**.
2. Search for a specific mailbox or click **Show All** to see a complete list of mailboxes.
3. Click a mailbox link or select a mailbox in the list, and then click **Edit > Selected**.
4. Edit the mailbox parameters as required:
  - Enter the email address (Microsoft) in the **Advanced UM Email Alias** field.
  - Enter the password for the email alias in the **Advanced UM Email Password** field.
5. Click **Save**.

**Note:**

For details concerning the Advanced UM user mailbox settings, see [Enable Advanced UM for User Mailbox](#).

## Configuring Office 365

No special configuration steps are required to support Office 365 IMAP connection to NuPoint UM or Advanced UM user mailboxes. Refer to the Microsoft documentation for more information.

## NuPoint Advanced UM IMAP Configuration Settings on Exchange 2013 and Exchange 2016 Servers

The following steps provide basic information on how to configure IMAP settings on Exchange 2013, and 2016 servers for NuPoint Advanced Unified Messaging



**Note:**

**Note:** For any assistance with making changes to the Exchange server, the site administrator can contact Microsoft. The administrator is responsible for all configuration changes made to the server.

1. Create the following registry keys in your machine using the following procedure:

- a. Click **Start**, click **Run**, type regedit in the Open box, and then click **OK**. The Registry Editor window opens.
- b. Navigate to *HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\MSExchange\ParametersSystem*.
- c. Right-click the **Parameters System** key. A pop-up menu opens.
- d. Point to **New** and choose **Key** from the drop-down menu. A new key value displays as **New Key #1**. Rename it as **Maximum Allowed Sessions Per User** by right-clicking it and choosing **Rename**.
- e. Double-click **Default** on the right pane and enter the value 2048 in the **Value Data** field.
- f. Similarly add another registry key with the name **Maximum Allowed Service Sessions Per User** and value 2048.

2. Create the following DWORDs in the registry key using the following procedure:

- a. Right-click the **Maximum Allowed Sessions Per User** key. A pop-up menu opens.
  - b. Point to **New** and choose **DWORD Value** from the drop-down menu. A new DWORD value displays as **NewValue#1**. Rename it as **Maximum Allowed Sessions Per User** by right-clicking it and choosing **Rename**.
  - c. Double-click **Maximum Allowed Sessions Per User**. Click the **Hexadecimal** radio button in the **Base** section. Enter the value 2048 in the **Value data** text field and click **OK**.
  - d. Similarly add another DWORD with the name **Maximum Allowed Service Sessions Per User** and value 2048.
3. Close the Registry Editor window. Restart the Exchange server or restart the IMAP4 front-end and back-end services.
4. After the server restarts, launch the Exchange Management Shell and run the following command to prevent the Exchange Server from repeatedly prompting for authentication credentials and to restart your IMAP services on the Exchange Server:

```
Set-IMAPSettings -EnableGSSAPIAndNTLMAuth $false cmdlet
```

1. Enable IMAP logging and run the following command in the Exchange Management Shell to set the log file size allotment on server as 10MB:

Set-ImapSettings -Server <ServerName> -LogPerFileSizeQuota 10MB

1. Set the Maximum connections from a single user to 200000 from the default value of 16. Also make sure that all other connections are set to the default values. To make these changes, access the Exchange Admin Center (EAC) in the Exchange Server and follow the below mentioned steps:
  - a. In the EAC, navigate to **Servers>Servers**.
  - b. In the list of servers, select the Client Access server, and then click **Edit**.
  - c. On the **Server Properties** page, click **IMAP4**.
  - d. Scroll down and click **More options**.
  - e. Under **Connection limits**, specify the following settings:
    - i. **Maximum connections**: Specifies the total number of connections the specified server will accept. This includes authenticated and unauthenticated connections. The default value is 2,147,483,647. The supported values are from 1 through 2,147,483,647.
    - ii. **Maximum connections from a single IP address**: Specifies the number of connections that the server will accept from a single IP address. The default value is 2,147,483,647. The supported values are from 1 through 2,147,483,647.
    - iii. **Maximum connections from a single user**: Specifies the maximum number of connections that the server will accept from a user. The default value is 16. The supported values are from 1 through 2,147,483,647. Make sure that you set the value to 200000.
    - iv. **Maximum command size (bytes)**: Specifies the maximum size of a single command. The default value is 10,240. The supported values are from 1,024 through 16,384.
    - v. Click **Apply**, and then click **OK** to save your changes.

You can also set the connection limits by running the following command in the Exchange Management Shell:

```
Set-ImapSettings -Server "exchange server name" -MaxConnectionsPerUser 200000
```

After you set the connection limits, restart the IMAP4 front-end and back-end services on the Exchange Server.

1. Configure the Throttling policy for ImapMaxConcurrency, ImapMaxBurst, ImapRechargeRate, ImapCutoffBalance, and CPAMaxConcurrency to Unlimited by running the following command in the Exchange Management Shell:
2. Set-ThrottlingPolicy NPUMAdminPolicy -ImapMaxConcurrency Unlimited -ImapMaxBurst Unlimited -ImapRechargeRate Unlimited -ImapCutoffBalance Unlimited -CPAMaxConcurrency Unlimited

## 1.4.23.5.2.3.1.2 Configure a Superuser Account for Office 365

If you are using Office 365 as an email server, you can sync Office 365 passwords with Advanced UM as an Office 365 Superuser. Configure a Superuser account to access multiple mailboxes. This eliminates the need to update passwords manually in NuPoint.

### Note:

Delegate the Superuser to those users who will be using Advance Unified messaging.

Depending on your Office 365 setup, use one of the following methods listed below:

### Setting Up Superuser's Permissions from within Microsoft Exchange Admin Center

1. Log on to the **Microsoft Exchange Admin Center** using the **ECP Domain Administrator** credentials.
2. Click **recipients > mailboxes**
3. Select the mailboxes of users you want access to by doubling clicking on the users.
4. Click **Mailbox Delegation**.
5. Provide **Send As** and **Full Permission** to the user, on behalf of the delegator.
6. Click **Save**.

### Setting up Superuser's Permissions from within Microsoft Office 365 Admin Center

#### Send email from another user's mailbox

1. In the admin center, go to the **Users > Active users page**.
2. Select the name of the user (who provides the sending permission) to open their properties pane.
3. On the Mail tab, select **Manage mailbox permissions**.
4. Select **Edit**.
5. Select **Add permissions** and then choose the name of the person to whom you would want to send this email.
6. Select **Save**.

## Read and Manage email in another user's mailbox

1. In the admin center, go to the **Users > Active users** page.
2. Select the name of the user (from whom the sending permission should be given) to open their properties pane.
3. On the Mail tab, select **Manage mailbox permissions**.
4. Next to Read and Manage, select **Edit**.
5. Select **Add permissions** and then choose the name of the user or users that you want to allow to read the email from this mailbox.
6. Select **Save**.

## Configuring Office 365 Superuser on NuPoint

1. Log in to the **Admin Web Console**.
2. Navigate to **NuPoint Web Console > Unified Messaging > Advanced UM**.
3. Select Mail Server Type as **Office 365**.
4. Enter the **Superuser account name** and **Password**.
5. Save the credentials.

### Note:

Please enable Feature Class of Service (FCOS Bit 295) to only the users that will be using Advance Unified messaging.

## 1.4.23.5.2.3.1.3 Create a Superuser Account for Microsoft Exchange 2013 or 2016

If you are using a Microsoft Exchange Server as an email server, you can configure a Superuser account to access the individual email accounts. This eliminates the need for users to maintain passwords on the NuPoint UM system. Instead, they are required to create and update passwords in one place only: Microsoft Outlook.

NuPoint UM supports a feature called Client Throttling on MS Exchange. You can use it to give the Superuser enhanced access to server resources.

### Creating a Superuser Account

To create the **NPUM Admin** Superuser account on the Active Directory platform with MS Exchange Server:

1. Log in to the Exchange Management Console to create a new user and an Exchange mailbox. You must have the rights to create new users.
2. In the Exchange Management Console, select **Recipient Configuration > Mailbox > New Mailbox > User Mailbox > New User**.
3. In the first New Mailbox window, enter **NPUMAdmin** in the **First Name, User logon name (User Principal Name)** and **User logon name (pre-Windows 2000)** fields.  
Note: The NPUMAdmin name is case sensitive.
4. Enter a password in the **Password** and **Confirm Password** fields, then click **Next**.
5. Enter the mailbox settings for a mailbox on your system, and then click **Next**.
6. When the next window appears, click **Finish**.
7. Ensure that the NPUMAdmin account can be seen on Exchange address lists. (Right-click on the NPUMAdmin user to access Properties. On the General tab, ensure that the **Hide From Exchange address lists** check box is cleared.)

## Adding the Superuser Account to Active Directory Groups

To add the Superuser account to Active Directory Groups:

1. Log in to the Active Directory Users and Computers tool.
2. Locate the **NPUM Admin** Superuser account.
3. Add the account as a member of the following group for Exchange:

```
Organization
Management, ExchangeLegacyInterop
```

## Setting Up Permissions for the Superuser Account

To set permissions for the Superuser account, on a computer that has Exchange Management Shell installed:

1. Launch Exchange Management Shell. Do not use Windows Powershell.
2. At the MSH prompt, enter the following information on one line:

```
Get-OrganizationConfig | Add-AdPermission -user NPUMAdmin -accessRights
GenericRead -extendedrights "Read metabase properties","Create named properties
in the information store","View information store status","Administer information
store","Receive as","Send as"
```

### Note:

By default these permissions will be applied to all sub-containers. Do not change this setting.

3. Make sure that the **NPUMAdmin** account is a member of **Domain Users** only.

**Note:**

To confirm that the account has been set up correctly, repeat step 2. You should receive a message saying "Already Complete."

4. At the MSH prompt, enter the following information to give full access rights to the Superuser account:

```
get-mailbox  
-ResultSize Unlimited | add-MailboxPermission -user NPUMAdmin  
-accessRights FullAccess
```

**Note:**

- Entering the above-noted command enables the NPUMAdmin account to have access to all mailboxes currently on the Exchange Server. If new users are added after this command has been run, then the command must be run again to grant full access rights.
- Full Access permissions are not granted until the Microsoft Information Store service caches the permissions and updates the cache, which can take up to two hours. To grant the permissions immediately, stop and then start the Microsoft Exchange Information Store service on the Exchange Server. See [http://technet.microsoft.com/en-US/library/aa996343\(EXCHG.80\).aspx](http://technet.microsoft.com/en-US/library/aa996343(EXCHG.80).aspx) for more details.

## Configuring the Client Throttling Policy

You can configure a client throttling policy to give the Superuser enhanced access to the server resources.

### Exchange 2013 SP1

**Note:**

In the following procedure, NPUMAdmin is the Superuser account name.

To configure the client throttling policy for 2013 SP1:

1. Access the Exchange Management Shell.
2. Run the following command to set the RCAMaxConcurrency value to zero, allowing unlimited concurrent connections for the superuser account:

```
new-throttlingpolicy
-name NPUMAdminPolicy -RCAMaxConcurrency Unlimited
```

3. Run the following command to apply the new client throttling policy to the superuser account:

```
set-mailbox -identity NPUMAdmin -throttlingpolicy NPUMAdminPolicy
```

To confirm that the client throttling policy is set correctly:

4. Access the Exchange Management Shell.
5. Run the following command to show the client throttling policy for the NPUMAdminPolicy Superuser account:

```
Get-ThrottlingPolicy -identity NPUMAdminPolicy | Format-List
```

6. Run the following command to show all client throttling policies:

```
Get-ThrottlingPolicy
| Format-List
```

## 1.4.23.5.2.3.1.4 Troubleshooting Notes for IMAP for Exchange or Office 365

### Advance Unified messaging IMAP Configuration Settings on Exchange 2013 and Exchange 2016 Server

To ensure overall system stability, we engaged Microsoft to make some system modifications that will allow the overall integrated system to properly function.

Please find below the modification that has been advised by Microsoft. Changes to the exchange server configurations is at sites own risk. If the site admin is not comfortable with the changes, then please contact Microsoft.

#### To see IMAP setting on Exchange

- **Get-ExchangeServer | fl name,serverrole,site,fqdn,admindisplayversion**
- **Get-AcceptedDomain**
- **Get-TransportAgent**
- **Get-DomainController | fl name,dnshostname,adsite**
- **Get-IMAPSettings | FL on both the Servers**
- **Get-ThrottlingPolicy NPUMAdminPolicy | fl**

## Maximum Allowed Sessions Per User and Maximum Allowed Service Sessions Per User

Create the following registry key. If there is no existing registry key, create one. If site is not comfortable creating this key in the Exchange registry or any changes to the Exchange server, please call Microsoft for assistance.

Create a Maximum Allowed Sessions Per User registry key with value 2048 under:

HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\MSExchangeIS\ParametersSystem

Add 2 new **DWORD** entries:

- Maximum Allowed Sessions Per User with value 2048 (Hexadecimal)
- Maximum Allowed Service Sessions Per User with value 2048 (Hexadecimal)

After creating the registry key, reboot the exchange server or restart IMAP4 services and the front and back-end services.

## NTLM authentication protocol authentication

This is applicable to Exchange 2013 and Exchange 2016 Mail and CAS servers.

Perform the following steps for NTLM authentication protocol:

1. Disable the parameter:

`EnableGSSAPIAndNTLMAuth`

2. Check this KB: <https://support.microsoft.com/en-us/kb/3076376>

3. Run the **Set-IMAPSettings**, where

`EnableGSSAPIAndNTLMAuth` is set to `$false`

4. To set the log file's size quota on the server, run the following command:

```
Set-ImapSettings
-Server <ServerName> -LogPerFileSizeQuota 10MB
```

## Set the IMAP4 connection limits for a server

This is applicable to 2013 CU 11 and Exchange 2016 latest software load.

NOTE: Set the limit for maximum connections from a single user to 200000 from the default value of 16. Also, make sure that all other connections are set to the default settings. You can make the changes via the Exchange ECP Web console.



1. In the EAC, navigate to **Server > Servers**.
2. From the list of servers, select the **Client Access Server** and then click **Edit**.
3. On the server properties page, click **IMAP4**.
4. Click **More Options**.
5. Under Connection Limit, use the following settings:
  - Maximum connections - Specifies the total number of connections the specified server will accept. This includes authenticated and unauthenticated connections. The default value is 2,147,483,647. The possible values are from 1 through 2,147,483,647.
  - Maximum connections from a single IP address - Specifies the number of connections that the server will accept from a single IP address. The default value is 2,147,483,647. The possible values are from 1 through 2,147,483,647.
  - Maximum connections from a single user - Specifies the maximum number of connections that the server will accept from a particular user. The default value is 16. The possible values are from 1 through 2,147,483,647.
  - Maximum commands size (bytes) - Specifies the maximum size of a single command. The default size is 10,240. The possible values are from 1,024 through 16,384.
6. Click **Apply** and then click **OK** to save your changes.

After you set connection limits, restart the IMAP4 services front-end and back-end on the Exchange server services.

OR

You can make the changes via a command prompt, where you can increase the MaxConnectionsPerUser value from 16 (default) to 200000 by running below command:

```
Set-ImapSettings -Server "exchange server name" -MaxConnectionsPerUser 200000
```

### Configuring the client through Set-Throttling Policy

You can set the Throttling policy to **Unlimited** for the following parameters:

- ImapMaxConcurrency
- ImapMaxBurst
- ImapRechargeRate
- ImapCutoffBalance
- CPAMaxConcurrency

For example:

```
Set-ThrottlingPolicy
```

```
NPUMAdminPolicy
```

```
[ -ImapMaxConcurrency  
<Unlimited>]
```

```
[ -ImapMaxBurst  
<Unlimited>]
```

```
[ -ImapRechargeRate  
<Unlimited>]
```

```
[ -ImapCutoffBalance  
<Unlimited>]
```

```
[-CPAMaxConcurrency <Unlimited>]
```

**Note:**

**Changes to the Exchange Server configurations is at the sites own risk. If the site admin is not comfortable with the changes, kindly contact Microsoft.**

**Troubleshooting and fixes for one or more Exchange servers when they are of different software version (Exchange 2016 forwarding to multiple 2013 exchange servers)**

Exchange IMAP log errors:

- Checked IMAP protocol logs on Exchange server for this ERROR:
- 993:SSL""; ErrMsg=ProxyNotAuthenticated ",

Example:

```
22T12:06:14.459Z,00000000002422BF,3,172.1.0.16:993,192.168.12.15:49088,npumadmin2,61,5
NPUMAdmin2/oozuna *****,"R=""MSB1 NO LOGIN failed.""",Msg=""User:LegacyDn: /
o=Kat,ou=Exchange Administrative Group (FYDIBOHF23SPDLT)/cn=Recipients/
cn=Olga Ozuna, RecipientType: UserMailbox, RecipientTypeDetails:
UserMailbox, Selected Mailbox: Display Name: Sally Ozuna, Mailbox Guid:
4ec4d3b2-1719-4f75-93dc-78737a68fc78, Database: 1d149126-97d1-4a8f-ab95-
ed0522a1f9d0, Location: ServerFqdn: FW-EXCH01.Mitel.com, ServerVersion:
1937997947, DatabaseName: Mitel FW New, HomePublicFolderDatabaseGuid:
be5fc5e4-4151-4446-a88c-932d59f5f7d0;Proxy:FW-
EXCH01.Kat.com:993:SSL"";ErrMsg=ProxyNotAuthenticated",
```

- Check System and Application Event Viewer logs on the Exchange Servers

Log Name: System

Source: Schannel

Date: 2/22/2019 2:38:41 PM

Event ID: 36888

Task Category: None

Level: Error

Keywords:

User: SYSTEM

Computer: FW-EXCH01.Kat.com

Description:

The following fatal alert was generated: 51. The internal error state is 900.

Event Xml:

```
<Event xmlns="http://schemas.microsoft.com/win/2004/08/events/event">
  <System>
    <Provider Name="Schannel" Guid="{1F678132-5938-4686-9FDC-C8FF68F15C85}" />
    <EventID>36888</EventID>
    <Version>0</Version>
    <Level>2</Level>
    <Task>0</Task>
    <Opcode>0</Opcode>
    <Keywords>0x8000000000000000</Keywords>
    <TimeCreated SystemTime="2019-02-22T20:38:41.809566900Z" />
    <EventRecordID>1204930</EventRecordID>
    <Correlation />
    <Execution ProcessID="524" ThreadID="632" />
```

```
<Channel>System</Channel>  
<Computer>FW-EXCH01.Kat.com</Computer>  
<Security UserID="S-1-5-18" />  
</System>  
<EventData>  
<Data Name="AlertDesc">51</Data>  
<Data Name="ErrorState">900</Data>  
</EventData>  
</Event>
```

Log Name: Application

Source: MExchangeIMAP4

Date: 2/22/2019 3:36:23 PM

Event ID: 1102

Task Category: (1)

Level: Error

Keywords: Classic

User: N/A

Computer: FW-EXCH01.Kat.com

Description:

The IMAP4 service failed to connect using SSL or TLS encryption. No valid certificate is configured to respond to SSL/TLS connections. Check the configured host name

as well as which certificates are installed in the Personal Certificates store of the computer.

Event Xml:

```
<Event xmlns="http://schemas.microsoft.com/win/2004/08/events/event">
<System>
<Provider Name="MSExchangeIMAP4" />
<EventID Qualifiers="49156">1102</EventID>
<Level>2</Level>
<Task>1</Task>
<Keywords>0x8000000000000000</Keywords>
<TimeCreated SystemTime="2019-02-22T21:36:23.000000000Z" />
<EventRecordID>4290878</EventRecordID>
<Channel>Application</Channel>
<Computer>FW-EXCH01.Kat.com</Computer>
<Security />
</System>
<EventData>
</EventData>
</Event>
```

### Examples of issues and solutions:

#### 1. Issue Scenario: Voice messages are not getting delivered for recipients on Exchange servers

##### Solution:

- Run the

```
Set-ImapSettings
```

```
cmdlet
```

to modify the settings of the Microsoft Exchange IMAP4 service on Exchange servers.

- Add CertificateName to the X509CertificateName parameter which specifies the certificate that's used for encrypting IMAP4 client connections.
- Disabled NTLM for IMAP4 connections for EnableGSSAPIAndNTLMAuth parameter which specifies whether connections can use Integrated Windows authentication (NTLM) using the Generic Security Services application programming interface (GSSAPI)

If third party certificate, you may need to run the Enable-ExchangeCertificate cmdlet to enable an existing third-party certificate on the Exchange server for IMAP service.

## 2. Issue Scenario:

- Voice message were not getting delivered for users on Exchange
- IMAP SSL is not working, gives the error - "BYE connection is closed. 14"

**Solution:** Resolved by adding hostname to the X509CertificateName parameter which specifies the certificate that's used for encrypting IMAP4 client connections.

## Mail flow and the transport pipeline in Exchange 2013/2016

In Exchange Server 2016, mail flow occurs through the transport pipeline. The transport pipeline is a collection of services, connections, components, and queues that work together to route all messages to the categorizer in the Transport service on an Exchange 2016 Mailbox server inside the organization.

### Understanding the transport pipeline

The transport pipeline consists of the following services:

- 1. Front End Transport service:** This service acts as a stateless proxy for all inbound and (optionally) outbound external SMTP traffic for the Exchange 2016 organization. The Front End Transport service does not inspect message content, or communicate with the Mailbox Transport service, and does not queue any messages locally.

Front End Transport will attempt to anchor on a recipient and will look-up that recipient in Active Directory and find a DAG to which the recipient belongs to.

It will also attempt to route mail to a mailbox server in that DAG (preferably in the same site).

## 2. Transport service: The Transport service on a mailbox server includes the following components and processes:

- **SMTP Receive**

Whenever messages are received by the transport service, message content inspection is conducted, transport rules are applied, and anti-spam and anti-malware inspection is conducted if they are enabled.

The SMTP session has a sequence and series of events that work together in a particular order to verify and validate the contents of a message before it's accepted. When a message has passed absolutely through SMTP Receive and isn't rejected by receive events, or via an anti-spam or anti-malware agent, it is directed over the Submission queue.

- **Submission queue**

Holds messages that have been accepted by the transport service, but are not processed. Messages in the Submission queue are either waiting to be processed, or are actively being processed.

On Mailbox servers, messages are received by a Receive connector, the Pickup or Replay directories, or the Mailbox Transport Submission service. On Edge Transport servers, messages are typically received by a Receive connector, but the Pickup and Replay directories are also available.

Every Mailbox server or Edge Transport server has only one Submission queue.

- **Categorizer**

The categorizer chooses one message at a time from the Submission queue.

The categorizer performs the following steps:

- Recipient resolution that includes top-level addressing,
- Message bifurcation, and distribution group expansion.
- Routing resolution.
- Content conversion.

Moreover, mail flow rules which the organization defined are applied. After messages have been segregated, they're routed into a delivery queue which is based on the destination of the message. Messages are lined up and queued by the destination mailbox database, Active Directory site, DAG, Active Directory forest.

## 3. Mailbox Transport Submission service: This service connects to the local mailbox database using an Exchange remote procedure call (RPC) to retrieve messages. The service submits the messages over SMTP to the Transport service on the local Mailbox server or on other Mailbox servers. The Mailbox Transport Submission service has access to the same routing topology information as the Transport service.

**4. Mailbox Transport Delivery service** : This service receives SMTP messages from the Transport service on the local Mailbox server or on other Mailbox servers and connects to the local mailbox database using RPC to deliver the messages. The Mailbox Transport service doesn't communicate with the Front End Transport service, the Mailbox Transport service, or mailbox databases on other Mailbox servers. It also doesn't queue any m

### Ports used for mail flow in Exchange 2016

- **Port 25** – This port just like in previous versions of Exchange is used for SMTP. Used by both External SMTP into the Front End Transport Service (FET), between MBX servers, and also from the FET to the Transport Service. There is a receive connector named Default Frontend <servername> that listens on this port.
- **Port 587** – This port just like previous versions of Exchange is used for Client Connections (POP\IMAP). The CAS Server has a receive connection listening on this port name Client Frontend <servername>.
- **Port 717** – Used for outbound proxy connections from the Transport service to the FET Service. When you create a Send connection you have the option to send mail destined for the Internet directly from the Transport Service to the Internet\Smart Host or relay that mail through the Front End Transport Service. There is a receive connector named Outbound Proxy Frontend <servername> that listens on this port.
- **Port 465** – Used to accept proxies connections that were received on port 587 by the FET service for client connections. There is a receive connector named Client Proxy <servername> that listens on this port.
- **Port 475** – The Mailbox Transport Delivery Service listens on this ports for connections either from the transport service SMTP Send connector or SMTP from the Transport Service on other Mailbox Servers that need to send mail to users on this server.
- **Port 2525** – if the CAS and MBX servers are collocated on the same server the SMTP Receive connection for the Transport service will listen on 2525 instead of 25. This is because two services (FET and Transport Service) can't listen on the same port.

## 1.4.23.5.2.3.2 IMAP for Google Apps

### 1.4.23.5.2.3.2.1 Configure IMAP Server Settings for Google Apps



You can use the IMAP4 protocol to connect the Google Apps for Business email server and the NuPoint UM server. A maximum of 2500 Advanced UM users are supported with this implementation.



To set up IMAP for Google Apps, do the following:

- [Enable IMAP Access for Google\\_Apps](#)
- [Configure OAuth for Google\\_Apps](#)

**Note:**

- Messages marked as "urgent" will be delivered as regular messages in Google Mail.
- In most cases, voice mail messages are sent immediately to the email server and then forwarded to the Advanced UM users. However, hosted email configurations such as Google Apps may experience slight delays due to virus scanning, anti-spam software, or routing delays caused by traffic volume. As a result, the timestamps of the original voice mail message and email audio attachment may not match.

## Enable IMAP Access for Google Apps

You must enable global IMAP access for all users in the Google Apps domain to facilitate the synchronization of voice mail and email messages.

To enable global IMAP access:

1. Log in to the Google Apps administrator control panel: <https://www.google.com/a/cpanel/yourdomainname>
2. Enter the domain administrator **Email** and **password**.
3. Click the **Settings** tab and select **Email**.
4. Clear the **Disable POP and IMAP access for all users in the domain** check box.

IMAP access is enabled for all users in the domain, irrespective of their individual account settings.

## Configure OAuth for Google Apps

You must configure the OAuth (Open Authentication) 2.0 settings for service accounts. With this type of server-to-server interaction, the Mitel application has to prove its own identity to the Google API but end users do not need to be involved. This enables NuPoint UM to synchronize voice mails and email with Google Apps such as Google Calendar and eliminates the need for users to maintain email passwords on the NuPoint UM system.

Configuring OAuth is a multi-step process. First, you must log into the Google Apps console and create a new API project. Then you must select a service for the project, create a service account with client ID, and download your credentials (private key and JSON file). Finally, you must log in to MSL and upload your credentials to the server.

**Note:**

- If the system time is inaccurate, NuPoint UM will be unable to access user email accounts using OAuth. To ensure that your system time is correct, log in to the MSL Server Manager, click **Date and Time** under **Configuration**, and then select the **Enable Network Time Server** option. Disabling this option and using the host's real time clock for the system time is not recommended.
- Support for [OAuth 1.0](#) has been deprecated with the release of MSL 10.1. If you are currently using OAuth 1.0 and upgrade to MSL 10.1 or later software, you should reprogram API access for your application using an OAuth 2.0 Service Account. After you have done this, the OAuth 1.0 tab will be removed from the MSL server manager interface.

## Create an API Project and Client ID in Google

**Note:**

The following instructions are provided as a guide only. For up-to-date instructions, refer to the following resources:

- Google online help available at <https://developers.google.com/console/help/>
- Mitel Knowledge Base article 15-5138-00053 available at <http://www.mitel.com/mol>

### Log In to the Google API Console

1. Open a web browser and navigate to <https://code.google.com/apis/console>.
2. Enter the domain administrator **Email** and **password** to log in.

### Create the Project

1. Click the **Create project** button.
2. Enter the **Project name** (for example, "NuPoint Advanced UM") and click **Create**. Remain in the project.

## Enable Google APIs for the project

1. Open the side menu and select **API Manager**.
2. Select a Google API such as "Calendar API" and click **Enable API**.
3. Repeat for all Google APIs you want to support. Remain in the project.

Create the Service Account with Client ID

1. Open the side menu and select **Permissions**.
2. Under the **Service accounts** tab, select **Create service account**.
3. Enter a **Name**, select **Furnish a new private key** and **JSON** as the file type, and then select **Enable Google Apps Domain-wide Delegation**. Set a **Product name** if prompted.
4. Click **Create** and **Close**. The service account is created and the file containing the Private Key and Client ID is downloaded.

### Note:

Store the file in a safe location. You will require it to establish your credentials to MSL.

5. For the service account you just created, click **View Client ID**.
6. Copy the Client ID and click **Cancel**. You will require the Client ID in the next procedure.

## Manage API Client Access (API Scopes)

Once a service account is created, you must enable the scope of access for your client ID.

1. Access the Google Admin console:
  - a. Open a web browser and navigate to admin.google.com.
  - b. Enter the domain administrator **Email** and **password** to log in.
2. Click **Security**.
3. Click **Show more** and then click **Advanced settings**.
4. Under **Authentication**, click **Manage API Client access**.

5. On the Manage API client access panel:

- a. Paste the client ID in the **Client Name** box.
- b. Enter the following in the **One or More API Scopes** box:

To support Gmail integration (for NuPoint Advanced UM), enter: `https://mail.google.com/`

- c. Click **Authorize**.

The client ID now has access to resources in the specified domains.

### Upload Credentials to MSL

This procedure involves uploading your OAuth 2.0 credentials (service account Client ID and Private Key) from your computer to MSL. MiCollab employs these credentials to integrate with publicly available Google Apps.

1. Log in to the MSL Server Manager as "admin".
2. In the navigation tree, under **Configuration**, click **Google Apps**.
3. Select the **Service Account** tab.
4. Under **Configuration**, choose the following files from your computer:
  - Service Account ID (.json file)
  - Private Key (.p12 file)

**Note:**

The **Private Key (.p12 file)** file is required only for earlier implementations.

5. Click **Upload Credentials**.
6. Confirm that the Client ID, Email address, and Private Key are correct by comparing them to the corresponding fields in the Google API project.

It is now possible to configure a secure connection to publicly-available Google Apps using the OAuth 2.0 protocol for the Service Account client ID.

**Note:**

- You can generate another private-public key pair and then upload the private key to the Service Account in MSL.
- OAuth 2.0 data is not included in system (MSL) backups. Accordingly, if you perform a backup and restore procedure, you must then re-enter the OAuth 2.0 data in order to restore the Google Apps integration.

## 1.4.23.5.2.4 Procedures (Web Console)

### 1.4.23.5.2.4.1 Configure Advanced UM Parameters

Advanced UM can also be configured from the Text console; however, it is not possible to configure Advanced UM from both consoles simultaneously.

Ensure that you have filled out the [Advanced Parameters worksheet](#) before you begin configuration.

#### Configuration

To configure Advanced UM Parameters:

1. From the navigation tree, under **Unified Messaging**, click **Advanced UM**.
2. The Advanced UM Configuration screen appears.
3. On the **NuPoint** tab, enter the following information from your worksheet:
  - Administrator Login
  - Administrator Password
  - Mailbox Poll Interval (in minutes or hours)
  - Permanent Delete (True or False)
  - Sender Domain

**Note:**

If the Administrator Password is changed, you must update this field to show the new password.

4. On the **Mail Servers** tab, enter the following information from your worksheet:

- Mail Connection Properties:
  - Unread Mail Poll Interval
  - Read Mail Poll Interval
  - Mail Server Timeout
  - Maximum Concurrent Connections
- Mail Server Connections:
  - Mail Server Type - Microsoft Exchange, Google Apps, Office 365
  - Adapter Type - This field defaults to "IMAP" if the Mail Server Type is Google Apps, or Office 365
  - Secure IMAP - True or False
  - Authentication Mode
    - Select Auth 2.0 - Authentication will be done with Microsoft Graph API (Recommended)
    - Select Basic - Authentication will be done with IMAP Secure

**Note:**

1)

To enable the Authentication Mode as OAuth 2.0 for Office 365 for NPM Advanced UM feature, the pre-requisites are as follows:

- In Microsoft Azure, the below permissions need to be added to the application for secure OAuth 2.0 to work for Office 365 with Microsoft Graph:
  - Mail.Read
  - Mail.ReadWrite
  - Mail.Send
- Configuration is needed at Cloud Service Provider in MSL. See the Configure Microsoft Identity section for details. See the below screenshots for reference

The screenshot shows the 'Cloud service provider settings' page in the Mitel MiCollab web console. The left sidebar contains a navigation menu with categories like 'System Information', 'Configuration', 'Security', and 'Miscellaneous'. The 'Cloud Service Provider' option is highlighted. The main content area is titled 'Cloud service provider settings' and has tabs for 'Google' and 'Microsoft'. The 'Microsoft' tab is active, showing 'Microsoft identity configuration'. Below this, there is a 'Configuration' section with two sub-sections: 'Tenant directory...' and 'Application identity...'. Each sub-section has two input fields: 'Tenant Name (optional)' and 'Tenant ID' for the first, and 'Application Name (optional)' and 'Application ID' for the second. A 'Save' button is at the bottom right. A yellow banner at the bottom contains the text: 'Encrypted Backup. Note that the credentials will only be available in encrypted backups. Otherwise, please ensure that you keep a copy of the credentials.'

**Mitel** | Mitel Standard Linux

Export  
Parameters  
Report

**Class of Service**  
Feature COS  
Group COS  
Limits COS  
Network COS  
Restriction COS  
Tenant COS

**Active Configuration**  
View System Configuration  
Line Groups

**Offline Configuration**  
View Offline Configuration  
Activate Offline Configuration  
Edit Offline Configuration

**Unified Messaging**  
Smarthost Configuration  
UM-SMTP  
UM-Web View  
Advanced UM  
UM User Licensing  
TTS Configuration  
STT Configuration

**Call Director**  
Configuration  
Call Flow  
Templates  
Reports  
View Call Flow Report  
Reset Call Flow Report

**Advanced UM Configuration**

Save Reset Cancel Restart Advanced UM

Nupoint Mail Servers LDAP

**Mail Connection Properties**

Unread Mail Poll Interval: 5 seconds  
Read Mail Poll Interval: 60 seconds  
Mail Server Timeout: 60 seconds  
Maximum Concurrent Connections: 40

Restore Defaults

**Mail Server Connections**

Mail Server Type: Office 365  
Adapter Type: IMAP  
Secure IMAP: ☒ True ☐ False  
Authentication Mode: ☒ OAuth 2.0 ☐ Basic  
Superuser account name:  
Superuser password:  
IP Address: outlook.office365.com

For detailed steps on how to register an application at Office 365, see [Steps to register your application at Microsoft Office 365](#).

The Cloud Service Provider configuration is required at MSL followed by configuration at NPM Advance UM. For details on configuration at MSL, refer to the Microsoft Cloud section. Once the configuration of OAuth 2.0 is successful at MSL, the administrator has to select Authentication Mode OAuth 2.0



**Note:**

2)

NPM can receive voice messages from:

- a. External callers
- b. Internal callers

The internal callers can be categorized into:

- i. User having mailbox configured and with valid O365 domain
- ii. User with no mailbox configured
- iii. User having mailbox configured and invalid O365 domain
- iv. User having mailbox configured but no email configured

For Users having mailbox configured and with valid O365 domain, in advanced UM emails:

- The **To** field will show the recipient's Email Id and the **From** field will show the sender's Email Id.
- Sender information will also be present in the subject line and Email body.

For a, b(ii), b(iii) and b(iv), in advanced UM emails:

- The **To** and **From** fields in the Email will show the recipient's Email Id. This is because the Graph API does not support the send operations for the invalid O365 domain.
- Sender information will be present in the Subject line and in the Email body.

- Superuser account name - IMAP superuser account name.
- Superuser password - IMAP superuser password.
- Port No. / Hosted Exchange - If your implementation has a Microsoft Exchange server in a hosted environment, you can use these fields to specify a non-default IMAP inbound connector port up to five digits in length. This port number must also be configured on the Exchange server. For configuration details, see the [Advanced Parameters Worksheet](#).
- IP Address - This field defaults to "imap.gmail.com" if the Mail Server Type is Google Apps and "outlook.office365.com" if the Mail Server Type is Office 365. Hostnames must be resolvable by the corporate DNS server defined in MSL. If a connection is being made to a Client Access Server (CAS), enter the address of

the CAS in place of the mail server address. Note that either a load balancer or an Exchange server can function as a CAS.

**Note:**

To take advantage of Secure IMAP, you must enter the correct authentication settings in the Exchange Server. For details, see [IMAP Setup for Exchange Server](#).

5. On the **LDAP** tab, enter the following information from your worksheet:

- LDAP Server Address
- LDAP Administrator DN
- LDAP Login Password
- LDAP Search Base

**Note:**

- LDAP is not available for Google Apps.
- LDAP DN syntax refers to the creation of a Distinguished Name, which is a series of name components forming a unique identifier, similar to a path to a file. The abbreviations **cn** and **dc** refer to Common Name and Domain Component, respectively. For more information about LDAP, refer to the Microsoft TechNet Library at <http://technet.microsoft.com/en-us/library/>.
- This account is used to perform queries, not updates. As such, it only requires "read" access to the database. It does not require administrative rights with "read/write" access.

6. On the Mail Servers or LDAP tab, click **Verify Connection** to test your configuration settings.

**Note:**

The Verify Connection function detects only one error at a time.

7. Click **Save**. The system validates your input and, when all parameters are validated successfully, a confirmation box appears indicating that the Advanced UM server must be restarted for your changes to be applied.

8. Click **OK**.

**Note:**

Restarting the Advanced UM server may cause an interruption to Advanced UM service. Voice mail ports are not affected.

**Advanced UM Form Button Actions**


| Button              | Action                                                                                |
|---------------------|---------------------------------------------------------------------------------------|
| Save                | Saves the configuration.                                                              |
| Reset               | Resets all fields on the screen to their default values.                              |
| Cancel              | Exits the screen without making any changes.                                          |
| Restart Advanced UM | Restarts the Advanced UM service while all other NuPoint UM services remains running. |

## 1.4.23.5.2.4.1.1 Steps to register your application at Microsoft Office 365

To use OAuth 2.0, an application must have an application ID issued by Azure Active Directory.

1. Open a browser and navigate to the [Azure Active Directory admin center](#) and login using **admin account**.
2. Select **Azure Active Directory** in the left-hand navigation, then select **App registrations** under

Manage.

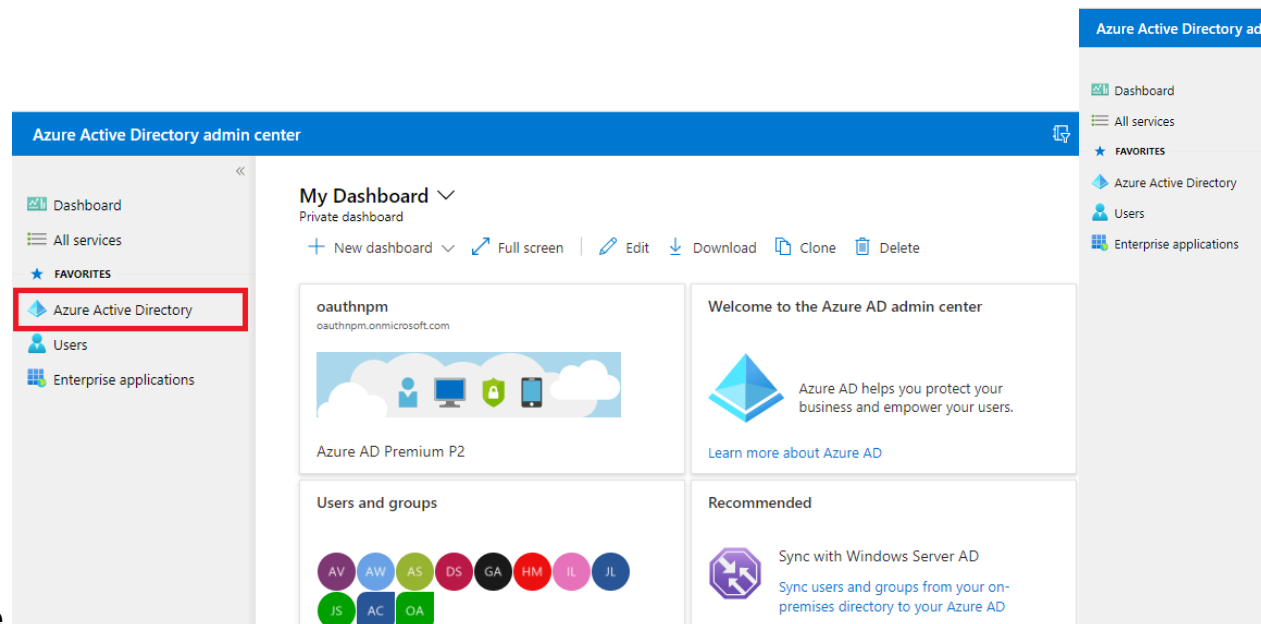


3. Select **New registration**. On the **Register an application** page, set the values as follows:


- Set **Name** to a friendly name for your app.
- Set **Supported account types** to Accounts in this organizational directory only.
- For **Redirect URI**, change the dropdown to **Public client (mobile & desktop)** and set the value to **https://login.microsoftonline.com/common/oauth2/**

nativeclient

4. Click on **Register**. On the next page, copy the value of the **Application (client) ID** and **Directory (tenant) ID** and save them, you will need that later.

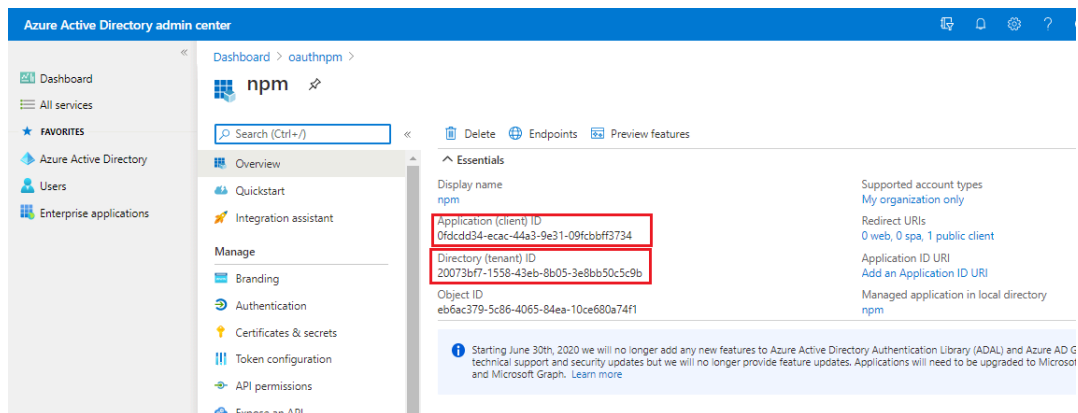


## 5. Select **API permissions** in the left-hand navigation under

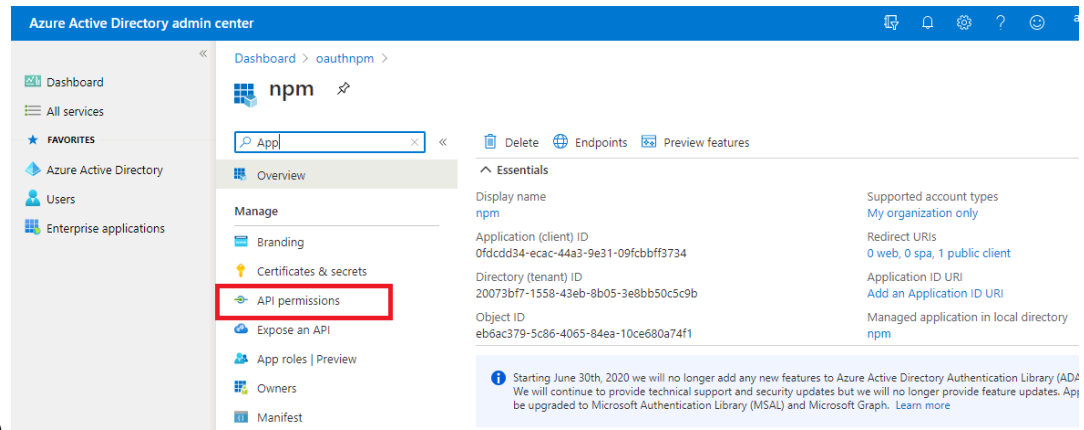


**Manage.**

## 6. Select **Add a permission**. On the **Request API permissions** page, select **Microsoft Graph**.

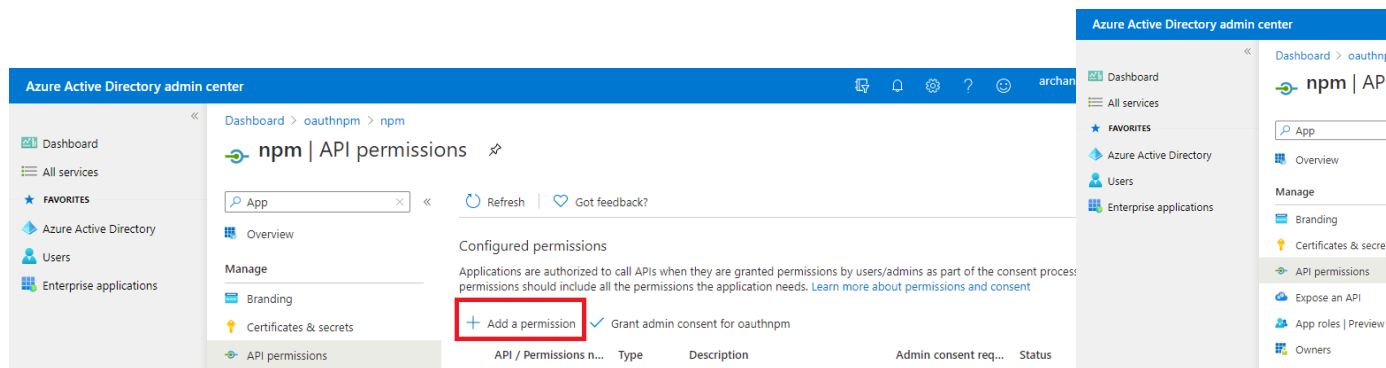


7. Select **Application permissions** and then select:

- **Mail.Read**
- **Mail.ReadWrite**
- **Mail.Send**

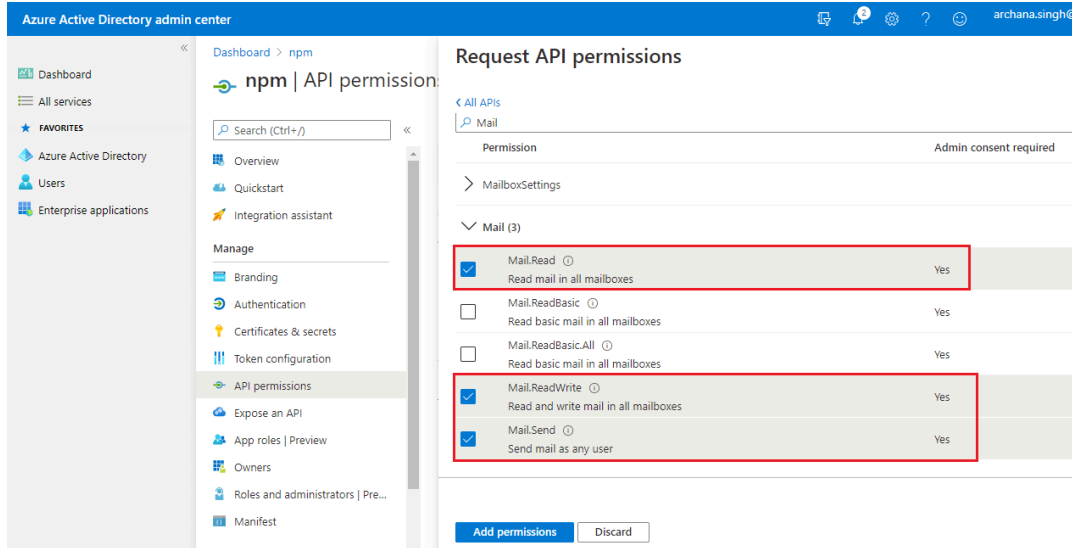


Click on **Add permissions**


8. Select **Grant admin consent for org** and click on the **Yes** button in the consent dialog.

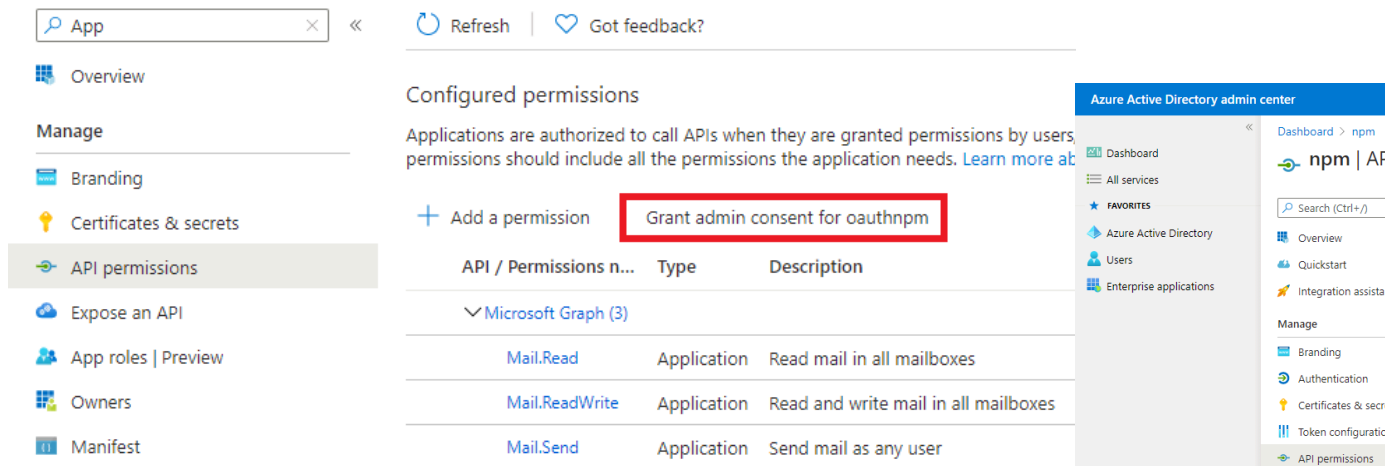

9. Under Manage, click on **Certificates & secrets** from the left-hand navigation pane.

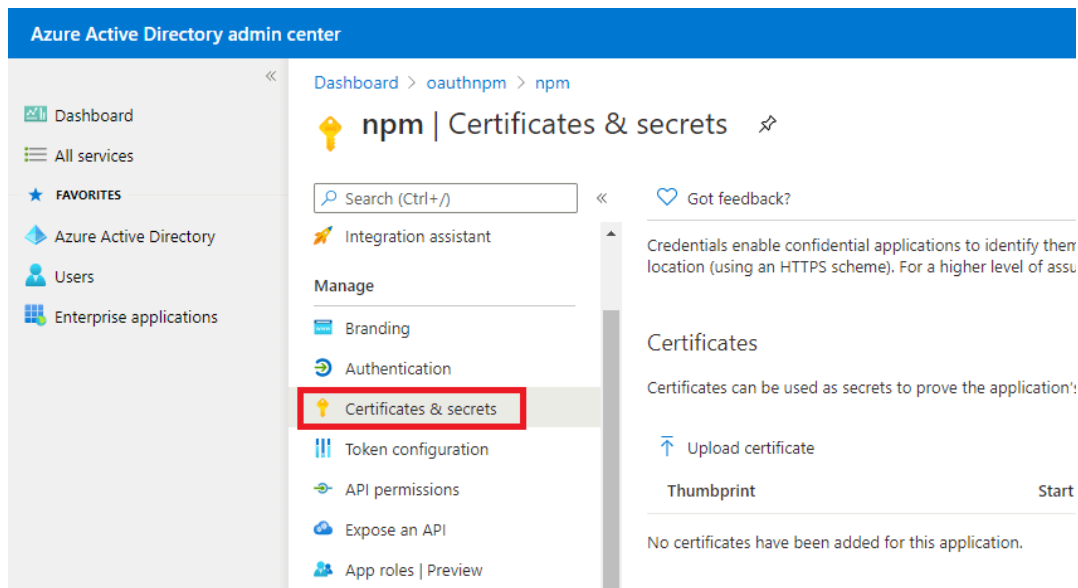

10. Select **New Client Secret**, add a small short description and select **Add**.

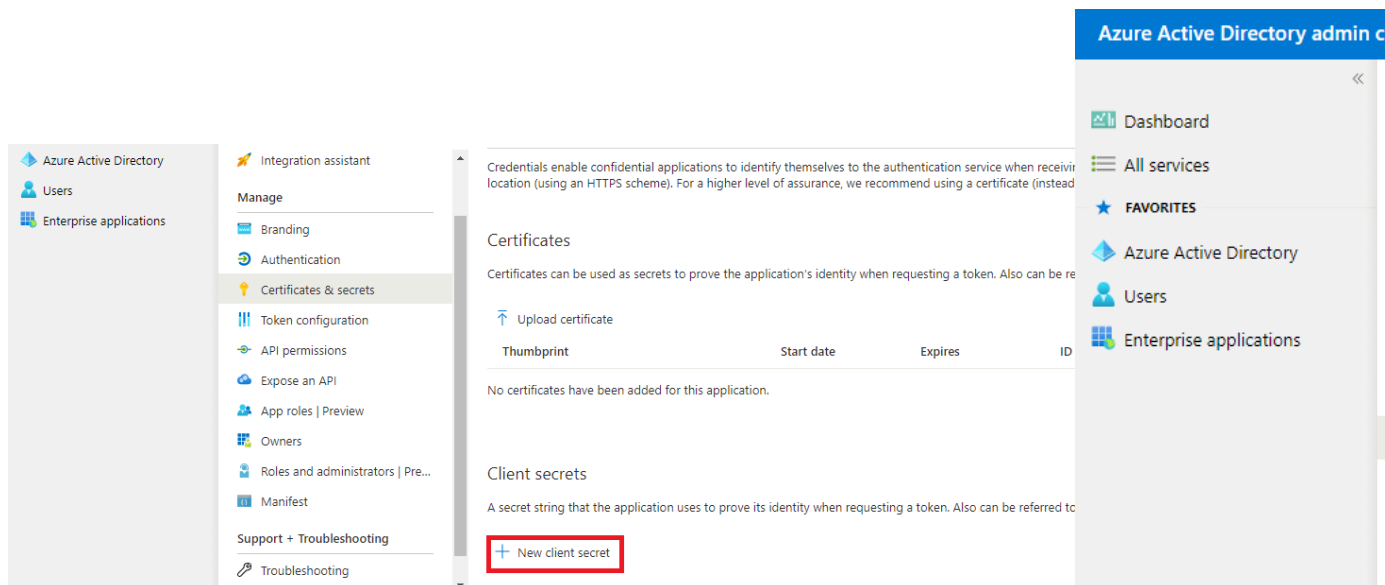

11. Copy the value of the newly added client secret and save it, as you will need it later.

12. The below values will be required to configure OAuth 2.0 in MiCollab.

- Tenant-ID (generated in Step-4)
- Application-ID (generated in Step-4)
- Client Secret (generated in Step-11)

**Note:**

- For New Deployments - The admin of Office 365 needs to perform Step 1 to Step 12
- For Existing Sites - If the application is already registered in their tenant, they need to follow Step 5 to Step 1

## 1.4.23.5.2.4.2 Configure Text to Speech

**Note:**

This feature is applicable for releases prior to R9.1.

To configure Text-to-Speech:

1. From the navigation tree, click **Unified Messaging** and then click **TTS Configuration**.
2. The Text-to-Speech Configuration screen appears.
3. On the **Configuration** tab, enter the following information:
  - **TTS rate of speech:** Select a value between 1 and 9 (1 being a very slow rate of speech and 9 being a very fast rate of speech. Default is 5.)
  - **TTS volume:** Select a value between 1 and 9 (1 being low volume and 9 being high volume. Default is 5.)
4. On the **Dictionary** tab, enter the following information:
  - **Dictionary language:** Select a specific language from the drop-down menu.
  - **Note:** The supported languages are NA English and UK English.
  - **Word:** Click Add and type the word you want to define.
  - **Pronunciation:** Type the phonetic pronunciation for the word. (For example, for the name "Mitel", you might type "Mytell".)

**Note:**

You can also edit and delete the pronunciation information using the **Edit** and **Delete** buttons.



## 1.4.23.5.2.5 Procedures (Text Console)

### 1.4.23.5.2.5.1 Configure Advanced UM Parameters

Advanced UM Parameters consist of settings for the NuPoint server, the mail server, and the LDAP server.

You can configure Advanced UM parameters from the Text Console (instructions below) or from the Web Console (see the Web Console online help). If you want to switch from the Text Console to the Web Console at any point in the configuration process, you must exit the Advanced UM menu and save your changes in the Text Console before logging in to the Web Console.

#### Note:

- Before starting the configuration, ensure that you have completed the [Advanced UM Parameters worksheet](#) for reference.
- You can include a **Corporate Callback Number** in your notification emails. See [Configuring Standard UM](#).

To configure Advanced UM parameters:

1. From the Main Menu, select **(S) System Maintenance, (R) Reconfiguration, (U) Unified Messaging**.
2. In the Unified Messaging menu, select **(A) Advanced UM**.
3. In the Advanced UM menu, select **(N) NPM Parameters**.
4. Configure the following parameters using your worksheet as a reference:
  - **(L)** Administrator Login
  - **(P)** Administrator Password
  - **(I)** Mailbox Poll Interval
  - **(K)** Permanent Delete
  - **(V)** Sender Domain
5. Exit **(X)** to the Advanced UM menu: COMMAND (N/E/L/U/T/Q/X)
6. In the Advanced UM menu, select **(E) Mail server parameters**.
7. Select **(S) Mail Server Connections**.
8. Select **(R) Server Type** and enter **E** for Microsoft Exchange or **G** for Google Apps.

**9. Select (T) Adapter Type** and then do the following

- For **IMAP**, type **I** and then select **(S) IP Address/Hostname**. Enter the IP address or hostname of the IMAP server. If the Server Type is Google Apps, this field defaults to "imap.gmail.com."

**10. Select (C) Secure IMAP** and then select "true."

**Note:**

To take advantage of Secure IMAP, you must enter the correct authentication settings in the Exchange Server. For details, see [IMAP Setup for Exchange Server](#).

**11. Select (P) Port Number** and enter a free, unreserved port the non-default IMAP inbound connector port to be used by Microsoft Exchange in a hosted environment. This port number must also be entered on the Exchange server and Outlook.

**12. Select (V) Verify connection** to perform connection tests on all defined IP addresses.

**13. Exit (X)** to the Mail Server Parameters Menu (COMMAND (S/U/R/E/T/D/X):)

**14. Configure the following parameters** using your worksheet as a reference:

- **(U)** Unread Mail Poll Interval (seconds) [5]
- **(R)** Read Mail Poll Interval (seconds) [60]
- **(E)** Mail Server Timeout (seconds) [120]
- **(T)** Maximum Concurrent Connections [100]
- **(D)** Restore Defaults (Select this option to return all settings to their default values.)

**15. Exit (X)** to the Advanced UM Menu: COMMAND (N/E/L/U/T/Q/X).

**16. In the Advanced UM Menu, select (L) LDAP Parameters** (LDAP is not available for Google Apps).

**17. Configure the following parameters** using your worksheet as a reference:

- **(A)** LDAP server address []:
- **(D)** LDAP Administrator DN []:
- **(P)** LDAP login password []:
- **(B)** LDAP search base []:

**18. Select (V) Verify connection** to perform connection tests on Active Directory server based on all LDAP parameters. (This Verify function detects only one error at a time.)

**19. Exit (X)** to the Advanced UM menu: COMMAND (N/E/L/U/T/Q/X).

**20. Select (X) Exit -- Save Changes** and enter **Y** to restart Advanced UM.

## 1.4.23.5.2.5.2 Configure Text to Speech

To configure Text-to-Speech:

1. From the Main menu, select **(S) System Maintenance**, **(R) Reconfigure System**, **(U) Unified Messaging**, and then **(A) Advanced UM**.
2. Select **(T) Text to Speech parameters**.
3. Select **(R) TTS rate of speech** and then enter a value between 1 and 9 (1 being a very slow rate of speech and 9 being a very fast rate of speech).
4. Select **(V) TTS volume** and then enter a value between 1 and 9 (1 being low volume and 9 being high volume).
5. (Optional) Select **(F) Implicit Email Count Timeout** and enter the number of seconds to wait for the system to present the summary of voice mail and email messages before skipping the summary and prompting instead to "Press 3 for email or press 8 for voice mail". (Default is 5.)
6. (Optional) Select **(S) Explicit Email Count Timeout** and enter the number of seconds to wait for the system to access email (after the user has pressed "3" for email) before responding with a "system is busy - please try again later" message and initializing the mailbox. (Default is 15.)

**Note:**

User Dictionary configuration is only available through the **Web Console**.

## 1.4.23.5.2.5.3 Force Manual License Update

To force a license update:

1. From the Main Menu, select **(S) System Maintenance**, **(R) Reconfiguration**, **(U) Unified Messaging**, and then **(A) Advanced UM**.
2. Select **(U) User Licensing**.
3. Select **(U) Update User Licenses**. You are prompted to confirm.
4. Enter Y.

**Note:**

For MiCollab deployments, you cannot force a license update by selecting the **Update User Licenses** option. Instead, you must access the MiCollab Users and Services application and enable **Advanced Unified Messaging**.

## 1.4.23.5.2.6 Enable Advanced UM for User Mailbox

When all system-level configuration is complete, the users' mailboxes must be enabled for Advanced UM.

### Note:

- Each user must have a unique Advanced UM Email Alias / Full Name / Address (i.e. the ID must not be used in any other NuPoint mailbox). Duplication of IDs causes NuPoint to attempt to synchronize two voice mailboxes to one e-mail account, resulting in the deletion of all voice messages.
- If the Advanced UM service stops working, an e-mail is sent automatically to the System Administrator.

### To Enable Advanced UM for a User Mailbox:

1. [Customize an FCOS](#) for UM users and add the following feature bits for each type of user:

| For this feature: | Add these Feature Bits: |
|-------------------|-------------------------|
| Advanced UM       | 295                     |
| Text-to-Speech    | 296                     |

2. Assign the customized FCOS to the user's mailbox.
3. Force a manual license update for Advanced UM.
4. Modify the user's mailbox as follows:
  - Enter the email alias (Microsoft) or address (Google) into the **Advanced UM Email Alias / Advanced UM Full Name / Advanced UM Email Address** field.
  - Enter the password for the email alias into the **Advanced UM Email Password** field. (See notes below for password requirements.)

**Note:**

- If the password is changed in the email client, it must also be changed in the user's mailbox. If the password is not updated, messages will be rejected.
- The email alias appears in the **General** tab of the **User Properties** in Microsoft Exchange.
- Updating UM User Licensing causes a scan of mailboxes that may take some time to complete and may place an extra load on the system.
- Password Requirements:

— For IMAP, the password must be the user's actual password. The Exchange server must support cleartext passwords. If passwords are changed regularly, mailbox programming must be updated to match.

5. If the user will be using the Speech to Text feature, select the **Enable Speech-to-Text Transcription** check box. Enabling this feature causes all incoming voice mails (except Confidential, Record-a-Call, and Fax messages) to be automatically transcribed to text and sent as email messages to the user's account. The status of these transcription emails is not synchronized, and does not affect the status of the original voice mail or MWI.
6. Enable web access to voice mail in the user's e-mail client. Refer to the *Web View User Help* for specific user configuration instructions.

## 1.4.23.5.3 Outlook Client Plug-in

### 1.4.23.5.3.1 About the Outlook Client Plug-In

#### Overview

The Microsoft Outlook Client Plug-in (OCP) is an application that enables Microsoft Outlook client PCs to manage NP-UM voice mails.

#### OCP for Microsoft Outlook

The OCP for Outlook installs the Mitel NuPoint UM tab in the ribbon of your Microsoft Outlook email client. You can use the buttons on the tab to manage your messages (reply, forward, create a new message, etc.), and to specify whether your messages should be played automatically. In addition, the OCP provides multimedia controls that enable you to manage messages while playing them on your PC speakers or phone.

The OCP can be installed in the 32- and 64-bit bit variants of Outlook 2010, 2013, and 2016.

## Feature Requirements

The OCP feature requires:

- Microsoft Outlook 2010, 2013 or 2016 (32- or 64-bit).
- Microsoft Exchange Server 2013 or 2016.
- Microsoft Windows 7 Professional, Windows 7 Enterprise, Windows 7 Ultimate (32- or 64-bit, Regular edition), Windows 8 Professional, or Windows 10.
- (Optional) PC Sound cards and PC speakers.

## User Conditions

The following user conditions must be met before users can install the OCP to have Microsoft Exchange integration with Advanced UM capability:

- Users must have Advanced UM configured for their mailboxes.
- Users must have Microsoft Outlook installed.
- The system administrator must configure the Outlook Client Plug-in security settings.
- The system administrator must supply the location of the Plug-in installation files to the user: either Web View or, if feature bit **303** is enabled, a shared location.
- The system administrator must set up a [pager line group](#) to allow outdial before users can play messages on their phones.
- Do not assign [Fax Class of Service \(COS\) Parameters](#) to a user mailbox with OCP. If fax feature bits are assigned, some OCP features may malfunction. For example, it may prove impossible to send messages using the Call Me/Meet me feature.

**Note:** Mailboxes to which the proper feature bits are assigned are not guaranteed licenses. Licenses are automatically allocated starting at the lowest numbered mailbox until all licenses are used. This means that there could be some higher-numbered mailboxes that have the Advanced UM feature bit but are not allocated licenses.

## Configuring the Smart Host

To support the forwarding of emails to users who are not advanced UM users, when you set up the OCP you must [configure the SMART Host](#). Emails to these users will be sent through the NuPoint UM system using SMTP forwarding.

## 1.4.23.6 Troubleshooting UM

### 1.4.23.6.1 Troubleshooting Standard UM

#### SMTP-forwarded voice mail fails to reach the e-mail server destination

There are many cases where SMTP forwarding could fail:

1. Invalid address (not reaching an e-mail server)
2. SMTP server temporarily unavailable (e-mail server down)
3. Invalid user (user not valid in e-mail server)
4. Account is full.

Cases 1 and 2 are very similar from the point of view of the SMTP client. The message will not be able to reach an SMTP server.

In cases 3 and 4, the forwarded messages will be delivered to the SMTP server, but the message may bounce back in the form of a reject message. NuPoint Unified Messaging will not attempt to parse those reject messages or to inform the administrator about the failure.

At all times, NuPoint Unified Messaging will keep the messages to be SMTP-forwarded in an SMTP queue. NuPoint Unified Messaging will only remove the messages from that queue when the message is finally delivered to an SMTP server, when the end user removes the message from his/her inbox, or when the age limit timer for the message has been reached.

The amount of retries and time between the retries that the NuPoint Unified Messaging system will attempt to deliver the message to the SMTP server will be configured on a sendmail.cfg file and will not be presented in the menus. When changing the parameters registered in this configuration file, a reboot will be needed for the changes to take place.

## 1.4.23.6.2 Troubleshooting Advanced UM

### 1.4.23.6.2.1 Before You Call Mitel Product Support

Please provide the following information/perform the following tasks BEFORE calling Mitel Product Support. Use the link at the bottom of the page to print this task list:

| Task                                                                                                       | Site:                             |
|------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Confirm the system is licensed for sufficient Advanced UM users.                                           | Yes / No                          |
| Determine the NuPoint UM software version and platform (for example, NuPoint 14.0.1.7 on MiCollab server). | NuPoint Version:<br><br>Platform: |
| Determine Active Directory version                                                                         | Version #:                        |

| Task                                                                                                                                                                                        | Site:                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Is Active Directory housed on the Exchange server?                                                                                                                                          | Yes / No                            |
| Are there multiple Exchange servers?                                                                                                                                                        | Yes / No                            |
| How many mail stores are configured on the Exchange server?                                                                                                                                 |                                     |
| Is the site using IMAP Gateway?                                                                                                                                                             | IMAP Gateway                        |
| Are all servers within the same network?                                                                                                                                                    | Yes / No                            |
| List the IP addresses of all servers                                                                                                                                                        |                                     |
| Provide the SuperUser account, password, and base path:<br>(for example,<br><i>CN=NPMAdmin,CN=Users,DC=mitel,DC=com</i> )                                                                   | account:<br>password:<br>base path: |
| Provide the User search base:<br>(for example, <i>DC=mitel,DC=com</i> )                                                                                                                     | user search base:                   |
| Be prepared to provide remote access to the NuPoint UM server, the Exchange server. If you need to contact IT to arrange remote access, please do so before you call Mitel Product Support. |                                     |



| Task                                                                                                                                                                                                                                                                                                        | Site: |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| <p>Test the system to ensure that TCP/UDP port 143 is open.</p> <ul style="list-style-type: none"> <li>To test the connection with Exchange when using IMAP, run the Telnet tests from the NuPoint UM server to the Exchange server IP address: for example,</li> </ul> <pre>telnet 192.168.10.10 143</pre> |       |

### 1.4.23.6.2.2 Troubleshooting Advanced UM

Advanced UM log files can be found here: `/usr/vm/log/msblog.txt`

#### Outlook Client Plug-in Troubleshooting

The "Trusted Code" tab does not appear in the Outlook Security Settings form

If the security settings form contains an "Outlook Security Settings" tab and a "Programmatic Settings" tab only, then an old version of the form (older than Outlook 2002) is being used. When you publish the "OutlookSecurity.off" form, make sure that any existing security form is overwritten (see Set Security Settings). At this point it is a good idea to delete the "Outlook Security Settings" folder on the Exchange Server and recreate it following the steps described in Install Outlook Administrator Security Package and Configure Security Settings for Outlook.

There may also be complications if more than one version of the form exist together in the public folder. Determining which version the Outlook Client uses can become complicated. Additional details can be found at: <http://office.microsoft.com/en-au/assistance/HA011402931033.aspx>

Unable to save changes to the Outlook Security Settings form

The Mail Profile being used when modifying the Outlook Security Settings form through Outlook must connect to Exchange with a user that has Write permissions on the "Outlook Security Settings" folder. Verify the permissions on the folder and the user the Mail Profile is using when connecting to Exchange. Also ensure that the user profile being used is in online mode (see Set Security Settings).

## **Exchange Server and NuPoint Unified Messaging Server not synchronized (LDAP or IMAP services timeout)**

Synchronization between the Exchange server and the NuPoint Unified Messaging server may be affected if the Exchange server has been restarted or put into maintenance mode, especially if the outage is prolonged. If synchronization is not recovered and there is an LDAP or IMAP services timeout on the NP-UM server, you will need to restart the NP-UM server.

## **Deleted Voice Messages are Re-delivered**

Sometimes, synchronization is temporarily lost between the Exchange server and the NuPoint server, perhaps due to system time-out or a restart of the NuPoint UM system. If a user deletes a voice mail while the synchronization is out, that email may be re-delivered when the connection is restored.

## **Delay in the delivery of Voice Messages to a user's mailbox**

If a user's mailbox is full or of limited size, there is a delay in the delivery of voice messages. An ideal mailbox size can alleviate this issue. For an ideal mailbox size, specify the following configuration while setting up a user's mailbox:

- Maximum Connections per User – set the value to 200000
- Maximum Allowed Sessions per User – set the value to 2048
- Maximum Allowed Service Sessions per User – set the value to 2048

These are the settings recommended by Microsoft for Exchange Servers using IMAP.

### **Notes:**

1. The above-mentioned settings do not affect CPU and memory usage.
2. These settings can be applied on Exchange 2013, and 2016.

## **NuPoint Voice Messages Deleted Prematurely**

Client applications that change the MessageClass property of NuPoint voice mails in Outlook are not supported.

(NuPoint UM voice mails in Outlook have a MessageClass property of "IPM.Note.Multimedia". Client applications (like the Mitel Messaging Server) that change the message class can make NuPoint UM delete voice messages prematurely when attempting to synch with Outlook.

## ***1.4.23.6.2.3 Upgrading a System With Advanced UM***

After you perform an upgrade:

- If your system is connected to a Microsoft Exchange or Lotus Domino mail server and is configured to obtain user data from an LDAP server, confirm that the [Advanced UM Email](#) and [Advanced UM Password](#) fields are populated automatically.
- If your system is not configured to obtain user data from an LDAP server or is connected to a Google Apps mail server, the user data (email and password) must be reentered on the Web Console or Web View interface. See [Enable Advanced UM for a User Mailbox](#) for the required steps.

## 1.4.24 Visual Voice Mail Support

### Description

Visual Voice Mail is a feature of MiVoice Business software on the MiVoice Business ICP that allows you to visually interact with your voice mail on selected Mitel IP Phones. This feature enables the user to view the voice mail details (type, caller, time, duration) and view information concerning the person who left the voice mail.

For more information about Visual Voice Mail, see the *MiVoice Business System Administration Tool Help* available at Mitel OnLine.

### Conditions and Feature Interactions

- A maximum of 120 concurrent Visual Voice Mail sessions are possible to permit users to login, delete, or save their voice mail.
- A maximum of 120 audio connections to the voice mail system can be active at one time.
- A maximum of 50 IP Phones is supported.
- You are automatically logged out of the system after 5 minutes of inactivity.
- For internal calls originating from extensions that have a voice mailbox, Visual Voice Mail displays both the caller name and number. All other calls display "Unknown Caller" followed by the number (if available).
- Each user must have a NuPoint mailbox configured with a Feature Class of Service (FCOS) that contains feature bit 290 ("Unified Messaging - Web View"). To enable optional settings, ensure that the appropriate feature bit is added to the FCOS. For example, to enable "Give and Mark Urgent," add feature bit 018.
- NuPoint UM provides limited support for Visual Voice Mail message playback controls. While listening to a message, you can stop and restart it, but you cannot skip to the end, fast forward, rewind, or go to the beginning of the message. The advanced message playback controls are available only when Visual Voice Mail is implemented with an embedded voice mail system, not with NuPoint UM.

## 1.4.25 VPIM

## 1.4.25.1 VPIM - Description

**Note:**

VPIM must be configured using the **Text Console**.

The Administered Voice Profile for Internet Mail (VPIM) optional feature allows users to send voice messages from a NuPoint Unified Messaging system to other, different voice mail systems. The transfer uses the VPIM protocol, which enables voice mail systems from different vendors to communicate with each other.

The voice mail system routes incoming and outgoing messages through the Administered VPIM facility. Outgoing messages go to a pre-configured destination system. Incoming messages go to recipients on the local system. VPIM sets up the routing through information contained in the [Digits Translation Table](#) (DTA) and [Node Translation Table](#) (NTA).

On outgoing VPIM messages from NuPoint UM, the NTA contains the programming information that defines each node for routing purposes. After reading the node number from the DTA, the server reads the FQDN name and additional VPIM configuration (encoding type, prefix type, and alternate prefix) for the associated node, and then sends the message to the remote VPIM server.

For incoming messages, NuPoint UM compares the destination address to the prefix entries in the DTA. When the DTA table finds a match, it takes the necessary action according to the Absorb Cnt value and reads the node number for that prefix. If the digits that remain after being processed by the DTA match a mailbox listed in the alias file, the server places the message in the recipient's mailbox and activates a message waiting notification.

### Nodes and Prefixes

Servers that send and receive VPIM messages are called nodes. Each node is identified by a number.

Node prefixes are the leading digit of the network mailbox numbers that are associated with the node, or additional digits dialed in front of the mailbox number. Prefixes can also be used as node ID numbers. All network messages are routed by the node prefixes in the DTA.

### Absorb Count

This term refers to the number of leading digits to be stripped by NuPoint UM. For outgoing messages, the VPIM compares the destination address to the prefix entries in the DTA. When it finds a match, it strips the prefix (or leading digit(s)) from the

destination address. NPM absorbs the same number of digits indicated by the absorb count. A value of 0 passes the digits unaltered; a value of 1 or higher strips the number of digits as indicated from the front of the mailbox (destination) address.

**Alias**

The Alias file is an ordered list of mailbox extensions on the local NuPoint UM voice mail system. This file is used by VPIM to match mailboxes for routing the messages to the appropriate mailbox.

**Digits Translation Table**

The Digit Translation Access (DTA) table holds the information (mail server and node identification) that sorts or routes the messages. For example:

| Prefix | Node | Absorb | Cnt |
|--------|------|--------|-----|
| 520    | 2    | 3      |     |
| 512    | 1    | 3      |     |

**Node Translation Table**

VPIM uses a prefix configured in the NTA table for transporting the message between nodes in the network. On outgoing VPIM messages from NuPoint UM, the NTA contains the programming information that defines each node for routing purposes. After reading the node number from the DTA, the server reads the FQDN and additional VPIM configuration (encoding type, prefix type, and alternate prefix) for the associated node, then sends the message to the remote VPIM server. After receiving a message, the remote system checks the DTA and NTA tables to derive the mailbox number from the message address.

For the various VPIM nodes to successfully send and receive messages, the DTA and NTA tables at each VPIM node must contain the same information about all VPIM nodes.

To exchange VPIM messages with a remote node, set the protocol type in the NTA table for both nodes to “VPIM”.

An example of the NTA table is:


| Node Number                                 | Protocol Type | Access |
|---------------------------------------------|---------------|--------|
| 1                                           | VPIM Y        |        |
| Domain name : sanityem.inter-tel.com        |               |        |
| Encoding type: G.721 Prefix type: No Prefix |               |        |
| 2                                           | VPIM Y        |        |
| Domain name : nupoint.mitel.com             |               |        |
| Encoding type: G.721 Prefix type: No Prefix |               |        |

## 1.4.25.2 Configuration Overview

The following figures illustrate the flow of information and configuration required for VPIM messages to be sent and received.


### Sending a VPIM message from a Mailbox

The diagram below shows the configuration menus in NuPoint UM that must be set up for NuPoint UM to send VPIM messages.

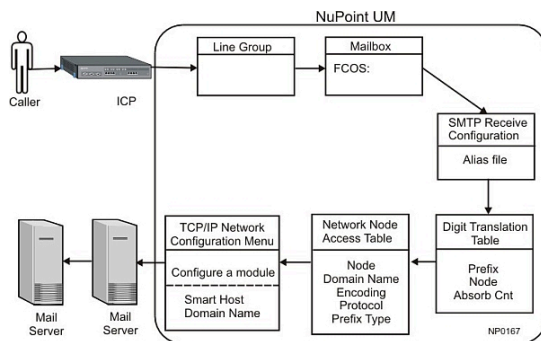

### Receiving a VPIM message and saving it to a Mailbox

The diagram below shows the configuration menus on NuPoint UM that must be set up for NuPoint UM to receive VPIM messages.

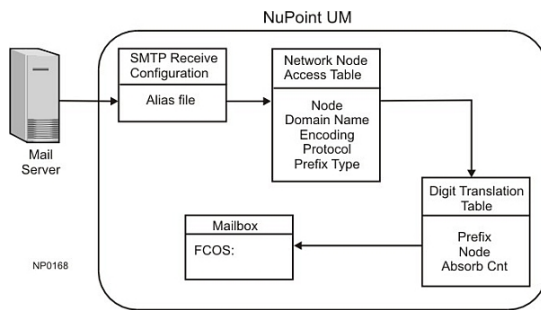

### 1.4.25.3 NuPoint-UM Configuration

Configuring VPIM includes setting basic parameters for the TCP/IP network and for mailboxes, then setting parameters that determine how the mailboxes with the VPIM feature will communicate over the network.

Before you start to configure VPIM on any node in the network, identify each node in the network and record these parameters:

- **Node Number** The number, from 2 to 8191, that identifies each node in the system; do not use 1 for any VPIM node
- **Prefix Type** Select the prefix type for each node:
  - Default: the VPIM user mailbox uses the prefix configured in the DTA table
  - No prefix: the VPIM user mailbox does not include a prefix
  - Alternate prefix: the VPIM network uses a prefix configured in the NTA table for transporting the message between nodes in the network
- **Prefix** The number, from 1 to 99,999,999,999, of the prefix for user mailboxes on this node; set in the DTA table (set the Prefix Type to D)
- **Alternate Prefix** The number, from 1 to 999,999, if a node uses the alternate prefix set in the NTA table (set the Prefix Type to A) for transporting messages within the network.

### Configure VPIM

VPIM configuration consists of the following steps (described in detail below):

1. [Configure basic VPIM parameters.](#)
2. [Configure the NTA table.](#)
3. [Configure the DTA table.](#)
4. [Configure the Dial Plan.](#)
5. [Configure the Network Queue.](#)
6. [Configure SMTP Message Reception.](#)
7. [Generate and verify the Alias File.](#)
8. [Test the VPIM Feature](#)

## Configure Basic VPIM Parameters

To use the VPIM optional feature, configure as follows:

1. Add any necessary optional feature software.
2. Set up Unified TCP/IP:
  - From the console Main menu, select **(S) System Maintenance, (R) Reconfiguration, (R) Reconfigure System, (G) Offline Menu, (B) Duplicate Configuration**, and then **(U) Unified TCP/IP**
  - Select **(M) Configure a Module**
  - Select **(V) Smart Host Domain Name** and enter the fully qualified domain name for the smart host (i.e. the company e-mail server).
3. Set the Features Class of Service (**FCOS**). By default, the FCOS is 1, which includes permissions to receive/create/send VPIM messages.
4. Set the Network Class of Service (**NCOS**). Use the NCOS function to control a user's privileges, such as answering, making, or giving voice messages across the network. To include basic VPIM message capability in any mailbox, set up an NCOS with NCOS bits 2 through 9 as shown here:

| NCOS Bit | Description                                        |
|----------|----------------------------------------------------|
| 002      | Allow user to make network messages                |
| 003      | Allow user to make urgent network messages         |
| 004      | Allow user to give network message                 |
| 005      | Allow user to give urgent network messages         |
| 006      | Allow user to answer network message               |
| 007      | Allow user to answer urgent network messages       |
| 008      | Automatic receipt on network messages              |
| 009      | Say "Remote mailbox" when playing network messages |

## Configure the NTA table

For the node for each server, determine these NTA parameters:

- **Node number** A number, from 2 to 8191, that identifies a particular node in the system. Do not use 1 for any VPIM node.
- **Protocol** V for VPIM
- **Access** Y for all nodes
- **Domain name** The Internet address, up to 255 alphanumeric characters



- **Prefix Type** Select the prefix type for the node:
  - D, default: the VPIM user mailbox uses the prefix configured in the DTA table
  - N, no prefix: the VPIM user mailbox does not include a prefix
  - A, alternate prefix: the VPIM network uses the prefix configured in the NTA table for transporting the message between nodes in the network
- **Alternate Prefix** The number, from 1 to 999,999, that is the alternate prefix if the Prefix Type is set to A.

To configure the NTA table:

1. From the Main menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance**, and then **(T) Network Node Table**.
2. Select **(C) Create new node entry** and then, when prompted, set the following parameters:
3. **Node number**: enter the **number** that identifies the node in the system.
4. **Protocol**: enter **V (VPIM Node)**
5. **Domain Name**: enter the fully qualified host name of the node, up to 255 characters.
6. **Encoding type**: enter **G**. (G.726 (formerly G.721) for VPIM-compliant communication)
7. **Select prefix to use**: enter **N (no prefix should be sent from the server)**
8. **Access**, enter **Y. (allow access)**
9. Press **Enter** to return to the Network Node Access Table Maintenance menu.

Here is a sample Node Access Table Report that includes VPIM node #3 with the address "load.bayptin.com":

```

NODE ACCESS TABLE REPORT      Wed Jan 5 03:12:45 20XX  NODE NAME  PROTO STRING  HA
RDWARE  ACCESS PARALLEL LINKS      DELAY MAX 2  VPIM      Y  Domain name : model120.bayp
tin.com  Encoding type: G.721 Prefix type: Use Default 3  VPIM      Y  Domain name : load.bayptin.com Encodi
ng type: G.721 Prefix type: Use Default 4  VPIM      Y  Domain name : model70.bayptin.com Encoding type: G.7
21 Prefix type: Use Default 104 npnet1  TCP  100.1.1.1  0 = ETHERNET Y 105 npnet  TCP 100.1.1.2  0 = ETHE
RNET Y 5 Nodes found Press any key to continue....

```

**Note:** The G.721 codec has been superseded by G.726, which is the standard codec for VPIM to use.

## Configure the DTA table

For each node, determine these DTA parameters:

- **Node Number** A number, from 2 to 8191, that identifies a particular node in the system. Do not use 1 for any VPIM node.
- **Absorb digit** The number of digits to absorb (strip from the telephone number) for a destination node. Set this to the same length as the prefix.
- **Prefix** The number, from 1 to 99,999,999,999 that is the valid prefix for this node.

To configure the DTA table:

1. From the Main menu, select **(S) System Maintenance**, **(W) Network Menu**, **(M) Network Maintenance**, and then **(D) Digits Translation**.
2. Select **(C) Create new prefix/node pairs** and enter the **number** for the VPIM node.
3. At the **Absorb digits** prompt, enter the **number** of digits to strip from the telephone number.
4. At the **Prefix** prompt, enter the prefix **number** for this node.
5. Exit to the Digits Translation menu and select **(L) List the data table** to check your information. A sample DTA table is shown here:

#### PREFIX/NODE PAIR REPORT

Tue May 25 08:54:18 20XX

Prefix Node Absorb Cnt

520 2 3

512 1 3

6 6 0

888 888 3

In this example, the prefix "520" represents remote mailboxes that have 4 digits and leading digits 520. A message sent to 5202000 has a sender address that looks something like "2000@company.mitel.com. The 520 prefix is stripped as indicated by the Absorb Count of 3.

### Configure the Dialing Plan

For more information, see [About Dialing Plans](#).

- 

- Each position or index in the Dial Plan reading left to right corresponds to a digit from 1-9 as shown below.

|                 |   |   |   |   |   |    |   |   |   |
|-----------------|---|---|---|---|---|----|---|---|---|
| Position        | 1 | 2 | 3 | 4 | 5 | 6  | 7 | 8 | 9 |
| Dial Plan Digit | 4 | 4 | 4 | 4 | 4 | N8 | 4 | 4 | 4 |

-

- The "N" indicates that the corresponding dialing plan entry represents a **Network** node (that is, VPIM). In the example above, the prefix for a remote office is "612" and the mailboxes are of 5 digits in length.

The "N8" placed at index number 6 indicates that all Network mailboxes starting with the digit "6" are considered remote network mailboxes with length of 8 digits. For example, when a NuPoint UM user forwards a voice mail message to mailbox 12345, that is located on the remote location Voice Mail 612, the NP-UM user enters 61212345 to send to the remote VPIM mailbox.

To configure the Dialing Plan:

- From the Main Menu, select **(S) System maintenance, (R) Reconfiguration, (R) Reconfigure system, (E) Modify Active Configuration, (M) Modify Application, (D) Dialing Plan Menu**.
- [Modify the dialing plan](#) to handle your node prefix plus the length of the mailboxes. You must set the dialing plan of every line group from which users will be allowed to send network messages.
- Exit the active configuration menu.

## Configure the Network Queue

The network queue parameters affect how NP Net and VPIM perform in a system. Use these settings, rather than the defaults, for optimum VPIM performance:

| Parameter                 | Explanation                                                                                                                               | Set to |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Message Count Threshold   | The minimum number of individual messages, of any type, that must arrive in a queue before that queue sends the messages                  | 0      |
| Message Waiting Threshold | The maximum time, in minutes, that any message can wait in a queue, even if the message total has not reached the message count threshold | 0      |
| Total Message Minutes     | The minimum total of speech time that must arrive in the queue before the queue sends the messages.                                       | 0      |
| Maximum Call Setup Tries  | The maximum number of calls that this node will make to the destination node to make a connection                                         | 3      |
| Call Setup Retry Interval | The time, in minutes, between attempts to establish a connection with the destination node.                                               | 2      |

To configure network queueing:

- From the Main menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance**, then **(Q) Modify Network Queueing**.

2. Set the Network Queue Time Windows for weekdays and weekends according to the guidelines for the site. For details about the Network Queue parameters, see the NP Net topic [Configure the Network Queues](#).

## Configuring SMTP Message Reception

SMTP Message Reception must be modified to set the SMTP Receive Tasks Limit to 1. This allows the server to continue processing other calls.

1. From the Main menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance, (V) SMTP Receive Configuration**, and then **(M) Modify VPIM configuration**.
2. At the **Max Number of Receivers** prompt, enter **1**.

## Generating and Verifying the Alias File

To generate the alias file:

1. From the Main menu, select **(S) System Maintenance, (W) Network Menu, (M) Network Maintenance, (V) SMTP Receive Configuration**, then **(G) Generate Alias File**. The utility automatically creates the list of prefixes with mailbox numbers that can send and receive VPIM messages.
2. Select **(V) View Alias File** and verify that all mailboxes are included. A sample alias list is shown here:

```
# aliases for VPIM accounts

vpim: "|/usr/vm/bin/vpim_rcv"

1234:"| /usr/vm/bin/vpim_rcv -a 1234"
1235:"| /usr/vm/bin/vpim_rcv -a 1235"
1236:"| /usr/vm/bin/vpim_rcv -a 1236"
1250:"| /usr/vm/bin/vpim_rcv -a 1250"
1251:"| /usr/vm/bin/vpim_rcv -a 1251"
1252:"| /usr/vm/bin/vpim_rcv -a 1252"
1253:"| /usr/vm/bin/vpim_rcv -a 1253"
1254:"| /usr/vm/bin/vpim_rcv -a 1254"
1260:"| /usr/vm/bin/vpim_rcv -a 1260"
1261:"| /usr/vm/bin/vpim_rcv -a 1261"
1262:"| /usr/vm/bin/vpim_rcv -a 1262"
1263:"| /usr/vm/bin/vpim_rcv -a 1263"
1264:"| /usr/vm/bin/vpim_rcv -a 1264"
3333:"| /usr/vm/bin/vpim_rcv -a 3333"
3849:"| /usr/vm/bin/vpim_rcv -a 3849"
```

Each time you create or delete a mailbox with VPIM privileges, you must regenerate the alias file.

### Test the VPIM Feature

When all parameters are configured and the nodes are connected, check that messages move successfully between remote mailboxes.

1. Make and send one or more messages from a mailbox on one node to mailboxes on each other node in the system.
2. Check that all messages arrived.
3. Answer each message from within the mailbox.
4. Check that each answer arrived at the originating mailbox.

## 1.4.26 Web View

### 1.4.26.1 Web View - Description

The Web View application provides an interface for managing Unified Messaging, Call Director and NP Fax features from an e-mail client or Web browser.

To use Web View, users must be licensed and configured for Unified Messaging, Call Director and/or NP Fax, and they must also have Web View configured for email or Web browser. See [Web View Configuration](#).

Compatible web browsers include:

- Microsoft Edge
- Internet Explorer
- Google Chrome
- Mozilla Firefox

Your user type determines your access to the tabs in the Web View interface:

| User Type     | Available Tabs:                                                                                                    |
|---------------|--------------------------------------------------------------------------------------------------------------------|
| UM-SMTP       | Settings                                                                                                           |
| UM - Web View | Messages, Settings, Distribution Lists, and Greetings                                                              |
| Standard UM   | Messages, Settings, Distribution Lists, and Greetings                                                              |
| Advanced UM   | Messages, Settings, Distribution Lists, Greetings and Downloads                                                    |
|               | Users can launch the Web View from the optional Unified Messaging toolbar in their Microsoft Outlook email client. |
| Call Director | Call Director                                                                                                      |
| NP Fax        | Messages, Settings and Downloads                                                                                   |

**Note:**

A UM user can also be a Call Director or NP Fax user, but a Call Director or NP Fax user does not have to be a UM user.

Web View is available in the following languages:

- North American English

- UK English
- Canadian French
- European French
- Dutch
- Latin American Spanish (NuPoint UM 4.0 and later)

## 1.5 MiVoice Office 250 Integration

### 1.5.1 Overview

#### 1.5.1.1 MiVoice Office 250 Integration Overview


NuPoint Unified Messaging (NuPoint UM) supports Session Initiation Protocol (SIP) integration with the MiVoice Office 250 via the MiCollab . NuPoint UM communicates with a single MiVoice Office 250 system over a SIP trunk. The MiVoice Office 250 communicates with NuPoint Unified Messaging through the SIP interface and consequently has access to the voice mail features. The maximum number of NuPoint 60 ports is 16. Speech Auto Attendant ports are licensed separately.

**Note:**

The MiVoice Office 250 integration is supported only on MiCollab Release 1.2 or later. The configuration for MiVoice Office 250 on NuPoint UM will fail if the NuPoint UM software is installed without the MiCollab license.

One or more SIP trunks can link NuPoint UM to the MiVoice Office 250 . NuPoint Unified Messaging receives and sends SIP messages over these trunks. Each SIP trunk consists of one or multiple SIP ports.

The diagram below illustrates the SIP trunk integration:

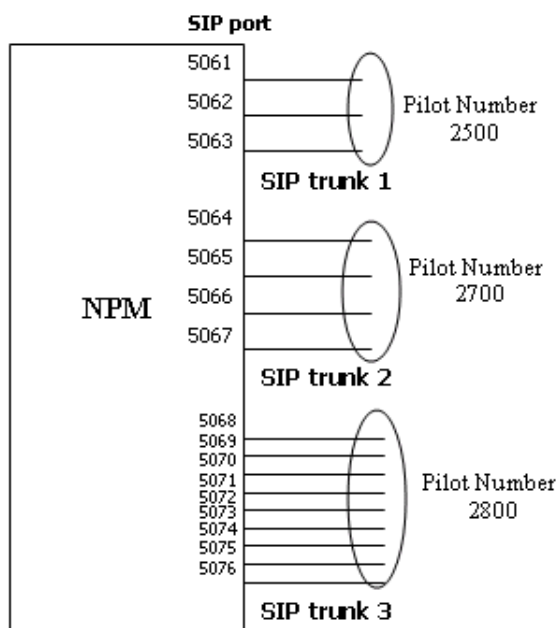

Every SIP trunk is assigned a Pilot Number. To call into NuPoint UM, the MiVoice Office 250 provides a pilot number for the endpoint users to dial. When NuPoint UM makes a trunk call to the MiVoice Office 250, it identifies itself using a pilot number. Therefore, when NuPoint UM receives an incoming call, the pilot number is used as the Called ID. When NuPoint UM makes an outgoing call, in the case of MWI, pager or external call transferring, the pilot number is used as the Calling ID.

A SIP session is established through connection to a SIP port in real-time. Each SIP port handles one call connection to NuPoint UM, thus the number of ports grouped in a SIP trunk determines the number of parallel-connections this trunk can handle at the same time. For example, if four callers on the MiVoice Office 250 simultaneously dial the pilot number 2500 (shown in the figure above), only three of these callers can be connected to NuPoint UM. This principle is applied to every voice mail call connection, whether it is inbound and outbound.

The pilot numbers on NuPoint UM are mapped to applications on the MiVoice Office 250. For example, pilot number 2500 for NuPoint UM Voice is mapped to extension 2500 for the Voice Mail application programmed on the MiVoice Office 250. In the configuration where the application is configured as a mailbox, you must associate an extension to an application as well as the pilot number used to access the application. Multiple pilot numbers can exist in the system.

To be consistent with the existing IP, Digital Media Gateway (DMG - formerly PIMG/ TIMG) integrations, a SIP trunk is reserved to be either a receiver or a sender, so it cannot perform both roles. The receiver SIP trunk will detect inbound calls and the sender SIP trunk will generate outbound calls.



All calls arriving to NuPoint UM on a SIP trunk are accepted at the fixed and predefined SIP port. This port is not configurable. The call is redirected based on the pilot number (which is the called ID in the case of an incoming trunk).

All SIP trunk calls generated by NuPoint UM include a pre-configured SIP port and a pilot number (which is the calling ID in the case of an outgoing trunk).

## Supported Functionality

The following NuPoint Unified Messaging functionality is supported with the MiVoice Office 250 SIP integration:

- Configuring a Cluster Node and SIP Channels linked to the MiVoice Office 250
- Backing up and restoring a configuration
- Answering a telephone or Speech Auto Attendant (SAA) call
- Receiving and replying to fax messages
- Playing prompts and recording messages
- DTMF recognition and collection
- Transferring calls
- Making a call to MWI, Pager or Fax connected to the MiVoice Office 250
- Record-A-Call
- Voice Mail Softkeys

## Licensing and Optioning

SIP is not a purchasable option. No special license is required for it. SIP lines or channels are licensed the same way as the DMG (formerly PIMG/TIMG) integration, and no special option will be provided.

The configuration of the MiVoice Office 250 as a cluster item is allowed if a MiCollab license is granted. Refer ***Applications > Users and Services > About UCC Licensing*** for more information on licensing.

### 1.5.1.2 Prerequisites for the MiVoice Office 250 Integration

The requirements stated below must be satisfied before NuPoint UM can be integrated with the MiVoice Office 250 via a SIP Gateway connected to IP endpoints.

1. The MiVoice Office 250 integration is supported only on MiCollab Release 1.2 or later. The configuration for the MiVoice Office 250 on NuPoint UM requires a MiCollab license. Refer ***Applications > Users and Services > About UCC Licensing*** for more information on licensing.
2. It is assumed that the SIP Gateway is running and correctly configured with IP Endpoints so that each endpoint has a registered extension.

3. Mitel Standard Linux (MSL) and NuPoint UM software must be installed and running on a computer system connected to the same physical network as the SIP Gateway. Also, full IP connectivity is assumed possible between NuPoint UM and the SIP Gateway, meaning that no security hardware or software is active.
4. MSL has been properly licensed using Mitel's Applications Management Center server (AMC). NuPoint UM features to be used or tested must be enabled in the AMC Application Record. The Application Record ID is requested and the Application Record is "activated" during the MSL installation.
5. The NuPoint UM server is mapped from the SIP gateway by a Pilot Number and configured as a SIP Trunk.
6. The security settings on the NuPoint UM server must be modified so that it is possible to establish full telephony communication between the SIP Gateway and NuPoint Unified Messaging. Follow the procedure below to modify the security settings.

### Modifying the Security Settings for NuPoint Unified Messaging

You can grant server access privileges to additional networks:

1. Log into the MiCollab server console.
2. Under **Configuration**, click **Configure Networks**.
3. Click **Add a new trusted network**.
4. In the Network Address field, enter the IPv4 or IPv6 address of the network to designate as "local".
5. In the Subnet mask or network prefix length field, enter the dot-decimal subnet mask or CIDR network prefix to apply to the Network Address. If this field is left blank, the system assigns a network prefix length of /24 for IPv4 networks or /64 for IPv6 networks.
6. In the Router field, enter the IP address of the router you will use to access the newly-added network.
7. Click **Add**.

1. **Note:** Under some circumstances, modifying the "Local Networks" will not update security settings correctly. Should call connectivity or two-way audio not appear to be initiated correctly, the following command may be issued, as a last resort, to disable the NuPoint UM server firewall through a Linux console session: **service masq stop**.

## 1.5.2 Configuration

## 1.5.2.1 MiVoice Office 250 Integration Configuration Overview

The Mitel MiVoice Office 250 and NuPoint Unified Messaging integration requires configuration of three different applications:

- MiCollab
- NuPoint Unified Messaging ( NuPoint UM )
- MiVoice Office 250

Several [prerequisites](#) must first be satisfied before NuPoint UM can be integrated with the MiVoice Office 250 via a SIP Gateway connected to IP endpoints.

To integrate NuPoint UM with the MiVoice Office 250 , the system administrator must configure a cluster node that represents the peer MiVoice Office 250 and the line group(s) that represent the SIP trunk(s). Line(s) must be added to the line group and mapped to the SIP ports.

The system administrator must configure a SIP Gateway (add a SIP Gateway as a Cluster Node) and then configure SIP trunks as line groups before calls can be made from IP Endpoints to NuPoint UM. The information entered in these steps provides NuPoint UM with SIP Gateway IP/port data and Line mapping details used to accept calls from the SIP Gateway and re-direct them to available NuPoint UM lines. When Lines are linked to a SIP Gateway Cluster Node, incoming SIP calls can be accepted and routed to available NuPoint UM Lines for SIP.

Refer to [Add a Line Group](#) for instructions to configure a SIP Gateway and to configure NuPoint Unified Messaging lines for a SIP Gateway.

Once the configuration is complete, IP endpoints will call a Pilot Number that routes to an available NuPoint UM line and will hear a greeting prompt, such as "Welcome to the message center. Please enter a mailbox number or wait."

### Constraints

- Although the NuPoint UM software system does not prevent the system administrator or installer from configuring and setting up a SIP integration that includes Digital Media Gateway (formerly PIMG, HD-PIMG, or TIMG) and the MiVoice Office 250 , this integration mix **is not supported** .
- NuPoint UM will communicate with only one MiVoice Office 250 .
- Although you can configure more than one MiVoice Office 250 node to communicate with NuPoint UM, it is not a supported configuration and many NuPoint UM features like MWI and Pager Notifications do not work with this type of configuration.
- The numbers used by the SIP interface to represent SIP ports (e.g. Port 5058 for NuPoint UM on MAS or 5060 for NuPoint UM Standalone) remain as unconfigurable data.

## External Dependencies

- The SIP component on the MiVoice Office 250 is required. Refer to the MiVoice Office 250 documentation for SIP configuration instructions.
- The MiVoice Office 250 must be configured to use the correct port for SIP communication from NuPoint UM. For NuPoint UM on MiCollab , use 5058; for NuPoint UM Standalone, use 5060.
- The configuration for MiVoice Office 250 on NuPoint UM requires a MiCollab license. Refer ***Applications > Users and Services > About UCC Licensing*** for more information on licensing.

Refer to the [MiVoice Office 250 Integration Task Summary](#) for configuration task lists for each of the applications.

### 1.5.2.2 MiVoice Office 250 Integration Task Summary

This section provides task summaries for integrating NuPoint Unified Messaging voice mail with the MiVoice Office 250 . Each summary provides a high-level list of the tasks that are required for each of the applications involved in the product integration.

For detailed integration procedures, refer to the *Mitel MiVoice Office 250 and NuPoint Unified Messaging Integration Guide* available at Mitel OnLine.

Task summaries are provided below for the following applications:

- [MiCollab](#)
- [NuPoint Unified Messaging](#)
- [MiVoice Office 250](#)

## MiCollab Installation Summary

The table below summarizes the installation and configuration tasks necessary on the MiCollab server.

Refer to the *MiCollab Installation and Maintenance Guide* for detailed procedures.

| TASK                                                               | COMMENTS                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Install Mitel Standard Linux (MSL) and NuPoint UM software.        | Install from boot-up on the MiCollab server connected to the same physical network as the MiVoice Office 250 . Also full IP connectivity is assumed possible between NuPoint UM and the SIP Gateway, meaning that no security hardware or software is active. |
| Install application blades from CD.                                |                                                                                                                                                                                                                                                               |
| Install Text-to-Speech blade from the Server Manager Blades panel. |                                                                                                                                                                                                                                                               |
| Reboot the MiCollab server.                                        | Make sure to select the EL version of the kernel.                                                                                                                                                                                                             |

| TASK                                                                                                  | COMMENTS                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Check that MSL has been properly licensed using Mite'l's Applications Management Center server (AMC). | NuPoint UM features to be used or tested are enabled in the AMC Application Record. The Application Record ID is requested and the Application Record is activated during the MSL installation. |

## NuPoint Unified Messaging Configuration Summary

The following configuration tasks are required for NuPoint Unified Messaging voice mail to integrate with the MiVoice Office 250 .

A documentation reference is provided for each of the configuration tasks.

| TASK                                                                                                                                                                           | COMMENTS                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Verify that the SIP Gateway is running and correctly configured.                                                                                                               | This provides NuPoint UM with SIP Gateway IP/port data and Line mapping details used to accept calls from the SIP Gateway and redirect them to available NuPoint Lines. SIP endpoints will be able to call a Pilot Number that will route to an available NuPoint UM line and hear a greeting prompt, such as "Welcome to the message center. Please enter a mailbox number or wait." |
| Verify that the security settings on the NP-UM server have been modified so that it is possible to establish full telephony communication between the SIP Gateway and NuPoint. | Security modifications are completed within the MSL Server Console.<br><br>See <a href="#">Modifying the Security Settings on the NuPoint Unified Messaging Server</a> for instructions.                                                                                                                                                                                              |
| Configure/Add a SIP Gateway as a Cluster Node to NuPoint UM.                                                                                                                   | This is necessary to set up network mappings for SIP calls.<br><br>Refer to <a href="#">Add a Network Element</a> for instructions to configure a SIP Gateway.                                                                                                                                                                                                                        |

| TASK                                                       | COMMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Configure NuPoint UM Line Groups, Ports, and Dialing Plan. | <p>Each NuPoint UM line is dedicated to handle one call at a time. Therefore, the number of lines defined in NuPoint UM is the maximum number of simultaneous calls possible. NuPoint UM can have up to 120 lines. A Line Group is a collection of one or more NuPoint UM lines, each mapped to a cluster node. When lines are linked to a SIP Gateway cluster node, incoming SIP calls can be accepted and routed to available NuPoint UM lines for SIP.</p> <p>Refer to <a href="#">Add a Line Group</a> for instructions to set up NuPoint Unified Messaging lines for a SIP Gateway.</p> |
| Configure basic voice mail and mailboxes for NuPoint UM.   | <p>Add users, phones, mailboxes, and the Speech Auto Attendant.</p> <p>After the configuration is completed, an endpoint that calls in to NuPoint UM with an extension that matches the mailbox number in the created mailbox will be prompted to log on. For example, if mailbox 1000 is created, the Endpoint assigned to extension 1000 may call NuPoint UM and hear "Hello mailbox 1000. Please enter your passcode."</p>                                                                                                                                                                |
| Set up and initialize the Administrator mailbox.           | <p>The Administrator mailbox is set up by default (under mailbox number 998) during the NuPoint UM software installation. It can be used to record System Message Prompts and program additional user mailboxes.</p> <p>See <a href="#">Managing Mailboxes</a></p>                                                                                                                                                                                                                                                                                                                           |

| TASK                                                                                                                             | COMMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Direct callers to NuPoint UM mailboxes on Call No Answer.</p> <p>Enable message notifications.</p>                            | <p>Call No Answer scenarios must be correctly configured through the SIP Gateway/SIP Endpoint Call Forwarding options. In general, when Call No Answer is detected at the SIP Endpoint, the call should be forwarded to the NuPoint UM Pilot Number (Extension) as "Call Forward Not Available." It is assumed that the Endpoint Extension forwarding the call matches a mailbox number programmed in NuPoint UM. If this is the case, when a forwarded call is received by NuPoint UM, a prompt will indicate that the recipient is not available and ask the caller to leave a message.</p> <p>Check that message notifications are set up at the mailbox level. Each mailbox may be set up for two notification types concurrently.</p> <p>Refer to <a href="#">Configure a Mailbox for Paging</a>.</p> <div data-bbox="857 863 1446 1205"> <p><b>Note:</b></p> <p>When a Message Delivery Pager Notification Type is enabled, the receiver of the Notification Call must speak within five seconds for NuPoint UM to provide message information and options. Otherwise, NuPoint UM will consider the Notification Call to be a failure.</p> </div> |
| <p>Configure Distribution Lists.</p>                                                                                             | <p>Distribution lists allow a mailbox user to send messages to multiple mailboxes in one step. Distribution lists may be configured in the Web Console or in the Web View interface.</p> <p>Refer to <a href="#">Managing Distribution Lists</a>.</p> <p>Refer to the <i>Web View Help</i> for configuration instructions through the web view interface.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p>Configure Line Groups voice mail, MWI notifications, and Pager Notifications if this functionality is used in the system.</p> | <p>Refer to Add a Line Group.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

| TASK                                                                                                                         | COMMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Configure Line Groups for Speech Auto Attendant, Fax , and NuPoint Receptionist if this functionality is used in the system. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Configure NuPoint Receptionist if this functionality is used in the system.                                                  | Refer to NP Receptionist.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Create call flows with Call Director.                                                                                        | <p>Create customized call flows to handle incoming callers with the NuPoint UM Call Director. Before any Call Director call flow may be created, the Call Director User Interface must be enabled within associated Line Groups.</p> <p>Refer to the <i>Call Director Help</i> for call flow creation.</p>                                                                                                                                                                                                                                                                                     |
| Configure Classes of Service (COS).                                                                                          | Each mailbox created in NuPoint UM is assigned a set of values that define features, limitations and restrictions. These attributes are defined as three Classes of Service, called Feature Class of Service (FCOS), Limits Class of Service (LCOS) and Restriction Class of Service (RCOS). Default classes already exist in NuPoint and are applied to new mailboxes automatically. However, changing privileges for a user requires an administrator to apply different classes to a mailbox. New classes definitions are often required to define a specific set of attributes adequately. |

## MiVoice Office 250 Configuration Summary

The following list provides a configuration summary of what to configure on the MiVoice Office 250 for NuPoint UM.

Refer to the *MiVoice Office 250 Features and Programming Guide* for detailed procedures.

| TASK                           | COMMENTS                                                                                                                                                                                             |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Create SIP Peer Voice Mail.    |                                                                                                                                                                                                      |
| Specify configuration options. | <p>The following information is required:</p> <ul style="list-style-type: none"> <li>• IP address</li> <li>• Port number</li> <li>• Call configuration</li> <li>• Maximum number of ports</li> </ul> |
| Configure Group Lists.         |                                                                                                                                                                                                      |
| Configure Mailboxes.           |                                                                                                                                                                                                      |



| TASK                                                                                                 | COMMENTS                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Configure IP Call Configuration.</p> <p>Create and configure SIP Peer Voice Mail Application.</p> | <p>The following configuration is required:</p> <ul style="list-style-type: none"> <li>• Set "Supports RTP Redirect" field to <b>No</b>.</li> <li>• Set "DTMF Encoding Settings" field to <b>RFC 2833</b>.</li> <li>• Set "Audio Frames/IP Packet" field to <b>2</b>.</li> <li>• Set "Fax Detection Sensitivity" field to <b>0</b>.</li> <li>• Set "Fax Encoding setting (Fax Transmission)" field to <b>G.711 Mu-Law</b>.</li> </ul> |

### 1.5.3 MiVoice Office 250 Integration Troubleshooting

The following sections provide specific information on SIP feature interactions that may help to troubleshoot some common SIP problems. Also refer to [Integration Prerequisites](#) for additional information.

#### SIP Feature Interactions

##### Clustering

The SIP subsystem on NuPoint UM communicates to only one cluster node of the MiVoice Office 250 . If there is more than one MiVoice Office 250 system installed in a cluster, the MWI and pager calls may not be directed to the correct MiVoice Office 250 system.

##### Call Redirection

All calls that arrive on NuPoint UM are made to the same location. The SIP subsystem on NuPoint UM will redirect every incoming call to an appropriate line configured as a SIP port.

For example, when NuPoint UM receives a voice mail call at a reserved and fixed SIP port, NuPoint UM will redirect this call to one of the free ports in the SIP trunk group.

##### Validation of Incoming Call

In order for the SIP subsystem on NuPoint UM to accept an incoming call, this call must have the correct IP address of the MiVoice Office 250 and a correct Pilot Number. In addition, the call must arrive on the correct port for SIP communication (5058 for NuPoint UM on MAS or 5060 for NuPoint UM Standalone).

A call is rejected if validation fails.

### Answering a Call

The SIP subsystem on NuPoint UM uses the called ID (i.e. pilot number of a call) to select a line pre-configured for the line group identified by the given pilot number.

A busy reply is given if all lines in this line group are busy.

### Generating a Call

The SIP subsystem on NuPoint UM uses the pilot number configured for a specific outgoing line group as the calling ID and send the call via a free line in the group to a fixed location on the MiVoice Office 250.

### Lighting MWI

NuPoint UM provides the MiVoice Office 250 with the extension number of an endpoint and the indication for light on or off.

### Media Connection

During the set up of a pager call, the MiVoice Office 250 can negotiate with NuPoint UM for a standard DTMF payload type that is sent from NuPoint UM.

There is no specific change required for the current RTP subsystem in order for it to send and receive audio including DTMF to and from the MiVoice Office 250 .

### MiCollab Licensing

The MiVoice Office 250 integration is supported only on MiCollab Release 1.2 and higher. The configuration for the MiVoice Office 250 on NuPoint UM will fail if the NuPoint UM software is installed without the MiCollab license. Refer ***Applications > Users and Services > About UCC Licensing*** for more information on licensing.

## 1.6 Call Director

### 1.6.1 Getting Started

#### 1.6.1.1 About Call Director

Call Director is an optional feature that adds powerful call-processing capabilities to your NuPoint Unified Messaging™ (NP-UM) system.

With Call Director, you can create automated attendant and call processing applications, known as *call flows*, for your organization, for departments within your organization, and for individual mailboxes and extensions.

Call Director is an optional feature that adds powerful call-processing capabilities to your NuPoint Unified Messaging (NP-UM) system. With Call Director, you can create an automated attendant application (known as a *call flow*) to handle your calls when you can't answer personally.

A call flow is a collection of call-processing *actions* programmed by the call flow owner to control how an incoming call is handled. Call flow owners can be either the end user of the phone, or the System Administrator. The end user programs personal call flows, which are associated with their own voice mailboxes. The Administrator can program corporate call flows which are applied to line groups, and can also add, modify and delete personal call flows.

Call flows actions direct NuPoint Unified Messaging to:

- Play a message,
- Perform a call transfer (blind, supervised, or screened) to an extension or external phone,
- Forward a call to a specified voice mailbox,
- Send a page or a text message,
- Send the caller to the dial-by-name application, or
- Hang up.

Without Call Director, NuPoint Unified Messaging simply sends an incoming call to the called person's voice mailbox.

There are two types of users associated with Call Director: Regular and Advanced.

A **Regular user** is defined as a user who has an LCOS assigned to the mailbox with a template assigned to the LCOS. A Regular user has the ability to customize an assigned call flow through the Web View interface.

An **Advanced user** is defined as a user who has an LCOS assigned to the mailbox with no template assigned to the LCOS. An Advanced user can create a call flow from scratch through the Web View interface.

The Call Director functionality includes a set of templates that can be assigned to a mailbox or line group. There are two sets of templates: system templates and user-defined templates.

**Note:**

Only System Administrators are able to assign templates to LCOS or LCOS to mailboxes. Advanced users can use an existing template as the start of the creation of a call flow.

There are five system templates provided with the Call Director functionality. These templates can be used as a starting point when creating a call flow. Additional templates may have been created by the System Administrator and are also available for the call flow. See [Starting with a template](#) to use an existing template for your call flow.

Refer to the Call Director Templates section of the *Web Console Help* for more information about creating, editing, deleting, importing and exporting templates.

Call Flow Reports can be generated from the **Reports** menu of the call flow page. The Call Flow Report contains records of each call and how it was handled.

See:

[About Call Flow Reports](#)

[Viewing a Call Flow Report](#)

[Resetting a Call Flow Report](#)

## Managing Call Director Settings

The global configuration settings and call flows for users and line groups are now managed through the Web Console interface. Refer to the Call Director section of the Web Console Help for more information on managing Call Director settings.

### 1.6.1.2 About the NuPoint UM Documentation Suite

To access the NuPoint Unified Messaging (UM) guides (in .PDF format) and the System Administration Help file, go to Mitel Document Center and log in. You must be a registered user to access Mitel Online.

The NuPoint UM documentation set includes the following components:

#### General Audience

General Information Guide:

- This guide includes general information on systems architecture, resiliency, feature descriptions, licensing, and geographic availability and provides an overview of administration and maintenance.

## Installers

Technician's Handbook:

- This guide includes information on hardware and software requirements, platforms and configurations, installations, basic maintenance, upgrades, data migration, configuring MSL, and trouble shooting systems and features.

Engineering Guidelines

- This guide includes information on system capacities, system requirements, and network engineering.

## Administrators

System Administration Help (includes Call Director for the Administrator):

- The help file includes information on post-installation instructions, system administration and maintenance, configuring and managing NuPoint UM and optional features, and troubleshooting Advanced UM.

## End Users

Web View Help

- This Help file includes information on the features that are available to users through the web client interface. It includes configuration information for end user settings and describes unified messaging features.

Messaging User Guide

- This guide includes information on setting up and using voice mailboxes, managing voice and email messages, using PCs to receive and manage messages, and the record-a-call, fax, and speech auto attendant features.

Call Director Web Help

- This help file includes information on configuring automated attendant call flows to handle your calls when you can't answer them personally.

Mitel TUI Quick Reference Guide

- This one-page document explains how to access voice mailboxes and identifies telephone user interface (TUI) main menu options.

## Mitel Online

All Mitel product documentation is available at Mitel Document Center.

## Accessing Documents and Help Files

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Product Documentation**.
3. In the right pane, select **Product Documentation**.
4. Point to **Messaging** and click **NuPoint Unified Messaging**. A list of documents intended for System Administrators is displayed.
5. Select a document from the list or select **Show End User Documents** or **Show Archived Documents** to access end user or archived documents.

### 1.6.1.3 What's New in This Release

For a list of new MiCollab functionality, see the [MiCollab What's New Guide](#) on the Mitel Customer Documentation site.

### 1.6.1.4 About the Call Flow Page

A call flow is created by combining call-processing actions. These actions are executed when a call is directed to a mailbox or line group. The programming of the action determines if and how the call is treated.

The following call flow actions are available:

- Override
- Schedule
- Message
- Menu
- Blind Transfer
- Supervised Transfer
- Screened Transfer
- Alternate Transfer
- Voicemail
- Dial-by-Name
- Internal/External call handling
- Caller ID
- Daily Greeting
- Message Center

Most actions have a *result*. For example, a [Supervised call transfer](#) (the action), has three possible results depending on whether the destination receiving the transfer is busy, not answering, or does not exist. A [Blind call transfer](#) action on the other hand has no result because it doesn't matter whether the call succeeds (i.e., is answered by the

call flow owner) or fails (i.e., is not answered by either the call flow owner or the call flow owner's voice mailbox).

## Parts of the Call Flow Page

The Call Flow page is divided into three main windows: Call Flow Display, Properties, and Results.

### Call Flow Display

This window displays the current structure of the call flow, showing how the results of each action flow into subsequent actions.

You can click on an action to select it and view its assigned properties and results.

You can expand and collapse the branches of the call flow by clicking on the + and - signs on the left of the call flow tree.


**Note:** When an action is used more than once in a call flow, each subsequent instance is an *alias* of the original. Aliases inherit the properties of the original and are identified by an underline.

To create a call flow with multiple instances of an action, each with unique properties, assign the actions different names.

A set of menus at the top of the call flow page allows you to perform such tasks as editing the call flow, recording greetings, or viewing reports.

#### **Note:**

These menus change depending on the type of user privileges that are assigned to your mailbox.

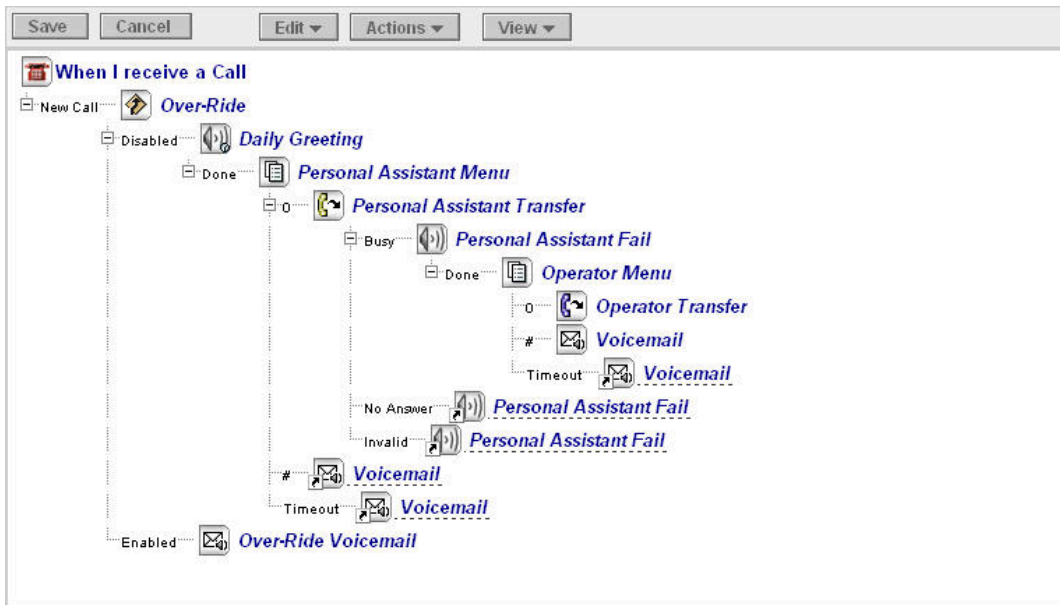

## Properties

The properties belonging to the selected action are displayed and modified in this window. All actions have a name property, followed by a set of action-specific properties.

### Daily Greeting Properties

Name:  \*

Today's Daily Greeting:  Not Recorded

Default Daily Greeting:  Not Recorded

Note: You can record the audio for this action by dialing into your mailbox and pressing the \* key. Then follow the instructions.

## Results

This window displays the results for the selected action in the Call Flow and links for changing the results. Modifying action results here causes the call flow display to update to reflect the new flow.

| Results for <i>Operator Menu</i> |                                                   |
|----------------------------------|---------------------------------------------------|
| Result                           | Destination Action                                |
| 0                                | <a href="#">Blind Transfer: Operator Transfer</a> |
| 1                                | <a href="#">Retry</a>                             |
| 2                                | <a href="#">Retry</a>                             |
| 3                                | <a href="#">Retry</a>                             |
| 4                                | <a href="#">Retry</a>                             |
| 5                                | <a href="#">Retry</a>                             |
| 6                                | <a href="#">Retry</a>                             |
| 7                                | <a href="#">Retry</a>                             |
| 8                                | <a href="#">Retry</a>                             |
| 9                                | <a href="#">Retry</a>                             |
| #                                | <a href="#">Voicemail: Voicemail</a>              |
| *                                | <a href="#">Retry</a>                             |



## 1.6.1.5 About the Configuration Page

The Configuration page contains a number of Global settings that you can alter to control the behavior of individual call flows. For instance, you set call transfer sequences, valid extension lengths, and the destination for calls transferred to the attendant.

The Global settings govern the operation and programming of all newly created unmodified call flows. Unless the Administrator intentionally modifies a specific call flow, the entries in the Configuration page govern that call flows's **default** settings. Any changes made to these settings in individual call flows always supersede the Global settings.

To open the Configuration page:

- In the navigation tree, click **Call Director**, and then click **Configuration**.
- Select the Line Group to configure and click **Edit**.

After making changes on this page, ensure that you click **Save** to save them.

The following table lists the call flow parameters that you can manage on the Configuration page:

| Parameter Name      | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                            |
|---------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GENERAL PROPERTIES  |                           |                                                                                                                                                                                                                                                                        |
| Attendant Extension | 0                         | Specifies the extension of the local attendant. This parameter is used for call transfers where the user has specified the attendant's extension as the call transfer destination.<br><br>Change this value only if your main attendant's extension is other than "0". |
| DTMF Timeout        | 5                         | Specifies the length of time a caller has to press keys for a Menu action.                                                                                                                                                                                             |

| Parameter Name        | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Loop Count            | 10                        | <p>Specifies the maximum number of times an action in a call flow can be re-entered during the call. After the maximum number is exceeded, the call is disconnected.</p> <p>A simple example of a loop is when a Menu action includes an option to repeat the menu prompts. The key the repeats the prompts can only be pressed the number of times set for Loop Count, at which point the call will automatically disconnect.</p> |
| Max. Extension Length | 4                         | Specifies the maximum number of digits that a mailbox extension can contain.                                                                                                                                                                                                                                                                                                                                                       |

| Parameter Name | Value<br>(default = <b>bold</b> ) | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Menu Dial Plan | vvvvvvvv                          | <p>Specifies the global dial plan for all menu actions in all call flows. The dial plan must always contain 9 character positions. The positions correspond to the leading DTMF digits 1 to 9. The value in each position represents the total number of digits that will be collected when that leading digit is pressed (including the leading digit itself). A 'v' in any position means that the number of digits collected in total or to follow is variable. The Maximum Digit and Timeout properties for the menu govern when digit collection stops.</p> <p>For example, the dial plan vv4vvvvvv means that for leading digit 3, four digits will be collected in total (including the leading digit 3), and for leading digits 1,2,4,5,6,7,8,and 9 the number of digits to follow is variable.</p> <p>Leading digits *, #, and 0 always permit a variable number of digits to follow, and so they are not represented in the dial plan.</p> |

| Parameter Name       | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time Until No Answer | 20                        | <p>Applies to transfer sequences that tell Call Director to supervise the call for answer. Call Director waits the indicated number of seconds before reconnecting the caller if the called number does not answer. Maximum is 60 seconds.</p> <p>The Time Out setting for an Alternate Transfer overrides this Time Until No Answer setting.</p> |

| Parameter Name       | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Forward Override FAC | n/a                       | <p>This is the Feature Access Code (FAC) that is programmed into the PBX to override forwarding. Call Director will use this value when performing a supervised or screened transfer to a phone from a call flow. If this value is not set, then the transfer target may forward calls due to a busy or no-answer condition, and Call Director will not be able to pull the call back for continued processing of the busy or no-answer condition in the call flow.</p> <p>This setting is only applicable to NP-UM systems that are integrated with Mitel MiVoice Business series PBXs. The value in the Call Director configuration must match the FAC setting in the MiVoice Business PBX, and all networked PBXs must have the same setting. Furthermore, the MiVoice Business Class of Service applied to the NP-UM ports must have Call Forward Override enabled.</p> |

| Parameter Name               | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hook Flash FAC               | n/a                       | <p>This is the Feature Access Code (FAC) that is programmed into the PBX to perform a single trunk flash.</p> <p>Call Director uses this value to initiate a hook flash on an outgoing trunk. The value that you enter in this field is the FAC programmed on the MiVoice Business ICP PBX to perform a single trunk flash (Trunk Single Flash).</p> <div> <p><b>Note:</b></p> <p>Note: In general, the NuPoint Unified Messaging system does not support Feature Access Codes (FACs). The exceptions are "Forward Override" and "Hook Flash", which NuPoint supports in Call Director only.</p> </div> |
| TRANSFER SEQUENCE PROPERTIES |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Parameter Name      | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reconnect Reject    | NS                        | <p>When a screened call is rejected by the called party, reconnect the original caller with this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (NS) = start a new activity without going off-hook, and then perform a switch hook flash, no wait required.</p>                                   |
| Supervised Transfer | S+XG                      | <p>When transferring a call to another number, and answer supervision is required, use this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (S+XG, where X is the target extension of the call flow) = Switch hook flash, call target extension, wait for for a voice or computer tone answer.</p> |

| Parameter Name     | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                   |
|--------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attendant Transfer | S+X                       | <p>The transfer sequence used when transferring a call to the Attendant. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (S+X where X is the attendant extension) = switch hook flash, call the attendant.</p>                                                                         |
| Reconnect Busy     | NS                        | <p>When a transfer to a number encounters a ring-no-answer, reconnect the original caller with this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (NS) = start a new activity without going off-hook, and then perform a switch hook flash, no wait required.</p> |
| Blind Transfer     | S+XH                      | <p>When transferring a call to another number, and no answer supervision is required, use this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (S+XH where X is the target extension of the call flow) = switch hook flash, call target extension, hang up.</p>     |



| Parameter Name    | Value<br>(default = bold) | Description                                                                                                                                                                                                                                                                                                                   |
|-------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reconnect Invalid | NS                        | <p>When a transfer to a number encounters an invalid tone, reconnect the original caller with this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (NS) = start a new activity without going off-hook, and then perform a switch hook flash, no wait required.</p>  |
| Reconnect RNA     | NS                        | <p>When a transfer to a number encounters a ring-no-answer, reconnect the original caller with this transfer sequence. The sequence is comprised of characters from the Dial String Table.</p> <p>The default (NS) = start a new activity without going off-hook, and then perform a switch hook flash, no wait required.</p> |

## 1.6.2 Getting Help

### 1.6.2.1 Finding online Help Quickly

This online Help system provides you with a number of ways to find information quickly:

| To search         | Use this feature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| By topic          | The Contents function takes you directly to the information you need. This function provides you with a complete list of the main topics in the online Help system. To open a book in the list, double-click the book. To choose a topic, click the topic name. When you click a topic in the list, the online Help system takes you directly to the relevant information.                                                                                                                                                            |
| By word or phrase | The Search function is a handy feature for finding a particular word or phrase across all topics in the online Help system. To access the Search function, click Search, and then enter a word or phrase that relates to the subject you want more information about. The Search function will then link the subject you've specified to the relevant topic(s). At this point, you can select the topic that's most likely to have the information you're looking for. This may be the quickest way to find the information you need. |
| By index          | The online Index works like an index in a book, except it's faster! To look for an entry in the online Index, click Index, and then enter the word you're looking for into the text box that appears just below Index. As you type, matching entries will be highlighted. To see the corresponding information, click on the corresponding topic that appears.                                                                                                                                                                        |

## 1.6.2.2 Accessing Documentation, Release Notes, Articles, and Downloads

The following sections detail how to access specific NuPoint UM documents from Mitel Document Center.

### Documents and Help Files

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Product Documentation**.
3. Click the **Product Documentation** link.
4. Point to **Messaging** and click **NuPoint Unified Messaging**.
5. A list of documents intended for System Administrators is displayed. Select a document from the list or select **Show End User Documents** or **Show Archived Documents** to access end user or archived documents.

### The Qualified Hardware List

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Product Documentation**.
3. Click the **Product Documentation** link.
4. To search for a document, press **CTL + F**.

5. To access the Mitel Standard Linux Qualified Hardware list, type **MSL** in the **CTL + F** search box.

## Product Release Notes

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Mitel Knowledge Base**.
3. Click **Mitel Knowledge Base**.
4. In the **Product** list, select **Mitel NuPoint UM IP** (Standard Edition).
5. Under **Article Type**, select **Release Notes** and click **Search**.

## Knowledge Base Articles

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Mitel Knowledge Base**.
3. Click **Mitel Knowledge Base**.
4. In the **Product** list, select **Mitel NuPoint UM IP** (Standard Edition).
5. Under **Article Type**, select the type of article to be viewed.
6. Specify other search parameters to narrow your search and click **Search**.

## Software Downloads

1. Log in to Mitel OnLine.
2. Point to **Support** and then click **Software Downloads**.
3. Select the appropriate Mitel NuPoint UM link.
4. Click the download link for your selected release and follow the instructions on the software download page.

## 1.6.2.3 Contacting Mitel

Mitel Networks Corporation

World Headquarters

350 Legget Drive

Kanata, Ontario

Canada K2K 2W7

Telephone: 613-592-2122

Fax: 613-592-4784

Internet: [http:// www.mitel.com](http://www.mitel.com)

## 1.6.2.4 Disclaimer, Trademarks, Copyright

### Disclaimer

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Networks Corporation ( MITEL®). The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes.

### Trademarks

NuPoint Unified Messaging is a trademark of Mitel Networks Corporation.

Mitel is a registered trademark of Mitel Networks Corporation.

Other product names mentioned in this document may be trademarks of their respective companies and are hereby acknowledged.

### Copyright

®, TM Trademark of MITEL Networks Corporation

© Copyright 2019, MITEL Networks Corporation

All rights reserved

## 1.6.3 Call Flow Examples and Tutorials

### 1.6.3.1 Personal Call Flow Example

Penny Graham is a sales manager at ACME Widgets. She travels frequently and is rarely at her desk. When she happens to be in the office she is normally on the phone. Her phone (extension 1234) is forwarded to her voice mailbox if she does not answer or is on another call. Penny's specific call handling requirements are as follows:

#### Penny's Requirements

1. If I am temporarily out of the office or I am traveling, tell callers to press a key to transfer to John, my secretary. If he doesn't answer his phone, he may be out too, so

put the caller into my voice mailbox. If he is at his desk but his phone is busy, put the caller into his voice mailbox. He will get the message faster than I will.

2. Sometimes, I need to be reached at home, but I don't want to give out my home number. If someone calls my extension and I don't answer, let them press a key that will transfer them to my home number. I only want people to try me at home until 11:00 P.M. Mondays through Thursdays. Don't let anyone call me on Friday nights. Saturday and Sunday during the day are OK.
3. Whenever I am paged because someone has left me a message, first I have to make a call to my voice mailbox to find out who called, then I have to place another call once I have their return phone number. Just let people page me directly and enter their callback numbers so I don't have to keep calling my mailbox. Of course, you should never tell a caller my pager number.
4. Sometimes, even when I'm on the road, people need to talk to me live. I don't always get around to checking my messages. Is it possible to set something up so that I can enter the telephone number of the site I'm at and have my calls transferred there? Then, I can just record something like "To reach me while I'm on the road, press [5]." ( P.S. I'll need to be able to change the telephone number from wherever I am.)
5. Sometimes I can't be interrupted by phone calls if there is a crisis. I've tried forwarding my phone to voice mail, but if my children call they won't be able to get through. Isn't there a way that I can let some people ring my extension and not others?

## Penny's Call Flow Solution

Here is Penny's Call Flow:

"Hello. This is Penny Graham. I'm not available right now, your call is important to me.

To speak with John, my secretary, press [1];

To leave me a voice message, press [2], or stay on the line. *If you would like to speak with an operator, press [0] at any time.."*

Both internal and external callers will hear this recording. However, some of Penny's colleagues know that they can press 8 (not mentioned in the recording) for additional options:

"Hello. You have reached my personal call list.

To transfer to my pager, press [2] and enter your callback number;


Stay on the line or press [0] to leave me a voice message."

In this example, callers dialing Penny's extension number are forwarded to NuPoint Unified Messaging if she is on the phone or does not answer. Instead of going directly to her voice mailbox, callers reach Penny's Call Flow. This gives callers the opportunity to try to speak with someone else (always a good alternative) rather than forcing everyone to either hang up or leave a message.

Penny has complete control over who can reach her and when. She can be accessible to her colleagues at the time and days of her own choosing, and still keep her home and pager numbers private.

Penny recorded a greeting ("Hello. This is Penny Graham. I'm not available right now..."), and a menu ("To speak with John, press [1] ...") in her own voice. She (or the NuPoint Unified Messaging Administrator) programmed each key to transfer to a specific extension, outside telephone number, pager number or voice mailbox. A schedule was also set up so that she would not be disturbed at all hours. To address her occasional requirement that she not be interrupted by phone calls unless they are from her kids, an override was put in that permits only calls from selected numbers (home and school for example) to ring her phone.

### Show Penny's Call Flow

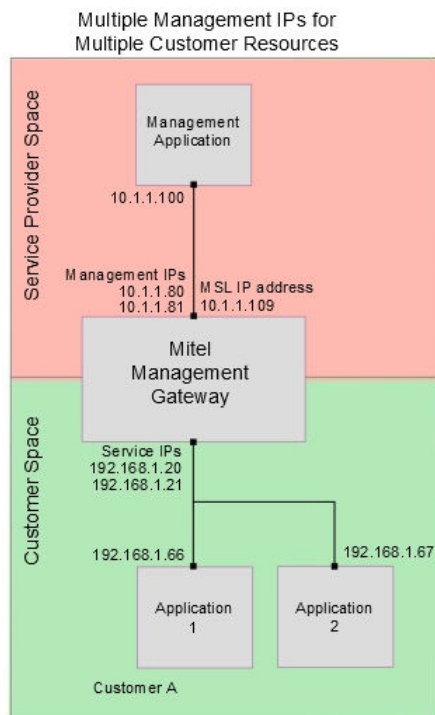

### Explain how the Call Flow works

The following explanation should help you visualize a caller's path through a personal call flow. The call flow handles incoming calls directed to Penny's voice mailbox. It includes 12 unique actions in the order in which they are executed.

#### Call Flow Sequence

When a new call arrives, check the Override setting to see whether it is enabled or not.

If Override is enabled, perform a Supervised Transfer to Secretary (John).

If the Override is disabled, evaluate Penny's Schedule settings.

During off-hours, send the call to My Voicemail.

During on-hours, play the caller Penny's greeting message (**My Greeting**):

"Hello. This is Penny Graham. I'm not available right now,  
but your call is important to me."

Then play the **Main Menu**:

"To speak with John, my secretary, press [1];

To leave me a voice message, press [2], or stay on the line.

If you would like to speak with an operator, press [0] at any time.."

Key [1] does a Supervised transfer to John's extension. John's extension is not call-forwarded busy or no-answer, so Penny's call flow can control the transfer. On a busy or no-answer at 5678, Call Director hook-flashes to get the caller back and moves the caller either into mailbox 5678 (busy) or 1234 (on a no-answer).

Key [0] transfers to the operator.

Key [2] or remaining on the line moves the caller to Penny's voice mailbox

Penny's staff knows to press [8] if they really need to reach her. Key [8] moves the caller to Penny's **Personal Call List Menu**:

*"Hello. You have reached my personal call list*

To try and reach me at home after hours, press [1];

To transfer to my pager, press [2] and enter your callback number;

If I'm traveling, and it's important that you reach me directly, press [5]

Stay on the line or press [0] to leave me a voice message."

Key [1] transfers to Penny's home phone number. NuPoint Unified Messaging automatically performs a hook switch flash to get dial tone, dials 9, pauses one second, then dials the number. The call is supervised for 20 seconds (Penny's home answering machine picks up calls after 25 seconds). If Penny's home phone rings no answer, or is busy, the caller is reconnected and continues in the call flow to hear the menu again (retry count is set to 5). This way the caller can try another option on the same phone call.

Notice the small arrow at the bottom left of the My Voicemail icon, . This is called an alias and it means that the No Answer result of the supervised transfer goes to the same Voicemail action as the Off-hours result of the schedule action. You will normally see many aliases throughout a call flow when more than one action result leads to the same subsequent action.

Key [2] transfers the caller to Penny's outside pager number. NuPoint Unified

Messaging performs a switch hook flash, gets a dial tone, dials 9 (for an outside line), pauses one second, then dials 1-800 and the pager number (789-1234). After the

## 1.6.3.2 Corporate Call Flow Example - Main Auto Attendant

ACME's Vice President of Voice Services submitted the following list of requirements for ACME's main automated attendant application:

### ACME Main Automated Attendant Requirements

1. Anyone calling our main telephone number should be greeted with a short, professional recording telling the caller to dial an extension or to press a single key for the Sales, Shipping or Accounting departments. If the call is from a rotary phone, send them to the operator as quickly as possible.
2. If they do not know the extension number, allow the caller to spell out the person's name to find the extension number. The President and I do not want, under any circumstances, a caller to be able to find out what our extension numbers or voice mailbox numbers are. Incidentally, anyone dialing either extension should be routed to our respective secretaries.
3. Anyone calling a Department's main number directly should reach that department's automated attendant. (I don't want to have to dedicate lines in the system for this.) You should know that the Shipping department is working two shifts, including a full night shift on Sundays. Their auto-attendant should reflect this fact. Also, Accounting doesn't take outside calls on Wednesday afternoons.
4. I want a year's worth of holidays pre-programmed in the system at all times. Each holiday should have its own special cheery recordings.
5. If something happens, such as a major snowstorm, I want you to be able to change our main automated attendant from your home, so we can tell callers that no one will be in the office and the company is closed.
6. I want to be able to find out if a particular person is answering calls when they are supposed to be available... or if they are skipping out early every day. Give me statistics on this.

### Auto Attendant Call Flow Solution

The NuPoint Unified Messaging Administrator designed the following solution:

"Thank you for calling ACME Manufacturing.

If you know your party's 4 digit extension number, you may enter it now or at any time during this message. To use Dial-by-Name, press [8].

For Sales and Marketing, press [1];

For Shipping, press [2];

For Accounting, press [3];



If you wish to speak with the operator, press [0], or stay on the line."

A caller pressing 2 would hear the Shipping department's automated attendant greeting:

"Thank you for calling the ACME shipping department.

To check on the status of your order, press [1];

For new orders, press [2];

To report shipping discrepancies, press [3], or stay on the line."

The Shipping department's automated attendant greets callers through two shifts of the day. Callers dialing Shipping's direct outside number still reach this recording.

Accounting also has a direct outside number. Callers reach the same recordings when they press 3 from the ACME main automated attendant, or when they dial Accounting directly.

"You have reached the ACME accounting department.


For Accounts Payable, press [1];

For Accounts Receivable, press [2];

For all other inquiries, press [0], or remain on the line."

All of the power, flexibility and features available at the organization's NP-UM Agent application are also available to every department, extension or mailbox within the organization. This is because all NP-UM Agent applications are built from combinations of the same basic building block -- the call box.

### Show the Main Auto-Attendant Call Flow

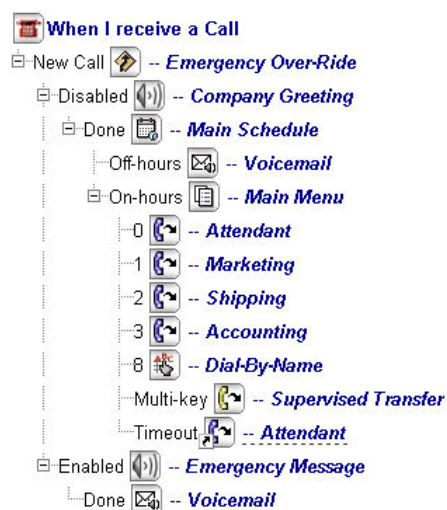

Explain how the Call Flow works

The example below should help you visualize a caller's path through a call flow. The call flow handles incoming calls to ACME on Line Group 10. It includes three actions in the order in which they are executed.

| Call Flow Action | Action Description                                                                            |
|------------------|-----------------------------------------------------------------------------------------------|
| Override         | (If activated.) Send all calls to my secretary. Don't bother with the rest of this call flow. |

| Call Flow Action | Action Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Schedule (Main)  | <p data-bbox="857 226 1105 264">Holiday Schedule</p> <p data-bbox="857 300 1437 447">Check to see if today is an observed Holiday. If it is, route call through the holiday's call flow. Otherwise, continue to next node.</p> <p data-bbox="857 483 1102 520">Weekly Schedule</p> <p data-bbox="857 556 1437 703">Between 9:00 AM and 5:00 PM, Monday through Friday, continue to the next node in this call flow. After 5:00 PM and on weekends go to the Off-hours call flow.</p> <p data-bbox="857 739 1451 848">Although not shown, the night and weekend mode (voice mailbox xxx) greets all callers with:</p> <p data-bbox="857 884 1430 1031">"Thank you for calling ACME Manufacturing. Our normal business hours are 9 AM to 5 PM Monday through Fridays".</p> <p data-bbox="857 1066 1375 1140">The Menu offers callers the following choices:</p> <p data-bbox="857 1176 1437 1365">If you would like to leave a message for someone, enter their four-digit extension number. If you do not know the extension number, or are calling from a rotary phone, stay on the line.</p> <p data-bbox="857 1400 1440 1509">Callers entering an extension number will be transferred directly to that person's voice mailbox.</p> <p data-bbox="857 1545 1425 1772">Key [0] could be assigned to transfer to night bell extension. The recorded menu does not inform the caller of this key. However, any employee of the company can use key [0] to ring the night bell or night station.</p> |

| Call Flow Action | Action Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Menu             | <p>Play the recorded Greeting and Menu:</p> <p>"Thank you for calling ACME Manufacturing.</p> <p>"If you know your party's 4 digit extension number, you may enter it now or at any time during this message. To look up a name in the company phonebook, press [8].</p> <p>For Sales and Marketing, press [1];</p> <p>For Shipping, press [2];</p> <p>For Accounting, press [3];</p> <p>If you wish to speak with the operator, press [0], or stay on the line."</p> <p>Key [1] does a transfer to the Sales and Marketing ACD Queue. On a Ring Busy, Ring No Answer, or invalid transfer attempt (which should never happen), the call is reconnected and routed to the Attendant.</p> <p>Keys [2] and [3] route calls to the Shipping and Accounting departments respectively.</p> <p>Callers can also enter a four-digit extension number. The Multi-key action is programmed to Blind Transfer callers to the appropriate extension number. On Ring Busy or Ring No Answer at the dialed extension, the caller is routed to the corresponding voice mailbox to leave a message. Callers wish to Dial-by-Name press [8].</p> <p>If the caller does nothing, (such as, a rotary phone caller) the Auto-Exit transfers the caller to the operator. Key [0] performs the same function.</p> |

### 1.6.3.3 System Templates

There are six system templates provided with the Call Director functionality. These templates can be used as a starting point when creating a call flow. The system templates have recorded prompts. These templates are read-only and cannot be changed or deleted.


The templates are as follows: [Daily Greeting](#), [Follow Me](#), [Find Me](#), [Personal Dial Zero](#), [Alternate Daily Greeting](#), and [NP Receptionist](#).

The following system templates are provided:

#### Daily Greeting

The Daily Greeting feature allows users to customize their greeting on a daily basis, with a temporary greeting that reverts back to the user's primary personal greeting at midnight. The Daily Greeting feature is available to all licensed Call Director users.

The call flow for this template is as follows:

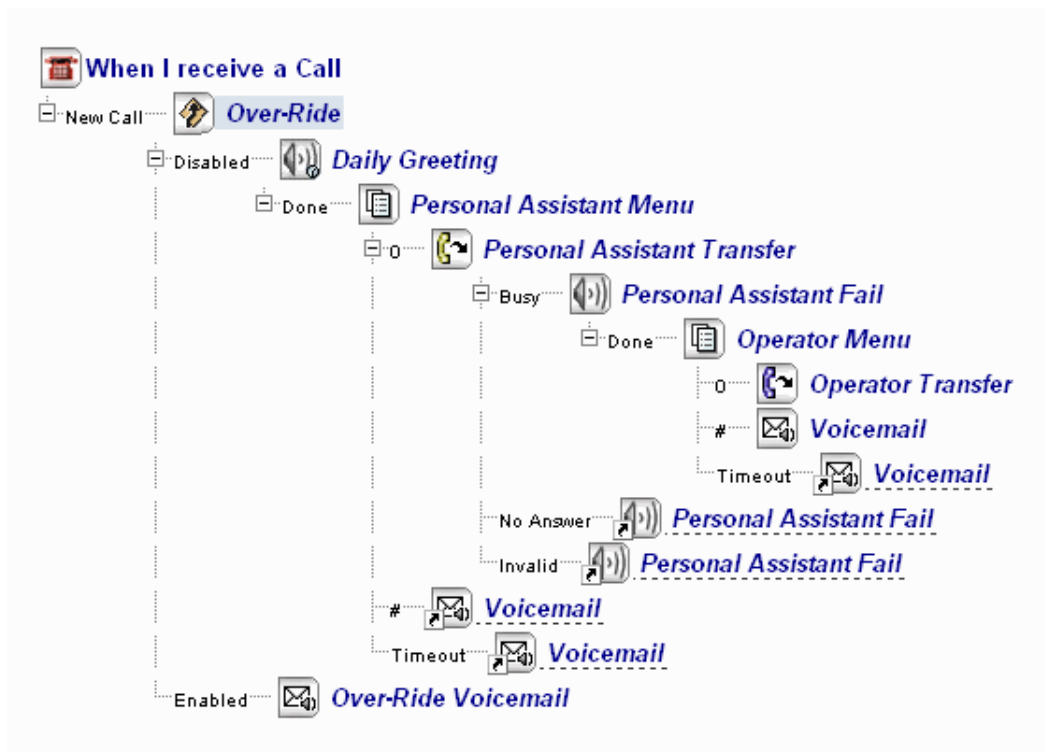


#### Follow Me

The call flow for this template is as follows:




## Find Me

The call flow for this template is as follows:

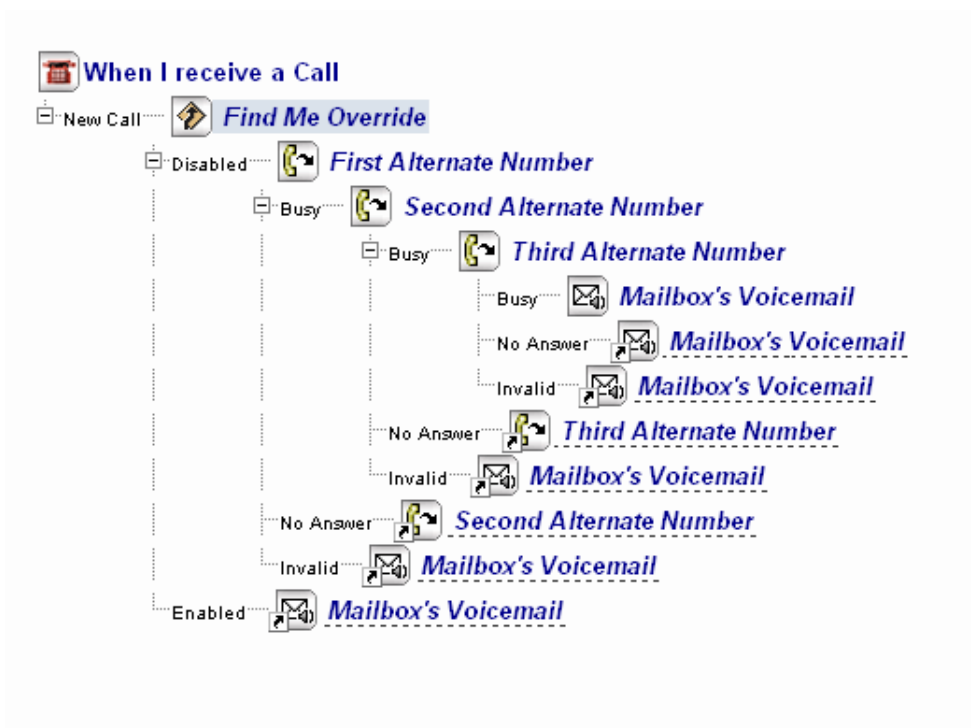

## Personal Dial Zero


The call flow for this template is as follows:

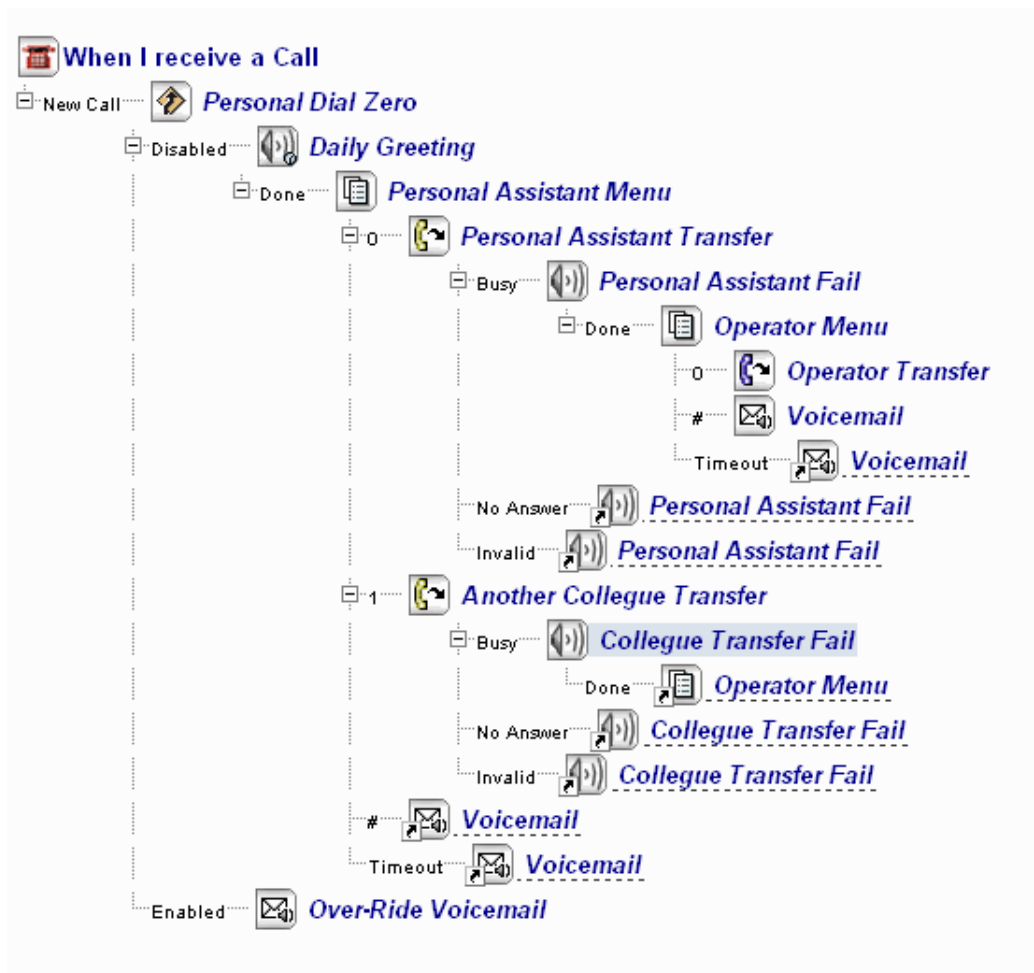

## Alternate Daily Greeting

The Alternate Daily Greeting template allows users to set up a call flow when they are using an Extended Absence Greeting (EAG). The caller hears the greeting advising that the user is away and is presented with alternative options.

The call flow for this template is as follows:

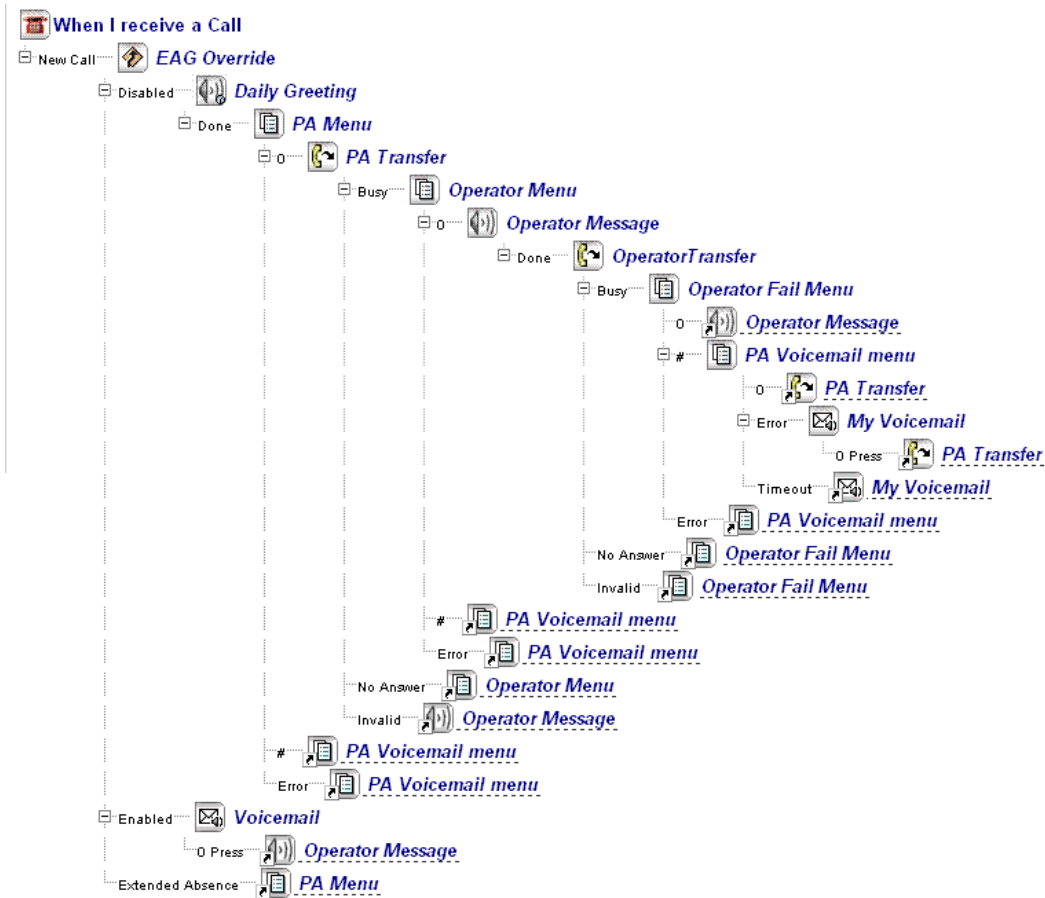

## NP Receptionist

The NP Receptionist feature provides the functionality of a simple automated attendant. The template greets the caller, asks for an extension number, and transfers the call to the destination (blind transfer). This feature is available to all licensed Call Director users, but it is optimized for use by administrators.

When you configure the actions for this template, note the following:

- **Override:** This action enables/disables the call flow. By default it is enabled.
- **Caller ID:** This optional action handles calls based on whether the caller's number is in your Caller ID list. You can delete this action from the call flow without impacting the operation of the NP Receptionist feature.
- **Menu:** This action causes a recording to play which prompts the caller to press a key to select a menu option. By default, the system plays, "Welcome to the automated receptionist. Please enter an extension number." Note that as part of configuring the Menu action, you must specify the "Maximum DTMF Length," which should match the extension number length for your system.
- **Blind Transfer:** This action dials the destination and then releases the call regardless whether the destination is busy or not answering.




- **Voicemail:** This optional action sends the caller to a NuPoint Unified Messaging mailbox. You can delete this action from the call flow without impacting the operation of the NP Receptionist feature.

#### Notes:

- The properties of the **Blind Transfer** action default to “Gathered digits” but this property can be modified to “Operator” or “Specified Extension.”
- Dial-by-Name can be configured by adding it to the configuration of the **Menu** action.
- The NP Receptionist template does not support treatment types (i.e. situational call behaviors).

The call flow for the NP Receptionist template is as follows:

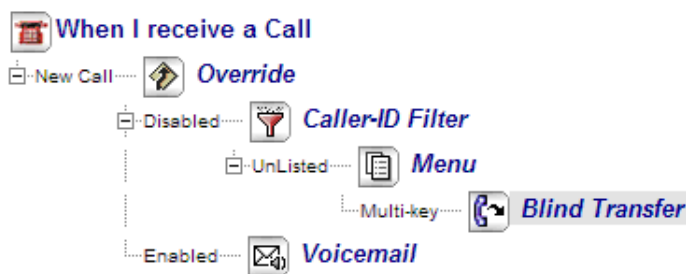

### 1.6.3.4 Voicemail RADs

Call Director can provide Recorded Announcement Device (RAD) functionality, eliminating the need for external tape machines or other audio-playing devices.

RADs are commonly employed in ACD environments to automatically answer lines and deliver pre-recorded messages such as, "All of our representatives are busy helping other callers, please continue to hold to maintain your call priority." When the RAD message finishes playing, the caller usually hears music-on-hold while waiting for an agent to become available. RAD messages may also give the caller information, which answers their questions, thus resulting in a 'good' abandoned call. They may also provide advertising or promotional information to callers while they're waiting for someone to take their call.

To configure RAD functionality, create a call flow containing any number of Message actions and assign it to a Line Group.

#### To program a RAD call flow:

1. Access the main Call Director administrator web page.
2. Create a new call flow assigned to a Line Group that will be used as the RAD.

3. Add a Message action node to the call flow.



4. In the **Message** properties, program an appropriate delay for this action.
5. For the **Done** result of the message action, select the **Message** action itself as the **Destination Action**. This creates the loop.

| Results for <i>RAD Message</i> |                                     |
|--------------------------------|-------------------------------------|
| Result                         | Destination Action                  |
| Done                           | <a href="#">Message:RAD Message</a> |

The call flow will look something like the following. Note that the loop is presented as the Message action followed by itself in the form of an [alias](#).



6. Click **Save** to save the call flow.
7. Access the Administrator mailbox and follow the TUI prompts to record the message for this Line Group call flow.
8. Call the line group to test the call flow.
9. Assign the Line Group to the RAD Group of the ACD application.

#### Note:

In the call flow, add a Message Center action following the RAD Message action node. This prevents the call from being terminated if the user happens to press a TUI key while listening to the recorded announcement.

#### You need to know

- Selecting the Message action as the Destination Action for itself creates a continuous loop. You can terminate the loop after a number of revolutions by limiting the loop count value for the call flow. The maximum loop count is configured in the >Configuration Page and applicable to all call flows.
- You can “daisy chain” several messages, each with their own delay, and configure the last message return to the first message.
- Ensure that all the IP telephones representing Voicemail RAD ports are registered as 5240 IP devices if Record-A-Call is installed or 5020 IP devices if Record-A-Call is not

installed. If you need to re-configure the telephones, reboot NuPoint so that it can re-register its devices.

- To enable callers to press non-numeric DTMF keys such as # and \* during playback of the RAD message, ensure that the ACD group interflow paths are configured correctly on the ICP.

### 1.6.3.5 Tutorials

This page provides PDF tutorials with examples of common call flows:

- Personal Call Flow
- Corporate Call Flow
- Holiday Settings Call Flow

## 1.6.4 Call Flow Actions Explained

### 1.6.4.1 Override

When an Override action is encountered, Call Director checks to see if it is enabled. If it is not, the call flow follows the **Disabled** result. If Override is enabled, Call Director performs the action connected to the **Enabled** or **From Call Flow** results (typically a transfer to another extension, a voice mailbox, or the attendant).

Override can be turned on and off in Call Director or from any DTMF telephone.

#### Example — Main System Automated Attendant

Calls to the main telephone number for ACME Widgets arrive on lines assigned to Line Group 1 and are answered by the automated attendant. The Call Director Administrator has programmed an initial Override function for this line group to go to the snow emergency closure message. When Override is enabled, instead of hearing the normal automated attendant, outside callers will now hear:

"Thank you for calling ACME. Due to severe weather conditions, our offices are temporarily closed."

"If you know the extension number of the person you wish to reach, please dial it now and

leave a message. We will return your call as soon as possible. Thank you."

To activate Override, the System Administrator needs only to enable it from any touch-tone phone.

## Example — Personal Call Flow

Penny is working late and is expecting an important call. She will be working in the computer room, and overrides all of her calls to go directly to that extension (3456). Upon returning to her own desk, she simply disables Override to return her call flow to normal processing.

The following table lists the configurable properties for the Override action and its possible results:

| Item              | Values (default = bold) | Description/Notes                                                                                                                                                                                                                                                                                                     |
|-------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PROPERTIES</b> |                         |                                                                                                                                                                                                                                                                                                                       |
| Name              | <user-definable>        | Changing an action name renames all aliases of the action.                                                                                                                                                                                                                                                            |
|                   | <b>Override</b>         |                                                                                                                                                                                                                                                                                                                       |
| Override Enabled  | Disabled                | Indicates whether Override is enabled or disabled. When it is enabled, the result is based on either Enabled or From Call Flow.                                                                                                                                                                                       |
| Action ID         | --                      | A system-generated three-digit ID used to identify this action when enabling or disabling it by telephone.                                                                                                                                                                                                            |
| <b>RESULTS</b>    |                         |                                                                                                                                                                                                                                                                                                                       |
| Enabled           | Message Center          | <p>The action taken when <b>Override</b> is enabled <b>AND</b> the call has been forwarded to your call flow by your extension. The default is <i>Message Center</i>, which plays a system message and then disconnects the call.</p> <p>When <b>Override</b> is enabled, it has priority over the other results.</p> |
| Disabled          | Message Center          | The action taken when <b>Override</b> is disabled. The default is <i>Message Center</i> , which plays a message that you have pre-recorded and then disconnects the call.                                                                                                                                             |

|                  |            |                                                                                                                                                                                                                                                                        |
|------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| From Call Flow   | Unassigned | The action taken when Override is disabled AND the call has been transferred to your call flow from another call flow, as a Transfer or Voicemail action. The default is Unassigned, which means that for an incoming interflow call, the Disabled result is followed. |
| Extended Absence | Unassigned | The action taken when Override is disabled, after the Extended Absence Greeting is played. The default is Unassigned, which means that after playing the EAG, the Disabled result is followed.                                                                         |

Programming an Override Action

To program the Override action:

- 1. Access the Call Flow page.
- 2. Do one of the following:
  - 1. • For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
- 1. Add the **Override** action to the call flow.
- 2. Under **When I receive a Call**, click the **Override** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.
- 3. Enter or modify the property as needed. For information about the properties, see the table above.
- 4. Assign actions as required to the Enabled and Disabled results from the call flow and/or Extended Absence if applicable.
- 5. Click **Save**. The call flow is saved.

1.6.4.2 Schedule

The Schedule action alters the call flow based on the user's weekly schedule and, optionally, on the user's holiday schedule.

The Weekly Schedule checks the time-of-day and day-of-week of each call. It then redirects the call according to the programmed Call Flow Action for that time and day. For example, a call flow owner can have all calls ring his extension during normal working hours, Monday through Friday. After hours and on weekends, all calls can be routed to the owner's voice mailbox.

The Holiday Schedule checks the time-of-day and day-of-year of each call. If the call falls within a predefined Holiday range, Call Director moves the caller to the next action in the call flow for further processing.

A Weekly Schedule can have an unlimited number of time slots, with a minimum one-minute difference required between the set times. For example, the call flow owner can set their work hours for Monday through Friday as 9:00a.m. to 12:00p.m., 1:00p.m. to 2:30p.m. and 3:00p.m. - 5:00p.m.

A call flow can have multiple schedules inserted at any point in the flow.

The following table lists the configurable properties for the Schedule action and its possible results:

| Item              | Values (default = bold) | Description/Notes                                                                                                                                                    |
|-------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PROPERTIES</b> |                         |                                                                                                                                                                      |
| Name              | <user-definable>        | Changing an action name renames all aliases of the action.                                                                                                           |
| <b>Schedule</b>   |                         |                                                                                                                                                                      |
| Weekly Schedule   | --                      | Opens a pop-up window for defining work hours for each day of the week. If work hours are not specified, then the call is processed by the on-hours result.          |
| Holiday Schedule  | --                      | Opens a pop-up window for entering names, dates and times for holidays.                                                                                              |
| <b>RESULTS</b>    |                         |                                                                                                                                                                      |
| Off-hours         | Message Center          | The action taken when the current time is outside of the scheduled time slots. Default is to play an appropriate pre-recorded message, and then disconnect the call. |
| On-hours          | Message Center          | The action taken when the current time is within the scheduled time slots. Default is to play an appropriate pre-recorded message, and then disconnect the call.     |

**Note:**

The Weekly Schedule and Holiday Schedule are managed by call flow owners through Call Director only.

## Programming a Schedule Action

To program the Schedule action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
3. Add the **Schedule** action to the call flow.
4. Under **When I receive a Call**, click the **Schedule** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.
5. Do one or both of the following:
  - To configure a weekly schedule, click **Weekly Schedule**. The Weekly Schedule window opens.
  - To configure a holiday schedule, click **Holiday Schedule**. The Holiday Schedule window opens.
6. If the window fails to appear, check to see whether your browser is using a pop-up blocker.
7. Enter or modify the schedule properties as needed. Click **Apply** and then **OK** to save the information, and to return to the Call Flow main page.
8. Assign actions as required to the On-hours and Off-hours results.
9. Click **Save**. The call flow is saved.

### 1.6.4.3 Message

The Message action plays recorded audio, such as a greeting, to callers. Messages play once before moving the caller down to the next action in the call flow.

A greeting message should be short and friendly. ACME's greeting is typical. *"Thank you for calling ACME Widgets."* All outside callers hear this company greeting when dialing ACME's main number. Immediately after the greeting, callers hear the recorded Menu: *"If you know your party's 4 digit extension number..."*

**Note:**

Do not combine greetings and menus in the same recording. If you do, Call Director will not be able to repeat the menu to the caller.

For instructions on how to record a greeting, see [Recording a Message](#).

A Message action can detect a call disconnection. If this occurs, the call-flow processing is immediately aborted.

The following table lists the configurable properties for the Message action and its possible results:

| Item                   | Values (default = bold)         | Description/Notes                                                                                                                                                                                  |
|------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES             |                                 |                                                                                                                                                                                                    |
| Name                   | <user-definable><br><br>Message | Changing an action name renames all aliases of the action.                                                                                                                                         |
| Delay                  | < <b>0</b> - Infinite>          | Number of seconds to wait until carrying out the action result. This property is useful in RAD applications where a recording plays continuously with a delay between plays. Default is 0 seconds. |
| Suppress Hangup Prompt | Disabled                        | Disables the system prompt that is played upon hangup.                                                                                                                                             |
| Action ID              | <xxxx>                          | A system-generated three-digit ID used to identify this action when recording the message by telephone.                                                                                            |
| Message Recording      | Recorded or Not Recorded        | Provides the status of the audio recording for this action. You can record a message from this field by clicking on the Recording button. See Recording and Importing Messages.                    |
| RESULTS                |                                 |                                                                                                                                                                                                    |
| Done                   | Hangup                          | Action taken when the message playback is complete. The default is hanging up.                                                                                                                     |

## Programming a Message Action

To program a Message action:

1. Access the Call Flow page.
2. Do one of the following:
3. For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click Edit.
4. For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click Edit.
5. Click **OK**. The current call flow appears.
6. Add the **Message** action to the call flow.
7. Under **When I receive a Call**, click the **Message** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.



**Note:** If you select the Suppress Mailbox Greeting option for a Call Flow, a caller will not hear your mailbox greeting if going through Call Director. The caller will, however, still hear the greeting if the call goes through the message center.

1. Enter or modify the properties as needed. For information, see the table above.
2. Assign an action as required to the Done result.
3. Click **Save**. The call flow is saved.

## 1.6.4.4 Menu

The Menu action is a recording that presents options to an incoming caller. The recorded Menu prompts callers to press a key on their telephone keypad to select a menu option. For example, an incoming call answered by the Menu could tell the caller, *"If you know the extension of the person you wish to reach, enter it now. To speak to the sales desk, press 2. To speak to an attendant, press 0."* The caller must then press the desired key on their phone's keypad, or hang up.

The Menu node includes not only the recorded Menu (that is, what callers will hear) but also a flag that determines how many times the menu should be repeated (Repetition count). You also define and program what the callers can input in response to the recorded Menu (that is, extension numbers, mailbox numbers, and single or multiple keys).

The call flow owner records the menu from the telephone interface. By default, the Menu repeats when the caller presses an invalid key.

The following table lists the configurable properties for the Menu action and its possible results:

| Item                | Values (default = bold)    | Description/Notes                                                                                          |
|---------------------|----------------------------|------------------------------------------------------------------------------------------------------------|
| PROPERTIES          |                            |                                                                                                            |
| Name                | <user-definable>           | Changing an action name renames all aliases of the action.                                                 |
|                     | <b>Menu</b>                |                                                                                                            |
| Maximum DTMF Length | <maximum number of digits> | Maximum number of DTMF digits to gather from the caller. A value greater than 1, enables Multi-key result. |
|                     | <b>1</b>                   |                                                                                                            |

| Item              | Values (default = bold)                       | Description/Notes                                                                                                                                                                                                                                                                                          |
|-------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Retry Count       | <p>&lt;0 - 99&gt;</p> <p><b>3</b></p>         | The number of times the Menu repeats when the caller makes invalid entries (or no entry at all). A retry count of 2, for example means that the Menu will play again, even after an invalid entry or no entry at all. This gives the caller additional opportunities to enter a valid selection.           |
| Timeout           | <p>&lt;0 - 99 seconds&gt;</p> <p><b>3</b></p> | <p>The number of seconds that the caller is given to respond with a valid key press as defined in the result.</p> <p><b>Note:</b> If the timeout is set to 0 seconds, the system defaults the timeout to 3 seconds. However, 1 and 2 seconds work appropriately.</p>                                       |
| Action ID         | < xxxx>                                       | A system-generated three-digit ID used to identify this action when recording the prompt via the phone.                                                                                                                                                                                                    |
| Prompt Recording  | Recorded or Not Recorded                      | Provides the status of the audio recording for this action. You can record a message from this field by clicking on the Recording button. See Recording and Importing Messages.                                                                                                                            |
| RESULTS           |                                               |                                                                                                                                                                                                                                                                                                            |
| DTMF Keys 0-9 * # | Retry                                         | <p>The action resulting from a single DTMF key pressed within the timeout period. Not all keys need to be connected to a subsequent action.</p> <p>Default (i.e., not connected to another action) is to play a pre-recorded system message, decrement the retry count, and repeat the menu recording.</p> |
| Multi-key         | Hangup                                        | The action taken when the caller keys in more than one digit within the Timeout period or has keyed in the maximum number of digits defined by Maximum DTMF Length. Default is to play an appropriate pre-recorded system prompt, and then hang up.                                                        |

| Item    | Values (default = bold) | Description/Notes                                                                                                                                                                                                                                                                                                                   |
|---------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timeout | Retry                   | The action taken when the caller fails to press any DTMF key within the specified timeout. If the Timeout result is unassigned, each timeout decrements the Retry Count. Default result (i.e., not connected to another action) is to play a pre-recorded system message, decrement the retry count, and repeat the menu recording. |
| Error   | Hangup                  | The action taken when retry count is reduced to zero as a result of the caller repeatedly pressing unassigned DTMF keys or not providing a response within the allowed timeout. Default is to play an appropriate pre-recorded system prompt, and then hang up.                                                                     |

## Programming a Menu Action

To program a Menu action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click Edit.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click Edit.
3. Click **OK**. The current call flow appears.
4. Add the **Menu** action to the call flow.
5. Under **When I receive a Call**, click the **Menu** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.
6. Enter or modify the properties as needed, assigning keys to voice messages. For information, see the table above.
7. Assign actions as required to the DTMF, timeout, and error results.
8. Click **Save**. The call flow is saved.

### 1.6.4.5 Call Transfers

A Transfer action routes the caller to a specified destination, such as an extension, the attendant, or an external telephone number.

Whenever you select a transfer Action, you can also define the transfer method as well as the subsequent incomplete transfer Action to take if the original transfer was incomplete (for example, a Ring Busy, Ring No Answer, or Invalid).

There are four types of call transfers: Blind Transfer, Supervised Transfer, Screened Transfer, and Alternate Transfer.

**Note:**

Call transfer privileges are governed by the system's Class of Service (COS). To use a particular type of call transfer, it must first be enabled in the system COS.

## Destinations

| Destination         | Description/Notes                                                                                                                                                                                                                                                                                                                              |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specified Extension | The call is transferred to the extension specified when the call flow was set up.                                                                                                                                                                                                                                                              |
| Gathered Digits     | The call is transferred to the digits the caller entered in response to a previous menu. This property allows a caller to key digits to reach a desired destination—for example, an extension, a mailbox or external telephone (if permitted by system programming). See Menu for the parameters that must be set for Gathered Digits to work. |
| Attendant           | The call is transferred to the extension for the user's mailbox configured by the system administrator or user. If the Attendant is not configured, the supervised transfer action will exit via the "Fail" path, without even attempting the transfer.                                                                                        |
| Attendant/Operator  | The call is transferred first to the Attendant, then to the Operator if the Attendant extension is not configured.                                                                                                                                                                                                                             |
| Operator            | The call is transferred to the Operator. The Operator is the Line Group Attendant Extension programmed on the Call Director Configuration page for the line group. If this extension is not programmed, the line group attendant extension is used.                                                                                            |

## Blind Transfers

A Blind Transfer dials the destination and then releases the call regardless whether the destination is busy or not answering.

With Call Director, the Blind Transfer action transfers a call to one of the following destinations, as configured by the call flow owner:

- An extension specified in the action properties;
- The Attendant/Operator extension;
- The extension stored as Gathered Digits during a previous Menu action that has a Multi-Key result.

The following table lists the configurable properties for the Blind Transfer action and its possible results:

| Item                                     | Value (default = bold)                          | Description/Notes                                                                                                                                                                                                                                |
|------------------------------------------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES                               |                                                 |                                                                                                                                                                                                                                                  |
| Name                                     | <user-definable><br><br><b>Blind Transfer</b>   | Changing an action name renames all aliases of the action.                                                                                                                                                                                       |
| Transfer To                              | <destination><br><br><b>Specified Extension</b> | Select the destination to which the call is to be transferred—Specified Extension, Gathered Digits or Attendant/Operator.                                                                                                                        |
| Extension                                | <extension><br><br><b>Blank</b>                 | Enter an extension number if Transfer To is set to Specified Extension; otherwise, leave blank.                                                                                                                                                  |
| Suppress Prompt                          | Disabled                                        | Disables the system prompt that is played upon transfer.                                                                                                                                                                                         |
| Try Call Flow First                      | Disabled                                        | Enables outgoing interflow. If the target number has a call flow, the call is transferred directly to the call flow instead of being transferred to the extension.<br><br>See Override to configure your call flow for incoming interflow calls. |
| RESULTS                                  |                                                 |                                                                                                                                                                                                                                                  |
| There is no result for a Blind Transfer. |                                                 |                                                                                                                                                                                                                                                  |

## Supervised Transfer

A Supervised Transfer waits for the called party to answer before completing the transfer. If the call is not answered or the called party is busy, it returns to the call flow for further processing.

The Supervised Transfer action transfers a call to one of the following destinations, as configured by the call flow owner:

- An extension specified in action properties;

- The Attendant/Operator extension;
- The extension stored in the Gathered Digits during a previous Menu action that has a Multi-Key result.
- The Attendant extension configured in the user mailbox
- The Operator extension

The following table lists the configurable properties for the Supervised Transfer action and its possible results. The results are dependant on the path of the call flow.

| Item                | Value (default = bold)                      | Description/Notes                                                                                                                                                                                                                                                |
|---------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES          |                                             |                                                                                                                                                                                                                                                                  |
| Name                | <user-definable><br><br>Supervised Transfer | Changing an action name renames all aliases of the action.                                                                                                                                                                                                       |
| Transfer To         | <destination><br><br>Specified Extension    | Select the destination to which the call is to be transferred—Specified Extension, Gathered Digits, Attendant, Operator, or Attendant/Operator.                                                                                                                  |
| Extension           | <extension><br><br>Blank                    | Enter an extension number if Transfer To is set to Specified Extension; otherwise, leave blank.                                                                                                                                                                  |
| No Answer Timeout   | <timeout in seconds><br><br>10              | The number of seconds that the system waits for an answer before timing out. This setting overrides the Time Until No Answer setting in the Configuration page.                                                                                                  |
| Suppress Prompt     | Disabled                                    | Disables the system prompt that is played upon transfer.                                                                                                                                                                                                         |
| Try Call Flow First | Disabled                                    | Enables outgoing interflow. If the target number has a call flow, the call is transferred directly to the call flow instead of being transferred to the extension.<br><br>See <a href="#">Override</a> to configure your call flow for incoming interflow calls. |
| RESULTS             |                                             |                                                                                                                                                                                                                                                                  |

| Item      | Value (default = bold) | Description/Notes                                                                                                                                                          |
|-----------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Busy      | Message Center         | Action taken when the transfer destination is busy. The default is to play a pre-recorded system message, and then hang up.                                                |
| No Answer | Message Center         | Action taken when the transfer destination fails to answer within the No Answer Timeout period. The default is to play a pre-recorded system message, and then hang up.    |
| Invalid   | Message Center         | Action taken if the transfer destination is invalid, as can happen for a Gathered-Digits transfer. The default is to play a pre-recorded system message, and then hang up. |

## Screened Transfer

A Screened Transfer is similar to a Supervised Transfer, except that the caller's name is first recorded and then played back to the called person. The called person has the option to accept or reject the call.

The Screened Transfer action transfers a call to one of the following destinations, as configured by the call flow owner:

- An extension specified in action properties;
- The extension stored in the Gathered Digits during a previous Menu action that has a Multi-Key result.

The following table lists the configurable properties for the Screened Transfer action and its possible results. The results are dependant on the path of the call flow.

| Item        | Values (default = bold)                   | Description/Notes                                                                                     |
|-------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------|
| PROPERTIES  |                                           |                                                                                                       |
| Name        | <user-definable><br><br>Screened Transfer | Changing an action name renames all aliases of the action.                                            |
| Transfer To | <destination><br><br>Specified Extension  | Select the destination to which the call is to be transferred—Specified Extension or Gathered Digits. |
| Extension   | <extension>                               | Enter an extension number if Transfer To is set to Specified Extension; otherwise, leave blank.       |

| Item                | Values (default = bold)        | Description/Notes                                                                                                                                                                                                                                |
|---------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No Answer Timeout   | <timeout in seconds><br><br>10 | The number of seconds that the system waits for an answer before timing out. This setting overrides the Time Until No Answer setting in the Configuration page.                                                                                  |
| Suppress Prompt     | Disabled                       | Disables the system prompt that is played upon transfer.                                                                                                                                                                                         |
| Try Call Flow First | Disabled                       | Enables outgoing interflow. If the target number has a call flow, the call is transferred directly to the call flow instead of being transferred to the extension.<br><br>See Override to configure your call flow for incoming interflow calls. |
| <b>RESULTS</b>      |                                |                                                                                                                                                                                                                                                  |
| Rejected            | Message Center                 | The action taken when the destination rejects the transfer attempt. The default is to play a pre-recorded system message, and then hang up.                                                                                                      |
| Busy                | Message Center                 | Action taken when the transfer destination is busy. The default is to play a pre-recorded system message, and then hang up.                                                                                                                      |
| No Answer           | Message Center                 | Action taken when the transfer destination fails to answer within the No Answer Timeout period. The default is to play a pre-recorded system message, and then hang up.                                                                          |
| Invalid             | Message Center                 | Action taken if the transfer destination is invalid, as can happen for a Gathered-Digits transfer. The default is to play a pre-recorded system message, and then hang up.                                                                       |

## Alternate Transfer

An Alternate Transfer is used to route calls to an external destination, such as a cell phone or pager, and for text messaging. The destination is defined by the dial string sequence, which can include commands that permit complete control of the outgoing call, including:

- Dial tone detection
- Call answer supervision



- Dialing DTMF keys
- Inserting pauses

The following table lists the properties to be configured for an Alternate Transfer and the results of the action. The results are dependant on the path of the call flow:

| Item              | Values ( default = bold)                        | Description/Notes                                                                                                                                                                                                                                                                                                       |
|-------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES        |                                                 |                                                                                                                                                                                                                                                                                                                         |
| Name              | <defined action name><br><br>Alternate Transfer | Changing an action name renames all aliases of the action.                                                                                                                                                                                                                                                              |
| Dial String       | <dial string>                                   | Enter a combination of characters, up to 16 total, from the Dial String Table.                                                                                                                                                                                                                                          |
| No Answer Timeout | <timeout in seconds><br><br>10                  | Number of seconds until the call is considered unanswered. Default is 10 seconds. This setting overrides the Time Until No Answer setting in the Configuration page.<br><br>NOTE: This setting has no effect unless the dial string contains at least one of the "wait" codes from the Dial String Table (G,L,P, or T). |
| RESULTS           |                                                 |                                                                                                                                                                                                                                                                                                                         |
| Timeout           | Message Center                                  | The action taken when the called destination fails to answer within the timeout period. The default is to play a relevant system message, and then hang up.                                                                                                                                                             |

## Programming a Call Transfer Action

To program a Call Transfer action:

1. Access the Call Flow page.

2. Do one of the following:

- For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
- For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.

3. Click **OK**. The current call flow appears.

4. Add a call transfer action (i.e. **Blind Transfer**, **Supervised Transfer**, **Screened Transfer**, or **Alternate Transfer**) to the call flow.

5. Under **When I receive a Call**, click the call transfer action listed in the call flow. The action's Properties and Results appear at the bottom of the window.

6. Enter or modify the properties as needed. For information, see the appropriate table above.

7. Assign actions as required to the transfer results.

8. Click **Save**. The call flow is saved.

## 1.6.4.6 Voicemail

The Voicemail action sends the caller to a NuPoint Unified Messaging mailbox. Normally the call is sent to a specific mailbox, but by using the Multi-key result of a Menu action the call can be sent to a caller-specified mailbox. If the mailbox is not specified, then the call is sent to the mailbox of the call-flow owner.

**Note:**

During an upgrade from Release 10 to Release 11, a vacant Voicemail node in a call flow is replaced with a Message Center node. However, there is no change to the user-defined name of this node that is displayed in the call flow. For example, if the user had left the name as Voicemail in Release 10, then the type of node is changed to the Message Center node in Release 11, but the name displayed in the call flow remains as Voicemail.

The following table lists the configurable properties for the Voicemail action and its possible results:

| Item       | Value (default = bold) | Description/Notes                                          |
|------------|------------------------|------------------------------------------------------------|
| PROPERTIES |                        |                                                            |
| Name       | <user-definable>       | Changing an action name renames all aliases of the action. |
|            | VoiceMail              |                                                            |

| Item                | Value (default = bold)                   | Description/Notes                                                                                                                                                                                                                                                                   |
|---------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transfer To         | <destination><br><br>Specified Extension | Select the destination to which the call is to be transferred—Specified Extension or Gathered Digits.                                                                                                                                                                               |
| Target Mailbox      | <target voice mailbox><br><br>Blank      | Enter the mailbox in which you want to leave a message. Can be explicitly defined, obtained from the caller (via the Multi-key result of a previous Menu action), or the mailbox of the call flow owner if left blank.                                                              |
| Suppress Greeting   | Disabled                                 | Suppresses the greeting that is played in the Target Mailbox.                                                                                                                                                                                                                       |
| Try Call Flow First | Disabled                                 | Enables outgoing interflow. If the target number has a call flow, the call is transferred directly to the call flow instead of being transferred to the extension.<br><br>See Override to configure the behavior for calls that are transferred to your call box through interflow. |
| RESULTS             |                                          |                                                                                                                                                                                                                                                                                     |
| Zero Press          | Unassigned                               | Enables call processing within the current call flow when the user presses 0 after leaving a message.                                                                                                                                                                               |

## Programming a Voicemail Action

To program a Voicemail action:

1. Access the Call Flow page.
2. Do one of the following:
3. For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click Edit.
4. For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
5. Click **OK**. The current call flow appears.
6. Add the **Voicemail** action to the call flow.
7. Under **When I receive a Call**, click the **Voicemail** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.

8. Enter or modify the properties as needed. For information, see the table above.
9. Click **Save**. The call flow is saved.

### 1.6.4.7 Dial-by-Name

The Dial-by-Name action sends the caller to the NuPoint Unified Messaging Dial-by-Name application which matches the telephone keypad equivalent of the spelled names of mailbox owners (as entered by the caller) with their mailbox and extension numbers.

**Note:**

For the Dial-By-Name action to work, the NuPoint Unified Messaging dialing plan for the line group associated with Call Director must have the letter 'A' somewhere in it. The 'A' triggers the prompt to spell the name. For more about the Dial-by-Name application, see the *NuPoint Unified Messaging System Administration Online Help*.

The following table lists the configurable properties for the Dial-by-Name action and its possible results:

| Item       | Values (default = bold) | Description/Notes                                          |
|------------|-------------------------|------------------------------------------------------------|
| PROPERTIES |                         |                                                            |
| Name       | <user-definable>        | Changing an action name renames all aliases of the action. |
|            | Dial-By-Name            |                                                            |

| Item               | Values (default = bold) | Description/Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Last Name First    | Disabled                | <p>Specifies that the person's last name should be entered first.</p> <p>If this setting is enabled, callers will be prompted to enter the mailbox owner's last name first when using the Dial-by-Name function. For example, to reach John Smith they would type S-M-I-T-H J-OH-N.</p> <p>If this setting is disabled, callers will be prompted to enter the mailbox owner's first name first when using the Dial-by-Name function. For example, to reach John Smith they would type J-OH-N S-M-I-T-H.</p> <p>The NuPoint UM server search its records for entries that match the letters the caller has typed. If it finds more than one match, it plays the names and mailbox numbers of the partial matches. If it finds a unique match, it plays either the user's name or personal greeting.</p> |
| Suppress Extension | Disabled                | Suppresses the mailbox extension from the search.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>RESULTS</b>     |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Match              | Blind Transfer          | If the name entered actually matches a system mailbox, then the call is transferred to that mailbox.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| No Match           | Attendant               | If the name entered does not match a system mailbox, then the call is sent to the Auto Attendant for completion.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Programming a Dial-by-Name Action

To program a Dial-by-Name action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
3. Click **OK**. The current call flow appears.
4. Add the **Dial-by-Name** action to the call flow.
5. Under **When I receive a Call**, click the **Dial-by-Name** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.
6. Enter or modify the properties as needed. For information, see the table above.
7. Click **Save**. The call flow is saved.

### 1.6.4.8 Internal/External Call Handling

The Internal/External action allows you handle internal calls one way and external calls another—for example, when you're on the phone, internal calls could go to your mailbox and external calls could go to your cell phone.

The following table lists the configurable properties for the Internal/External action and its possible results:

| Item       | Values (default = bold) | Description/Notes                                                                                            |
|------------|-------------------------|--------------------------------------------------------------------------------------------------------------|
| PROPERTIES |                         |                                                                                                              |
| Name       | <user-definable>        | Changing an action name renames all aliases of the action.                                                   |
|            | Internal/External       |                                                                                                              |
| RESULTS    |                         |                                                                                                              |
| Internal   | Hangup                  | The action taken for internal calls. The Default is to play a pre-recorded system message, and then hang up. |
| External   | Hangup                  | The action taken for external calls. The Default is to play a pre-recorded system message, and then hang up. |

## Programming an Internal/External Action

To program an Internal/External action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
3. Click **OK**. The current call flow appears.
4. Add the **Internal/External Filter** action to the call flow.
5. Assign actions to the results as required. For information, see the table above.
6. Click **Save**. The call flow is saved.

### 1.6.4.9 Caller ID Filter

The Caller ID Filter action handles calls based on whether the caller's number is in your Caller ID list. You can use this action, for example, to transfer calls from home to your cell phone instead of your extension. That way, your family can reach you when your extension is busy or when you're away from your desk. The list can contain up to twenty Caller ID entries.

The following table lists the configurable properties for the Caller ID Filter action and its possible results:

| Item              | Values (default = bold) | Description/Notes                                                                                                                                           |
|-------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PROPERTIES</b> |                         |                                                                                                                                                             |
| Name              | <user-definable>        | Changing an action name renames all aliases of the action.                                                                                                  |
| <b>Caller ID</b>  |                         |                                                                                                                                                             |
| Caller ID         | <Caller ID>             | Enter the extension or telephone number of the caller you want to add to your Caller ID List.                                                               |
| Add               | --                      | Click to add the Caller ID entry to the Caller ID List                                                                                                      |
| Remove            | --                      | Click to delete the selected entry in the Caller ID List.                                                                                                   |
| Caller ID List    | <user-definable>        | The list of callers that will be processed by the Listed destination action.                                                                                |
| <b>RESULTS</b>    |                         |                                                                                                                                                             |
| Listed            | Hang up                 | The action taken when the caller ID exactly matches an entry in the Caller ID List. The default is to play a pre-recorded system message, and then hang up. |

|          |         |                                                                                                                                          |
|----------|---------|------------------------------------------------------------------------------------------------------------------------------------------|
| UnListed | Hang up | The action taken when the caller ID is not in the Caller ID List. The default is to play a pre-recorded system message, and then hang up |
|----------|---------|------------------------------------------------------------------------------------------------------------------------------------------|

## Programming a Caller ID Action

To program a Caller ID action:

1. Access the Call Flow page.
2. Do one of the following:
  1. • For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
1. Click **OK**. The current call flow appears.
2. Add the **Caller-ID Filter** action to the call flow.
3. Under **When I receive a Call**, click the **Caller-ID Filter** action listed in the call flow. The action's Properties and Results appear at the bottom of the page.
4. Use the **Add** and **Remove** buttons to manage your list of **Caller IDs**. You can add up to twenty entries to the list.
5. Assign actions to the results as required.
6. Click **Save**. The call flow is saved.

### 1.6.4.10 Daily Greeting

When a Daily Greeting action is encountered in the call flow, your recorded daily greeting is played.

There are two types of Daily Greeting: Today's Daily Greeting or Default Daily Greeting. Today's Daily Greeting allows users to personalize their greeting on a daily basis with a temporary greeting that will revert at midnight back to the user's Default Daily Greeting, or, if that is not recorded, to their Primary Personal Greeting.

The following table lists the configurable properties for the Daily Greeting action and its possible results:

| Item       | Values (default = bold) | Description/Notes |
|------------|-------------------------|-------------------|
| PROPERTIES |                         |                   |



| Item                   | Values (default = bold)  | Description/Notes                                                                                                                                                               |
|------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                   | <user-definable>         | Changing an action name renames all aliases of the action.                                                                                                                      |
|                        | Daily Greeting           |                                                                                                                                                                                 |
| Today's Daily Greeting | Recorded or Not Recorded | Provides the status of the audio recording for this action. You can record a message from this field by clicking on the Recording button. See Recording and Importing Messages. |
| Default Daily Greeting | Recorded or Not Recorded | Provides the status of the audio recording for this action. You can record a message from this field by clicking on the Recording button. See Recording a Message.              |
| RESULT                 |                          |                                                                                                                                                                                 |
| Done                   | Hangup                   | Action taken after the daily greeting has finished playing. The default is hanging up.                                                                                          |

## Programming a Daily Greeting Action

To program a Daily Greeting action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.
3. Click **OK**. The current call flow appears.
4. Add the **Daily Greeting** action to the call flow.
5. Under **When I receive a Call**, click the **Daily Greeting** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.

6. Enter or modify the properties as needed. For information, see the table above.
7. Assign an action as required to the Done result.
8. Click **Save**. The call flow is saved.

### 1.6.4.11 Message Center

A Message Center node has been created to allow a call to end up in the message center. This node is the default destination when the voice mailbox is not specified.

The new Message Center node only has its name as a property. Like the Voicemail node, the Message Center node is a termination action meaning that there are no branches from this node.

Any existing mailbox call flow that contains a Voice mail node with no extension specified will be updated replacing the Voicemail node with a Message Center node.

**Note:**

During an upgrade from Release 10 to Release 11, a vacant Voicemail node in a call flow is replaced with a Message Center node. However, there is no change to the user-defined name of this node that is displayed in the call flow. For example, if the user had left the name as Voicemail in Release 10, then the type of node is changed to the Message Center node in Release 11, but the name displayed in the call flow remains as Voicemail.

The following table lists the configurable properties for the Message Center action:

| Item                                              | Value (default = bold)                 | Description/Notes                                          |
|---------------------------------------------------|----------------------------------------|------------------------------------------------------------|
| PROPERTIES                                        |                                        |                                                            |
| Name                                              | <user-definable><br><br>Message Center | Changing an action name renames all aliases of the action. |
| RESULTS                                           |                                        |                                                            |
| There is no result for the Message Center action. |                                        |                                                            |

### Programming a Message Center Action

To program a Message Center action:

1. Access the Call Flow page.

## 2. Do one of the following:

- For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click **Edit**.
- For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click **Edit**.

## 3. Click **OK**. The current call flow appears

## 4. Add the **Message Center** action to the call flow.

## 5. Under **When I receive a Call**, click the **Message Center** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.

## 6. Enter or modify the properties as needed. For information, see the table above.

## 7. Click **Save**. The call flow is saved.

### 1.6.4.12 Language Router

The Language Router action enables users to take advantage of the "Multilingual Service" feature if it is enabled on NuPoint. When users first reach the Message Center or Receptionist application, they are prompted to choose between multiple languages (for example, English, French, or German). Thereafter, they will receive prompts only in the language they have selected.

#### Note:

When callers encounter the Language Router action, they will be prompted to select a preferred language, irrespective of whether they or the mailbox they are trying to reach have a custom LCOS language. If a user reaches a mailbox number with a custom LCOS language, prompts will be delivered in the mailbox's language. To override this functionality (and have a multilingual system play prompts in the selected language rather than the mailbox language), assign an FCOS with feature bit 51, Do Not Switch Languages for Outside Caller, to the mailbox.

To take advantage of the Language Router action, you must activate the Multilingual Service feature on NuPoint by installing the alternate-language prompt software and configuring a line group with up to five prompt languages.

If the Multilingual Service is not activated, you can still add the Language Router action to a call flow. However, users will not be prompted to select a prompt language. Instead, they will receive prompts in the default language.

The following table lists the configurable properties for the Language Routing action:

| Item       | Values (default = bold) | Description/Notes |
|------------|-------------------------|-------------------|
| PROPERTIES |                         |                   |

| Item       | Values (default = bold)                 | Description/Notes                                                                                                                                                                                             |
|------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name       | <user-definable><br><br>Language Router | Changing an action name renames all aliases of the action.                                                                                                                                                    |
| RESULTS    |                                         |                                                                                                                                                                                                               |
| Language_1 | Message Center                          | The action taken when the Multilingual Service feature is enabled and the primary prompt language is selected. Default is to play an appropriate pre-recorded message, and then disconnect the call.          |
| Language_2 | Message Center                          | The action taken when the Multilingual Service feature is enabled and the second available prompt language is selected. Default is to play an appropriate pre-recorded message, and then disconnect the call. |
| Language_3 | Message Center                          | The action taken when the Multilingual Service feature is enabled and the third available prompt language is selected. Default is to play an appropriate pre-recorded message, and then disconnect the call.  |
| Language_4 | Message Center                          | The action taken when the Multilingual Service feature is enabled and the fourth available prompt language is selected. Default is to play an appropriate pre-recorded message, and then disconnect the call. |
| Language_5 | Message Center                          | The action taken when the Multilingual Service feature is enabled and the fifth available prompt language is selected. Default is to play an appropriate pre-recorded message, and then disconnect the call.  |

## Programming a Message Center Action

To program the Language Router action:

1. Access the Call Flow page.
2. Do one of the following:
  - For personal call flows, select **Mailbox** from the Call Flow list at the top of page, enter the desired Mailbox number, and then click Edit.
  - For line group call flows, select **Line Group** from the Call Flow list at the top of page, enter the desired Line Group number, and then click Edit.
3. Add the **Language Router** action to the call flow.

4. Under **When I receive a Call**, click the **Language Router** action listed in the call flow. The action's Properties and Results appear at the bottom of the window.
5. Assign actions as required to the Language\_1 and Language\_2 to Language\_5 results.
6. Select **Auto** as the Prompt language for the call flow.
7. Click **Save**. The call flow is saved.


## 1.6.5 Call Flow Authoring Procedures

### 1.6.5.1 Call Flow Authoring Procedures - Overview

Regular Call Director users are assigned a call flow by their system administrator. The administrator can configure all parameters for the user, or give the user the ability to change some parameters. Advanced Call Director users can create their own call flows.

#### Regular Call Director Users

If you are a Regular user and the system administrator has configured the parameters of your call flow for you, your Call Director tab will look something like the following example:

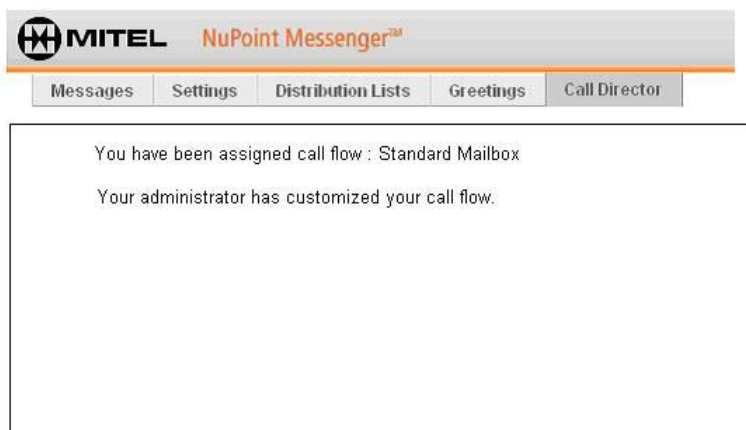

If you have the ability to change parameters, your Call Director tab will show which parameters you can change, as in the following example:

You have been assigned call flow : Standard Mailbox

**Personalize your call flow**

Personal Assistant Fail Prompt: ID: 003  Default

Personal Assistant Menu Prompt: ID: 008  Recorded

Operator Menu Prompt: ID: 004  Not Recorded

Transfer to Assistant Phone Number:

Transfer to Cell Phone Number:

Daily Greeting Greeting:  Not Recorded

Schedule:

Schedule:

For information on changing the parameters shown, see [Recording greetings and Schedule](#).

## Advanced Call Director Users

If you are an Advanced user, your system administrator has not assigned a call flow to you. You can create your own call flows and customize them as you choose.

For information on creating call flows see:

Starting with a template

Adding an action

Deleting an action

Reusing an action

Copying a call flow

Deleting a call flow

Inserting an action

Setting action properties

Setting the prompt language

Recording greetings

Viewing call flow paths

Printing call flows

## 1.6.5.2 Starting with a template

There are five system templates provided with the Call Director functionality. These templates can be used as a starting point when creating a call flow. Additional templates may have been created by the System Administrator and are also available for the call flow.

The five system templates are as follows: [Daily Greeting](#), [Follow Me](#), [Find Me](#), [Personal Dial Zero](#) and [Alternate Daily Greeting](#).

**Note:**

Only Advanced users are able to use templates to create call flows.

To select a template for the call flow:

1. From the **Edit** menu on the call flow page, click **Start with Template**.
2. A window with the list of available templates appears. Select the template you want to use for the call flow.
3. Click **OK**.

The selected call flow is activated and all default property values and recordings associated with that template are also activated. These property values and recordings can be edited once the call flow has been activated.

## 1.6.5.3 Adding an action

Adding an action is done by assigning a new action to a result of an existing action.

All call flows begin with the *When I receive a call* action.

There are no restrictions on the number and order of actions in call flow. The same action can be used more than once (see [Reusing an Action](#)).

To add an action to a call flow:

1. Do one of the following:

1. • For a new call flow, click on **When I receive a call** in the **Call Flow** display area.
  - For an existing call flow, click the action after which you want the new action added.
1. In the action's **Results** area, click a link representing a result (there may be more than one).
2. From the **New Actions** menu that appears, select the desired action type.
3. The new action item is added to the Call Flow display area and automatically selected.
4. Program the desired properties for the new action. At this point you can either assign actions to the results of the new action, or return to the original action and assign actions to its unassigned results. To create a call flow with multiple instances of an action, each with unique properties, assign the actions different names.
5. Click **Save**. The call flow is saved.

### 1.6.5.4 Deleting an action

When deleting an action, all actions to which it is connected become *Unused Actions*. These actions can be re-inserted into the call flow or deleted altogether.

To delete an action:

1. Select the action to be deleted.

Example:

#### Example 1: Ingress Scenario

2. From the **Edit** menu, click **Delete Action**.
3. A confirmation message appears. Click **OK** to confirm the deletion.

Any actions connected to the deleted action become *unused actions*. The unused actions are presented in a separate branch in the call flow tree. Because the actions are unused, they're ignored when a call is processed by the call flow.

Example:

Current setting: Tue 19 Oct 2010 03:27:18 PM EDT

| remote        | refid  | st | t | when | poll | reach | delay | offset | jitter |
|---------------|--------|----|---|------|------|-------|-------|--------|--------|
| 66.254.57.165 | .INIT. | 16 | u | -    | 64   | 0     | 0.000 | 0.000  | 0.001  |
| 72.55.146.217 | .INIT. | 16 | u | -    | 64   | 0     | 0.000 | 0.000  | 0.001  |
| 70.28.80.51   | .INIT. | 16 | u | -    | 64   | 0     | 0.000 | 0.000  | 0.001  |
| 127.127.1.0   | .LOCL. | 10 | l | -    | 64   | 0     | 0.000 | 0.000  | 0.001  |

4. To delete an unused actions, select it, and then click **Delete Action**.



5. Click **Save** to save the call flow changes.

### 1.6.5.5 Reusing an action

The same action can be assigned to results of other actions. For example, the **Busy** and **No answer** results of a **Supervised Transfer** action could both send a call to the same **Voicemail** action.

Reusing an action is always done by assigning an existing action to a result of an action. The resulting action may even be itself. For example, a **Menu** action might present a set of options followed by "...to hear these choices again, press the 8 key". The 8-key result of the Menu action could be assigned to the Menu action itself, thus creating a loop in the call flow.

Because actions are always created with the same name, you should be careful to assign meaningful names to actions to make them distinct. Reusing actions is a lot easier if the actions have distinct names.


There is no limit on the number of times an action can be reused.

To reuse an action:

The procedure for reusing an action is best explained by example. In the following scenario, we will make the Busy and No answer result of a Supervised Transfer go to the same Voicemail action.

1. **Add** a **Supervised Transfer** action to your call flow.
2. To the **Busy** result of the new **Supervised Transfer** action, add a **Voicemail** action.
3. Enter the required properties for the **Voicemail** action, including a meaningful name, such as *My mailbox*.
4. Click on the original **Supervised Transfer** action to select it.

The call flow will look similar to this:



5. Click on the **No Answer** result.

The resulting menu provides the option of creating a new action and a list of existing actions, including the Voicemail action created in step 2.

6. From this menu, select Voicemail:My mailbox This will assign the **No Answer** result to the same action as the **Busy** result. Your call flow will now look something like this:



Notice the small arrow at the bottom right of the icon beside the **No Answer** result. This means that the action is an *alias*. An alias acts like a reference to the “real” action elsewhere in the call flow. Clicking an alias selects the action it refers to. Thus, the alias has the same properties as the other action; any change made to the properties of the other action is automatically made to the alias.

7. Click **Save** to save the call flow changes.

### 1.6.5.6 Copying a call flow

A call flow can be copied from one mailbox or line group to another. This can be used in the scenario where a person has changed extensions and the existing call flow needs to be copied to the new mailbox.

#### Note:

- Only System Administrators are able to copy a call flow.
- To successfully copy a call flow, you must use the menu commands described in the following procedure. Do *not* attempt to manually copy a call flow using a copy-and-paste operation.

An existing call flow can also be copied and saved as a template.

To copy a call flow:

1. From the **Edit** menu on the call flow page, click **Copy From**.

#### Note:

This menu item is only available in the Web Console.

2. A window requesting you to enter the call flow for a particular mailbox or line group appears. Enter either the mailbox or line group number.

**Note:**

When the "Copy From" command is invoked from the Call Flow editing window for a mailbox, the feature is limited to copying mailboxes. An Advanced user's call flow can only be copied to another Advanced user's call flow. A Regular user's call flow can only be copied to another Regular user that has the same assigned template. When the "Copy From" command is invoked from the Call Flow editing window for a line group, the feature is limited to copying the call flow for a line group. A line group call flow can only be copied into another line group.

3. Click **OK**. The call flow and its associated properties are copied into the current call flow.

**Note:**

When the "Copy From" command is invoked from the create/edit template page in the Web Console, you can copy the call flow from an Advanced mailbox user OR line group into a template for the purposes of creating a new template. In this case, both the "Mailbox" and "Line Group" options are available.

### 1.6.5.7 Deleting a call flow

You can delete an entire call flow. When deleting a call flow, all actions to which the call flow is connected are deleted. All nodes including the nodes in the unused nodes branch will be deleted.

**Note:**

Only Advanced users and System Administrators are able to delete a call flow.

To delete a call flow:


1. Select the call flow you want to delete.
2. From the **Edit** menu on the call flow page, click **Delete Call Flow**.
3. A confirmation window appears. Click **Yes** to confirm the deletion. All nodes including the nodes in the unused nodes branch will be deleted.

## 1.6.5.8 Inserting an action

You may find that you need to add an action to your existing call flow, not at the end of a branch but somewhere in the middle. For example, your existing call flow does not make use of an Override action, but now you want to start off with an Override, while preserving the structure of your existing call flow.

To insert an action:

The procedure for inserting an action is best explained by example. In the following scenario, we build on the example in the [Reusing an Action](#) topic. Assuming the following call flow, we will insert an Override action between the When I receive a call and **Transfer to Bob** actions.



1. Click When I receive a call. Note that the **New Call** result is the **Supervised Transfer: Transfer to Bob** action.
2. In the **Results** area, click the **Supervised Transfer: Transfer to Bob** link.
3. From the New Actions menu, select **Override** as the new action type.

The new action item is added to the Call Flow display area and the new Override action is assigned to the New Call result. The entire call flow is moved under Unused Actions as follows (you may need to click the  $\oplus$  sign on the left of the call flow to expand the collapsed branches):



4. Click on the new **Override** action, and then on the **Disabled** result link.

5. Click on Supervised Transfer:Transfer to Bob. This will assign that action to the **Disabled** result of the **Override** action.

The call flow is re-created under the **Override** action's **Disabled** result and now appears as follows:



6. Assign actions to the **Enabled** result of the **Override** action as required. (These are typically a Message action followed by a Voicemail action.)
7. Click the Save button to save the call flow changes.

### 1.6.5.9 Setting action properties

You can change the properties of an action at any time. The changes take effect immediately after they are saved.

To set the properties of an action:

1. Click the action in the Call Flow that you want to modify.
2. Under Properties for (selected action), make the required changes.
3. Click **Save** to save the call flow changes.

### 1.6.5.10 Setting the prompt language

You can set the prompt language for a call flow.

To set the prompt language:

1. From the Actions menu on the call flow page, click **Set Prompt Language**.
2. A window with the list of available languages appears.
3. Select a language or accept "Auto" as the default value.

#### Note:

Use "Auto" to take advantage of the Multilingual Service feature, whereby users are asked to select between up to five prompt languages when the Language Router action is performed.

4. Click **OK**. The selected language will be used for the call flow.

**Note:**

Changes to the prompt language are not saved until you press the **Save** button.

### 1.6.5.11 Recording and Importing Messages

Each Message and Menu action in a call flow requires an audio recording. You can add your own recording or, if you are an Advanced user, import an existing one.

**Note:**

A maximum of 100 greetings are supported in call flow by Call Director.

#### Recording Messages in Call Director

Each message is assigned an Action ID by Call Director. The ID is a property of the action and is presented in the Properties area when the action is selected. You are prompted to enter the ID when recording the message. The Actions > Recordings menu item on the Call Flow page lists IDs for all messages in the call flow and shows whether or not the messages have been recorded.

**Note:** Do not combine greetings and menus in the same recording. If you do, Call Director will not be able to repeat the menu to the caller.

To record a message:

1. Using any touch-tone telephone, log into your NuPoint Unified Messaging mailbox, and press the \* key. This will connect your call into the Call Director Telephony User Interface (TUI).
2. As an alternative to pressing the \* key, follow the voice prompts to record your message.

#### Recording a Message for a Single Action

To record a message for a single action:

1. Select a Message or Menu action in the call flow.

2. (Optional) If you want the system to call your extension and allow you to record the message, complete the following steps in the Properties area:
  - a. Select the **Call Me** check box.
  - b. Enter your extension number in **Call Me Number**.
  - c. Click **Save**.
3. Click **Recording**. The Recording Status window opens.
4. Click **Record** under the Actions column.
5. The Record Message dialog opens, prompting you to record your message. The prompts differ depending on whether you have configured a **Call Me Number**:
  - If you have programmed a Call Me Number, the system calls your extension. Answer the call and proceed to the next step to make your recording.
  - If have *not* programmed a Call Me Number, the system prompts you to call in to your NuPoint voice mailbox, log in, and press the \* key to access the Call Director Telephone User Interface (TUI). Proceed to the next step to make your recording (you will not receive any voice prompts).
6. In the Record Message dialog, click the **Record** button and then record your message over the telephone. When you have finished recording, click the **Stop** button. To review your message before saving it, click the **Play** button. After you have finished recording your message, click **Save** to exit the Record Message dialog.
7. Click **Close** to exit the Recording Status window.

**Note:**

You cannot use Call Me functionality to record messages for multiple actions or Line Group call flows, or to edit Templates.

## Recording a Message for Multiple Actions

To record a message for one or more actions:

1. Select **Actions > Recordings**. The Recording Status window opens.
2. Locate the messages you wish to record and click **Record** under the Actions column.
3. A dialog opens, prompting you to call in to your NuPoint voice mailbox, log in, and press the \* key to access the Call Director Telephone User Interface (TUI).
4. Use the TUI to specify an action ID and record your message.
5. After you have finished recording your message, click **Close** to exit the Recording Status window.

**Note:**

- If you call in to your mailbox, as an alternative to pressing the \* key, you can simply follow the voice prompts to access the Call Director TUI and record your message.
- You can also record a message from the **Actions > Recordings** menu item on the call flow page or from the Recording button in the Properties area of the call flow page.
- There are two methods to call into your mailbox and record the Daily Greeting for the call flow:
- Press the \* key to access the Call Director TUI. Use the TUI to navigate through the system and record the message.
- Access the User Options menu and select Greetings (4) and Record Daily Greeting (8).

**Importing Greetings into Call Director**

Instead of recording greetings, you can also import a recorded greeting (prompt). Once the prompt has been imported, it is treated like any other recorded prompt.

**Note:**

- Only Advanced users and System Administrators are able to import recorded prompts.
- To be imported into a call flow, audio recordings are required to be in 8-bit, 8 KHz u-law or a-law format. Audio files recorded in any other format must be converted to this format before attempting the import function. In addition, the recording duration of the file being imported cannot exceed 5 minutes.
- The audio file must be in 8k u-law or 8k a-law format. If the file being imported is not in this format or does not exist, the Status will show "Import Error" and the file name controls will remain displayed for that prompt. An error message "Please specify a valid 8k u-law or a-law audio file" will also be displayed.
- If you are unable to import the audio file (indicated by a failure to save the recording or call flow), verify that your web browser security settings are correct. To do this, click the **Start** button and type **Internet Options** in the search box. Select the **Security** tab and click the **Custom Level** button. In the **Miscellaneous** section, ensure that **Display mixed content** is set to **Prompt**. If **Display mixed content** is disabled, file import will fail.



To import a recorded prompt:

1. Select **Actions > Recordings**. The Recording Status window appears showing the list of prompts. A status of "Recorded" or "Not Recorded" is displayed in the Status field.
2. Select the item for which you want to import a prompt and click **Import**.
3. A new File option appears in the window. Type the name of the filename or browse to the appropriate prompt file.
4. Click **Start Import** to import the prompt.

**Note:**

You can import a prompt one at a time, or specify all the prompts to import and then press the "Start Import" button.

### 1.6.5.12 Viewing call flow paths

You can view all the unused paths of a specific call flow. An unused path is an action, such as a Menu key, that does not have a result programmed.

To view the call flow paths:

1. From the View menu on the call flow page, click **Show All Paths**.
2. The call flow will expand to show all the unused paths within the call flow.

**Note:**

Once all paths are shown, the menu item will change to "Hide Unused Paths".

3. To hide the unused paths, click **Hide Unused Paths**.

### 1.6.5.13 Printing call flows

You can print an entire call flow, including its unused paths.

To print a call flow:

**Note:**

To include unused paths in the printout, click **Show All Paths** from the View menu prior to commencing the procedure.

1. On the call flow page, click **Print Callflow**.
2. Access the print preview dialog by entering the appropriate keyboard shortcut, such as **Control + P** in Windows or **Command + P** in Mac.
3. In the print preview dialog, select a **Destination**. You may send the printout to a regular printer or save it to file (PDF or XPS).
4. Click **Print**.

**Note:**

- If you receive a certificate error which prevents the print preview from displaying correctly, click **Show Content** at the bottom of the dialog.
- If you are saving the printout to file, follow the prompts to assign a name and location for the document.

## 1.6.6 Templates

### 1.6.6.1 About Call Director Templates

Call Director functionality includes a set of templates that can be assigned to a mailbox or line group. There are two sets of templates: **system templates** and **user-defined templates**. A maximum of 50 Call Director templates can be created.

There are five **system** templates provided. These templates can be used as a starting point when creating a call flow. The templates are as follows: Daily Greeting, Follow Me, Find Me, Personal Dial Zero, Alternate Daily Greeting, and NuPoint Receptionist. See [System Templates](#) for more information on the system templates.

**User-defined** templates can be [created](#), [edited](#), [deleted](#), [imported](#) and [exported](#). Each template has a number associated with it for the purpose of recording prompts in the TUI.

#### Associating Templates to LCOS

The templates are assigned to a mailbox via the existing [Limits Class of Service \(LCOS\) mechanism](#). The LCOS will have a Call Director template category. You can specify the template that is associated with this LCOS. The LCOS template attribute can be set in

the Web Console through the **Class of Service > Limits COS** menu item. By default, the LCOS will be assigned no template.

If the LCOS does not have a template associated to it, then the mailbox user assigned that LCOS is considered to be an Advanced user. Advanced mailbox users are able to create and fully customize their own call flows. If the mailbox user is an Advanced user, the Call Director tab in the Web View interface will have a full call flow-editing interface for creating and editing call flows.

If the LCOS has a template associated with it, then the mailbox user assigned that LCOS is considered to be a Regular mailbox user. Regular mailbox users are able to customize their call flows if there are writeable properties assigned to them. The changes to the call flow parameters can be made through the Call Director tab of the Web View interface.

## Managing Templates

The templates are created through the **Call Director > Templates** functionality. During creation of a template, you specify which properties a mailbox user is allowed to alter. The templates created by the System Administrator are considered to be the master templates. When these templates are edited, the changes are reflected in the Regular mailbox user's call flow for any mailboxes that are assigned this template.

When a mailbox is deleted through the Web Console or Text Console, the call flow file for that mailbox is also deleted.

Since the System Administrator can prevent the Regular mailbox user from recording the prompts, the System Administrator must have the ability to record any prompt/greeting for any template. The recording of the template prompts is done from the Web View interface and the TUI. Currently the System Administrator can record prompts for mailbox and line group specific call flows, and the functionality to record prompts for a template is now also added.

The System Administrator and the Advanced mailbox user are also able to import recordings to be used as messages and prompts in their call flows and templates. The only formats accepted are 8k u-law and 8k a-law.

Currently, the daily greeting is recorded through the TUI by pressing the \* immediately after the user logs into the mailbox. This functionality has been expanded to allow the recording of the Daily Greeting for the call flow from the User Options menu.

The Call Director templates are included in the backup and restore of the system templates, while user templates and mailbox/line group call flows are backed up through the current backup/restore mechanism.

## 1.6.6.2 System Templates

There are six system templates provided with the Call Director functionality. These templates can be used as a starting point when creating a call flow. The system templates have recorded prompts. These templates are read-only and cannot be changed or deleted.


The templates are as follows: [Daily Greeting](#), [Follow Me](#), [Find Me](#), [Personal Dial Zero](#), [Alternate Daily Greeting](#), and [NP Receptionist](#).

The following system templates are provided:

### Daily Greeting

The Daily Greeting feature allows users to customize their greeting on a daily basis, with a temporary greeting that reverts back to the user's primary personal greeting at midnight. The Daily Greeting feature is available to all licensed Call Director users.

The call flow for this template is as follows:

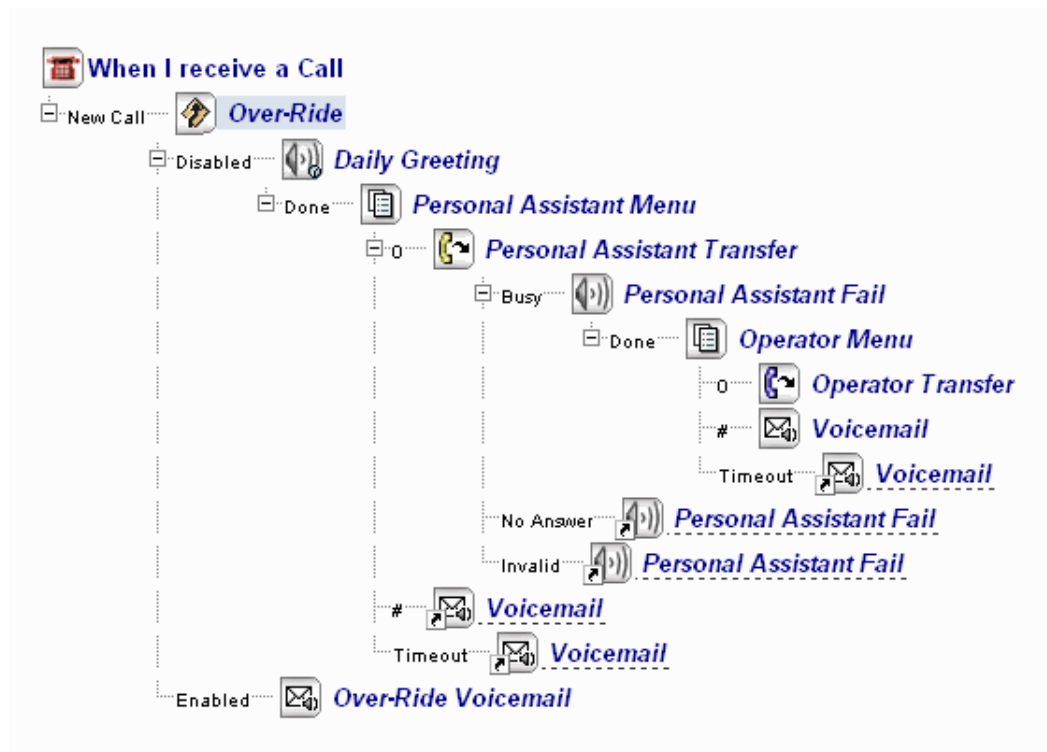


### Follow Me

The call flow for this template is as follows:




## Find Me

The call flow for this template is as follows:

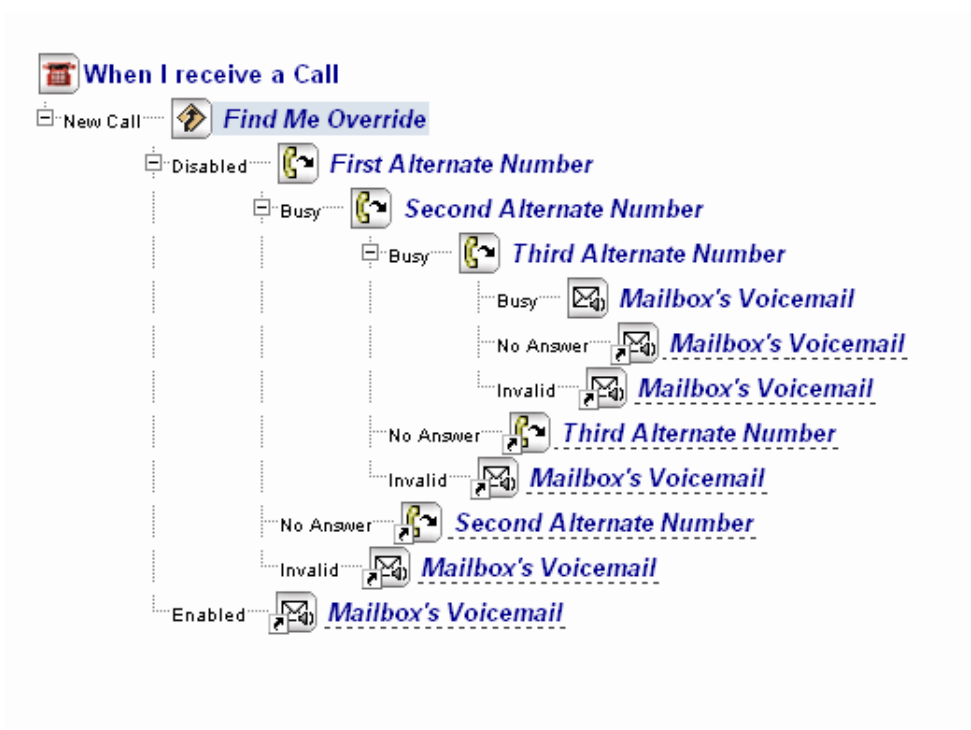

## Personal Dial Zero


The call flow for this template is as follows:

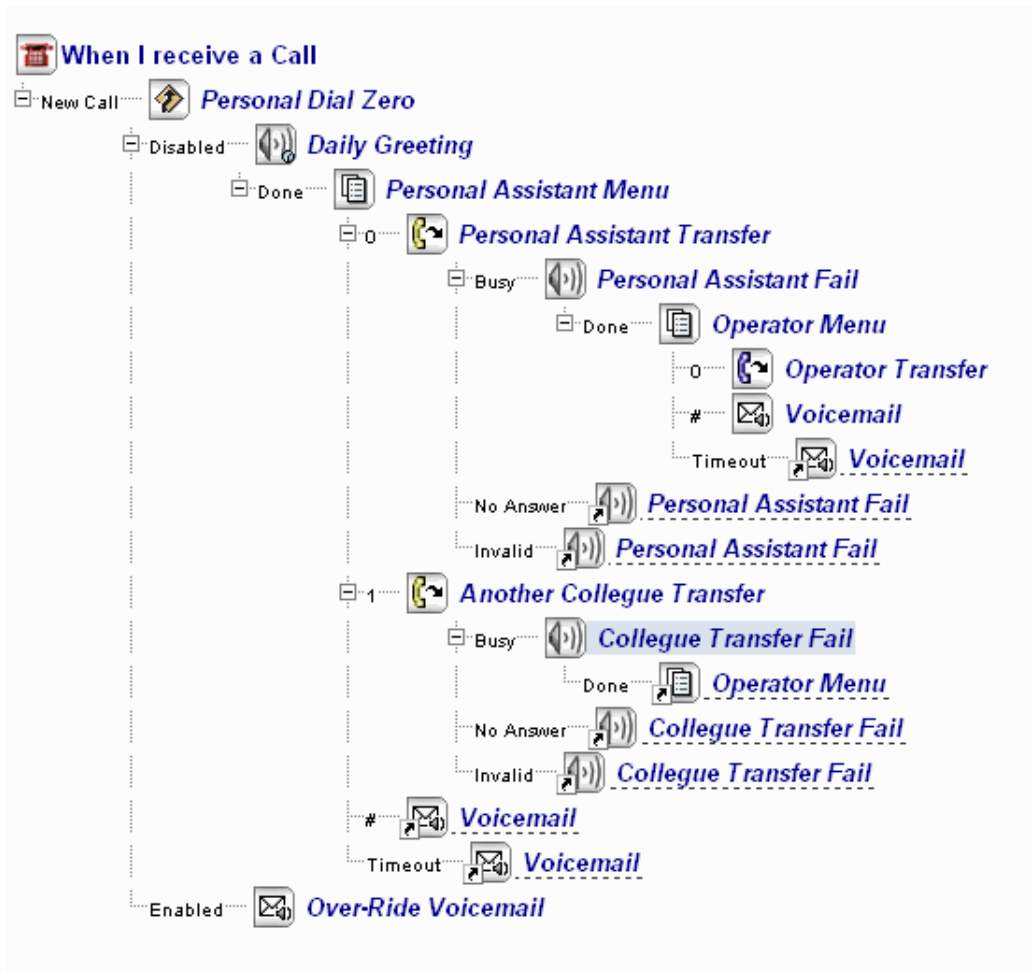

## Alternate Daily Greeting

The Alternate Daily Greeting template allows users to set up a call flow when they are using an Extended Absence Greeting (EAG). The caller hears the greeting advising that the user is away and is presented with alternative options.

The call flow for this template is as follows:

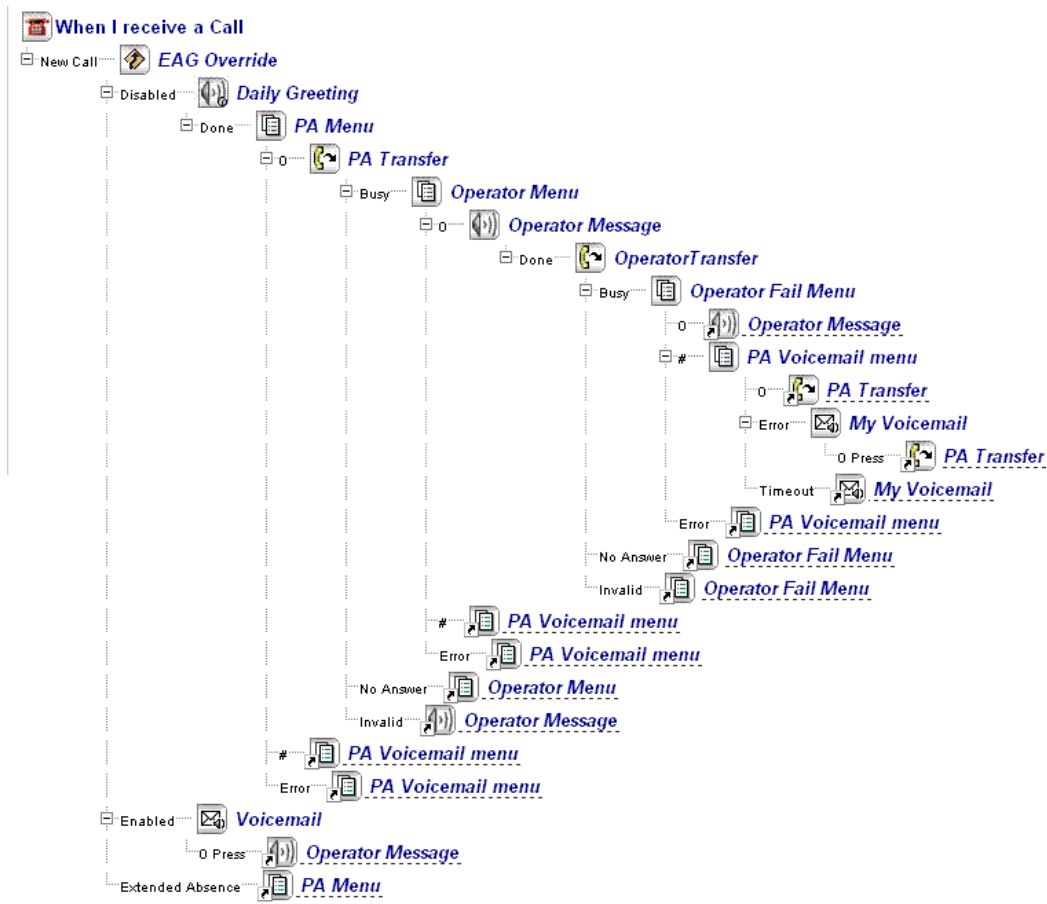

## NP Receptionist

The NP Receptionist feature provides the functionality of a simple automated attendant. The template greets the caller, asks for an extension number, and transfers the call to the destination (blind transfer). This feature is available to all licensed Call Director users, but it is optimized for use by administrators.

When you configure the actions for this template, note the following:


- **Override:** This action enables/disables the call flow. By default it is enabled.
- **Caller ID:** This optional action handles calls based on whether the caller's number is in your Caller ID list. You can delete this action from the call flow without impacting the operation of the NP Receptionist feature.
- **Menu:** This action causes a recording to play which prompts the caller to press a key to select a menu option. By default, the system plays, "Welcome to the automated receptionist. Please enter an extension number." Note that as part of configuring the Menu action, you must specify the "Maximum DTMF Length," which should match the extension number length for your system.
- **Blind Transfer:** This action dials the destination and then releases the call regardless whether the destination is busy or not answering.

- **Voicemail:** This optional action sends the caller to a NuPoint Unified Messaging mailbox. You can delete this action from the call flow without impacting the operation of the NP Receptionist feature.

#### Notes:

- The properties of the **Blind Transfer** action default to “Gathered digits” but this property can be modified to “Operator” or “Specified Extension.”
- Dial-by-Name can be configured by adding it to the configuration of the **Menu** action.
- The NP Receptionist template does not support treatment types (i.e. situational call behaviors).

The call flow for the NP Receptionist template is as follows:

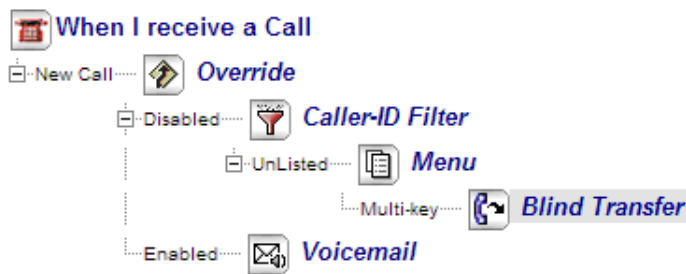

### 1.6.6.3 Add a Template

The Call Director functionality includes a set of templates that can be assigned to a mailbox or line group. There are two sets of templates: **system** templates and **user-defined** templates. A maximum of 50 Call Director templates can be created.

To add a new template:

1. From the navigation tree, click **Call Director**, and then click **Templates**.
2. Click **Add**. The Create Call Director Template page appears. **Note:** The Add button will be disabled if the maximum limit of 50 templates has been reached.
3. Enter a name for the template.
4. Enter a number for the template. You can now create a call flow in one of two ways:
  - a. • Define the call flow parameters

OR

  - Use a [System Template](#) either as is, or as a starting point for the call flow, by clicking on the **Start with Template** option in the Edit menu and selecting the appropriate template for the call flow.



5. Assign an LCOS to the template call flow. You can assign the template to an LCOS in one of two ways:

- a. • Click on the **Assign to LCOS** option in the Actions menu, or
  - Use the [Limits COS](#) option in the System Maintenance menu to assign the LCOS.

**Note:**

Templates assigned to a mailbox (through LCOS) are linked to a mailbox's call flow. This means that if changes are made to the template, the call flow for each mailbox assigned to that template will be updated as well.

6. Click **Save**. The template is now saved in the Call Director Templates list.

### 1.6.6.4 Edit a Template

The template list under Call Director > Templates contains the list of templates that have been created and are being used for specific call flows. You can edit these templates as required.

Each template is represented by a name and number in the list. For each template, up to 10 LCOS values are listed to which this template has been assigned.

To edit a template:

1. From the navigation tree, click **Call Director**, and then click **Templates**.
2. From the Call Director template list, select a template to edit.
3. Click **Edit**. The **Edit Call Director Template** page appears.
4. Modify the parameters as needed.

**Note:**

When you try to edit a template that has already been assigned to an LCOS, a dialog box will appear to confirm the changes since any changes to the call flow will affect the mailboxes with that LCOS.

5. Click **Save**.

## 1.6.6.5 Delete a Template

You can delete a template from the Call Director templates list.

**Note:** Templates that are assigned to an LCOS cannot be deleted. Attempts to delete a template that is assigned to an LCOS result in an error message.

To delete a template:

1. From the navigation tree, click **Call Director**, and then click **Templates**.
2. From the Call Director template list, select a template to delete.
3. Click **Delete**.
4. A confirmation dialog appears. Click **Yes** to confirm the deletion.
5. The template is deleted from the list.

## 1.6.6.6 Import/Export a Template

Templates can be imported into the Call Director template list from another source.

### Importing Templates

To import a template:

From the navigation tree, click **Call Director**, and then click **Templates**.

1. Click **Import**. The Import Template window appears. **Note:** The Import button will be disabled if the maximum limit of 50 templates has been reached.
2. Enter the template filename or browse to the location of the template.
3. Click **OK**.
4. The template is now imported into the Call Director template list.

### Exporting Templates

Call Director templates can also be exported to a specified location. If the template to be exported has recordings, they will be exported as well. Exporting a template does not remove it from the template list; it is still available on the system from where it was exported.

To export a template:

1. From the navigation tree, click **Call Director**, and then click **Templates**.
2. Select a template to export.
3. Click **Export**. The File Download window appears.

4. Click **Save** and then specify a location for the file.
5. Click **Save** again.

**Note:**

When templates are exported, the template file and the recordings (if applicable) are contained in a renamed zip file called **<template name>.cft**.

6. The template file is now exported to the specified location.

## 1.6.7 Admin Reports

### 1.6.7.1 About Call Director Reports

Several Call Director reports can be generated from the **Reports** menu of the Web Console.

The access to the reports has changed since most mailbox users will not have access to the full call flow editing interface, and thus the Reports feature will no longer be present there.

The following reports can be generated:

- [Call Flow Report](#)
- [System Reports](#) (which include a Mailbox System Report, Line Group System Report, and a combined System Report).

### 1.6.7.2 View a Call Flow Report

The report for a call flow contains statistics on how a call travels through the call flow. All call flows generate call flow reports that you can access. The report contains records of each call and how it was handled.

**Note:**

Programming changes to a call flow automatically clears the call flow report.

To view a Call Flow Report:

1. From the navigation tree, click **Call Director**, and then click **Reports**.
2. Click **View Call Flow Report**.

3. Select **Mailbox** or **Line Group** from the Call Flow drop-down menu.
4. Enter the number of the mailbox or line group call flow.
5. Click **View**.
6. The Call Flow Statistics window opens with the report criteria.

**Note:**

You can also view a call flow report when you are editing a call flow by selecting View Report from the Reports menu.

The following table lists the information in a call flow report:

| Statistic      | Meaning                                    |
|----------------|--------------------------------------------|
| Internal Calls | Number of incoming internal calls.         |
| External Calls | Number of incoming external calls.         |
| Total Calls    | Total number of incoming calls.            |
| Hourly Totals  | Number of calls received during each hour. |

For each action in the call flow, the following summary is provided:

| Name        | Name of the action used in the call flow.                                |
|-------------|--------------------------------------------------------------------------|
| Type        | Type of action (e.g. Call Transfer; Greeting; etc.) applied to the call. |
| ID          | A unique number assigned to the call flow action by Call Director.       |
| Entry Count | The number of times a call flow action was entered.                      |
| Exit Count  | The number of times each result of the call flow action was invoked.     |

### 1.6.7.3 Reset a Call Flow Report

You can reset a report without having to edit the call flow. You can reset a specific report or all reports at once. Once invoked, the report values are reset to 0.

**Note:**

Programming changes to a call flow automatically resets the call flow report.

To reset a specific report:

1. From the navigation tree, click **Call Director**, and then click **Reports**.

2. Click **Reset Call Flow Report**.
3. Select **Mailbox** or **Line Group** from the Call Flow drop-down menu.
4. Enter the number of the mailbox or line group call flow.
5. Click **Reset**.
6. A confirmation message appears indicating that the selected report values have been reset.

To reset all reports:

1. From the navigation tree, click **Call Director**, and then click **Reports**.
2. Click **Reset Call Flow Report**.
3. Click **Reset All**.
4. A confirmation message appears indicating that all report values have been reset.

### 1.6.7.4 Run a System Report

The following system reports can be generated:

- Mailbox System Report
- Line Group System Report
- **Combined System Report** (a combined report of the mailbox and line group statistics; the mailbox statistics will appear first and the line group statistics will appear second)

Reports are generated in a .csv file which has the following format:

**reportnamedate.csv**. (For example, a mailbox report that was run on February 2nd, 2007 will have the following naming convention: **MailboxReport\_2007\_2\_2.csv**)

#### Note:

When you generate a System Report you are given the option to Save or Open the file. If you click Save, the report is saved and you can open and view it. However, if you click Open, the file is empty.

To run a system report:

1. From the navigation tree, click **Call Director**, and then click **Reports**.
2. Click **Run System Report**.
3. Select the type of report to run by clicking the appropriate report button.
4. The File Download window appears.
5. Click **Save** and then specify a location for the file.

6. Click **Save** again.
7. The report is now saved to the specified location.

The following report criteria are listed within the system reports:

- Mailbox or Line Group Number
- Start Date & Start Time
- Report Date & Report Time
- Total Minutes
- Total Calls
- Total Successful Call Transfers
- Total Failed Call Transfers
- Total Hang Ups
- Hourly Totals (24 hours)
- Menu Key Presses (0-9)

## 1.6.8 Call Flow Reports

### 1.6.8.1 About Call Flow Reports

All call flows generate call flow reports that you can access. The report contains records of each call and how it was handled.

**Note:**

Programming changes to a call flow automatically clears the call flow report.

**Note:**

Only Advanced users and System Administrators have access to the Reports menu from the full call flow-editing interface.

The following table lists the information in a call flow report:

| Statistic      | Meaning                                     |
|----------------|---------------------------------------------|
| Internal Calls | Number of incoming internal calls.          |
| External Calls | Number of incoming external calls.          |
| Total Minutes  | Total length of telephone calls in minutes. |
| Total Calls    | Total number of incoming calls.             |

| Statistic     | Meaning                                    |
|---------------|--------------------------------------------|
| Hourly Totals | Number of calls received during each hour. |

For each action in the call flow, the following summary is provided:

| Name        | Name of the action used in the call flow.                                |
|-------------|--------------------------------------------------------------------------|
| Type        | Type of action (e.g. Call Transfer; Greeting; etc.) applied to the call. |
| ID          | A unique number assigned to the call flow action by Call Director.       |
| Entry Count | The number of times a call flow action was entered.                      |
| Exit Count  | The number of times each result of the call flow action was invoked.     |

### 1.6.8.2 Viewing a Call Flow Report

All call flows generate call flow reports that you can access.

To view a Call Flow Report:

1. From the Reports menu on the call flow page, click **View Report**.

**Note:**

Only Advanced users and System Administrators have access to the Reports menu from the full call flow-editing interface.

2. The Call Flow Statistics report opens in a new window.

### 1.6.8.3 Resetting a Call Flow Report

A Call Flow Report can be reset without having to edit the call flow. Once the reset is invoked, the report values are reset to 0.

**Note:**

Editing a call flow will cause the report to reset.

To reset a Call Flow Report:

1. From the Reports menu on the call flow page, click **Reset Report**.

**Note:**


Only Advanced users and System Administrators have access to the Reports menu from the full call flow-editing interface.

2. A confirmation message appears indicating that the report has been reset.
3. Click **OK** to clear the message.

## 1.6.9 Call Director Glossary

### 1.6.9.1 Glossary

The following table lists Call Director terms used in this Help system:

| Term               | Definition                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Action             | Any of the twelve programmable functions (Over-Ride, Schedule, Message, Menu, etc.) that determine how a call is handled.                                                                                                                                                                                                                                                               |
| Alias              | <p>Another instance of an action in a call flow. Each instance inherits the properties of the original action and is identified by an underline as follows:</p>  <p>To create a call flow with multiple instances of an action, each with different properties, assign the actions unique names.</p> |
| Alternate Transfer | Sends a call to an external telephone number. Also used for paging and sending text messages.                                                                                                                                                                                                                                                                                           |
| Answer Supervision | A signal sent by the telephone system when it is connecting a call to indicate that the called party has answered. Supervised transfers require answer supervision; blind transfers do not.                                                                                                                                                                                             |
| Attendant Transfer | Sends a call to the extension designated as the attendant by the System Administrator.                                                                                                                                                                                                                                                                                                  |
| Blind Transfer     | Dials the destination and then releases the call regardless whether the destination is busy or not answering.                                                                                                                                                                                                                                                                           |
| Call Flow          | The series of actions programmed by the call flow owner, which controls how a call is handled.                                                                                                                                                                                                                                                                                          |



| Term                 | Definition                                                                                                                                                                                                                                                                                                                             |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Call Flow Owner      | Can be either an extension user or the System Administrator. Extension users program personal call flows, which are associated with their own voice mailbox. The Administrator programs the corporate or line group call flows, and can also add, modify and delete personal call flows.                                               |
| Call Flow Tree       | The graphic representation of the call flow hierarchy.                                                                                                                                                                                                                                                                                 |
| Call Transfers       | (Action) The four types of call transfers that you can add to a call flow to route an incoming call: Blind Transfer, Supervised Transfer, Screened Transfer, and Alternate Transfer                                                                                                                                                    |
| Caller ID            | (Action) Handles incoming calls certain ways, depending on the caller ID. For example, a call flow owner may configure the Caller ID action to send his manager's calls to his voice mailbox, and send his calls from home to his cell phone.                                                                                          |
| Dial-by-Name         | (Action) Sends the incoming call to the NuPoint Unified Messaging Dial-by-Name application, which allows callers to key in the name of the party they wish to reach.                                                                                                                                                                   |
| Gathered Digits      | The collection of digits that are dialed to make a call to the desired phone or mailbox.                                                                                                                                                                                                                                               |
| Greeting             | See Message.                                                                                                                                                                                                                                                                                                                           |
| Interflow            | Interflow allows calls to be transferred from one call flow directly into another call flow. You use the Transfer and Voicemail actions to transfer a call to another call flow (outgoing interflow), and you use the Override action to determine the call flow for a call that comes in from another call flow (incoming interflow). |
| Internal/External    | (Action) For handling calls based on whether their origin is internal or external.                                                                                                                                                                                                                                                     |
| Line Group Call Flow | Call flow for handling calls to the company's main telephone number(s). Available for programming by the Administrator only.                                                                                                                                                                                                           |
| Menu                 | (Action) List of recorded voice prompts to which a caller would listen for call-directing instructions. For example, "If you know the extension of the person you wish to reach, press 1. To speak to the sales desk, press 2. To speak to an attendant, press 0." The caller must then press the desired key, or hang up.             |
| Message              | (Action) A recording played for a caller. Includes greetings and menu prompts. The call flow owner records the message using their phone.                                                                                                                                                                                              |
| Multi-key            | A Menu option that allows callers to enter multiple digits (for example, extension numbers or voice mailbox numbers).                                                                                                                                                                                                                  |
| Override             | (Action) Alters the normal call flow for temporary situations such as vacation absences or unexpected office closures. Overrides can be turned on and off from any touch-tone telephone and from Call Director.                                                                                                                        |

| Term                | Definition                                                                                                                                                                                                                                        |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Personal Call Flow  | Call flow administered by the end user. Personal call flows are associated with the end user's voice mailbox. Administrators can add, delete or modify personal call flows.                                                                       |
| Properties          | The parameters, such as the destination for a call transfer, that are specific to an action.                                                                                                                                                      |
| Screened Transfer   | Similar to a Supervised Transfer, except that the caller's name is first recorded and then played back to the called person. The called person has the option to accept or reject the call.                                                       |
| Supervised Transfer | A transfer that requires the called party to answer; otherwise, the caller is reconnected for further processing.                                                                                                                                 |
| Result              | Outcome of an action. Some actions have multiple results—for example, a Supervised Transfer has Busy, No Answer, or Invalid as its result.                                                                                                        |
| Schedule            | (Action) Consists of time slots that define work hours and off hours; therefore, if a user sets their work hours, then a call flow will be treated differently after work hours. In addition, Schedule includes an optional set of holiday hours. |
| Mailbox             | (Action) Sends the incoming call to a voice mailbox programmed by the caller flow owner or obtained from the caller.                                                                                                                              |
| Template            | A call flow with pre-defined properties and results for all the actions.                                                                                                                                                                          |

